


DELTALIGHT®

WELCOME TO OUR WORLD

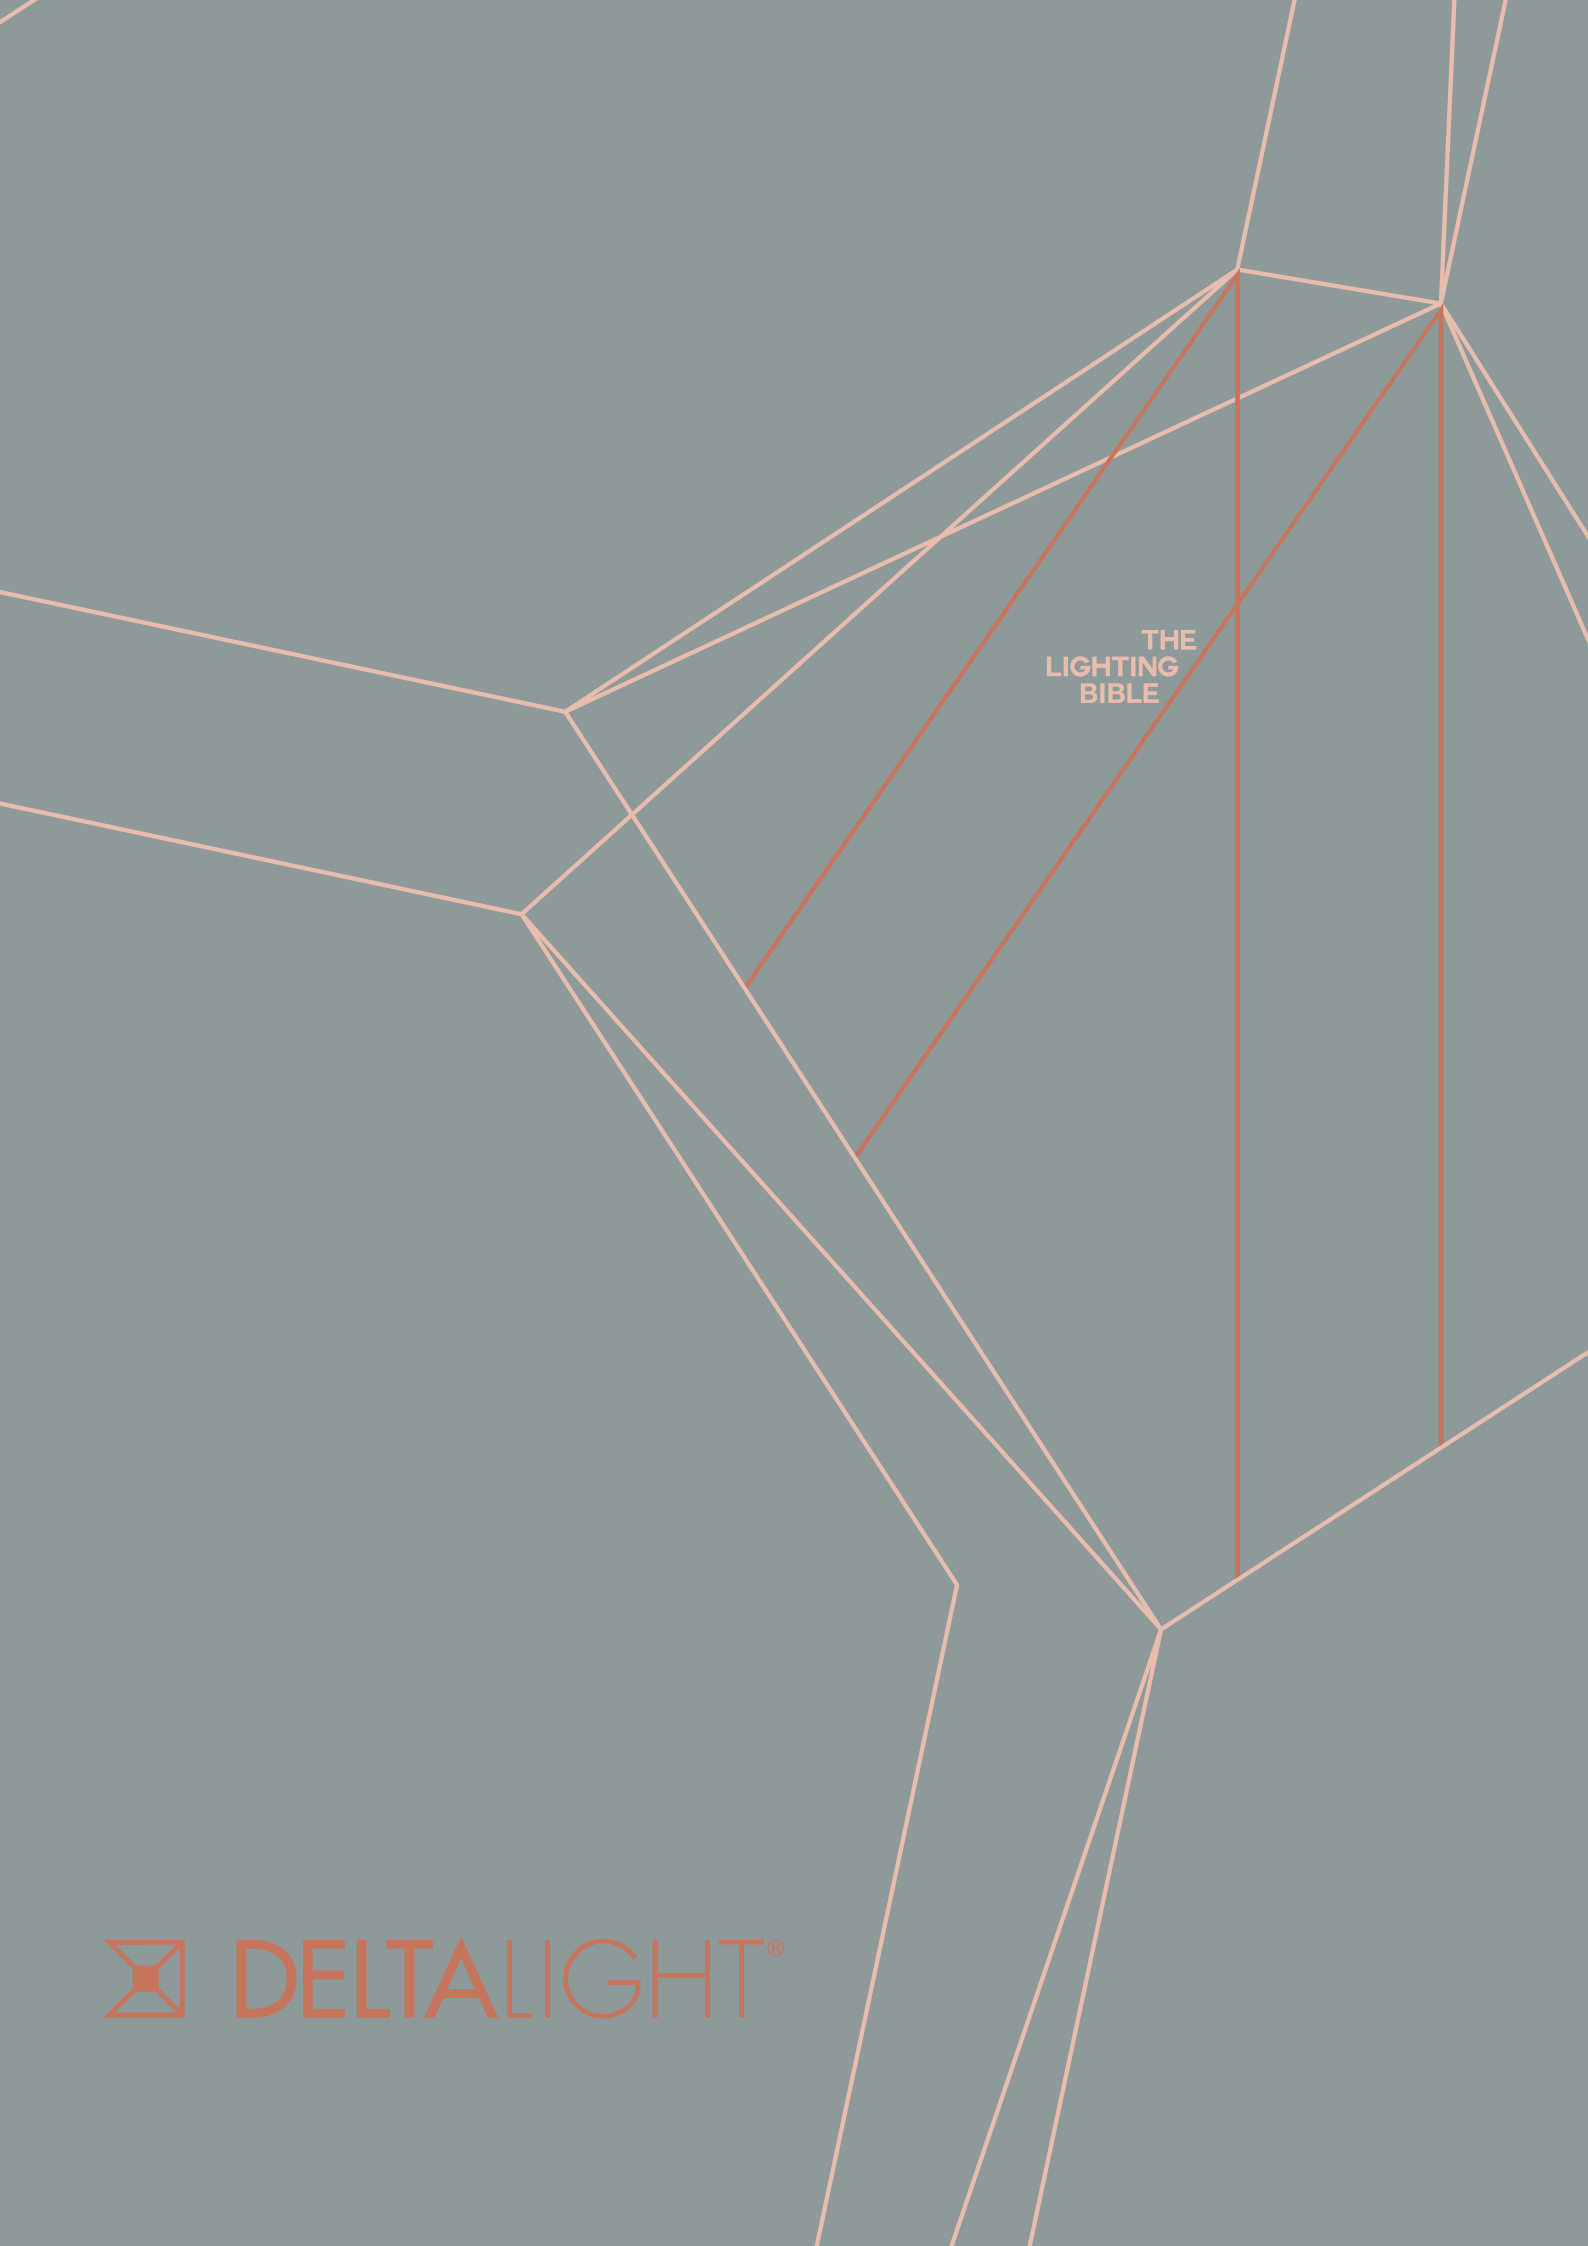

We make light that makes you see, light that makes you look, light that animates the world around you.

We develop lighting solutions that enhance people's life, and therefore people's quality of life. We bring our experience in light to the service of architects, interior and lighting designers, realizing what is in their mind, creating a lighting scenography integrated in the architecture. Using the right light in the right way to make architectural concepts stand out.


Founded by designer **Paul Ameloot**, today the company is still owned and managed by the family. As **a family business** we love to share our passion, creativity and dedication.
Our aim is to inspire people all around the world.
As a family we have a personal stake in making your project successful.
We strive to be the best in all we do.

Building on 25 years of lighting development, production and design expertise, we look very ambitious but confident towards **the future**. We continuously invest in people, in new markets, in production techniques and in our infrastructure – aiming to further upgrade our service abilities, expand our R&D department, testing and laboratories facilities, increase warehouse automation and extend the House of Light training center.



At Delta Light we realize that our business activities are associated with responsibility for ecological awareness, health and sustainability, and handle these issues as a priority. Over the past few years Delta Light has been working to minimize the environmental impacts of its products and manufacturing processes, aiming to further increase the energy efficiency of the company.



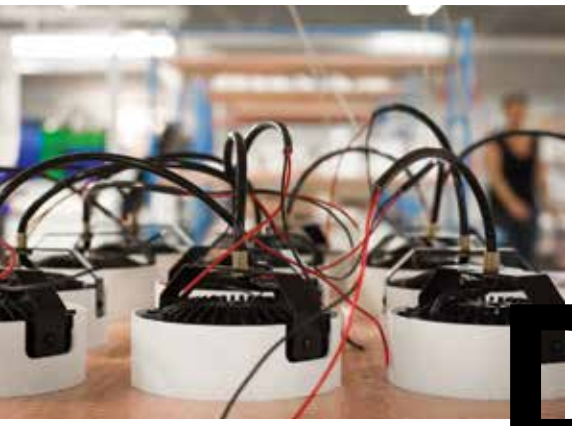

WE ARE DELTA LIGHT®



An essential tribute in Delta Light's creative process is the extensive in-house design, development, testing, engineering and manufacturing of all products. This enables the company to realize its short idea-to-market philosophy, resulting in extensive new collections on a very regular basis.

The lighting industry is constantly changing and evolving. We consider this both to be a challenge and an opportunity. It fascinates us to keep on bringing **new designs and lighting solutions**. You could consider it a passion to surprise and inspire people around the world. We start from our own in-house design team, but also love to explore common grounds with architects and designers, coming from different industries, exceeding the essence of collaboration.

Delta Light's extensive R&D team is constantly on the look-out for the trends of the future, both in terms of design and use of materials, without losing sight for **the power of imagination**. Its creative statement is confirmed by the opinion of several expert panels, resulting in a number of prestigious awards such as IF Design Award, Good Design Award, Red Dot Design Award and many others.

An important feature in Delta Light's creative process is the use of **state of the art development techniques**. The intensive use of 3D printing, early stage FMEA (Failure Mode and Effect analysis), goniophotometry and in-house third party recognized lab (SMT / CTF / satellite data acceptance)













result in a fast, efficient and first time right development process. As such, an essential attribute in the company's short idea-to-market philosophy.

Throughout the entire production process Delta Light distinguishes itself by handling the **strictest quality parameters**, to ensure products and services are designed and produced to exceed customer requirements. Every step in the production process has a routine quality procedure, covering both product quality and testing. Each product that leaves Delta Light, has been inspected and tested thoroughly, resulting in minimal returns and maximum efficiency.

Product quality and safety testing according to the international IEC standards is done in our company owned accredited Delta Light Laboratory. The close cooperation with our certifying partner SGS-CEBEC® leads to CE, ENEC and CB certifications for European and IEC member countries (http://members.iecee.org/). The laboratory also covers the testing of products for the North American market by being certified as a level 4 satellite laboratory for INTERTEK®. This allows us to easily obtain the cETLus listing for our products.



DESIGN







We are focused on the details. The looks, how a fixure moves, how it can be specified and installed, the ease of enjoying the light and so much more. With a surprising visual simplicity, our products are the result of extensive research and testing, **fusing advanced technology with timeless design and sustainable materials.**

The breakthrough of **LED technology** currently being experienced is probably the biggest development in lighting technology for decades. Delta Light plays a leading role in implementing this new technology, designing and manufacturing its own LED lamps, developing innovative LED products and tailor-made solutions, enabling designers and users alike to optimally exploit the previously unimagined possibilities in lighting.

Delta Light's team of LED engineers is on a continuous quest to match the company's credo for design with energy-efficiency and **optimal quality of light**. Through extensive in-house testing, advanced product development knowledge and continuous optimization of materials used, Delta Light is able to provide architectural lighting which excels in optical performance, durability and efficiency.
The collection enables designers to create different lighting scenes, from accentuation to ambient, wall washing, orientation or open area lighting, selecting from an extensive range of beams, filters, lenses and other accessories.







Delta Light is and has always been at the forefront of new developments and has consequently gained an established position as a leading innovator of exclusive products in the lighting sector. An unfortunate consequence of the company's design focused philosophy is the high number of slavish copies available on the market.

These infringements upon **Delta Lights' intellectual property rights** are seen as an act of unfair competition, and an encroachment on Delta Light's innovative design positioning and its success. In this respect, Delta Light has established **a strict policy worldwide for enforcing the exclusivity in its designs by all legal means.**

TECHNOLOGY









Since our foundation in 1989 we have developed from a small Belgian company to become a global business, offering lighting solutions and services in 120 countries worldwide.

GLOBAL


Public


Residential


Bar & Restaurant

In addition to the Belgian headquarters we have Delta Light branch offices and partners on all continents and most important design capitals, from Miami to Bogota, from Amsterdam to Dubai, from Saint-Petersburg to Hong Kong, from New York to Milan, Toronto,... and many more. Our main goal is to support the international projects personally and locally.



Delta Light has catered for some of the world's most well-known brands and architects, providing sophisticated and value adding lighting solutions. Ranging from retail to residential, office, public, showrooms to hospitality and landscape projects, small to very large scale, Delta Light has the product range, experience and knowledge to meet the functional and aesthetic needs of your projects.


Gallery


Hotel

Each project requires a customized approach, as such Delta Light distinguishes itself with an exceptional package of services and design tools. The global team works with all stakeholders involved to get the best possible result. Starting with lighting support all the way down to the installation process and project follow-up. Be it for technical or application questions, performance and energy saving studies, custom designs and made-to-measure solution, rendering or graphics, or any other lighting support needs... Delta Light provides a one-stop-shopping solution for your projects.


Office


Retail

11 THINGS TO LOOK FOR

in the Lighting Bible® 11



1

Soft Ceiling iMax range designed to minimize glare and create clean sightlines. One luminaire type for multiple lighting scenographies.

2


Discover the Spy, a very extensive and versatile range. A hybrid of elegance and flexibility. Mini to medium or large sizes in all types of application - recessed, surface mounted, profile modules and track (including new 48V track version).





4

New Soft Dim technology, where the color of the LED gets warmer as it is dimmed, replicating the dimming behaviour of a conventional halogen lamp.

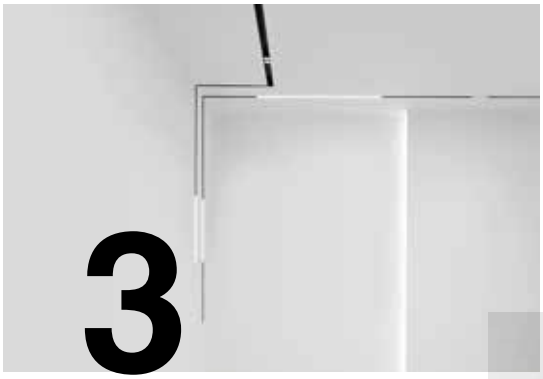

3

Extension of made-to-measure led profile solutions with trimless finish, superior efficiency and high light output results.



8

Miniaturization of luminaire design resulting in wide range of minimalistic led downlighters with surprising light output results.



5

Eyecatching new shapes and materials to upgrade your project.



9

New Montur collection, a range of authentic, pure and timeless luminaires for both interior and exterior use.



6

Customize your light effect choosing from a range of light shaping and glare controlling accessories. Available for wide range of luminaires, combining maximum eye comfort, full beam control and minimal light loss.



10

Extension of the very versatile Supernova range, resulting in track, recessed, surface mounted, stand alone and outdoor LED luminaires.



7

New generation of leds (up to 4000lm). Use of superior reflector materials providing maximum performance and efficiency.



11

Extension of the exterior range with more IP65 solutions, either recessed or surface mounted.





INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 294

INTERIOR WALL RECESSED INT 496

INTERIOR WALL SURFACE INT 516

INTERIOR STAND ALONE INT 584

INTERIOR TRACK LIGHTING t INT 594

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 22

EXTERIOR WALL RECESSED EXT 40

EXTERIOR WALL SURFACE EXT 54

EXTERIOR FLOOR RECESSED EXT 110

EXTERIOR FLOOR SURFACE EXT 138

TECHNICAL INFO tech TEC 2

INDEX index IND 2

INTERIOR
LIGHTING

The Lighting Bible® 11 catalogue offers a vast range of interior lighting solutions, ranging from ceiling to wall and floor applications, both recessed and surface mounted.

www.deltalight.com/products/overview





INTERIOR
CEILING RECESSED

Delta Light® offers a very extensive range of ceiling recessed lighting solutions for a wide range of ceiling conditions. Be it for general lighting, wall wash, accent, flood or diffused lighting, all recessed luminaires are designed to combine the light source with the best optics, reflectors and lenses to combine light quality and energy efficiency, helping you to apply the best lighting solutions for the intended purpose of the space.

www.deltalight.com/ICR

To discover more, or download technical files of your preferred product,
just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/41431822 or www.deltalight.com/spy-trimless



INDEX
INTERIOR CEILING RECESSED



iMAX®
INT 16


REO
INT 69


RODI
INT 109


DEEP RINGO S
INT 127


MINI SPY
INT 143


MINI CARREE
INT 162


iMAX®+
INT 43


REO S
INT 73


C-MAX
INT 113


TWENTY-7 TRIMLESS
INT 127


MIDISPY
INT 145


CARREE
INT 166


TWEETER
INT 47


GRAND REO
INT 77


LEDS SWING
INT 115


RINGO
INT 130


SPY
INT 147


GRAND CARREE
INT 191


TWEETER TRIMLESS
INT 55


MINI DIRO
INT 83


MICRO DEEP RINGO
INT 115


CIRCLE
INT 131


MIDISPY CLIP
INT 153


MINIGRID IN
INT 192


OREO
INT 59


DIRO
INT 91


MINI DEEP RINGO
INT 177


CIRCLE S
INT 131


SPY CLIP
INT 155


GRID IN
INT 216


MINI REO
INT 63


GRAND DIRO
INT 107


DEEP RINGO
INT 123


YOU-TURN
INT 134


HOLE IN ONE R
INT 157


MAESTRO S
INT 257



STREAMER W
INT 259



SUPERNOVA SEMI
INT 277



STREAMER
INT 261



SUPERNOVA
INT 279



DOWNFORCE R
INT 265



SUPERDOME
INT 289



DOWNFORCE S
INT 267



SUPERNOVA XS RECESSED
INT 271

SUPERNOVA TRIMLESS
INT 273

C-MAX	INT 113
CARREE	INT 166
CIRCLE	INT 131
DEEP RINGO	INT 123
DIRO	INT 91
DOWNFORCE R	INT 265
DOWNFORCE S	INT 267
GRAND CARREE	INT 191
GRAND DIRO	INT 107
GRAND REO	INT 77
GRID IN	INT 248
HOLE IN ONE	INT 157
IMAX® ADJUSTABLE	INT 25
IMAX® ADJUSTABLE TRIMLESS	INT 31
IMAX®	INT 19
IMAX® WALLWASH	INT 37
IMAX®+	INT 43
LEDS SWING	INT 115
MAESTRO S LED	INT 257
MICRO DEEP RINGO	INT 115
MIDISPY CLIP	INT 153
MINI CARREE	INT 162
MINI DEEP RINGO	INT 117
MINI DIRO	INT 83
MINI REO	INT 63
MINI SPY	INT 143
MINIGRID IN	INT 195
OREO	INT 59
REO	INT 69
RINGO	INT 130
RODI	INT 109
SPY CLIP	INT 154
SPY	INT 147
STREAMER	INT 260
SUPERDOME	INT 289
SUPERNOVA	INT 279
SUPERNOVA SEMI	INT 277
SUPERNOVA TRIMLESS	INT 273
SUPERNOVA XS RECESSED	INT 271
TWEETER	INT 46
TWENTY-7 TRIMLESS	INT 129
YOU-TURN	INT 134

SOFT CEILING®
INTRO

The Soft Ceiling® concept enables you to create discrete but diverse lighting scenographies, using one luminaire type. It allows architects and designers to work with different lighting applications, beams, effects, filters and output levels, using unobtrusive and glare-free fixtures for a zero-sightline ceiling.

Thanks to precise engineering, the use of superior reflector materials and a multitude of options, Soft Ceiling® fixtures guarantee optimal optic performance and maximum eye comfort. The vast range of options allow you to work with a Soft Ceiling® luminaire throughout the entire project, meeting the different needs of each room, without unnecessary cluttering of the ceiling.

play.deltalight.com/imaxsoftceiling



iMax® / 4 beams / Extreme Narrow (SP-6°), Narrow (SP-10°), Medium (FL-29°) and Wide (WFL-43°)



iMax® Adjustable - Trimless / 4 beams / Extreme Narrow (SP-6°), Narrow (SP-10°), Medium (FL-29°) and Wide (WFL-43°)



iMax® Wallwash / 2 beams / Medium (FL-29°) and Wide (WFL-43°)





iMax®
The iMax® range is the first collection in the Soft Ceiling® concept. The name symbolizes the maximum eye comfort - minimal appearance philosophy, offering a very vast assortment of refined and discrete lighting solutions.

Best lighting quality
The iMax® Soft Ceiling® range is using the most advanced LED engines available, delivering high performance, maximum efficacy and high quality illumination. The collection features different colour temperatures, CRI and output levels, combined with optimal colour consistency.

Throughout all versions specially designed reflectors guarantee uniform illumination and optimal beam alignment. Premium lenses are used to obtain real spot optics and best industry accuracy and quality.

Wet locations
The fixed and adjustable versions in the range are available with a clear glass, offering IP54. This enables you to continue the Soft Ceiling® minimalism and uniformity throughout bathrooms, wellness areas and other indoor damp locations.

Less is more
The Soft Ceiling® concept focuses on minimal appearance, giving stage to the light instead of the fixture. As such, the collection fuses Delta Light's credo for design sophistication and eye for detail, with precise engineering and premium materials, resulting in minimal fixtures with maximum impact. The interchangeable covers and colour finishes allow you to apply luminaires that disappear into the background.

CLEAN SIGHTLINES
MINIMAL APPEARANCE
MAXIMUM EYE COMFORT
GLARE-FREE
ONE LUMINAIRE TYPE FOR MULTIPLE LIGHTING SCENOGRAPHIES



iMAX®
SOFT CEILING

iMAX®
Uniform light to create general, glare-free illumination for all areas of application. A discrete appearance is combined with a vast multitude of variations, including different beams, outputs, CRI and colour finishes.
A timeless, highly functional and inconspicuous architectural lighting solution.


iMAX® ADJUSTABLE
A versatile accent lighting solution to emphasize individual objects or architectural elements.
The tilt mechanism allows the luminaire to be angled up to 30°, engineered with precision for optimum beam alignment.
As a result, the light is emitted exactly where you want it.
The tilting indicator and double locking system enable precise alignment of multiple fixtures.

iMAX®
Configurator

Configure your iMax online at
imax.deltalight.com

Multitude of Options
The **iMAX®** collection features a wide range of minimal recessed lighting fixtures, combining a discrete presence with high quality results. You can choose from **fixed or adjustable, trimless or with trim, and a wallwash version**, each one available with different light sources and finishes.

While the wallwasher comes in LED only, the other three versions can be applied with either LED, halogen or discharge lamps. Opting for LED opens a wide array of possibilities (160-1930 lumens).

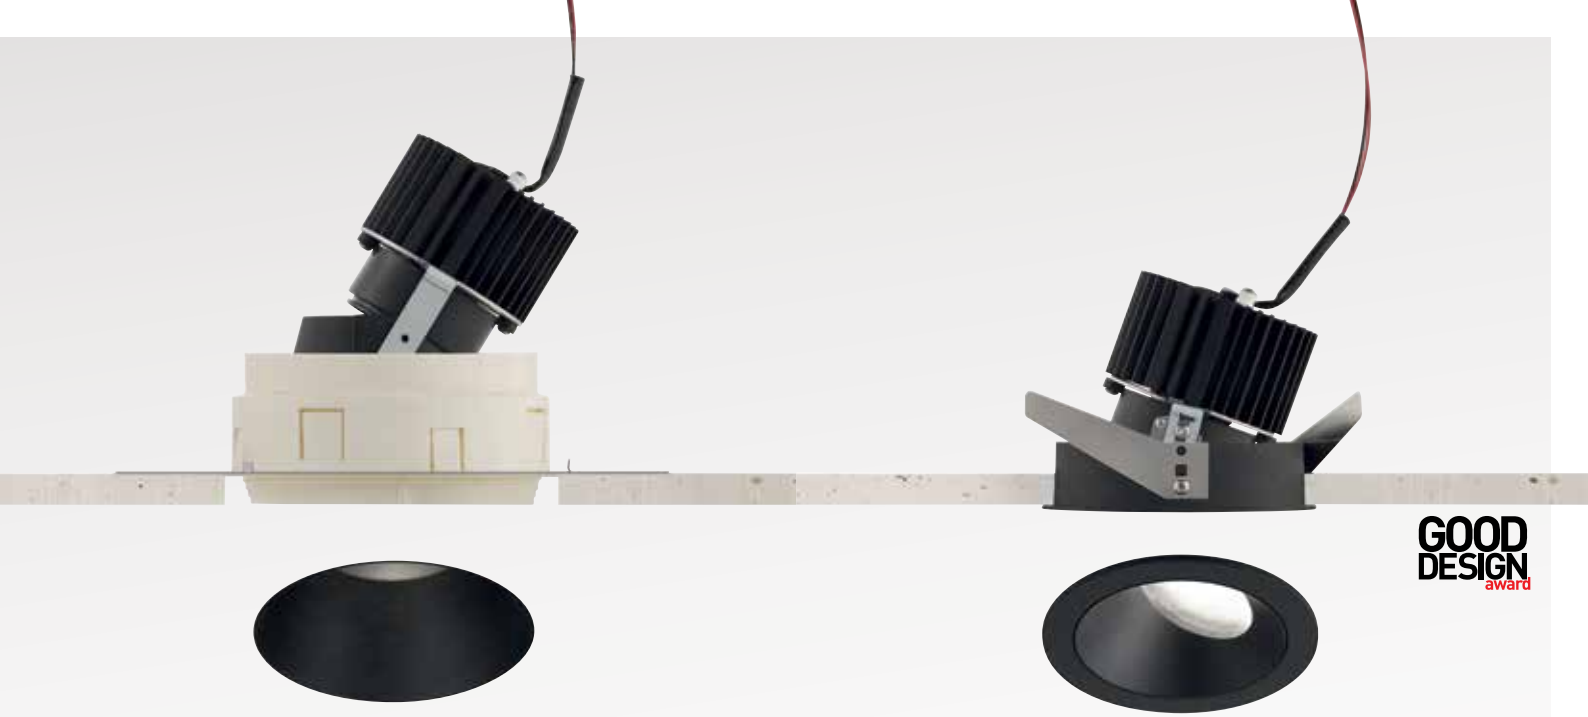

GOOD DESIGN award


iMAX® ADJUSTABLE TRIMLESS
Ultimate minimalism combined with maximum eye comfort. This version comes with a trimless mounting kit enabling quick and precise installation and finishing. The interchangeable black, white or gold insert allows you to match the fixture with its surroundings. A super smooth finish matched with maximum lighting comfort.

iMAX® WALLWASH
Evenly illuminated walls, thanks to the high performance soft ceiling® wallwashers. The specially designed reflector enables uninterrupted, homogenous illumination of the wall, from floor to ceiling. To obtain the best result, specific attention needs to go to the recommended spacing and setback from the wall.

Ø98

One cut-out for multiple versions: Fixed / Adjustable / Wallwash

iMAX®

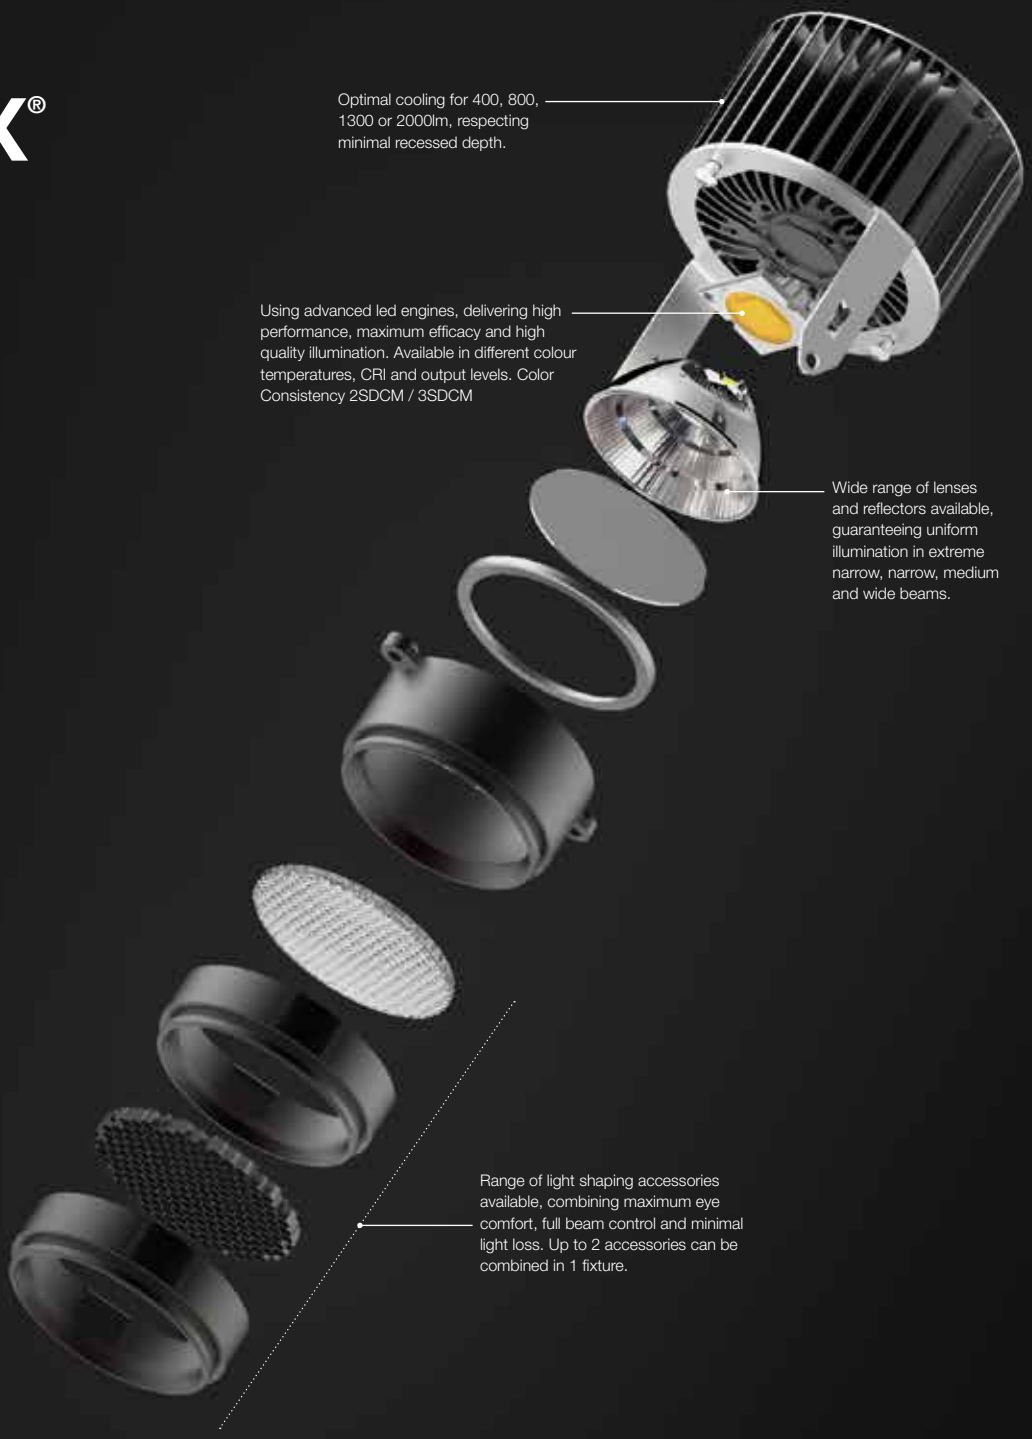

Optimal cooling for 400, 800, 1300 or 2000lm, respecting minimal recessed depth.

Using advanced led engines, delivering high performance, maximum efficacy and high quality illumination. Available in different colour temperatures, CRI and output levels. Color Consistency 2SDCM / 3SDCM

Wide range of lenses and reflectors available, guaranteeing uniform illumination in extreme narrow, narrow, medium and wide beams.

Range of light shaping accessories available, combining maximum eye comfort, full beam control and minimal light loss. Up to 2 accessories can be combined in 1 fixture.





Beam / Honeycomb
Beam / Linear Spread Lens
Beam / Spread Lens
Beam / Softening Lens
Beam / Glass Sbl





iMAX®
OVERVIEW new







iMAX® Configurator

Configure your iMax online at
imax.deltalight.com

EXAMPLE






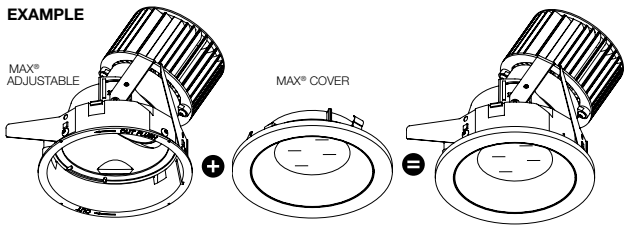


BASE				
iMAX® PAG 18 	led 160 - 1930lm LENS 6° / 12° REFLECTOR 29° / 43° CRI 80 / 95 3000K ● - 2700K ● (4000K ● ON REQUEST)	QR-C51	QPAR51	HIPAR51
iMAX® ADJUSTABLE PAG 26 	led 160 - 1930lm LENS 6° / 12° REFLECTOR 29° / 43° CRI 80 / 95 3000K ● - 2700K ● (4000K ● ON REQUEST)	QR-C51	QPAR51	HIPAR51
iMAX® ADJUSTABLE TRIMLESS PAG 34 	led 160 - 1930lm LENS 6° / 12° REFLECTOR 29° / 43° CRI 80 / 95 3000K ● - 2700K ● (4000K ● ON REQUEST)	QR-C51	QPAR51	HIPAR51
iMAX® WALLWASH PAG 42 	led 525 - 1300lm LENS - REFLECTOR 29° / 43° CRI 80 / 95 3000K ● - 2700K ● (4000K ● ON REQUEST)	–	–	–

ACCESSORIES	LED: only for iMAX® / iMAX® ADJUSTABLE / iMAX® ADJUSTABLE TRIMLESS					QR-C51	QPAR51	HIPAR51
	iMAX® Honeycomb	**iMAX® Linear Spread Lens**	**iMAX® Spread Lens**	**iMAX® Softening Lens**	**iMAX® Glass SBL**	**Clip 50 + Dicroic Filter 50**		
							–	–
COMBINATION OF MAX. 2 ACCESSORIES 								

REQUIREMENTS : iMAX® COVER

play.delta ight.com/imaxcovers

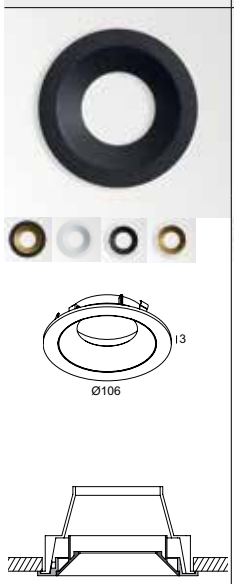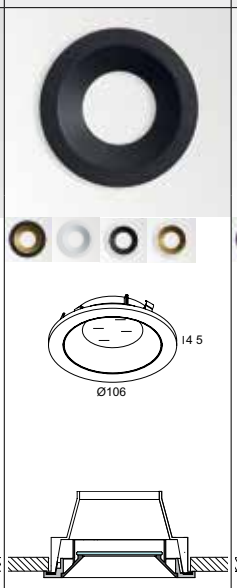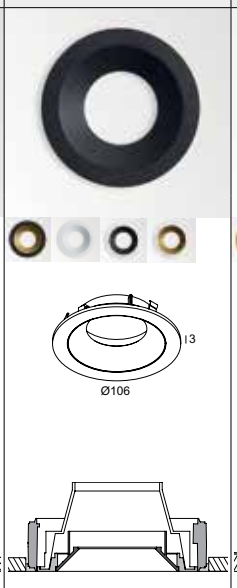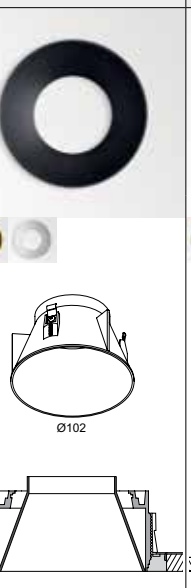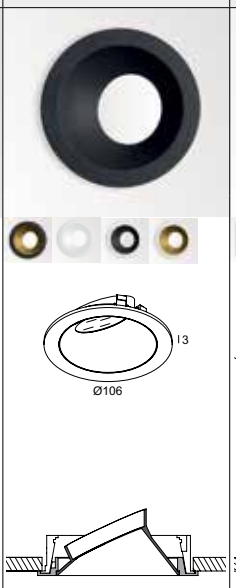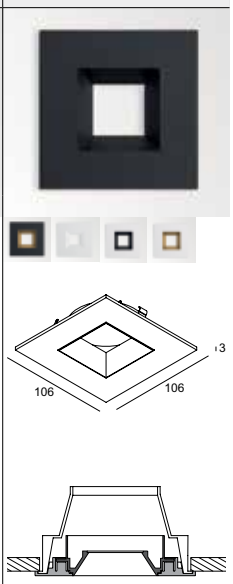ROUND	ROUND IP (IP54)	ROUND FLUSH	ROUND TRIMLESS	ROUND WALLWASH	SQUARE
					
			–	–	
			–	–	
–	–	–		–	–
–	–	–	–		–

iMAX®

Uniform light to create general, glare-free illumination for all areas of application. A discrete appearance is combined with a vast multitude of variations, including different beams, outputs, CRI and colour finishes.
A timeless, highly functional and inconspicuous architectural lighting solution.

iMAX® Configurator

Configure your iMax online at
imax.deltalight.com



GOOD DESIGN award

Requirements

iMAX® COVER ROUND ◇
400 00 11 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER ROUND IP ◇
400 00 21 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP54



MOUNTING KIT FLUSH*
400 90 01
121 12
*ONLY FOR COVER ROUND FLUSH



iMAX® COVER ROUND FLUSH ◇
400 00 19 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER SQUARE ◇
400 00 55 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



Options

INSTALLATION
MOUNTING SET S2
400 99 00



CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 16

Accessories

iMAX® HONEYCOMB ◇
400 03 01 ◇
◇ = B

iMAX® LINEAR SPREAD LENS
400 03 02


iMAX® SPREAD LENS
400 03 03


iMAX® SOFTENING LENS
400 03 04

iMAX® GLASS SBL
400 03 05

iMAX® TUBE ◇
400 03 10 ◇
◇ = C / M
NOT IN COMBINATION WITH HONEYCOMB / LENS / GLASS SBL

iMax® BL

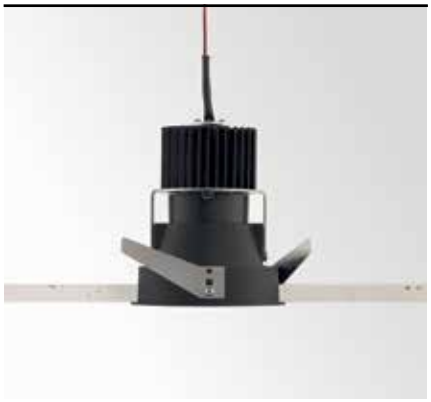



98 x 145 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	584lm (7W)	502lm (7W)
LENS SP-6°		
LENS SP-12°	**iMAX® BL4 83010** **401 02 04 839**	**iMAX® BL4 93010** **401 02 04 939**
2700K	566lm (7W)	453lm (7W)
LENS SP-6°		
LENS SP-12°	**iMAX® BL4 82710** **401 02 04 829**	**iMAX® BL4 92710** **401 02 04 929**

FIXED
INCL.1 x POWERLED WHITE [G] 7W
EXCL.LED POWER SUPPLY 700mA-DC


0,4


REQUIREMENTS
iMAX® COVER

OPTIONS
MOUNTING SET S2
LED POWER SUPPLY 700mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

iMax® CL

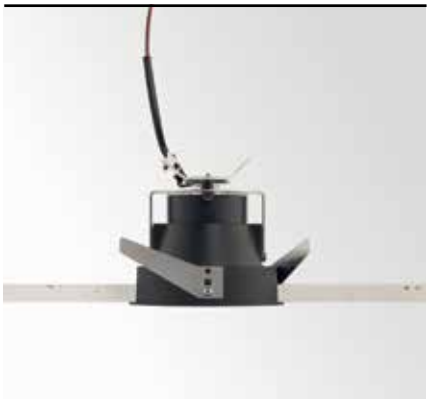



98 x 115 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	208lm (2W) 295lm (3,2W)	172lm (2W) 243lm (3,2W)
LENS SP-6°	**iMAX® CL 83006** **401 22 02 839**	**iMAX® CL 93006** **401 22 02 939**
LENS SP-12°		
2700K	175lm (2W) 276lm (3,2W)	160lm (2W) 226lm (3,2W)
LENS SP-6°	**iMAX® CL 82706** **401 22 02 829**	**iMAX® CL 92706** **401 22 02 929**
LENS SP-12°		

FIXED
INCL.1 x POWERLED WHITE [F] 2-3,2W
EXCL.LED POWER SUPPLY 700-1050mA-DC

0,3

REQUIREMENTS
iMAX® COVER

OPTIONS
MOUNTING SET S2
LED POWER SUPPLY 700-1050mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

Requirements

iMAX® COVER ROUND ◇
400 00 11 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20

iMAX® COVER ROUND IP ◇
400 00 21 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP54

MOUNTING KIT FLUSH*
400 90 01
121 12
*ONLY FOR COVER ROUND FLUSH

iMAX® COVER ROUND FLUSH ◇
400 00 19 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20

iMAX® COVER SQUARE ◇
400 00 55 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8
150 x 45 x 30

SOFT DIM

Options

INSTALLATION

MOUNTING SET S2
400 99 00

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG 16

Accessories

iMAX® HONEYCOMB ◇
400 03 01 ◇
◇ = B

iMAX® LINEAR SPREAD LENS
400 03 02

iMAX® SPREAD LENS
400 03 03

iMAX® SOFTENING LENS
400 03 04

iMAX® GLASS SBL
400 03 05

iMAX® TUBE ◇
400 03 10 ◇
◇ = C / M
NOT IN COMBINATION WITH HONEYCOMB / LENS / GLASS SBL

DIM8: dimming by falling edge dimmer




iMAX® BR 8 + MAX® COVER ROUND W-B + iMAX® TUBE M




iMAX® BR 8 + MOUNTING SET S2

new

led

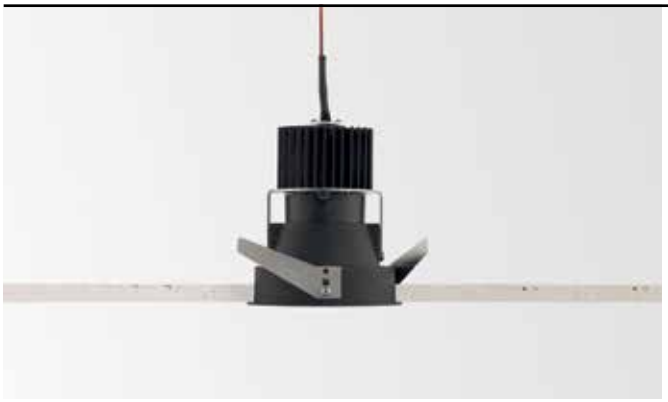



98 x 145 max.25

	CRI > 80	CRI > 90 * (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-29°	**iMAX® BR8 83029** **401 01 08 831**	**iMAX® BR8 93029 *** **401 01 08 931**
REFLECTOR WFL-43°	**iMAX® BR8 83043** **401 01 08 832**	**iMAX® BR8 93043** **401 01 08 932**
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-29°	**iMAX® BR8 82729** **401 01 08 821**	**iMAX® BR8 92729 *** **401 01 08 921**
REFLECTOR WFL-43°	**iMAX® BR8 82743** **401 01 08 822**	**iMAX® BR8 92743** **401 01 08 922**

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4

REQUIREMENTS
iMAX® COVER

OPTIONS
MOUNTING SET S2
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

new

SOFT DIM

INFO SOFT DIM
PAG TEC 9

2700-1800K	850lm (10W)
REFLECTOR FL-40°	**iMAX® SOFT** **401 31 08 802**

FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,4


REQUIREMENTS
iMAX® COVER
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

OPTIONS
MOUNTING SET S2

ACCESSORIES
iMAX® ACCESSORIES

iMax® BR





98 x 185 max.25

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
1930lm (18W)	1639lm (18W)
iMAX® BR20 83029 **401 01 21 831**	**iMAX® BR20 93029** **401 01 21 931**
iMAX® BR20 83043 **401 01 21 832**	**iMAX® BR20 93043** **401 01 21 932**
1787lm (18W)	1453lm (18W)
iMAX® BR20 82729 **401 01 21 821**	**iMAX® BR20 92729** **401 01 21 921**
iMAX® BR20 82743 **401 01 21 822**	**iMAX® BR20 92743** **401 01 21 922**

FIXED
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

0,6


REQUIREMENTS
iMAX® COVER

OPTIONS
MOUNTING SET S2
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

iMax® XR





98 x 170 max.25

CRI > 80	CRI > 95
ON REQUEST	
1300lm (12W)	965lm (11W)
iMAX® XR13 83043 **401 11 13 832**	**iMAX® XR13 93043** **401 11 13 932**
1300lm (12W)	965lm (11W)
iMAX® XR13 82743 **401 11 13 822**	**iMAX® XR13 92743** **401 11 13 922**

FIXED
INCL.1 x POWERLED WHITE [L] 12W
EXCL.LED POWER SUPPLY 700mA-DC


0,4

REQUIREMENTS
iMAX® COVER

OPTIONS
MOUNTING SET S2
LED POWER SUPPLY 500-700mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

FIXED
INCL.1 x POWERLED WHITE [L] 11W
EXCL.LED POWER SUPPLY 500mA-DC

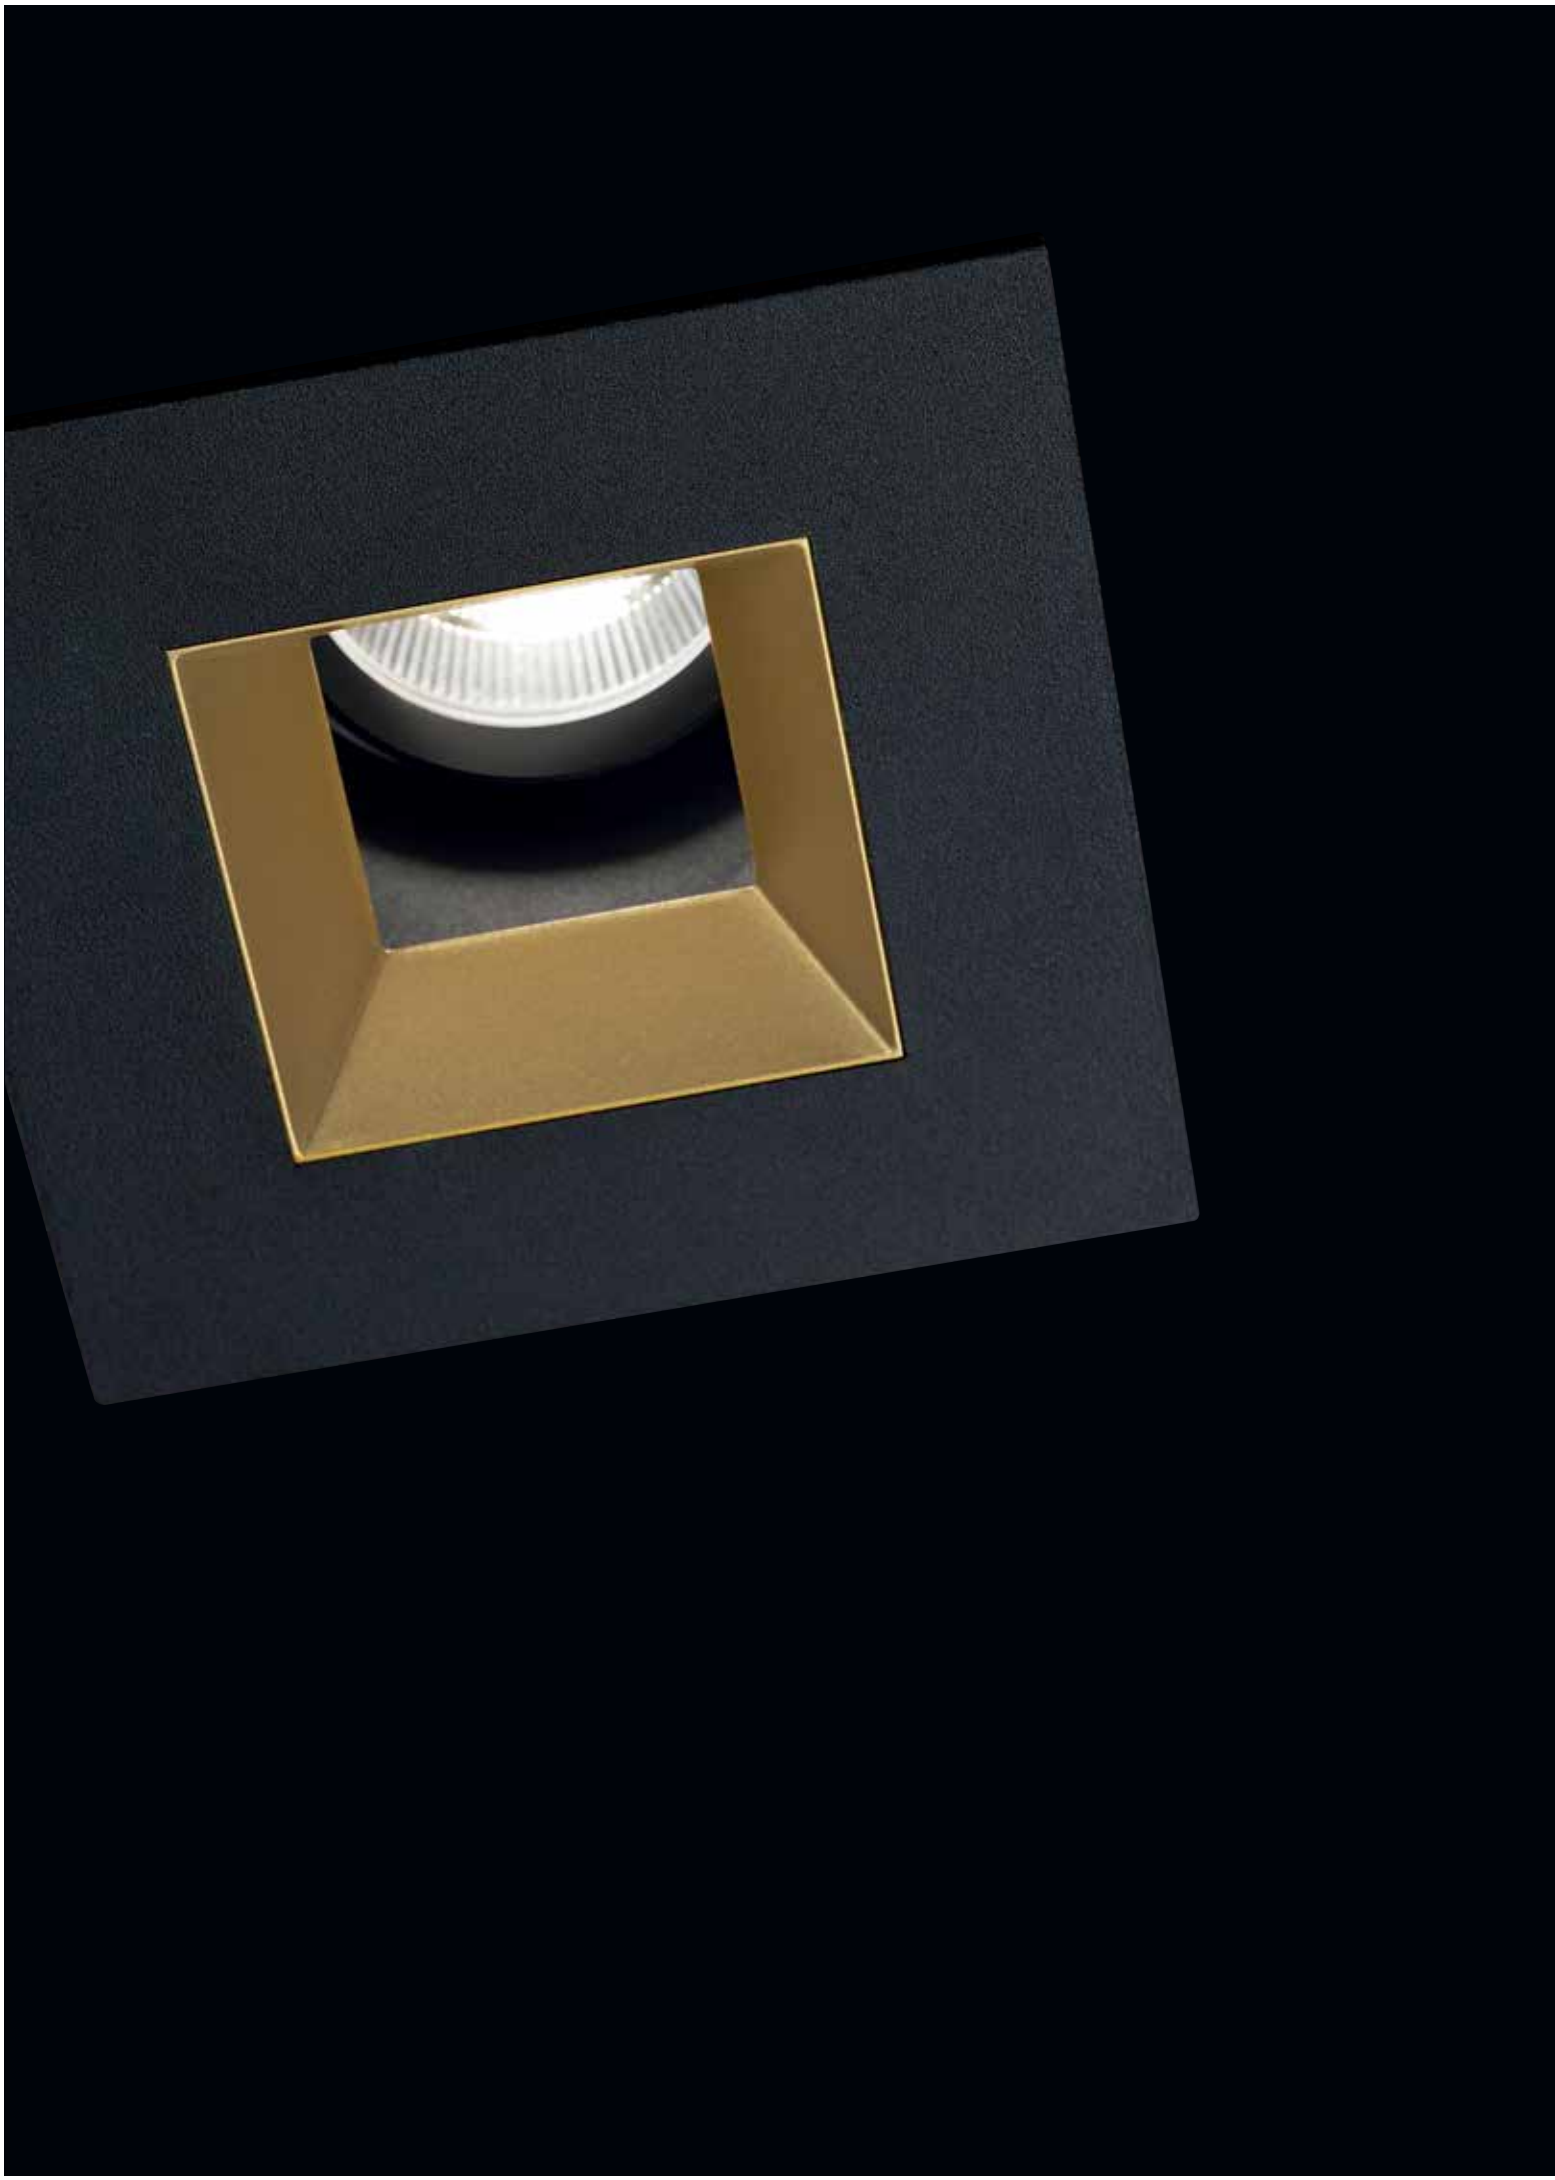

Requirements

iMAX® COVER ROUND ◇
400 00 11 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER ROUND IP ◇
400 00 21 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP54



MOUNTING KIT FLUSH*
400 90 01
121 12
*ONLY FOR COVER ROUND FLUSH



iMAX® COVER ROUND FLUSH ◇
400 00 19 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER SQUARE ◇
400 00 55 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



Options

FULL INFO / PAG TEC

CONTROL GEAR

TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

BALLASTSET C50 20 4,0 kV 140 x 67 x 31
200 44 21

BALLASTSET C50 35 4,0 kV 140 x 67 x 31
200 44 36

INSTALLATION
MOUNTING SET S2
400 99 00



Accessories

FULL INFO / PAG TEC

CLIP 50 ◇ Ø50 / H12
201 30 98 ◇
◇ = A / B / W





DICROIC FILTER 50 Ø50
201 30 11 ● max. 20W
201 30 12 ●
201 30 13 ●
201 30 14 ●



new

iMax® 50

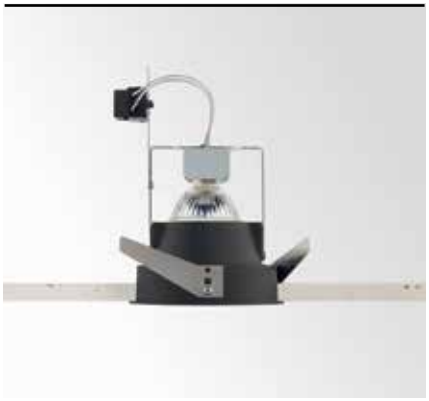



98 x 150 max.25


iMAX® 50
401 60 00
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-C51 max.35W (COVER IP)

0,2 0,5

REQUIREMENTS
iMAX® COVER

OPTIONS
TRANSFO
MOUNTING SET S2
led LED SOLUTION - PAG TEC 4-5

ACCESSORIES (max. 35W)
CLIP 50 + DICROIC FILTER 50



98 x 150 max.25

iMAX® 50Hi
401 61 00
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W
1 x QPAR51 max.20W (COVER IP)


0,2 0,5


REQUIREMENTS
iMAX® COVER

OPTIONS
MOUNTING SET S2
led LED SOLUTION - PAG TEC 4-5

new

iMax® C50

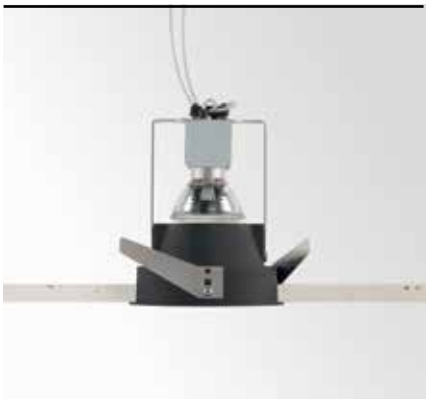



98 x 150 max.25

iMAX® C50
401 80 00
FIXED
GX10 / EXCL.EVG
1 x HIPAR51 max.35W

0,2 0,5

REQUIREMENTS
iMAX® COVER

OPTIONS
BALLASTSET C50
MOUNTING SET S2

iMAX®
ADJUSTABLE

A versatile accent lighting solution to emphasize individual objects or architectural elements.
The tilt mechanism allows the luminaire to be angled up to 30°, engineered with precision for optimum beam alignment.
As a result, the light is emitted exactly where you want it.
The tilting indicator and double locking system enable precise alignment of multiple fixtures.

iMAX®
Configurator

Configure your iMax online at
imax.deltalight.com



GOOD DESIGN award

Requirements

iMAX® COVER ROUND ◇
400 00 11 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER ROUND IP ◇
400 00 21 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP54



MOUNTING KIT FLUSH*
400 90 01
121 12
*ONLY FOR COVER ROUND FLUSH



iMAX® COVER ROUND FLUSH ◇
400 00 19 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER SQUARE ◇
400 00 55 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



Options

CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 16

Accessories

iMAX® HONEYCOMB ◇
400 03 01 ◇
◇ = B


iMAX® LINEAR SPREAD LENS
400 03 02

iMAX® SPREAD LENS
400 03 03


iMAX® SOFTENING LENS
400 03 04


iMAX® GLASS SBL
400 03 05

FOR FULL ADJUSTMENT
min 190



iMax® Adjustable BL

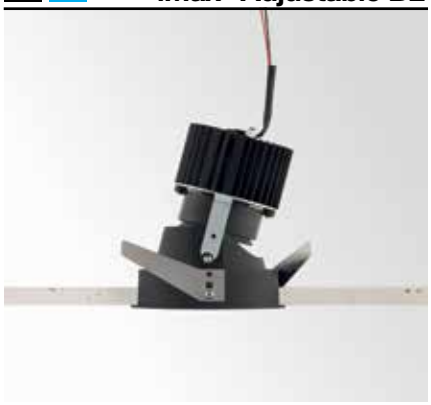



98 x 145 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	584lm (7W)	502lm (7W)
LENS SP-6°		
LENS SP-12°	**iMAX® ADJUSTABLE BL4 83010 402 02 04 839**	**iMAX® ADJUSTABLE BL4 93010 402 02 04 939**
2700K	566lm (7W)	453lm (7W)
LENS SP-6°		
LENS SP-12°	**iMAX® ADJUSTABLE BL4 82710 402 02 04 829**	**iMAX® ADJUSTABLE BL4 92710 402 02 04 929**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [G] 7W
EXCL.LED POWER SUPPLY 700mA-DC

0,4


REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 700mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

iMax® Adjustable CL





98 x 115 max.25

	CRI > 80	CRI > 90
	ON REQUEST	
3000K	208lm (2W) 295lm (3,2W)	172lm (2W) 243lm (3,2W)
LENS SP-6°	**iMAX® ADJUSTABLE CL 83006 402 22 02 839**	**iMAX® ADJUSTABLE CL 93006 402 22 02 939**
2700K	175lm (2W) 276lm (3,2W)	160lm (2W) 226lm (3,2W)
LENS SP-6°	**iMAX® ADJUSTABLE CL 82706 402 22 02 829**	**iMAX® ADJUSTABLE CL 92706 402 22 02 929**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [F] 2-3,2W
EXCL.LED POWER SUPPLY 700-1050mA-DC

0,3

REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 700-1050mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

Requirements

iMAX® COVER ROUND ◇
400 00 11 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER ROUND IP ◇
400 00 21 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP54



MOUNTING KIT FLUSH*
400 90 01
121 12
*ONLY FOR COVER ROUND FLUSH



iMAX® COVER ROUND FLUSH ◇
400 00 19 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER SQUARE ◇
400 00 55 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



CONTROL GEAR A-B C 150 x 45 x 30

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

SOFT DIM

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 16

Accessories

iMAX® HONEYCOMB ◇
400 03 01 ◇
◇ = B


iMAX® LINEAR SPREAD LENS
400 03 02

iMAX® SPREAD LENS
400 03 03

iMAX® SOFTENING LENS
400 03 04

iMAX® GLASS SBL
400 03 05


FOR FULL ADJUSTMENT
min 190




DIM8: dimming by falling edge dimmer

new

led

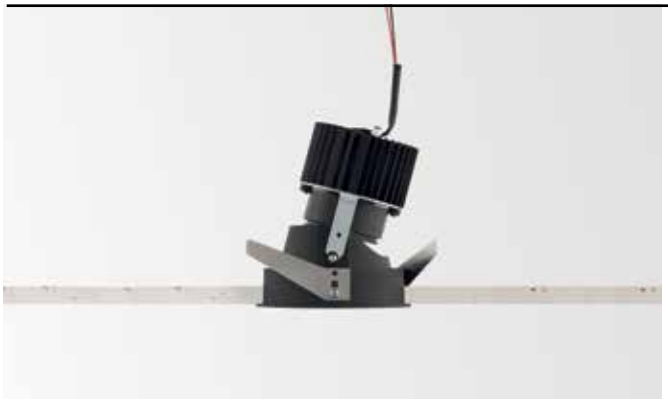



98 x 145 max.25

	CRI > 80	CRI > 90 * (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-29°	**iMAX® ADJUSTABLE** **BR8 83029** **402 01 08 831**	**iMAX® ADJUSTABLE** **BR8 93029 *** **402 01 08 931**
REFLECTOR WFL-43°	**iMAX® ADJUSTABLE** **BR8 83043** **402 01 08 832**	**iMAX® ADJUSTABLE** **BR8 93043** **402 01 08 932**
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-29°	**iMAX® ADJUSTABLE** **BR8 82729** **402 01 08 821**	**iMAX® ADJUSTABLE** **BR8 92729 *** **402 01 08 921**
REFLECTOR WFL-43°	**iMAX® ADJUSTABLE** **BR8 82743** **402 01 08 822**	**iMAX® ADJUSTABLE** **BR8 92743** **402 01 08 922**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4

REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

new

SOFT DIM

INFO SOFT DIM
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**iMAX® ADJUSTABLE SOFT** **402 31 08 802**	


FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC


0,4

REQUIREMENTS
iMAX® COVER
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

ACCESSORIES
iMAX® ACCESSORIES

iMax® Adjustable BR

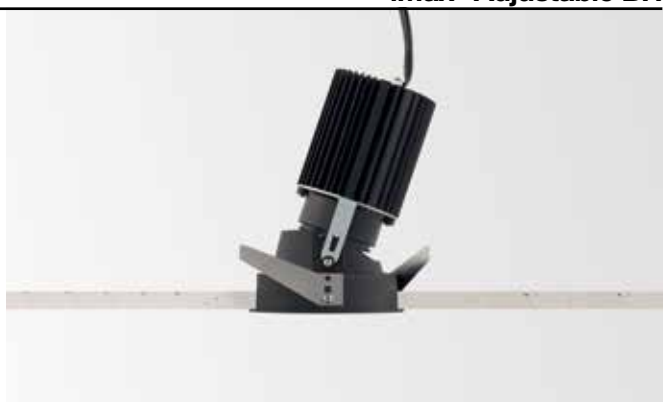



98 x 185 max.25

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
1930lm (18W)	1639lm (18W)
iMAX® ADJUSTABLE BR20 83029 402 01 21 831	**iMAX® ADJUSTABLE BR20 93029 402 01 21 931**
iMAX® ADJUSTABLE BR20 83043 402 01 21 832	**iMAX® ADJUSTABLE BR20 93043 402 01 21 932**
1787lm (18W)	1453lm (18W)
iMAX® ADJUSTABLE BR20 82729 402 01 21 821	**iMAX® ADJUSTABLE BR20 92729 402 01 21 921**
iMAX® ADJUSTABLE BR20 82743 402 01 21 822	**iMAX® ADJUSTABLE BR20 92743 402 01 21 922**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

0,6


REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

iMax® Adjustable XR





98 x 170 max.25

CRI > 80	CRI > 95
ON REQUEST	
1300lm (12W)	965lm (11W)
iMAX® ADJUSTABLE XR13 83043 402 11 13 832	**iMAX® ADJUSTABLE XR13 93043 402 11 13 932**
1300lm (12W)	965lm (11W)
iMAX® ADJUSTABLE XR13 82743 402 11 13 822	**iMAX® ADJUSTABLE XR13 92743 402 11 13 922**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [L] 12W
EXCL.LED POWER SUPPLY 700mA-DC

0,4

REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 500-700mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [L] 11W
EXCL.LED POWER SUPPLY 500mA-DC



iMAX® ADJUSTABLE XR13 + iMAX® COVER ROUND W-B + MAX® SPREAD LENS

Requirements

iMAX® COVER ROUND ◇
400 00 11 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER ROUND IP ◇
400 00 21 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP54



MOUNTING KIT FLUSH*
400 90 01
121 12
*ONLY FOR COVER ROUND FLUSH



iMAX® COVER ROUND FLUSH ◇
400 00 19 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



iMAX® COVER SQUARE ◇
400 00 55 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP20



Options


FULL INFO / PAG TEC

CONTROL GEAR	A-B-C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET C50 20 4,0 kV **200 44 21**	140 x 67 x 31
BALLASTSET C50 35 4,0 kV **200 44 36**	140 x 67 x 31

Accessories

FULL INFO / PAG TEC


	A-B-C
CLIP 50 ◇ **201 30 98 ◇** ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W



new

iMax® Adjustable 50






98 x 150 max.25

iMAX® ADJUSTABLE 50
402 60 00
ADJUSTABLE 0-30° / 355°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-C51 max.35W (COVER IP)
CE 0,2 0,5

REQUIREMENTS
iMAX® COVER

OPTIONS
TRANSFO
led LED SOLUTION - PAG TEC 4-5

ACCESSORIES (max. 35W)
CLIP 50 + DICROIC FILTER 50



98 x 150 max.25


iMAX® ADJUSTABLE 50Hi
402 61 00
ADJUSTABLE 0-30° / 355°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W
1 x QPAR51 max.20W (COVER IP)
CE 0,2 0,5


REQUIREMENTS
iMAX® COVER

OPTIONS
led LED SOLUTION - PAG TEC 4-5

new

iMax® Adjustable C50

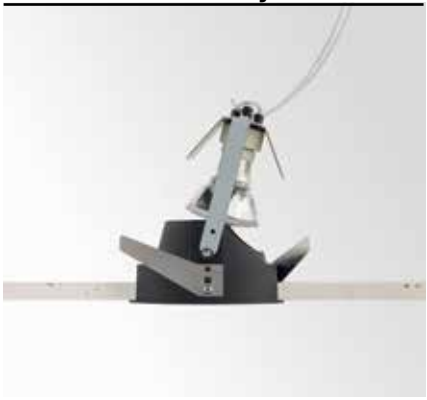



98 x 150 max.25

iMAX® ADJUSTABLE C50
402 80 00
ADJUSTABLE 0-30° / 355°
GX10 / EXCL.EVG
1 x HIPAR51 max.35W
CE 0,2 0,5

REQUIREMENTS
iMAX® COVER

OPTIONS
BALLASTSET C50

iMAX®
ADJUSTABLE TRIMLESS

Ultimate minimalism combined with maximum eye comfort. This version comes with a trimless mounting kit enabling quick and precise installation and finishing. The interchangeable black, white or gold insert allows you to match the fixture with its surroundings. A super smooth finish matched with maximum lighting comfort.

iMAX®
Configurator

Configure your iMax online at
imax.deltalight.com




Requirements


MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA

133

0,4



iMAX® COVER ROUND TRIMLESS ◇
400 00 30 ◇
◇ = B / MMAT / W
IP20



Options

CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 16

Accessories

iMAX® HONEYCOMB ◇
400 03 01 ◇
◇ = B

iMAX® LINEAR SPREAD LENS
400 03 02

iMAX® SPREAD LENS
400 03 03


iMAX® SOFTENING LENS
400 03 04


iMAX® GLASS SBL
400 03 05

FOR FULL ADJUSTMENT
min 190



iMax® Adjustable Trimless BL

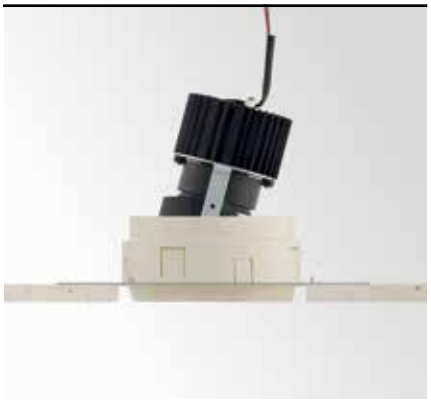



ØKIT x 145 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	584lm (7W)	502lm (7W)
LENS SP-6°		
LENS SP-12°	**iMAX® ADJUSTABLE TRIMLESS BL4 83010 403 02 04 839**	**iMAX® ADJUSTABLE TRIMLESS BL4 93010 403 02 04 939**
2700K	566lm (7W)	453lm (7W)
LENS SP-6°		
LENS SP-12°	**iMAX® ADJUSTABLE TRIMLESS BL4 82710 403 02 04 829**	**iMAX® ADJUSTABLE TRIMLESS BL4 92710 403 02 04 929**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [G] 7W
EXCL.LED POWER SUPPLY 700mA-DC


0,4


REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
LED POWER SUPPLY 700mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

iMax® Adjustable Trimless CL

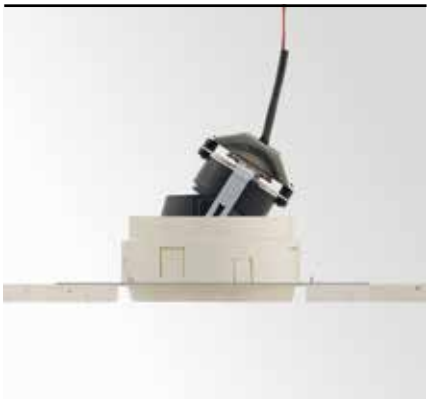



ØKIT x 115 max.25

CRI > 80	CRI > 90
ON REQUEST	
208lm (2W) 295lm (3,2W)	172lm (2W) 243lm (3,2W)
iMAX® ADJUSTABLE TRIMLESS CL 83006 403 22 02 839	**iMAX® ADJUSTABLE TRIMLESS CL 93006 403 22 02 939**
175lm (2W) 276lm (3,2W)	160lm (2W) 226lm (3,2W)
iMAX® ADJUSTABLE TRIMLESS CL 82706 403 22 02 829	**iMAX® ADJUSTABLE TRIMLESS CL 92706 403 22 02 929**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [F] 2-3,2W
EXCL.LED POWER SUPPLY 700-1050mA-DC

0,3


REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
LED POWER SUPPLY 700-1050mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

Requirements


MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA



133

0,4

iMAX® COVER ROUND TRIMLESS ◇
400 00 30 ◇
◇ = B / MMAT / W
IP20



CONTROL GEAR



150 x 45 x 30

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

SOFT DIM

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 16

Accessories

iMAX® HONEYCOMB ◇
400 03 01 ◇
◇ = B


iMAX® LINEAR SPREAD LENS
400 03 02

iMAX® SPREAD LENS
400 03 03

iMAX® SOFTENING LENS
400 03 04

iMAX® GLASS SBL
400 03 05

FOR FULL ADJUSTMENT
min 190




DIM8: dimming by falling edge dimmer

new

led





ØKIT x 145 max.25

	CRI > 80	CRI > 90 * (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-29°	**iMAX® ADJUSTABLE TRIMLESS BR8 83029** **403 01 08 831**	**iMAX® ADJUSTABLE TRIMLESS BR8 93029 *** **403 01 08 931**
REFLECTOR WFL-43°	**iMAX® ADJUSTABLE TRIMLESS BR8 83043** **403 01 08 832**	**iMAX® ADJUSTABLE TRIMLESS BR8 93043** **403 01 08 932**
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-29°	**iMAX® ADJUSTABLE TRIMLESS BR8 82729** **403 01 08 821**	**iMAX® ADJUSTABLE TRIMLESS BR8 92729 *** **403 01 08 921**
REFLECTOR WFL-43°	**iMAX® ADJUSTABLE TRIMLESS BR8 82743** **403 01 08 822**	**iMAX® ADJUSTABLE TRIMLESS BR8 92743** **403 01 08 922**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4

REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

new

SOFT DIM

INFO SOFT DIM
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**iMAX® ADJUSTABLE TRIMLESS SOFT** **403 31 08 802**	

FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC


0,4

REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

ACCESSORIES
iMAX® ACCESSORIES

iMax® Adjustable Trimless BR





ØKIT x 185 max.25

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
1930lm (18W)	1639lm (18W)
iMAX® ADJUSTABLE TRIMLESS BR20 83029 403 01 21 831	**iMAX® ADJUSTABLE TRIMLESS BR20 93029 403 01 21 931**
iMAX® ADJUSTABLE TRIMLESS BR20 83043 403 01 21 832	**iMAX® ADJUSTABLE TRIMLESS BR20 93043 403 01 21 932**
1787lm (18W)	1453lm (18W)
iMAX® ADJUSTABLE TRIMLESS BR20 82729 403 01 21 821	**iMAX® ADJUSTABLE TRIMLESS BR20 92729 403 01 21 921**
iMAX® ADJUSTABLE TRIMLESS BR20 82743 403 01 21 822	**iMAX® ADJUSTABLE TRIMLESS BR20 92743 403 01 21 922**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC


0,6


REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
iMAX® ACCESSORIES

iMax® Adjustable Trimless XR

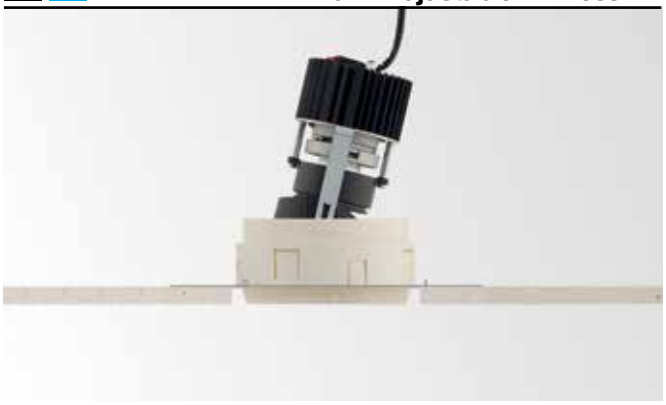



ØKIT x 170 max.25

CRI > 80	CRI > 95
ON REQUEST	
1300lm (12W)	965lm (11W)
iMAX® ADJUSTABLE TRIMLESS XR13 83043 403 11 13 832	**iMAX® ADJUSTABLE TRIMLESS XR13 93043 403 11 13 932**
1300lm (12W)	965lm (11W)
iMAX® ADJUSTABLE TRIMLESS XR13 82743 403 11 13 822	**iMAX® ADJUSTABLE TRIMLESS XR13 92743 403 11 13 922**

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [L] 12W
EXCL.LED POWER SUPPLY 700mA-DC


0,4

REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
LED POWER SUPPLY 500-700mA-DC / DIM


ACCESSORIES
iMAX® ACCESSORIES

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [L] 11W
EXCL.LED POWER SUPPLY 500mA-DC

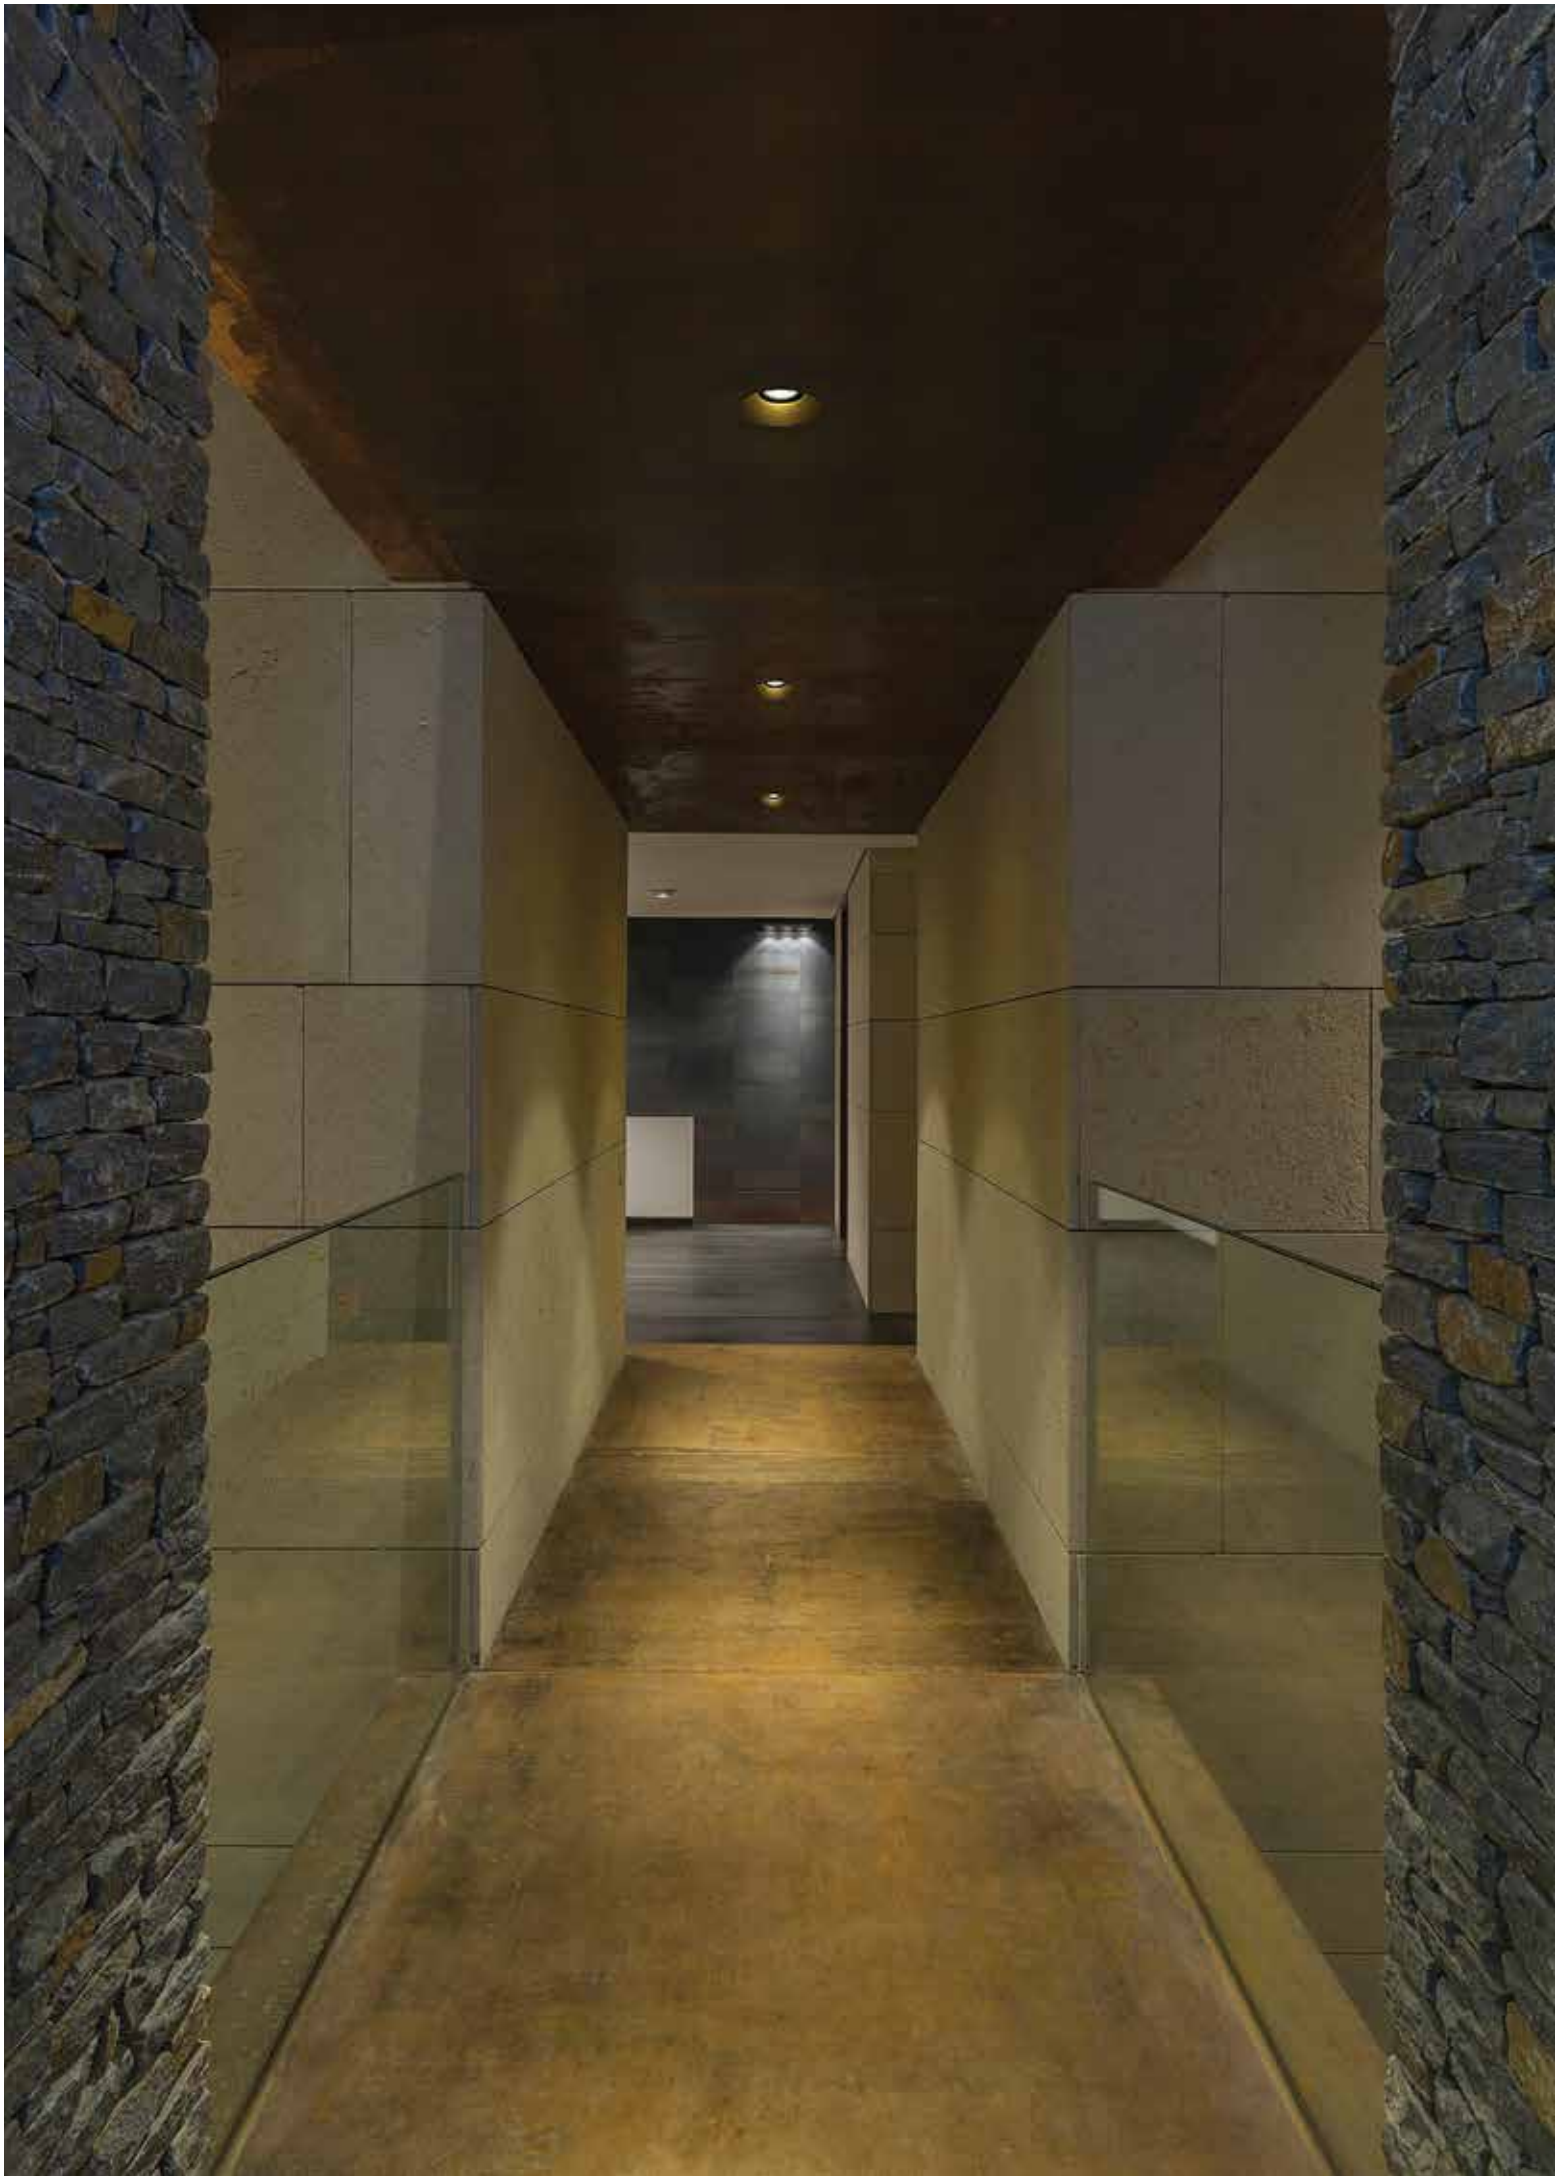


Requirements

MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA



iMAX® COVER ROUND TRIMLESS ◇
400 00 30 ◇
◇ = B / MMAT / W
IP20



Options


FULL INFO / PAG TEC

CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET C50 20 4,0 kV **200 44 21**	140 x 67 x 31
BALLASTSET C50 35 4,0 kV **200 44 36**	140 x 67 x 31


Accessories


FULL INFO / PAG TEC

	A B C
CLIP 50 ◇ **201 30 98 ◇** ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W



iMax® Adjustable Trimless 50

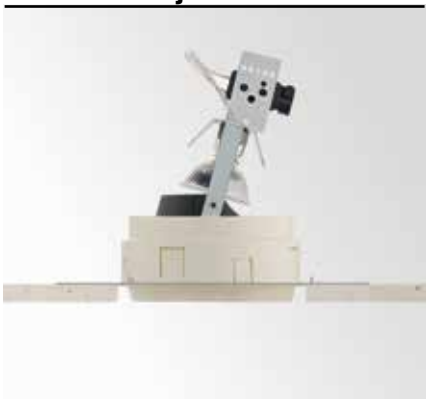




ØKIT x 150 max.25

iMAX® ADJUSTABLE TRIMLESS 50
403 60 00
ADJUSTABLE 0-30° / 355°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
0,2 0,5

REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
TRANSFO
led LED SOLUTION - PAG TEC 4-5

ACCESSORIES (max. 35W)
CLIP 50 + DICROIC FILTER 50




ØKIT x 150 max.25


iMAX® ADJUSTABLE TRIMLESS 50Hi
403 61 00
ADJUSTABLE 0-30° / 355°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W
0,2 0,5

REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
led LED SOLUTION - PAG TEC 4-5

iMax® Adjustable Trimless C50

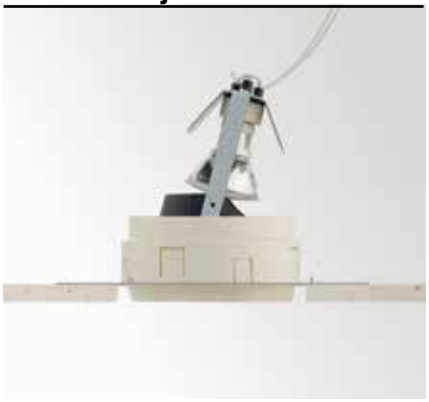



ØKIT x 150 max.25

iMAX® ADJUSTABLE TRIMLESS C50
403 80 00
ADJUSTABLE 0-30° / 355°
GX10 / EXCL.EVG
1 x HIPAR51 max.35W
0,2 0,5

REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX® COVER

OPTIONS
BALLASTSET C50

iMAX®
WALLWASH

Evenly illuminated walls, thanks to the high performance soft ceiling® wallwashers. The specially designed reflector enables uninterrupted, homogenous illumination of the wall, from floor to ceiling. To obtain the best result, specific attention needs to go to the recommended spacing and setback from the wall.

Requirements

iMAX® COVER ROUND WALLWASH ◇
400 00 41 ◇
◇ = B-B / B-MMAT / W-W / W-B / W-MMAT
IP43



INCL.GLASS

CONTROL GEAR



150 x 45 x 30

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER




iMAX® Configurator


Configure your iMax online at
imax.deltalight.com



DIM8: dimming by falling edge dimmer

iMax® Wallwash BR

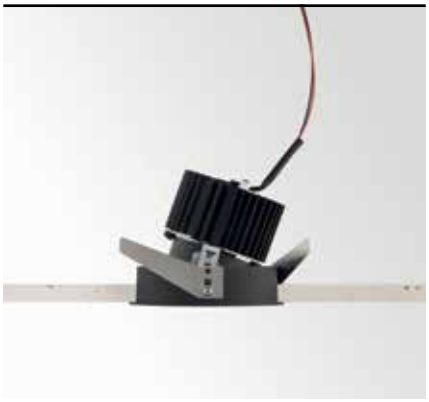



98 x 120 max.25

	CRI > 80	CRI > 90 * (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-29°	**iMAX® WALLWASH BR8 83029 404 01 08 831**	**iMAX® WALLWASH BR8 93029 * 404 01 08 931**
REFLECTOR WFL-43°	**iMAX® WALLWASH BR8 83043 404 01 08 832**	**iMAX® WALLWASH BR8 93043 404 01 08 932**
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-29°	**iMAX® WALLWASH BR8 82729 404 01 08 821**	**iMAX® WALLWASH BR8 92729 * 404 01 08 921**
REFLECTOR WFL-43°	**iMAX® WALLWASH BR8 82743 404 01 08 822**	**iMAX® WALLWASH BR8 92743 404 01 08 922**

FIXED 25°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4

REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

SOFT DIM
INFO SOFT DIM
PAG TEC 9


2700-1800K	850lm (10W)
REFLECTOR FL-40°	**iMAX® WALLWASH SOFT 404 31 08 802**


FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,4

REQUIREMENTS
iMAX® COVER
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

iMax® Wallwash XR

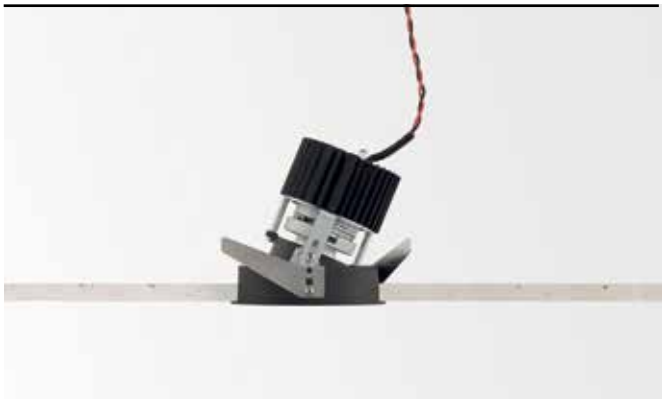



98 x 135 max.25

CRI > 80	CRI > 95
ON REQUEST	
1300lm (12W)	965lm (11W)
iMAX® WALLWASH XR13 83043 404 11 13 832	**iMAX® WALLWASH XR13 93043 404 11 13 932**
1300lm (12W)	965lm (11W)
iMAX® WALLWASH XR13 82743 404 11 13 822	**iMAX® WALLWASH XR13 92743 404 11 13 922**

FIXED 25°
INCL.1 x POWERLED WHITE [L] 12W
EXCL.LED POWER SUPPLY 700mA-DC

FIXED 25°
INCL.1 x POWERLED WHITE [L] 11W
EXCL.LED POWER SUPPLY 500mA-DC

0,4

REQUIREMENTS
iMAX® COVER

OPTIONS
LED POWER SUPPLY 500-700mA-DC / DIM





iMAX®+

The iMax®+ takes all the advantages of the Soft Ceiling® concept and combines it with Delta Light's unique Ex-centric Rotation System (ERS) - as featured in the Tweeter . This patented mechanism upgrades the rotation movement and guarantees advanced lighting abilities, while the double shell design prevents ceiling exposure throughout
all positions.

play.deltalight.com/ers





MAX®+ BR8 W-B + HONEYCOMB 50

iMAX®
Configurator

Configure your iMax online at
imax.deltalight.com





iMAX®+ W-B


MAX®+ B-B


iMAX®+ W-C


MAX®+ B-C


iMAX®+ W-M


MAX®+ B-M

FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 164 **207 01 164**	230 x 230	200 x 200


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ **413 03 01 ◇** ◇ = B	Ø50	
LINEAR SPREAD LENS 50 **413 03 02**	Ø50	
SPREAD LENS 50 **413 03 03**	Ø50	
SOFTENING LENS 50 **413 03 04**	Ø50	
GLASS SBL 50 **413 03 05**	Ø50	

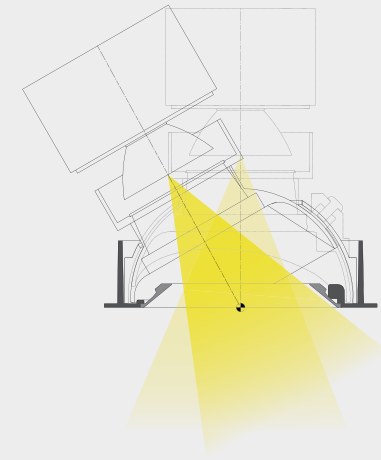



4000K

3000K

LENS SP-6°

LENS SP-12°

REFLECTOR FL-29°

REFLECTOR WFL-43°

2700K


LENS SP-6°

LENS SP-12°

REFLECTOR FL-29°

REFLECTOR WFL-43°





105 x 130 max.25


CRI > 80	CRI > 90
ON REQUEST	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
iMAX® + BR8 83029 ◇ **413 01 08 831 ◇** ◇=B-B/B-C/B-M/W B/W C/W-M	**iMAX® + BR8 93029 ◇** **413 01 08 931 ◇** ◇=B-B/B-C/B-M/W-B/W C/W-M
iMAX® + BR8 83043 ◇ **413 01 08 832 ◇** ◇=B-B/B-C/B-M/W B/W C/W-M	**iMAX® + BR8 93043 ◇** **413 01 08 932 ◇** ◇=B-B/B-C/B-M/W-B/W C/W-M
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
iMAX® + BR8 82729 ◇ **413 01 08 821 ◇** ◇=B-B/B-C/B-M/W B/W C/W-M	**iMAX® + BR8 92729 ◇** **413 01 08 921 ◇** ◇=B-B/B-C/B-M/W-B/W C/W-M
iMAX® + BR8 82743 ◇ **413 01 08 822 ◇** ◇=B-B/B-C/B-M/W B/W C/W-M	**iMAX® + BR8 92743 ◇** **413 01 08 922 ◇** ◇=B-B/B-C/B-M/W-B/W C/W-M

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,5 IP20

OPTIONS
PLASTERKIT 164
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50



105 x 135 max.25


CRI > 80	CRI > 90
ON REQUEST	
584lm (7W)	502lm (7W)
iMAX® + BL4 83010 ◇ **413 02 04 839 ◇** ◇=B-B/B C/B-M/W-B/W C/W-M	**iMAX® + BL4 93010 ◇** **413 02 04 939 ◇** ◇=B-B/B-C/B M/W B/W-C/W M
566lm (7W)	453lm (7W)
iMAX® + BL4 82710 ◇ **413 02 04 829 ◇** ◇=B-B/B C/B-M/W-B/W C/W-M	**iMAX® + BL4 92710 ◇** **413 02 04 929 ◇** ◇=B-B/B-C/B M/W B/W-C/W M

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [G] 7W
EXCL.LED POWER SUPPLY 700mA-DC

CE 0,5 IP20

OPTIONS
PLASTERKIT 164
LED POWER SUPPLY 700mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50



105 x 110 max.25

CRI > 80	CRI > 90
ON REQUEST	
208lm (2W) 295lm (3,2W)	172lm (2W) 243lm (3,2W)
iMAX® + CL 83006 ◇ **413 22 02 839 ◇** ◇=B-B/B-C/B-M/W-B/W C/W-M	**iMAX® + CL 93006 ◇** **413 22 02 939 ◇** ◇=B B/B C/B M/W-B/W-C/W M
175lm (2W) 276lm (3,2W)	160lm (2W) 226lm (3,2W)
iMAX® + CL 82706 ◇ **413 22 02 829 ◇** ◇=B-B/B-C/B-M/W-B/W C/W-M	**iMAX® + CL 92706 ◇** **413 22 02 929 ◇** ◇=B B/B C/B M/W-B/W-C/W M

ADJUSTABLE 0-30° / 355°
INCL.1 x POWERLED WHITE [F] 2-3,2W
EXCL.LED POWER SUPPLY 700-1050mA-DC

CE 0,3 IP20

OPTIONS
PLASTERKIT 164
LED POWER SUPPLY 700-1050mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

PATENTED EX-CENTRIC ROTATION SYSTEM®







KONRAD KRUSIEWICZ


FULL INFO / PAG TEC

Requirements

MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

152 x 100 max.25

0,4



FULL INFO / PAG TEC

Options

CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

FULL INFO / PAG TEC

Accessories

TWEETER CLIP ◇ Ø45 / H13
201 03 00 ◇
◇ = B / W



HONEYCOMB 40 ◇ Ø40
201 03 01 ◇
◇ = ALU / B



LINEAR SPREAD LENS 40 Ø40
201 03 02



SPREAD LENS 40 Ø40
201 03 03




SOFTENING LENS 40 Ø40
201 03 04



GLASS SBL 40 Ø40
201 03 05





TWEETER TRIMLESS REO W-W + TWEETER CLIP W + SOFTENING LENS 40

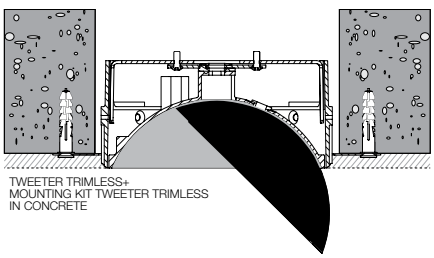

TWEETER TRIMLESS+
MOUNTING KIT TWEETER TRIMLESS
IN CONCRETE

Tweeter Trimless Reo

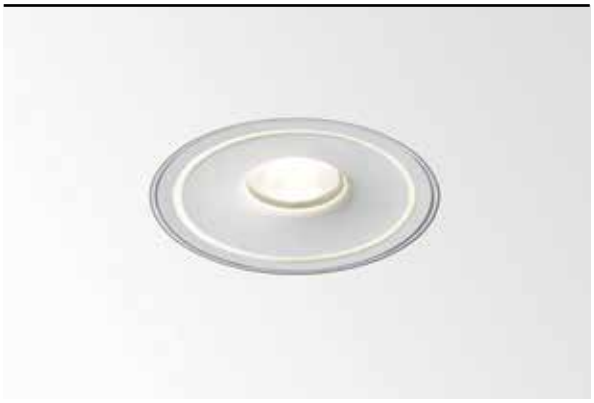



ØKIT x 100

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**TWEETER TRIMLESS REO 3033** ◇ **206 21 28122** ◇ ◇ = B-W / W-W	**TWEETER TRIMLESS REO 3033-9** ◇ **206 21 29122** ◇ ◇ = B-W / W-W
REFLECTOR WFL-50°	**TWEETER TRIMLESS REO 3050** ◇ **206 21 28132** ◇ ◇ = B-W / W-W	**TWEETER TRIMLESS REO 3050-9** ◇ **206 21 29132** ◇ ◇ = B-W / W-W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**TWEETER TRIMLESS REO 2733** ◇ **206 21 28123** ◇ ◇ = B-W / W-W	**TWEETER TRIMLESS REO 2733-9** ◇ **206 21 29123** ◇ ◇ = B-W / W-W
REFLECTOR WFL-50°	**TWEETER TRIMLESS REO 2750** ◇ **206 21 28133** ◇ ◇ = B-W / W-W	**TWEETER TRIMLESS REO 2750-9** ◇ **206 21 29133** ◇ ◇ = B-W / W-W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,7 IP20 IP23


REQUIREMENTS
MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40

Tweeter Trimless 111





ØKIT x 100

TWEETER TRIMLESS 111 ◇
206 21 11 ◇
◇ = B-B / B-W / W-W
ADJUSTABLE 0-45° / 355°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W

CE 0,6 IP20 1,0

REQUIREMENTS
MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

OPTIONS
TRANSFO

play.delta ight.com/tweeter
play.delta ight.com/ers

PATENTED EX-CENTRIC ROTATION SYSTEM®

AWARD DESIGN PLUS light+building · top design award 2013 · reddot design award winner 2013 · iF interior innovation award 2013 Winner

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 118 **202 56 99 01**	280 x 280	220 x 220

CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

FULL INFO / PAG TEC

Accessories

TWEETER CLIP ◇ **201 03 00 ◇** ◇ = B / W	Ø45 / H13
HONEYCOMB 40 ◇ **201 03 01 ◇** ◇ = ALU / B	Ø40
LINEAR SPREAD LENS 40 **201 03 02**	Ø40
SPREAD LENS 40 **201 03 03**	Ø40
SOFTENING LENS 40 **201 03 04**	Ø40
GLASS SBL 40 **201 03 05**	Ø40

Fixation S1




TWEETER ST D REO W-W + TWEETER CLIP W + SOFTENING LENS 40

led

Tweeter ST D Reo





160 x 115 max.25

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**TWEETER ST D REO 3033 S1 ◇** **206 11 28122 ◇** ◇ = W-W	**TWEETER ST D REO 3033-9 S1 ◇** **206 11 29122 ◇** ◇ = W-W
REFLECTOR WFL-50°	**TWEETER ST D REO 3050 S1 ◇** **206 11 28132 ◇** ◇ = W-W	**TWEETER ST D REO 3050-9 S1 ◇** **206 11 29132 ◇** ◇ = W-W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**TWEETER ST D REO 2733 S1 ◇** **206 11 28123 ◇** ◇ = W-W	**TWEETER ST D REO 2733-9 S1 ◇** **206 11 29123 ◇** ◇ = W-W
REFLECTOR WFL-50°	**TWEETER ST D REO 2750 S1 ◇** **206 11 28133 ◇** ◇ = W-W	**TWEETER ST D REO 2750-9 S1 ◇** **206 11 29133 ◇** ◇ = W-W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,9 IP20

OPTIONS
PLASTERKIT 118
LED POWER SUPPLY 350-500mA-DC / DIM


ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40


PATENTED EX-CENTRIC ROTATION SYSTEM®

play.de talight.com/tweeter





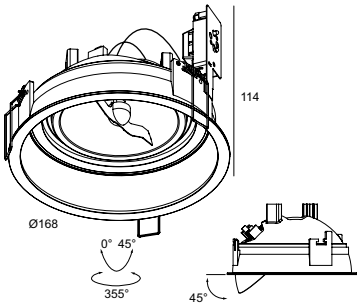

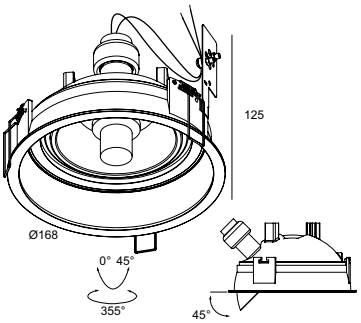

160 x 115 max.25

TWEETER ST D 111 ◇
206 11 11 ◇
◇ = W-B / W-W
ADJUSTABLE 0-45° / 355°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W
CE 0,8 IP20 1,0

OPTIONS
PLASTERKIT 118
TRANSFO

160 x 130 max.25

TWEETER ST D H111 ◇
206 11 88 ◇
◇ = W-B / W-W
ADJUSTABLE 0-45° / 355°
GX8.5 / EXCL.EVG
1 x HIR111-CE-P max.70W
CE 0,8 IP20 1,0

OPTIONS
PLASTERKIT 118
BALLASTSET HID


PATENTED EX-CENTRIC ROTATION SYSTEM®
play.deltalight.com/tweeter

AWARD DESIGN PLUS light+building
top design award 2013
reddot design award winner 2013
interior innovation award 2013 Winner




WWW.SAAI.CO



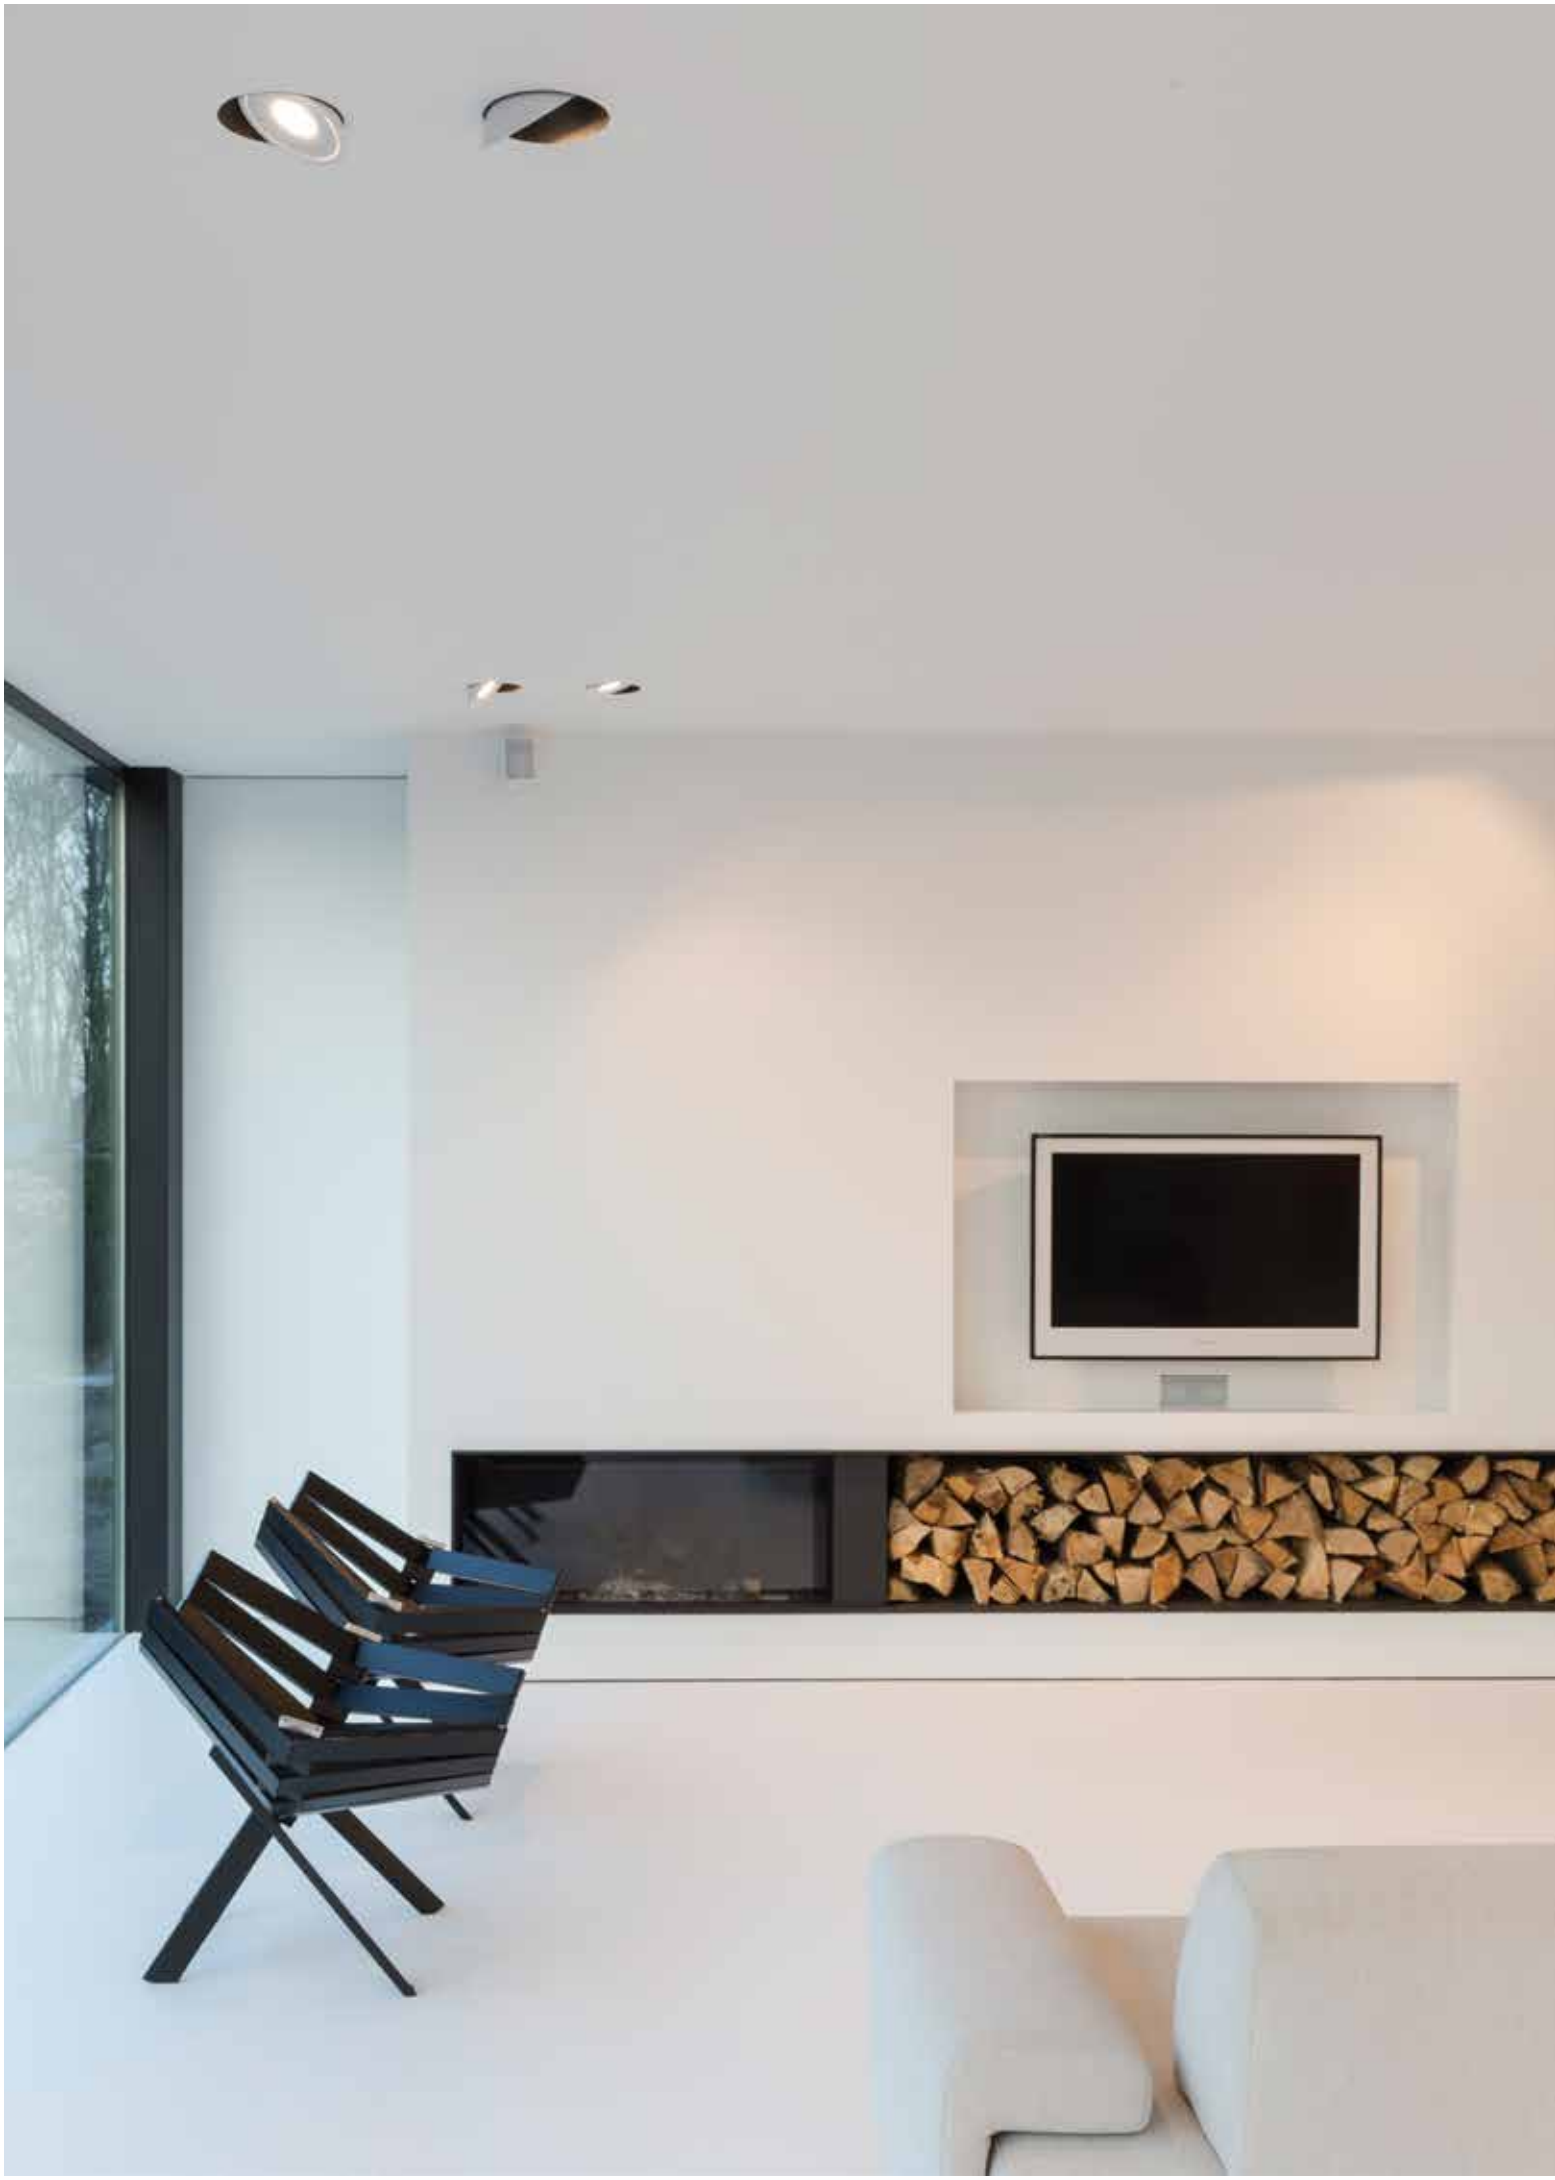



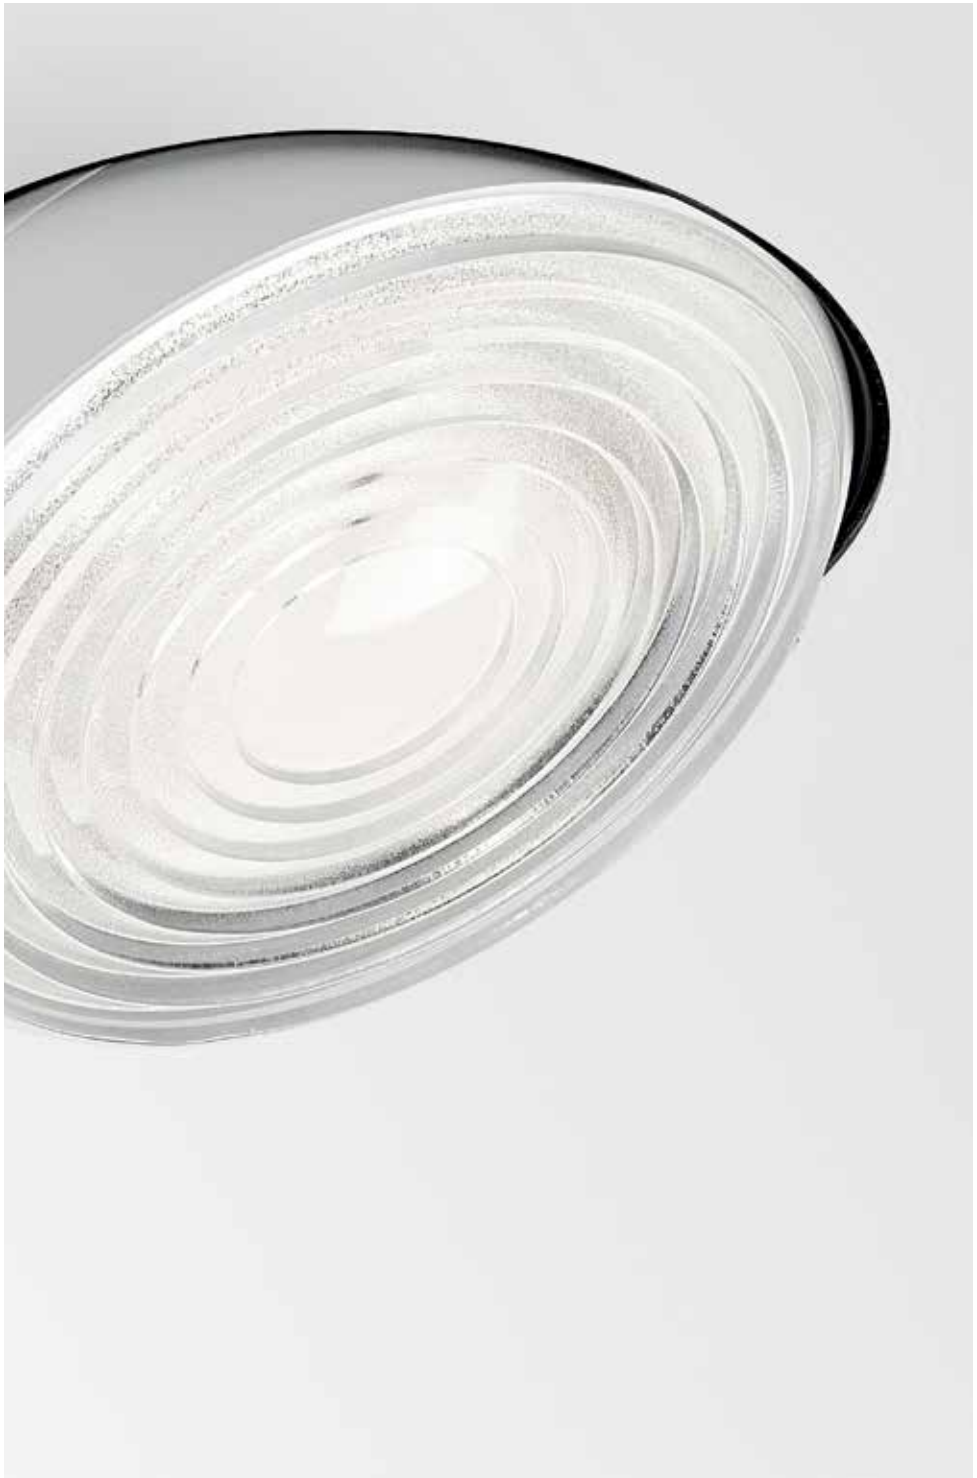


FULL INFO / PAG TEC

Requirements

MOUNTING KIT TWEETER TRIMLESS
202 15 61 971

152 x 100 max.25

0,4



FULL INFO / PAG TEC

Options

CONTROL GEAR




LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER




Tweeter Trimless






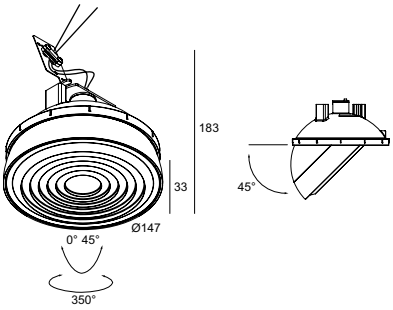

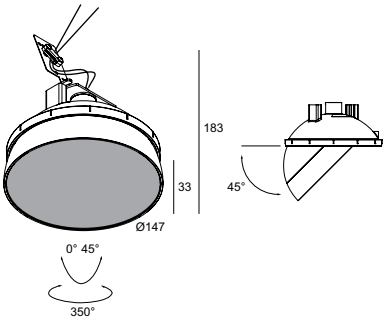


	ØKIT x 100	ØKIT x 100
	CRI > 80	**CRI > 80**
4000K		
	ON REQUEST	ON REQUEST
3000K	1930lm (18W)	1930lm (18W)
	TWEETER TRIMLESS FRL 830 ◇ **206 22 21 83 ◇** ◇ = B-W / W-W	**TWEETER TRIMLESS SBL 830 ◇** **206 23 21 83 ◇** ◇ = B-W / W-W
2700K	1787lm (18W)	1787lm (18W)
	TWEETER TRIMLESS FRL 827 ◇ **206 22 21 82 ◇** ◇ = B-W / W-W	**TWEETER TRIMLESS SBL 827 ◇** **206 23 21 82 ◇** ◇ = B-W / W-W
	ADJUSTABLE 0-45° / 355° INCL.1 x POWERLED WHITE [J] 18W INCL.1 x FRESNELL LENS 35° EXCL.LED POWER SUPPLY 500mA-DC	ADJUSTABLE 0-45° / 355° INCL.1 x POWERLED WHITE [J] 18W INCL.1 x PC SBL EXCL.LED POWER SUPPLY 500mA-DC
	CE 1,2 IP20	CE 0,9 IP20
	REQUIREMENTS MOUNTING KIT TWEETER TRIMLESS 202 15 61 971	REQUIREMENTS MOUNTING KIT TWEETER TRIMLESS 202 15 61 971
	OPTIONS LED POWER SUPPLY 500mA-DC / DIM	OPTIONS LED POWER SUPPLY 500mA-DC / DIM

PATENTED EX-CENTRIC ROTATION SYSTEM®

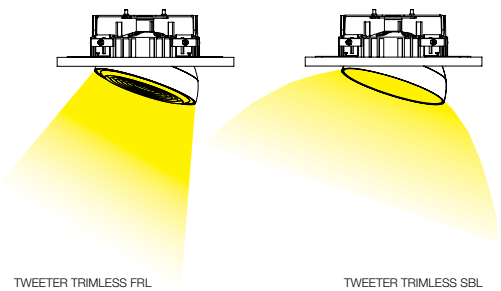

TWEETER TRIMLESS FRL

TWEETER TRIMLESS SBL

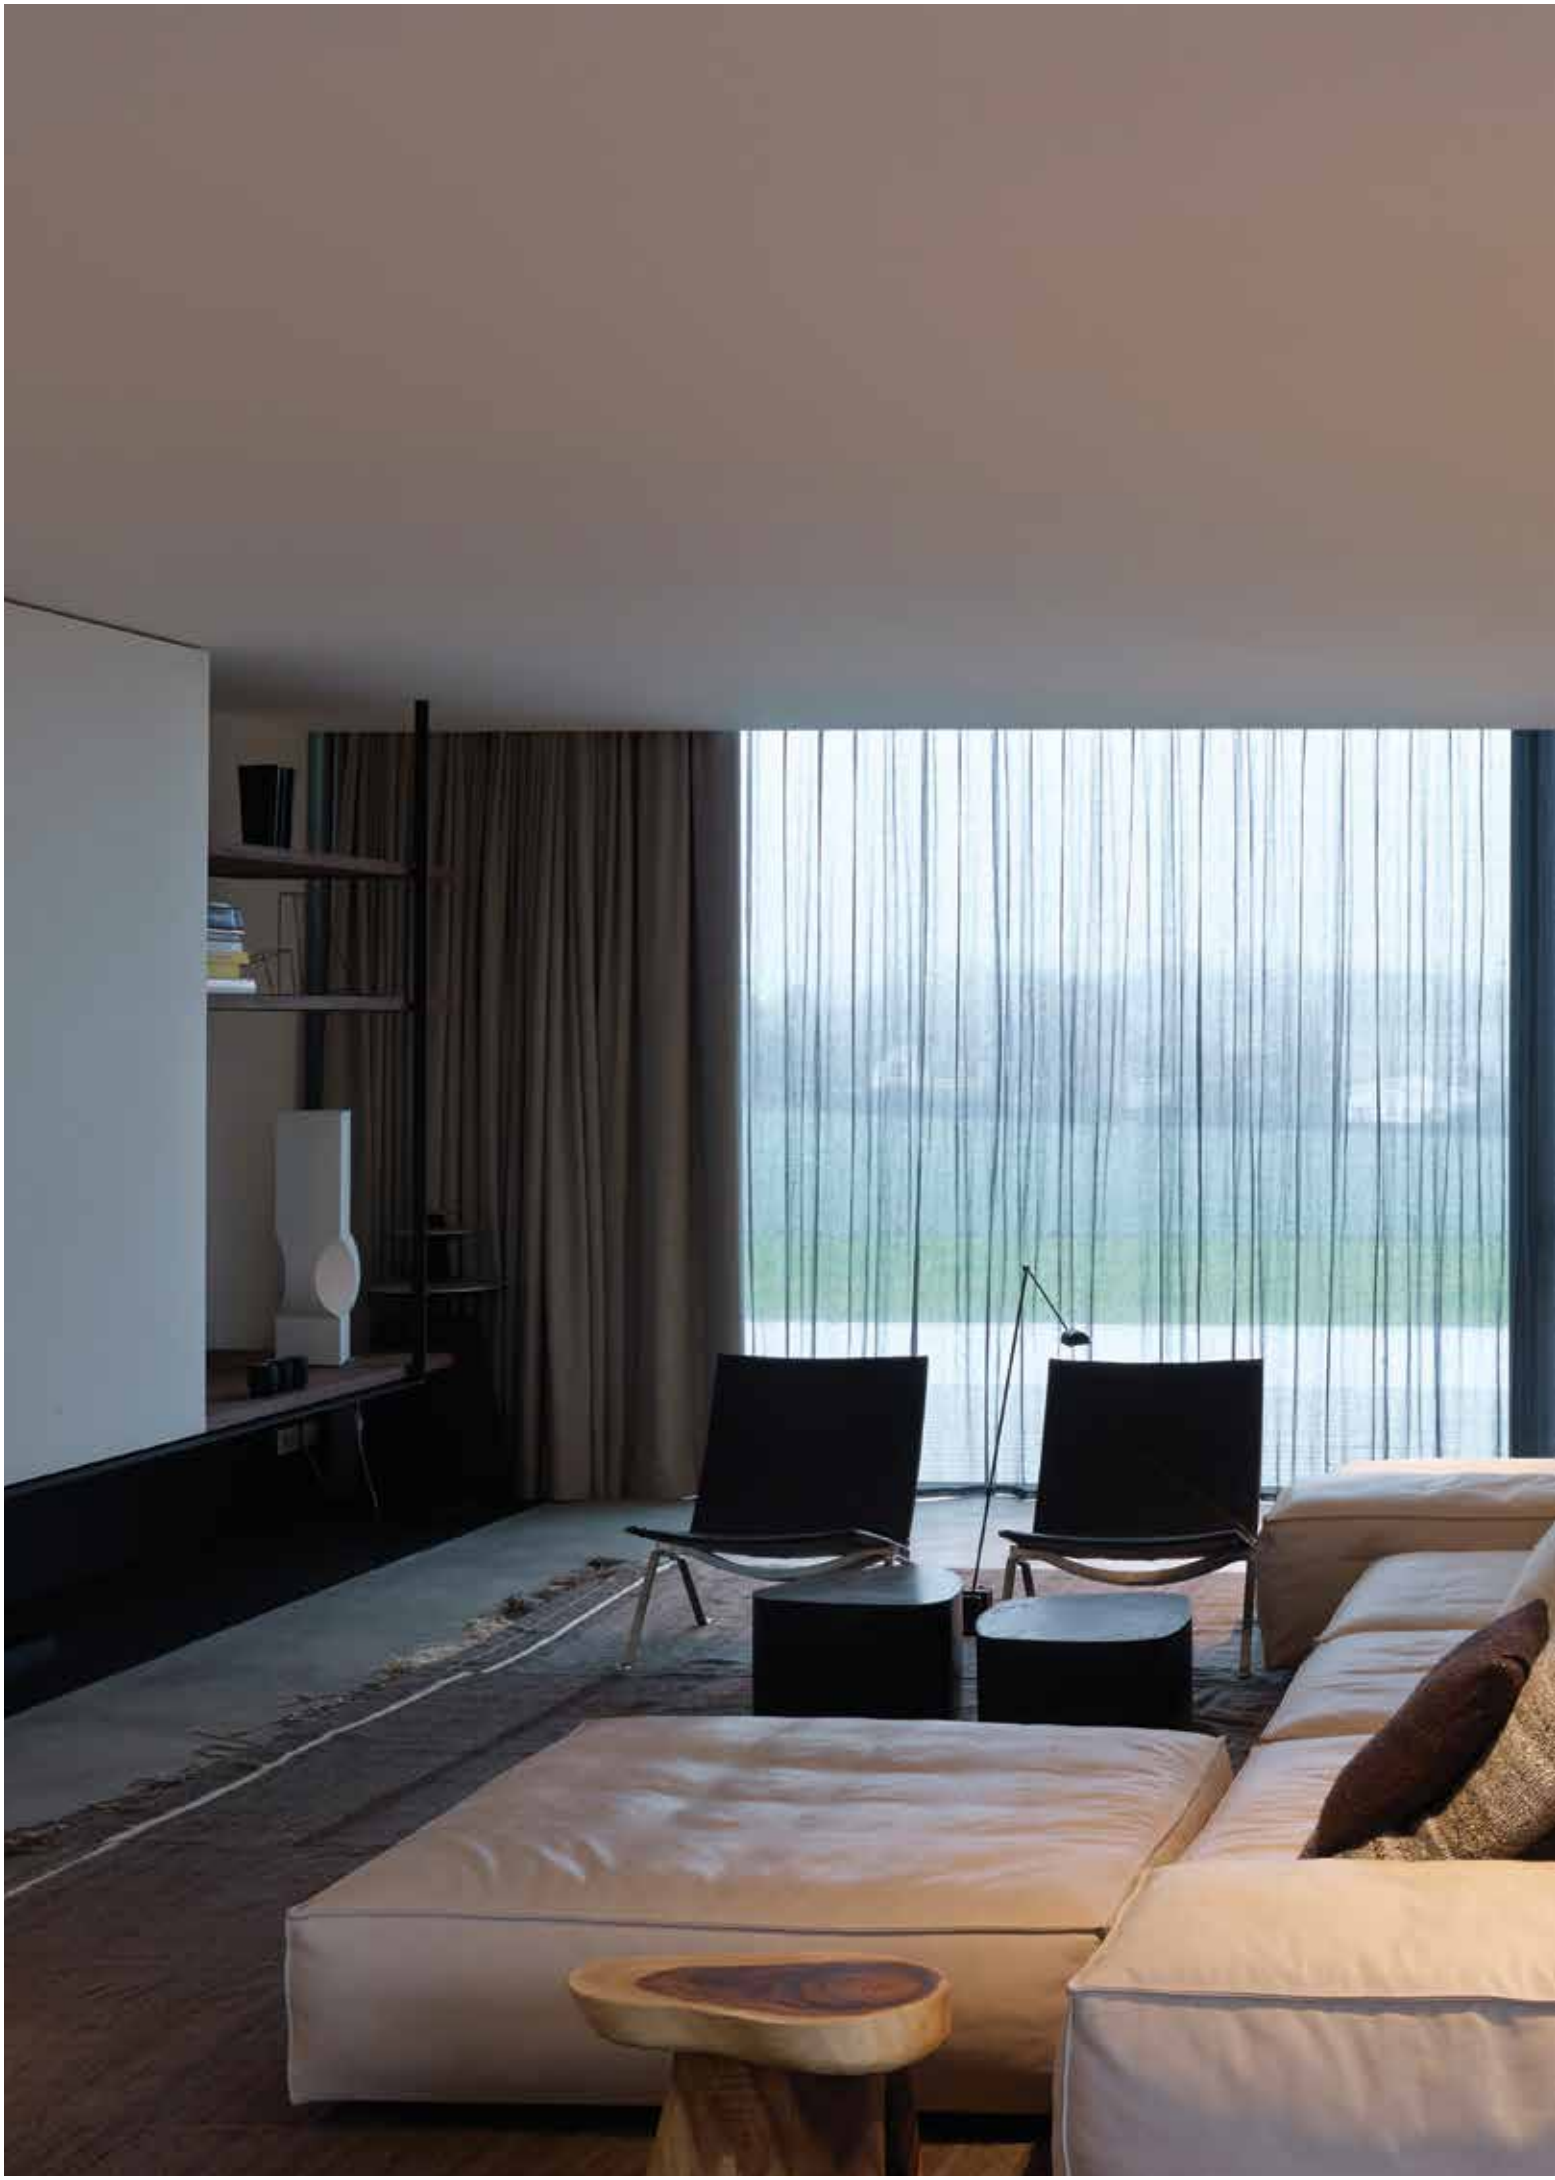





FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 170 **207 01 170**	230 x 230	100 x 220

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



led

Oreo





98 x 75 max.22

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**OREO 3033 S1** ◇ **206 06 28122** ◇ ◇ = W	**OREO 3033-9 S1** ◇ **206 06 29122** ◇ ◇ = W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**OREO 2733 S1** ◇ **206 06 28123** ◇ ◇ = W	**OREO 2733-9 S1** ◇ **206 06 29123** ◇ ◇ = W

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

IP20 IP23 IP20 IP20

OPTIONS
PLASTERKIT 170
LED POWER SUPPLY 350-500mA-DC / DIM

REO
OVERVIEW


Reo (Fixed)



Reo **OK** (Adjustable)



Reo **OK1** (Adjustable)

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/20226228132 or www.deltalight.com/reo

MINI REO OK



Ø 82

Ø 67

ADJUSTABLE 0-20°

led

PAG INT 63

MINI REO OK1



Ø 86

Ø 76

ADJUSTABLE 0-20° / 350°

led

PAG INT 65

MINI REO



Ø 75

Ø 67

FIXED

led

PAG INT 67

REO OK



Ø 104

Ø 98

ADJUSTABLE 0-30° / 350°

led

PAG INT 69

REO



Ø 82

Ø 76

FIXED

led

PAG INT 71

REO S OK



Ø 104 x 104

Ø 98

ADJUSTABLE 0-30° / 350°

led

PAG INT 73

REO S



Ø 84 x 84

Ø 67

FIXED

led

PAG INT 73

GRAND REO



Ø 120

Ø 102

FIXED

led

PAG INT 77

GRAND REO OK




Ø 132

Ø 121/122

ADJUSTABLE 0-20° / 350°

led

PAG INT 79

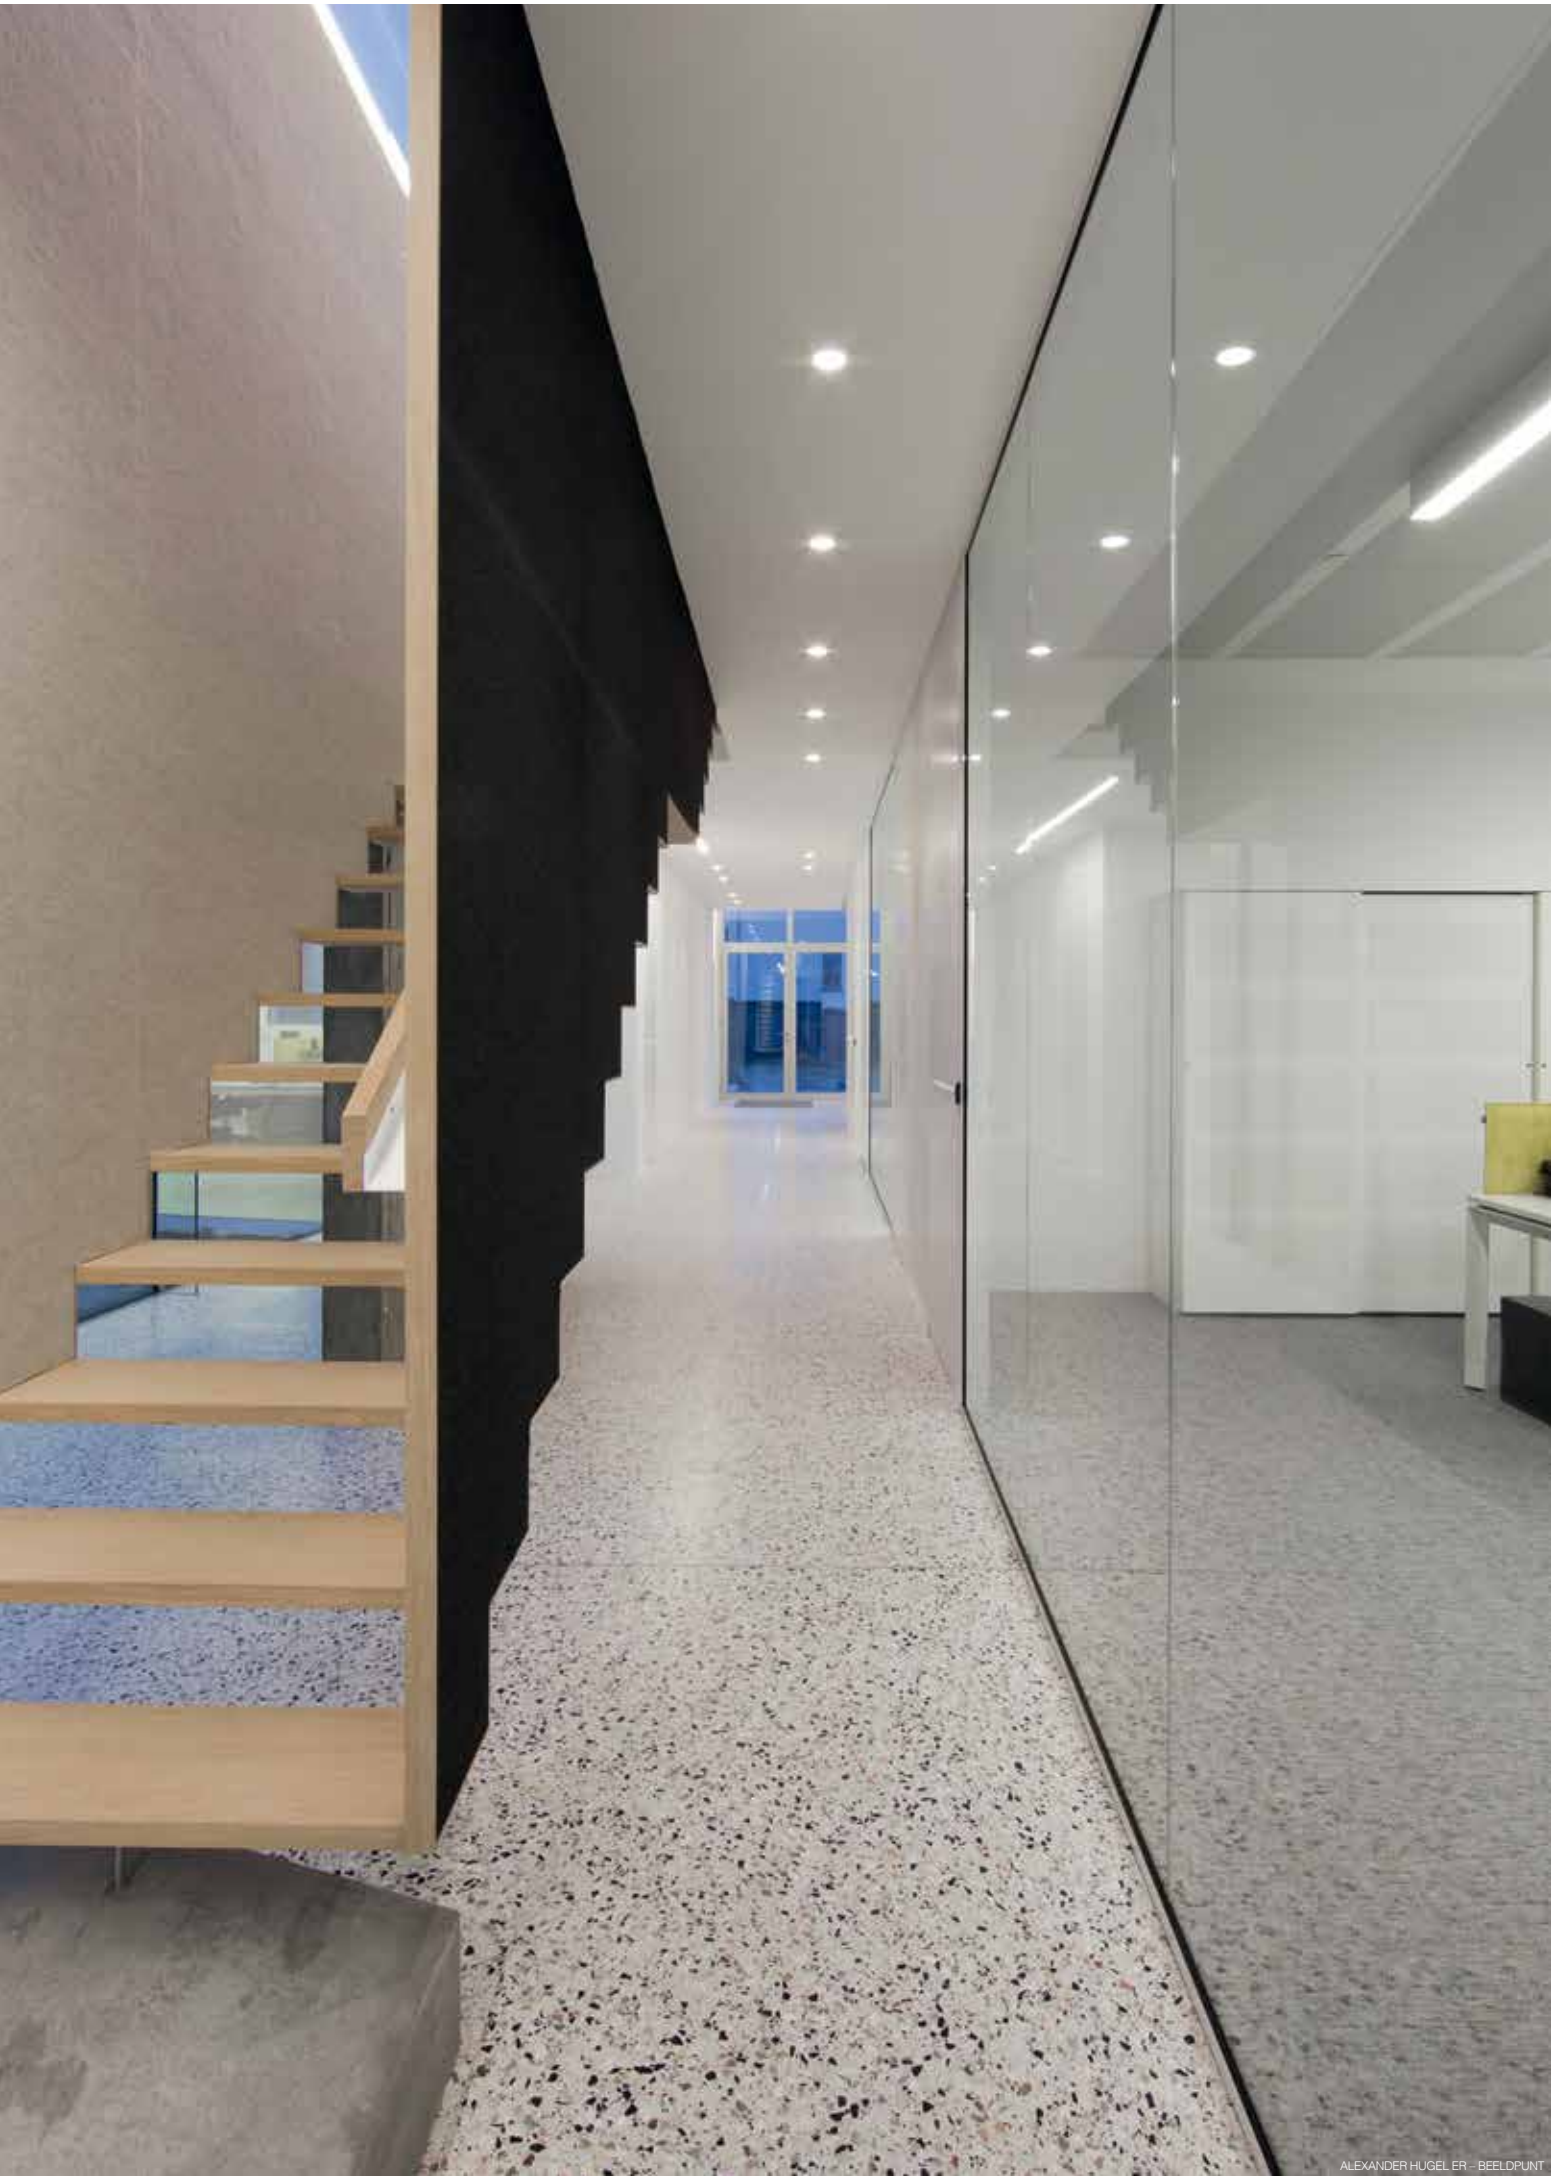

ALEXANDER HUGEL ER – BEELDPUNT



NADIA CORNELISSEN / ACES OF SPACE

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories

MINI REO HONEYCOMB◇ Ø37 / H6
415 03 01 ◇
◇ = B / W



MINI REO SOFTENING LENS◇ Ø37 / H6
415 03 04 ◇
◇ = B / W



MINI REO GLASS SBL◇ Ø37 / H6
415 03 05 ◇
◇ = B / W






MINI REO OK B + MINI REO HONEYCOMB B

Mini Reo OK





67 x 70 min.5

	CRI > 80		
4000K			
	ON REQUEST		
3000K	307lm (3,3W)	475lm (6W)	638lm (7W)
LENS SP-10°	**MINI REO OK 83010** ◇ **415 222 831** ◇ ◇ = B / W		
LENS FL-20°		**MINI REO OK 83020** ◇ **415 222 832** ◇ ◇ = B / W	
REFLECTOR WFL-40°			**MINI REO OK 83040** ◇ **415 221 833** ◇ ◇ = B / W
2700K	294lm (3,3W)	450lm (6W)	595lm (7W)
LENS SP-10°	**MINI REO OK 82710** ◇ **415 222 821** ◇ ◇ = B / W		
LENS FL-20°		**MINI REO OK 82720** ◇ **415 222 822** ◇ ◇ = B / W	
REFLECTOR WFL-40°			**MINI REO OK 82740** ◇ **415 221 823** ◇ ◇ = B / W
	ADJUSTABLE 0°- 20° INCL.1 x POWERLED WHITE [B] 3,3W EXCL.LED POWER SUPPLY 1050mA-DC 0,2 IP20 OPTIONS LED POWER SUPPLY 1050mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	ADJUSTABLE 0°- 20° INCL.1 x POWERLED WHITE [C] 6W EXCL.LED POWER SUPPLY 500mA-DC 0,2 IP20 OPTIONS LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	ADJUSTABLE 0°- 20° INCL.1 x POWERLED WHITE [D] 7W EXCL.LED POWER SUPPLY 350mA-DC 0,2 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories

MINI REO HONEYCOMB◇ Ø37 / H6
415 03 01 ◇
◇ = B / W



MINI REO SOFTENING LENS◇ Ø37 / H6
415 03 04 ◇
◇ = B / W



MINI REO GLASS SBL◇ Ø37 / H6
415 03 05 ◇
◇ = B / W






MINI REO OK1 W + MINI REO HONEYCOMB B

Mini Reo OK1





76 x 70 min.5

	CRI > 80		
4000K			
	ON REQUEST		
3000K	307lm (3,3W)	475lm (6W)	638lm (7W)
LENS SP-10°	**MINI REO OK1 83010** ◇ **415 212 831** ◇ ◇ = B / W		
LENS FL-20°		**MINI REO OK1 83020** ◇ **415 212 832** ◇ ◇ = B / W	
REFLECTOR WFL-40°			**MINI REO OK1 83040** ◇ **415 211 833** ◇ ◇ = B / W
2700K	294lm (3,3W)	450lm (6W)	595lm (7W)
LENS SP-10°	**MINI REO OK1 82710** ◇ **415 212 821** ◇ ◇ = B / W		
LENS FL-20°		**MINI REO OK1 82720** ◇ **415 212 822** ◇ ◇ = B / W	
REFLECTOR WFL-40°			**MINI REO OK1 82740** ◇ **415 211 823** ◇ ◇ = B / W
	ADJUSTABLE 0°- 20° / 350° INCL.1 x POWERLED WHITE [B] 3,3W EXCL.LED POWER SUPPLY 1050mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 1050mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	ADJUSTABLE 0°- 20° / 350° INCL.1 x POWERLED WHITE [C] 6W EXCL.LED POWER SUPPLY 500mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	ADJUSTABLE 0°- 20° / 350° INCL.1 x POWERLED WHITE [D] 7W EXCL.LED POWER SUPPLY 350mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL



NADIA CORNELISSEN / ACES OF SPACE

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories

MINI REO HONEYCOMB◇ Ø37 / H6
415 03 01 ◇
◇ = B / W



MINI REO SOFTENING LENS◇ Ø37 / H6
415 03 04 ◇
◇ = B / W



MINI REO GLASS SBL◇ Ø37 / H6
415 03 05 ◇
◇ = B / W






MINI REO B + MINI REO HONEYCOMB B

Mini Reo





67 x 60 min.5

	CRI > 80		
4000K			
	ON REQUEST		
3000K	307lm (3,3W)	475lm (6W)	638lm (7W)
LENS SP-10°	**MINI REO 83010** ◇ **415 112 831** ◇ ◇ = B / MMAT / W		
LENS FL-20°		**MINI REO 83020** ◇ **415 112 832** ◇ ◇ = B / MMAT / W	
REFLECTOR WFL-40°			**MINI REO 83040** ◇ **415 111 833** ◇ ◇ = B / MMAT / W
2700K	294lm (3,3W)	450lm (6W)	595lm (7W)
LENS SP-10°	**MINI REO 82710** ◇ **415 112 821** ◇ ◇ = B / MMAT / W		
LENS FL-20°		**MINI REO 82720** ◇ **415 112 822** ◇ ◇ = B / MMAT / W	
REFLECTOR WFL-40°			**MINI REO 82740** ◇ **415 111 823** ◇ ◇ = B / MMAT / W
	FIXED INCL.1 x POWERLED WHITE [B] 3,3W EXCL.LED POWER SUPPLY 1050mA-DC CE 0,2 IP20 OPTIONS LED POWER SUPPLY 1050mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	FIXED INCL.1 x POWERLED WHITE [C] 6W EXCL.LED POWER SUPPLY 500mA-DC CE 0,2 IP20 OPTIONS LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	FIXED INCL.1 x POWERLED WHITE [D] 7W EXCL.LED POWER SUPPLY 350mA-DC CE 0,2 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL



STUD EBUREAU HENK PIJPAERT ENG NEER NG

FULL INFO / PAG TEC

Requirements

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 170
207 01 170

230 x 230

100 x 220

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER


Fixation S1 | Fixation S2

DIM8: dimming by falling edge dimmer

Reo OK







	98 x 65 max.30		98 x 65	
	CRI > 80	**CRI > 90 *** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90 *** (> 97 ON REQUEST)
4000K	762lm (7W) 1071lm (10W)		762lm (7W) 1071lm (10W)	
REFLECTOR FL-33°	**REO OK 4033 S1** ◇ **202 37 28124** ◇ ◇ = A / W		**REO OK 4033 S2** ◇ **202 372 28124** ◇ ◇ = A / W	
REFLECTOR WFL-50°	**REO OK 4050 S1** ◇ **202 37 28134** ◇ ◇ = A / W		**REO OK 4050 S2** ◇ **202 372 28134** ◇ ◇ = A / W	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**REO OK 3033 S1** ◇ **202 37 28122** ◇ ◇ = A / W	**REO OK 3033-9 S1** ◇ * **202 37 29122** ◇ ◇ = A / W	**REO OK 3033 S2** ◇ **202 372 28122** ◇ ◇ = A / W	**REO OK 3033-9 S2** ◇ * **202 372 29122** ◇ ◇ = A / W
REFLECTOR WFL-50°	**REO OK 3050 S1** ◇ **202 37 28132** ◇ ◇ = A / W	**REO OK 3050-9 S1** ◇ **202 37 29132** ◇ ◇ = A / W	**REO OK 3050 S2** ◇ **202 372 28132** ◇ ◇ = A / W	**REO OK 3050-9 S2** ◇ **202 372 29132** ◇ ◇ = A / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**REO OK 2733 S1** ◇ **202 37 28123** ◇ ◇ = A / W	**REO OK 2733-9 S1** ◇ * **202 37 29123** ◇ ◇ = A / W	**REO OK 2733 S2** ◇ **202 372 28123** ◇ ◇ = A / W	**REO OK 2733-9 S2** ◇ * **202 372 29123** ◇ ◇ = A / W
REFLECTOR WFL-50°	**REO OK 2750 S1** ◇ **202 37 28133** ◇ ◇ = A / W	**REO OK 2750-9 S1** ◇ **202 37 29133** ◇ ◇ = A / W	**REO OK 2750 S2** ◇ **202 372 28133** ◇ ◇ = A / W	**REO OK 2750-9 S2** ◇ **202 372 29133** ◇ ◇ = A / W
	ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC OPTIONS PLASTERKIT 170 LED POWER SUPPLY 350-500mA-DC / DIM		ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC OPTIONS PLASTERKIT 170 LED POWER SUPPLY 350-500mA-DC / DIM	
2700-1800K	850lm (10W)		850lm (10W)	
REFLECTOR FL-40°	**REO OK SOFT S1** ◇ **202 37 28120** ◇ ◇ = A / W		**REO OK SOFT S2** ◇ **202 372 28120** ◇ ◇ = A / W	
	ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 170		ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 170	

new SOFT DIM

INFO SOFT DIM
PAG TEC 9



FULL INFO / PAG TEC

Requirements

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 101
202 11 19

205 x 205

80 x 180

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER


DIM8: dimming by falling edge dimmer


Fixation S1

Fixation S2

Reo







	76 x 55 max.22		76 x 55	
	CRI > 80	**CRI > 90** * (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** * (> 97 ON REQUEST)
4000K	762lm (7W) 1071lm (10W)		762lm (7W) 1071lm (10W)	
REFLECTOR FL-33°	**REO 4033 S1** ◇ **202 26 28124** ◇ ◇ = C / MMAT / W		**REO 4033 S2** ◇ **202 262 28124** ◇ ◇ = MMAT / W	
REFLECTOR WFL-50°	**REO 4050 S1** ◇ **202 26 28134** ◇ ◇ = C / MMAT / W		**REO 4050 S2** ◇ **202 262 28134** ◇ ◇ = MMAT / W	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**REO 3033 S1** ◇ **202 26 28122** ◇ ◇ = C / MMAT / W	**REO 3033-9 S1** ◇ * **202 26 29122** ◇ ◇ = C / MMAT / W	**REO 3033 S2** ◇ **202 262 28122** ◇ ◇ = MMAT / W	**REO 3033-9 S2** ◇ * **202 262 29122** ◇ ◇ = MMAT / W
REFLECTOR WFL-50°	**REO 3050 S1** ◇ **202 26 28132** ◇ ◇ = C / MMAT / W	**REO 3050-9 S1** ◇ **202 26 29132** ◇ ◇ = C / MMAT / W	**REO 3050 S2** ◇ **202 262 28132** ◇ ◇ = MMAT / W	**REO 3050-9 S2** ◇ **202 262 29132** ◇ ◇ = MMAT / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**REO 2733 S1** ◇ **202 26 28123** ◇ ◇ = C / MMAT / W	**REO 2733-9 S1** ◇ * **202 26 29123** ◇ ◇ = C / MMAT / W	**REO 2733 S2** ◇ **202 262 28123** ◇ ◇ = MMAT / W	**REO 2733-9 S2** ◇ * **202 262 29123** ◇ ◇ = MMAT / W
REFLECTOR WFL-50°	**REO 2750 S1** ◇ **202 26 28133** ◇ ◇ = C / MMAT / W	**REO 2750-9 S1** ◇ **202 26 29133** ◇ ◇ = C / MMAT / W	**REO 2750 S2** ◇ **202 262 28133** ◇ ◇ = MMAT / W	**REO 2750-9 S2** ◇ **202 262 29133** ◇ ◇ = MMAT / W
	FIXED INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 101 LED POWER SUPPLY 350-500mA-DC / DIM		FIXED INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP43 IP20 IP20 OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM	
2700-1800K	850lm (10W)		850lm (10W)	
REFLECTOR FL-40°	**REO SOFT S1** ◇ **202 26 28120** ◇ ◇ = C / MMAT / W		**REO SOFT S2** ◇ **202 262 28120** ◇ ◇ = MMAT / W	
	FIXED INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP43 IP20 IP20 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 101		FIXED INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP43 IP20 IP20 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8	

new SOFT DIM

INFO SOFT DIM
PAG TEC 9



REO S 3033 S1 C-B

FULL INFO / PAG TEC

Requirements

CONTROL GEAR		
LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8	150 x 45 x 30	SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 101 202 11 19	205 x 205	80 x 180
PLASTERKIT 170 207 01 170	230 x 230	100 x 220

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

Fixation S1

DIM8: dimming by falling edge dimmer

4000K

REFLECTOR FL-33°

REFLECTOR WFL-50°

3000K

REFLECTOR FL-33°

REFLECTOR WFL-50°

2700K

REFLECTOR FL-33°

REFLECTOR WFL-50°

new SOFT DIM

INFO SOFT DIM
PAG TEC 9


2700-1800K


REFLECTOR FL-40°

Reo S OK







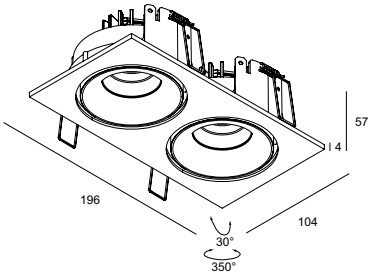

98 x 55 max.30

CRI > 80	**CRI > 90** * (> 97 ON REQUEST)
762lm (7W) 1071lm (10W)	
REO S OK 4033 S1 ◇ **202 38 28124** ◇ ◇ = A / W	
REO S OK 4050 S1 ◇ **202 38 28134** ◇ ◇ = A / W	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REO S OK 3033 S1 ◇ **202 38 28122** ◇ ◇ = A / W	**REO S OK 3033-9 S1** ◇ * **202 38 29122** ◇ ◇ = A / W
REO S OK 3050 S1 ◇ **202 38 28132** ◇ ◇ = A / W	**REO S OK 3050-9 S1** ◇ **202 38 29132** ◇ ◇ = A / W
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REO S OK 2733 S1 ◇ **202 38 28123** ◇ ◇ = A / W	**REO S OK 2733-9 S1** ◇ * **202 38 29123** ◇ ◇ = A / W
REO S OK 2750 S1 ◇ **202 38 28133** ◇ ◇ = A / W	**REO S OK 2750-9 S1** ◇ **202 38 29133** ◇ ◇ = A / W

ADJUSTABLE 0°- 30° / 350°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4 IP20 IP23 IP20 IP20

OPTIONS
PLASTERKIT 170
LED POWER SUPPLY 350-500mA-DC / DIM

850lm (10W)
REO S OK SOFT S1 ◇ **202 38 28120** ◇ ◇ = A / W

ADJUSTABLE 0°- 30° / 350°
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,4 IP20 IP23 IP20 IP20

REQUIREMENTS
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

OPTIONS
PLASTERKIT 170

190 x 98 x 55 max.30

CRI > 80	**CRI > 90** * (> 97 ON REQUEST)
2 x 762lm (7W) 2 x 1071lm (10W)	
REO 2 S OK 4033 S1 ◇ **202 38 28224** ◇ ◇ = A / W	
REO 2 S OK 4050 S1 ◇ **202 38 28234** ◇ ◇ = A / W	
2 x 680lm (7W) 2 x 958lm (10W)	2 x 566lm (7W) 2 x 803lm (10W)
REO 2 S OK 3033 S1 ◇ **202 38 28222** ◇ ◇ = A / W	**REO 2 S OK 3033-9 S1** ◇ * **202 38 29222** ◇ ◇ = A / W
REO 2 S OK 3050 S1 ◇ **202 38 28232** ◇ ◇ = A / W	**REO 2 S OK 3050-9 S1** ◇ **202 38 29232** ◇ ◇ = A / W
2 x 618lm (7W) 2 x 876lm (10W)	2 x 525lm (7W) 2 x 742lm (10W)
REO 2 S OK 2733 S1 ◇ **202 38 28223** ◇ ◇ = A / W	**REO 2 S OK 2733-9 S1** ◇ * **202 38 29223** ◇ ◇ = A / W
REO 2 S OK 2750 S1 ◇ **202 38 28233** ◇ ◇ = A / W	**REO 2 S OK 2750-9 S1** ◇ **202 38 29233** ◇ ◇ = A / W

ADJUSTABLE 0°- 30° / 350°
INCL.2 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,8 IP20 IP23 IP20 IP20

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

2 x 850lm (10W)
REO 2 S OK SOFT S1 ◇ **202 38 28220** ◇ ◇ = A / W


ADJUSTABLE 0°- 30° / 350°
INCL.2 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,8 IP20 IP23 IP20 IP20

REQUIREMENTS
2 x LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

Reo S





67 x 55 max.22

CRI > 80	**CRI > 90** * (> 97 ON REQUEST)
762lm (7W) 1071lm (10W)	
REO S 4033 S1 ◇ **202 141 28124** ◇ ◇ = C-B / W-C / W-W	
REO S 4050 S1 ◇ **202 141 28134** ◇ ◇ = C-B / W-C / W-W	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REO S 3033 S1 ◇ **202 141 28122** ◇ ◇ = C-B / W-C / W-W	**REO S 3033-9 S1** ◇ * **202 141 29122** ◇ ◇ = C-B / W-C / W-W
REO S 3050 S1 ◇ **202 141 28132** ◇ ◇ = C-B / W-C / W-W	**REO S 3050-9 S1** ◇ **202 141 29132** ◇ ◇ = C-B / W-C / W-W
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REO S 2733 S1 ◇ **202 141 28123** ◇ ◇ = C-B / W-C / W-W	**REO S 2733-9 S1** ◇ * **202 141 29123** ◇ ◇ = C-B / W-C / W-W
REO S 2750 S1 ◇ **202 141 28133** ◇ ◇ = C-B / W-C / W-W	**REO S 2750-9 S1** ◇ **202 141 29133** ◇ ◇ = C-B / W-C / W-W

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20 IP43 IP20 IP20

OPTIONS
PLASTERKIT 101
LED POWER SUPPLY 350-500mA-DC / DIM

850lm (10W)
REO S SOFT S1 ◇ **202 141 28120** ◇ ◇ = C-B / W-C / W-W

FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC


0,3 IP20 IP43 IP20 IP20

REQUIREMENTS
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

OPTIONS
PLASTERKIT 101





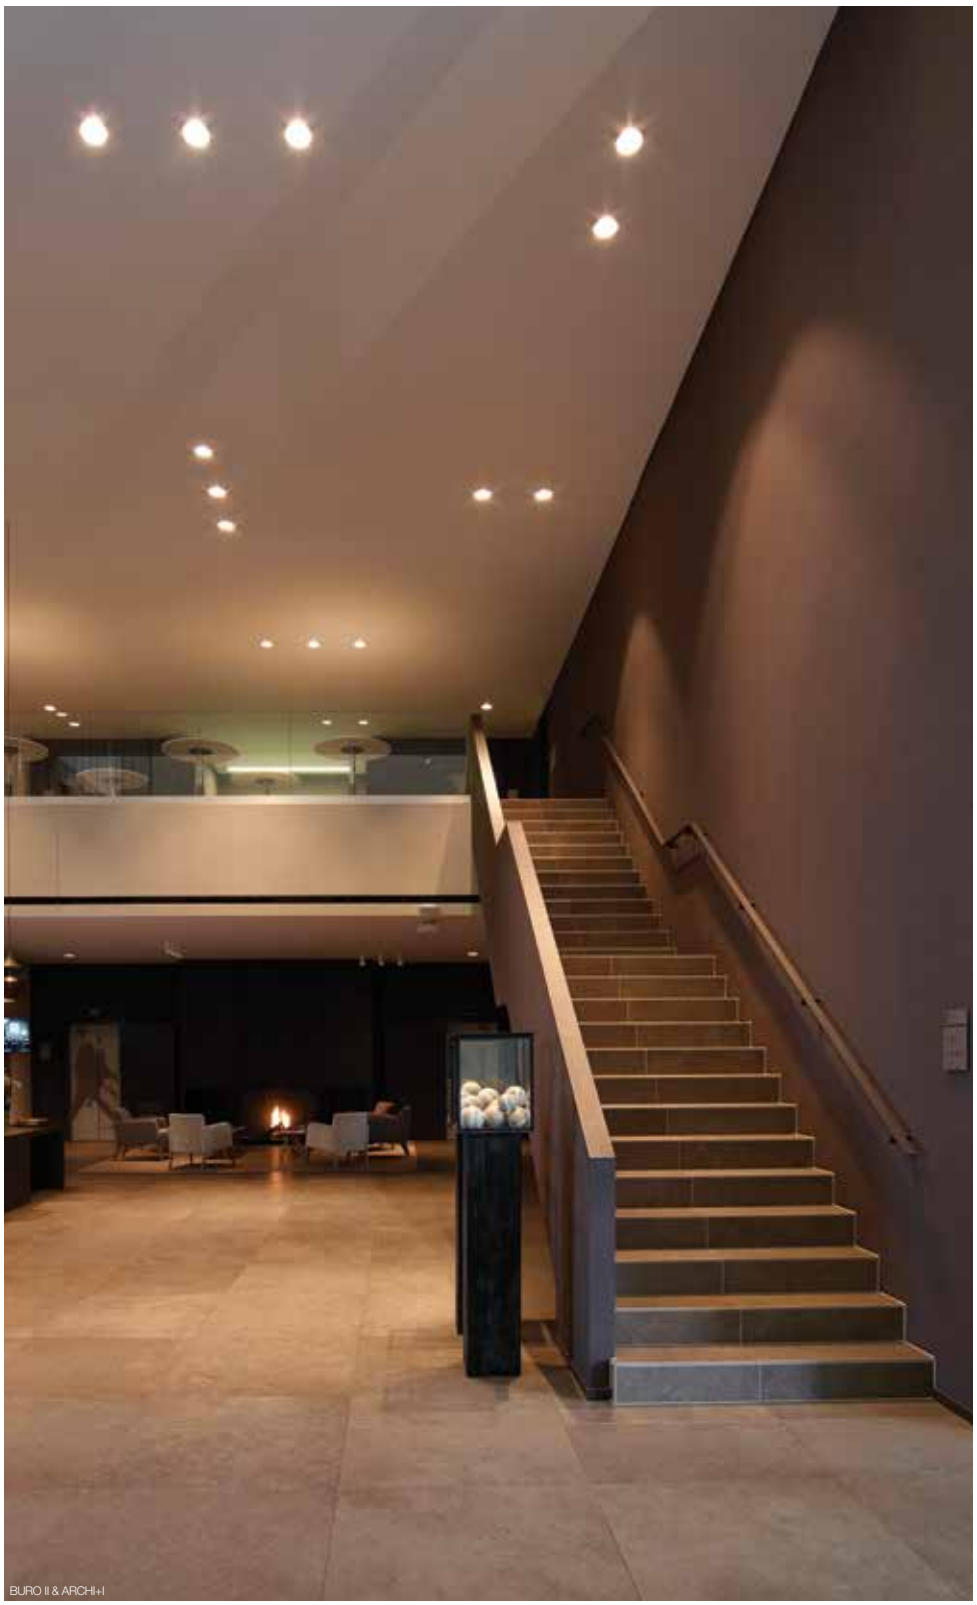

BURO II & ARCHI+I

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 193 **207 01 193**	230 x 230	161 - 220

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG TEC

Accessories

HONEYCOMB 78◇ **201 02 01◇** ◇ = B	Ø78
SOFTENING LENS 78 **201 02 04**	Ø78
GLASS SBL 78 **201 02 05**	Ø78


Fixation S1 | Fixation S2




GRAND REO W-W + GLASS SBL 78

Grand Reo







	102 x 120 max.22		102 x 120	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W) 2592lm (25W)	1639lm (18W) 2200lm (25W)	1930lm (18W) 2592lm (25W)	1639lm (18W) 2200lm (25W)
REFLECTOR FL-20°	**GRAND REO 83020 S1** ◇ **202 391 21 832** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 93020 S1** ◇ **202 391 21 932** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 83020 S2** ◇ **202 392 21 832** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 93020 S2** ◇ **202 392 21 932** ◇ ◇ = B-B / W-B / W-W
REFLECTOR FL-35°	**GRAND REO 83035 S1** ◇ **202 391 21 833** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 93035 S1** ◇ **202 391 21 933** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 83035 S2** ◇ **202 392 21 833** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 93035 S2** ◇ **202 392 21 933** ◇ ◇ = B-B / W-B / W-W
2700K	1787lm (18W) 2399lm (25W)	1453lm (18W) 1951lm (25W)	1787lm (18W) 2399lm (25W)	1453lm (18W) 1951lm (25W)
REFLECTOR FL-20°	**GRAND REO 82720 S1** ◇ **202 391 21 822** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 92720 S1** ◇ **202 391 21 922** ◇ ◇ = W-B	**GRAND REO 82720 S2** ◇ **202 392 21 822** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 92720 S2** ◇ **202 392 21 922** ◇ ◇ = W-B
REFLECTOR FL-35°	**GRAND REO 82735 S1** ◇ **202 391 21 823** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 92735 S1** ◇ **202 391 21 923** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 82735 S2** ◇ **202 392 21 823** ◇ ◇ = B-B / W-B / W-W	**GRAND REO 92735 S2** ◇ **202 392 21 923** ◇ ◇ = B-B / W-B / W-W
	FIXED INCL.1 x POWERLED WHITE [J] 18-25W EXCL.LED POWER SUPPLY 500-700mA-DC 0,6 IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 193 LED POWER SUPPLY 500-700mA-DC / DIM ACCESSORIES HONEYCOMB 78 SOFTENING LENS 78 GLASS SBL 78		FIXED INCL.1 x POWERLED WHITE [J] 18-25W EXCL.LED POWER SUPPLY 500-700mA-DC 0,6 IP20 IP43 IP20 IP20 OPTIONS LED POWER SUPPLY 500-700mA-DC / DIM ACCESSORIES HONEYCOMB 78 SOFTENING LENS 78 GLASS SBL 78	



GRAND REO OK W-W + HONEYCOMB 78

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 185 **207 01 185**	200 x 200	133-180

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG TEC


Accessories


HONEYCOMB 78◇ **201 02 01◇** ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	
GLASS SBL 78 **201 02 05**	Ø78	

Fixation S1 | Fixation S2

Grand Reo OK







	121 x 132 max.22		122 x 132	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W) 2592lm (25W)	1639lm (18W) 2200lm (25W)	1930lm (18W) 2592lm (25W)	1639lm (18W) 2200lm (25W)
REFLECTOR FL-20°	**GRAND REO OK 83020 S1 ◇** **202 393 21 832 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 93020 S1 ◇** **202 393 21 932 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 83020 S2 ◇** **202 394 21 832 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 93020 S2 ◇** **202 394 21 932 ◇** ◇ = B-B / W-B / W-W
REFLECTOR FL-35°	**GRAND REO OK 83035 S1 ◇** **202 393 21 833 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 93035 S1 ◇** **202 393 21 933 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 83035 S2 ◇** **202 394 21 833 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 93035 S2 ◇** **202 394 21 933 ◇** ◇ = B-B / W-B / W-W
2700K	1787lm (18W) 2399lm (25W)	1453lm (18W) 1951lm (25W)	1787lm (18W) 2399lm (25W)	1453lm (18W) 1951lm (25W)
REFLECTOR FL-20°	**GRAND REO OK 82720 S1 ◇** **202 393 21 822 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 92720 S1 ◇** **202 393 21 922 ◇** ◇ = W-B	**GRAND REO OK 82720 S2 ◇** **202 394 21 822 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 92720 S2 ◇** **202 394 21 922 ◇** ◇ = W-B
REFLECTOR FL-35°	**GRAND REO OK 82735 S1 ◇** **202 393 21 823 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 92735 S1 ◇** **202 393 21 923 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 82735 S2 ◇** **202 394 21 823 ◇** ◇ = B-B / W-B / W-W	**GRAND REO OK 92735 S2 ◇** **202 394 21 923 ◇** ◇ = B-B / W-B / W-W
	ADJUSTABLE 0°-20° / 350° INCL.1 x POWERLED WHITE [J] 18-25W EXCL.LED POWER SUPPLY 500-700mA-DC IP20 IP23 IP20 IP20 OPTIONS PLASTERKIT 185 LED POWER SUPPLY 500-700mA-DC / DIM ACCESSORIES HONEYCOMB 78 SOFTENING LENS 78 GLASS SBL 78		ADJUSTABLE 0°-20° / 350° INCL.1 x POWERLED WHITE [J] 18-25W EXCL.LED POWER SUPPLY 500-700mA-DC IP20 IP23 IP20 IP20 OPTIONS LED POWER SUPPLY 500-700mA-DC / DIM ACCESSORIES HONEYCOMB 78 SOFTENING LENS 78 GLASS SBL 78	

DIRO
OVERVIEW



TRIMLESS



ST (Small Trim)



ST **D** (Deep)



Diro (Fixed)



Diro **OK** (Adjustable)

MINI DIRO



Ø 26

Ø 50 (KIT)

FIXED

led

PAG INT 83

MINI DIRO II



Ø 57

Ø 66 (KIT)

FIXED

QR-C51

PAG INT 83

MINI DIRO R TRIMLESS



Ø 25

Ø 67 x 70

FIXED

led

PAG INT 85

MINI DIRO RL TRIMLESS



Ø 141

Ø 152 x 70

FIXED

led

PAG INT 85

MINI DIRO R



Ø 75

Ø 67 x 70

FIXED

led

PAG INT 89

MINI DIRO S



75 x 75

Ø 67 x 70

FIXED

led

PAG INT 89

DIRO TRIMLESS



Ø 81

Ø 105 (KIT)

FIXED

led / QR-C51

PAG INT 91

DIRO TRIMLESS OK



Ø 81

Ø 105 (KIT)

ADJUSTABLE 0-20°

QR-C51

PAG INT 91

DIRO ST OK



Ø 81


Ø 76

ADJUSTABLE 0-20°

led / QR-C51

PAG INT 95

DIRO DUO ST



Ø 79 x 157

Ø 153 x 75

ADJUSTABLE 20-40°

led / QR-C51

PAG INT 97

DIRO 130



Ø 81

Ø 76

FIXED

QR-C51

PAG INT 98

DIRO OK



Ø 85

Ø 76

ADJUSTABLE 0-20°

QR-C51 /QPAR51

PAG INT 99

DIRO GT



Ø 85

Ø 76

FIXED

led / QR-C51

PAG INT 101

DIRO DUO



Ø 81 x 159

Ø 153 x 75

ADJUSTABLE 20-40°

led / QR-C51

PAG INT 99

DIRO LED +



Ø 163

Ø 156

FIXED

led

PAG INT 105

DIRO 126 SBL



Ø 163

Ø 156

FIXED

TC-DEL

PAG INT 105

DIRO 226 SBL



Ø 223

Ø 216

FIXED

TC-DEL

PAG INT 105

GRAND DIRO TRIMLESS



Ø 142

Ø 152 (KIT)

ADJUSTABLE 0-50° / 360°

QR-LP111

PAG INT 107

GRAND DIRO TRIMLESS D



Ø 142

Ø 152 (KIT)

ADJUSTABLE 0-20° / 360°

QR-LP111

PAG INT 107

GRAND DIRO ST




Ø 162

Ø 152

ADJUSTABLE 0-50° / 360°

QR-LP111

PAG INT 107

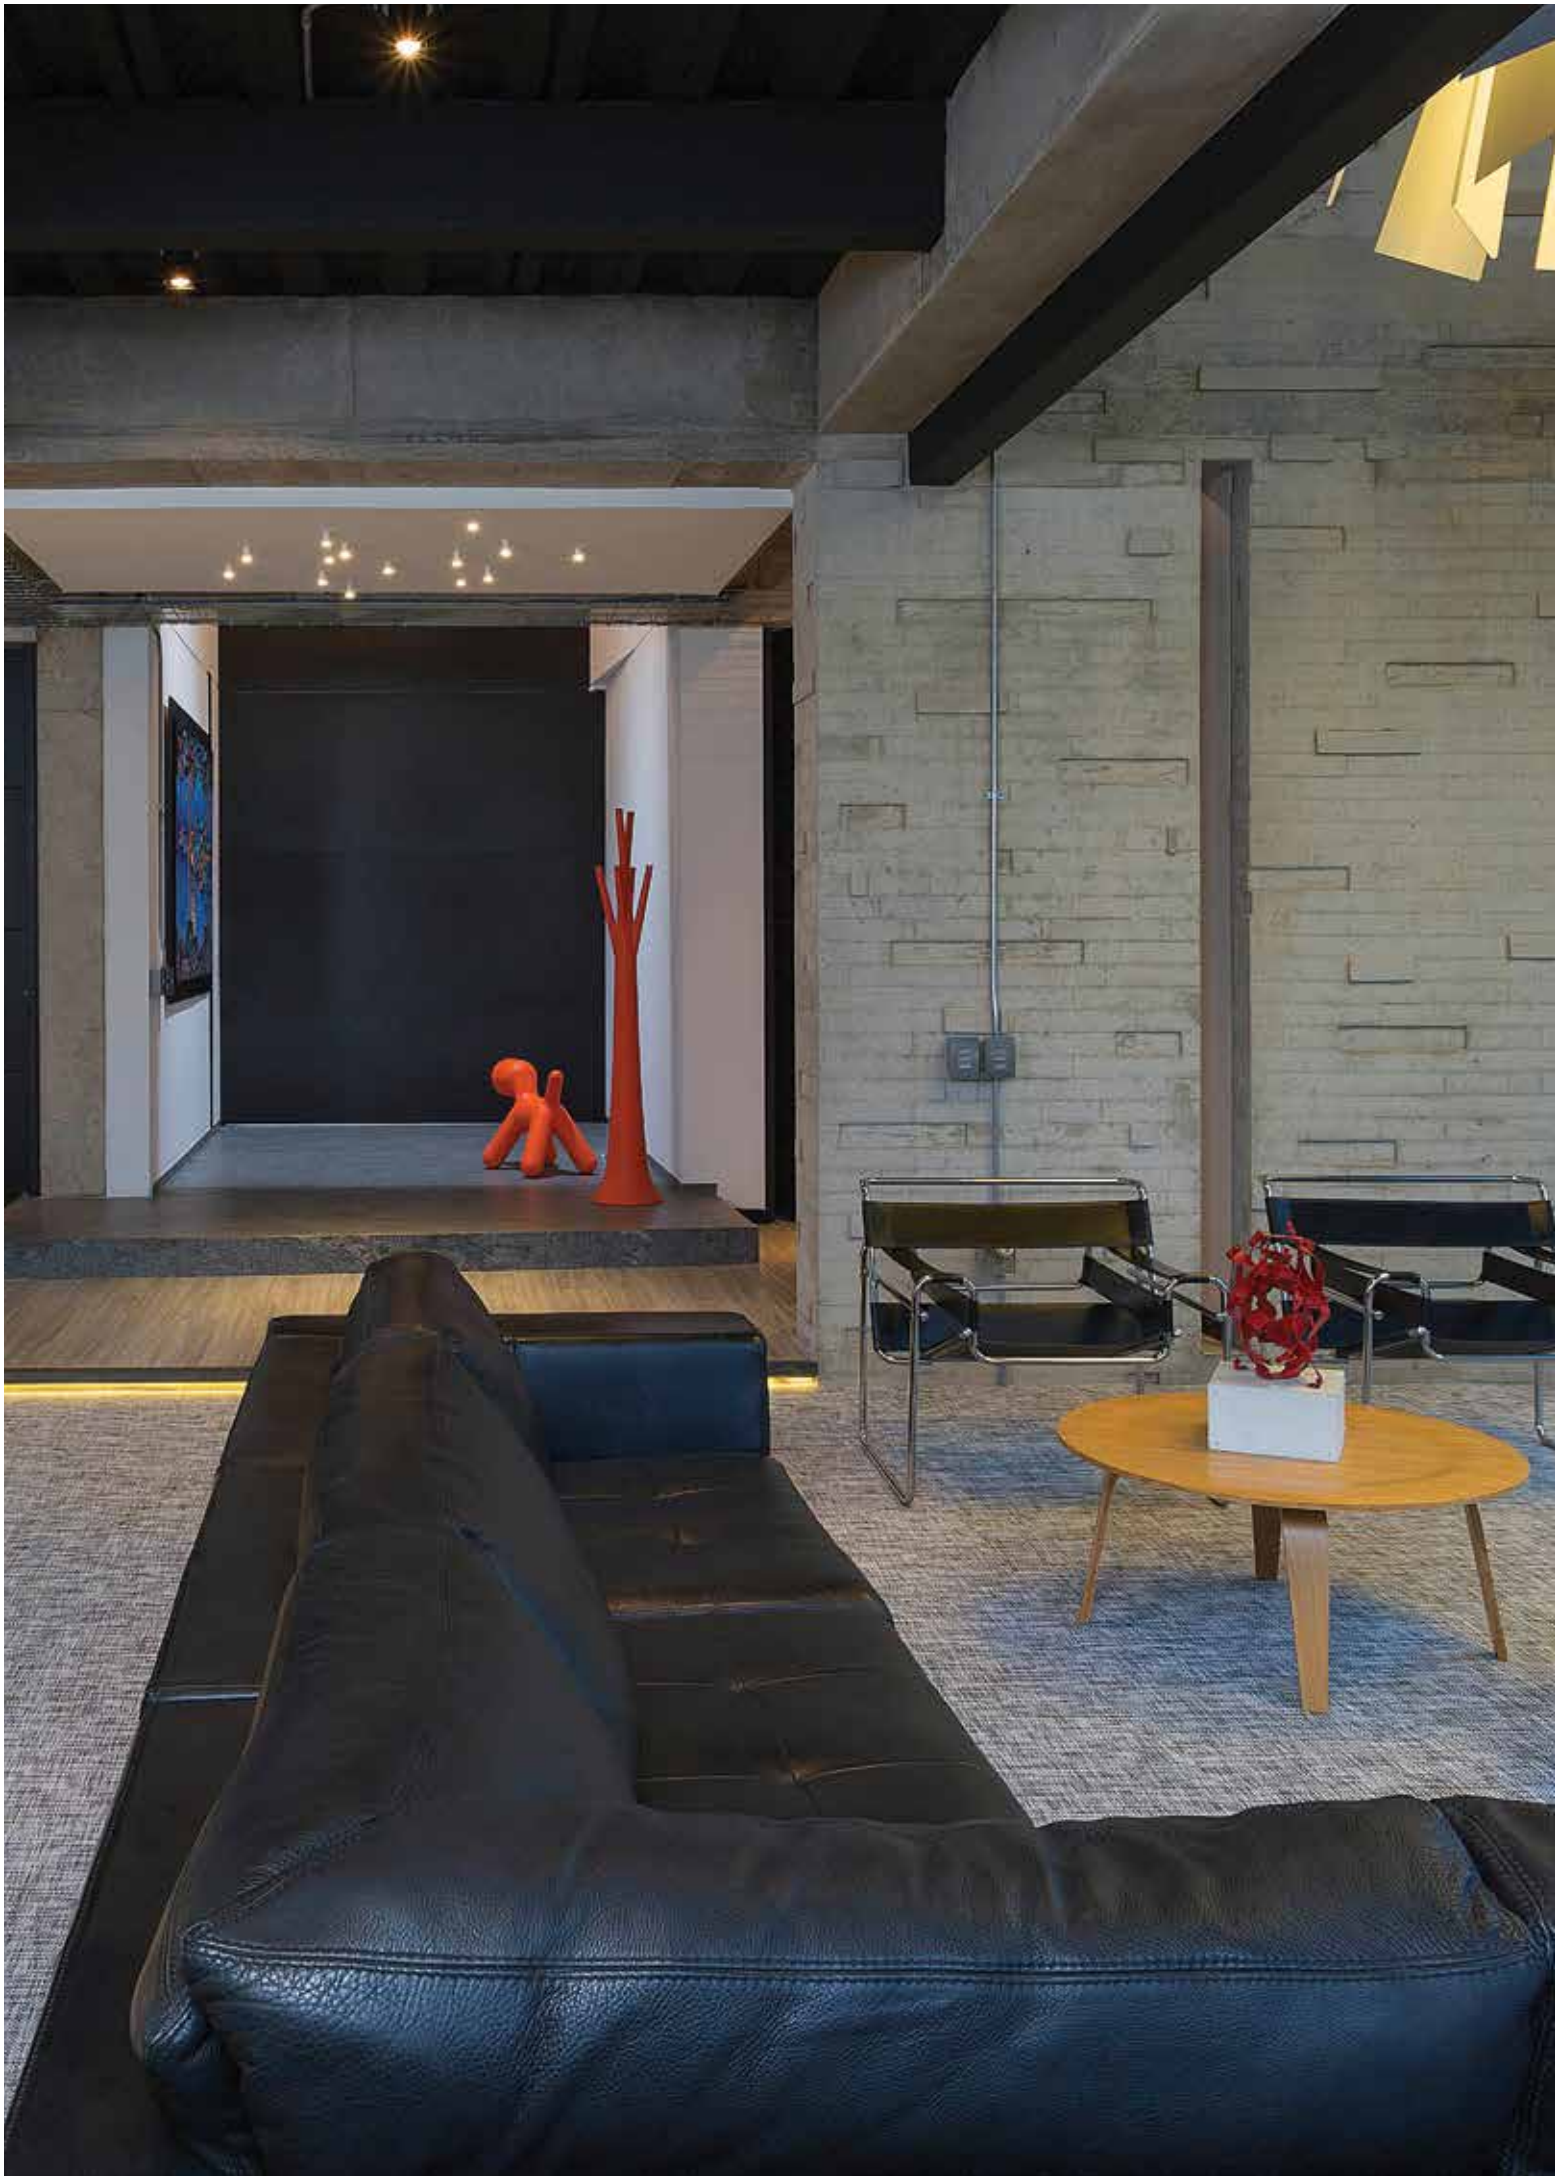

FULL INFO / PAG TEC


Requirements

INSTALLATION

MOUNTING KIT R30 TRIMLESS
202 41 30 00

Ø50


0,1



MOUNTING KIT MINI DIRO II 12
202 41 58 12

Ø66 12/24


0,1



MOUNTING KIT MINI DIRO II 15
202 41 58 15

Ø66 15

0,1



FULL INFO / PAG TEC

Options

CONTROL GEAR

LED POWER SUPPLY 240mA/10W 115 x 34 x 19
300 90 250 max. 2 x MINI DIRO LED / 300 90 250


TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

led

Mini Diro





ØKIT x 140


MINI DIRO LED ◇
202 41 30 15102 ◇
◇ = W
FIXED
INCL.1 x POWERLED WHITE 5W / 3000K
EXCL.LED POWER SUPPLY 240mA-DC

0,1 IP20

REQUIREMENTS
MOUNTING KIT R30 TRIMLESS
202 41 30 00

OPTIONS
LED POWER SUPPLY 240mA-DC


CRI >80 - 380lm (5W)

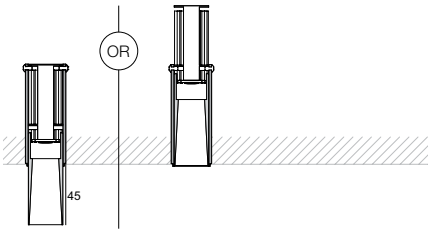

POSITION FOR INSTALLATION

Mini Diro II





ØKIT x 150

MINI DIRO II ◇
202 41 58 51 ◇
◇ = W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.35W

0,2 IP20 0,5

REQUIREMENTS
MOUNTING KIT MINI DIRO II 12
202 41 58 12
or
MOUNTING KIT MINI DIRO II 15
202 41 58 15

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO




ARCHITECTES ANONYMES

FULL INFO / PAG TEC

Requirements

INSTALLATION

MOUNTING KIT MINI DIRO RL TRIMLESS
202 15 61 973



152 x 70 max. 25

0,4

FULL INFO / PAG TEC


Options


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



Mini Diro R Trimless

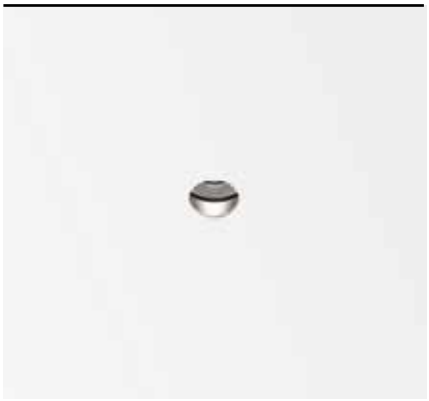





67 x 70 max.25

	CRI > 80
4000K	
	ON REQUEST
3000K	380lm (4,1W) 475lm (6W)
LENS FL-20°	**MINI DIRO R TRIMLESS 83020** **415 332 832**
2700K	360lm (4,1W) 450lm (6W)
LENS FL-20°	**MINI DIRO R TRIMLESS 82720** **415 332 822**


FIXED
INCL.1 x POWERLED WHITE [C] 4,1-6W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,2 IP20

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

Mini Diro RL Trimless





ØKIT x 70

	CRI > 80
	ON REQUEST
	380lm (4,1W) 475lm (6W)
	MINI DIRO RL TRIMLESS 83020 ◇ **415 342 832 ◇** ◇ = PRIM
	360lm (4,1W) 450lm (6W)
	MINI DIRO RL TRIMLESS 82720 ◇ **415 342 822 ◇** ◇ = PRIM

FIXED
INCL.1 x POWERLED WHITE [C] 4,1-6W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4 IP20

REQUIREMENTS
MOUNTING KIT MINI DIRO RL TRIMLESS
202 15 61 973

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM



ARCHITECTES ANONYMES





VYACHESLAV KHOMUTOV - HAUBAUS

FULL INFO / PAG TEC


Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

Mini Diro R






67 x 70 min.5

	CRI > 80
4000K	
	ON REQUEST
3000K	380lm (4,1W) 475lm (6W)
LENS FL-20°	**MINI DIRO R 83020** ◇ **415 132 832** ◇ ◇ = B / W
2700K	360lm (4,1W) 450lm (6W)
LENS FL-20°	**MINI DIRO R 82720** ◇ **415 132 822** ◇ ◇ = B / W
	FIXED INCL.1 x POWERLED WHITE [C] 4,1-6W EXCL.LED POWER SUPPLY 350-500mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM

Mini Diro S





67 x 70 min.5

	CRI > 80
4000K	
	ON REQUEST
3000K	380lm (4,1W) 475lm (6W)
	MINI DIRO S 83020 ◇ **415 142 832** ◇ ◇ = B / W
2700K	360lm (4,1W) 450lm (6W)
	MINI DIRO S 82720 ◇ **415 142 822** ◇ ◇ = B / W
	FIXED INCL.1 x POWERLED WHITE [C] 4,1-6W EXCL.LED POWER SUPPLY 350-500mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM




FULL INFO / PAG TEC

Requirements

INSTALLATION


MOUNTING KIT R82 TRIMLESS
202 11 82



105 x 135 max. 22

0,1


MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA



122

0,2

CONCRETE PACK TMK R82
207 02 9123 TMK



1,0

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8 150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

FULL INFO / PAG TEC


Accessories

ANTI GLARE TUBE ◇ Ø52 x 63
201 34 00 ◇
◇ = B / W
max. 20W



DIM8: dimming by falling edge dimmer



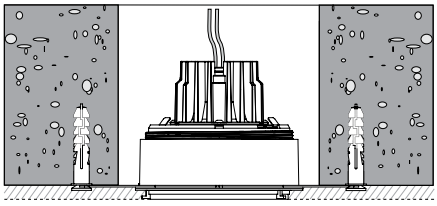

DIRO TRIMLESS LED + MOUNTING KIT R82 TRIMLESS OFA IN CONCRETE

4000K

3000K

REFLECTOR FL-33°

2700K

REFLECTOR FL-33°

new

SOFT DIM


INFO SOFT DIM
PAG TEC 9

2700-1800K

REFLECTOR FL-40°

Diro Trimless LED





ØKIT x 95

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
DIRO TRIMLESS LED 3033 ◇ **202 144 28122** ◇ ◇ = MMAT / W	**DIRO TRIMLESS LED 3033-9** ◇ **202 144 29122** ◇ ◇ = MMAT / W
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
DIRO TRIMLESS LED 2733 ◇ **202 144 28123** ◇ ◇ = MMAT / W	**DIRO TRIMLESS LED 2733-9** ◇ **202 144 29123** ◇ ◇ = MMAT / W

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20 IP23

REQUIREMENTS
MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

850lm (10W)
DIRO TRIMLESS LED SOFT ◇ **202 144 28120** ◇ ◇ = MMAT / W


FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,3 IP20 IP23

REQUIREMENTS
MOUNTING KIT R82 TRIMLESS O.F.A.
202 11 82 OFA
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

Diro Trimless





ØKIT x 135

DIRO TRIMLESS S1 ◇
202 14 91 ◇
◇ = W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


0,2 IP20 0,5

REQUIREMENTS
MOUNTING KIT R82 TRIMLESS
202 11 82
or
CONCRETE PACK TMK R82
207 02 9123 TMK

OPTIONS
LED SOLUTION - PAG TEC 4-5
TRANSFO

Diro Trimless OK





ØKIT x 135

DIRO TRIMLESS OK S1 ◇
202 14 90 ◇
◇ = A / B / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 0,5

REQUIREMENTS
MOUNTING KIT R82 TRIMLESS
202 11 82
or
CONCRETE PACK TMK R82
207 02 9123 TMK

OPTIONS
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE



INTERIEURBURO VANDECANDELAERE







FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180

CONTROL GEAR	
LED POWER SUPPLY **ALL INFO ON FOLD-OUT COVER**	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Fixation S1

Diro ST OK LED





76 x 115 min.5

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**DIRO ST OK LED 3033** ◇ **202 292 28122** ◇ ◇ = MMAT / W	**DIRO ST OK LED 3033-9** ◇ **202 292 29122** ◇ ◇ = MMAT / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**DIRO ST OK LED 2733** ◇ **202 292 28123** ◇ ◇ = MMAT / W	**DIRO ST OK LED 2733-9** ◇ **202 292 29123** ◇ ◇ = MMAT / W


ADJUSTABLE 0°-20° / 350°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,4 IP20 IP23

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

Diro ST OK





76 x 100 max.22

DIRO ST OK S1 ◇
202 14 61 ◇
◇ = ALU / B / C / MMAT / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO

1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



DIRO ST OK LED MMAT



FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 104 219 x 225 160 x 190
202 14 29

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

FULL INFO / PAG TEC

Accessories


ANTI GLARE TUBE ◇ Ø52 x 63
201 34 00 ◇
◇ = B / W
max. 20W

DICROIC FILTER 50 Ø50
201 30 11 🔵 max. 20W
201 30 12 🟢
201 30 13 🔴
201 30 14 🟡

Fixation S1

Diro Duo ST OK LED



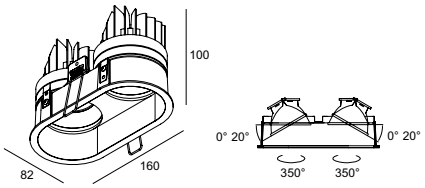

153 x 75 x 110 max.22

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2 x 680lm (7W) 2 x 958lm (10W)	2 x 566lm (7W) 2 x 803lm (10W)
REFLECTOR FL-33°	**DIRO DUO ST OK LED 3033 S1** ◇ **202 292 28222** ◇ ◇ = MMAT / W	**DIRO DUO ST OK LED 3033-9 S1** ◇ **202 292 29222** ◇ ◇ = MMAT / W
2700K	2 x 618lm (7W) 2 x 876lm (10W)	2 x 525lm (7W) 2 x 742lm (10W)
REFLECTOR FL-33°	**DIRO DUO ST OK LED 2733 S1** ◇ **202 292 28223** ◇ ◇ = MMAT / W	**DIRO DUO ST OK LED 2733-9 S1** ◇ **202 292 29223** ◇ ◇ = MMAT / W


2 x ADJUSTABLE 0°-20° / 350°
INCL.2 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,8 IP20 IP23

OPTIONS
PLASTERKIT 104
LED POWER SUPPLY 350-500mA-DC / DIM

Diro Duo ST



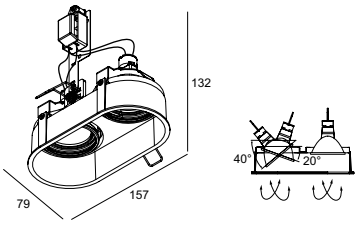

153 x 75 x 132 max.22

DIRO DUO ST S1 ◇
202 14 71 ◇
◇ = ALU / MMAT / W
2 x ADJUSTABLE 20°- 40°
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W

CE 0,1 IP20 0,5

OPTIONS
PLASTERKIT 104
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 101 **202 11 19**	205 x 205	80 x 180
PLASTERKIT 104 **202 14 29**	219 x 225	160 x 190

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Fixation S1 | Fixation S2

Diro 130






76 x 125 max.25

DIRO 130 S1 ◇
202 14 80 ◇
◇ = W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
0,2 IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Diro OK






76 x 100 max.22

DIRO OK S1 ◇
202 14 11 ◇
◇ = ALU-ALU / B-MMAT / C-B / W-B / W-W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



76 x 100

DIRO OK Hi S2 ◇
202 14 1210 ◇
◇ = ALU-ALU / W-W
ADJUSTABLE 0°- 20°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5



76 x 100


DIRO OK S2 ◇
202 14 12 ◇
◇ = ALU-ALU / W-W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

Diro Duo





153 x 75 x 132 max.22

DIRO DUO S1 ◇
202 14 21 ◇
◇ = ALU-ALU / B-MMAT / W-W
2 x ADJUSTABLE 20°- 40°
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
IP20 0,5

OPTIONS
PLASTERKIT 104
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50



FULL INFO / PAG TEC

Requirements

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 50W
200 46 06


86 x 31 x 20


TRANSFO 100W
200 46 10

107 x 35 x 21

DIM8: dimming by falling edge dimmer

Diro GT LED

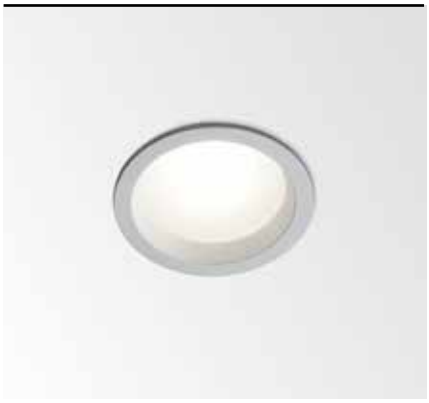




76 x 90 min.5

	CRI > 80
4000K	
	ON REQUEST
3000K	680lm (7W) 958lm (10W)
REFLECTOR FL-33°	**DIRO GT LED 3033** ◇ **202 342 28122** ◇ ◇ = A / W
2700K	618lm (7W) 876lm (10W)
REFLECTOR FL-33°	**DIRO GT LED 2733** ◇ **202 342 28123** ◇ ◇ = A / W
	FIXED INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP44 OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM
2700-1800K	850lm (10W)
REFLECTOR FL-40°	**DIRO GT LED SOFT** ◇ **202 342 28120** ◇ ◇ = A / W
	FIXED INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP44 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8

new
SOFT DIM
INFO SOFT D M
PAG TEC 9


Diro GT






76 x 115 min.5

DIRO GT ◇
202 34 12 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
IP20 IP44
OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

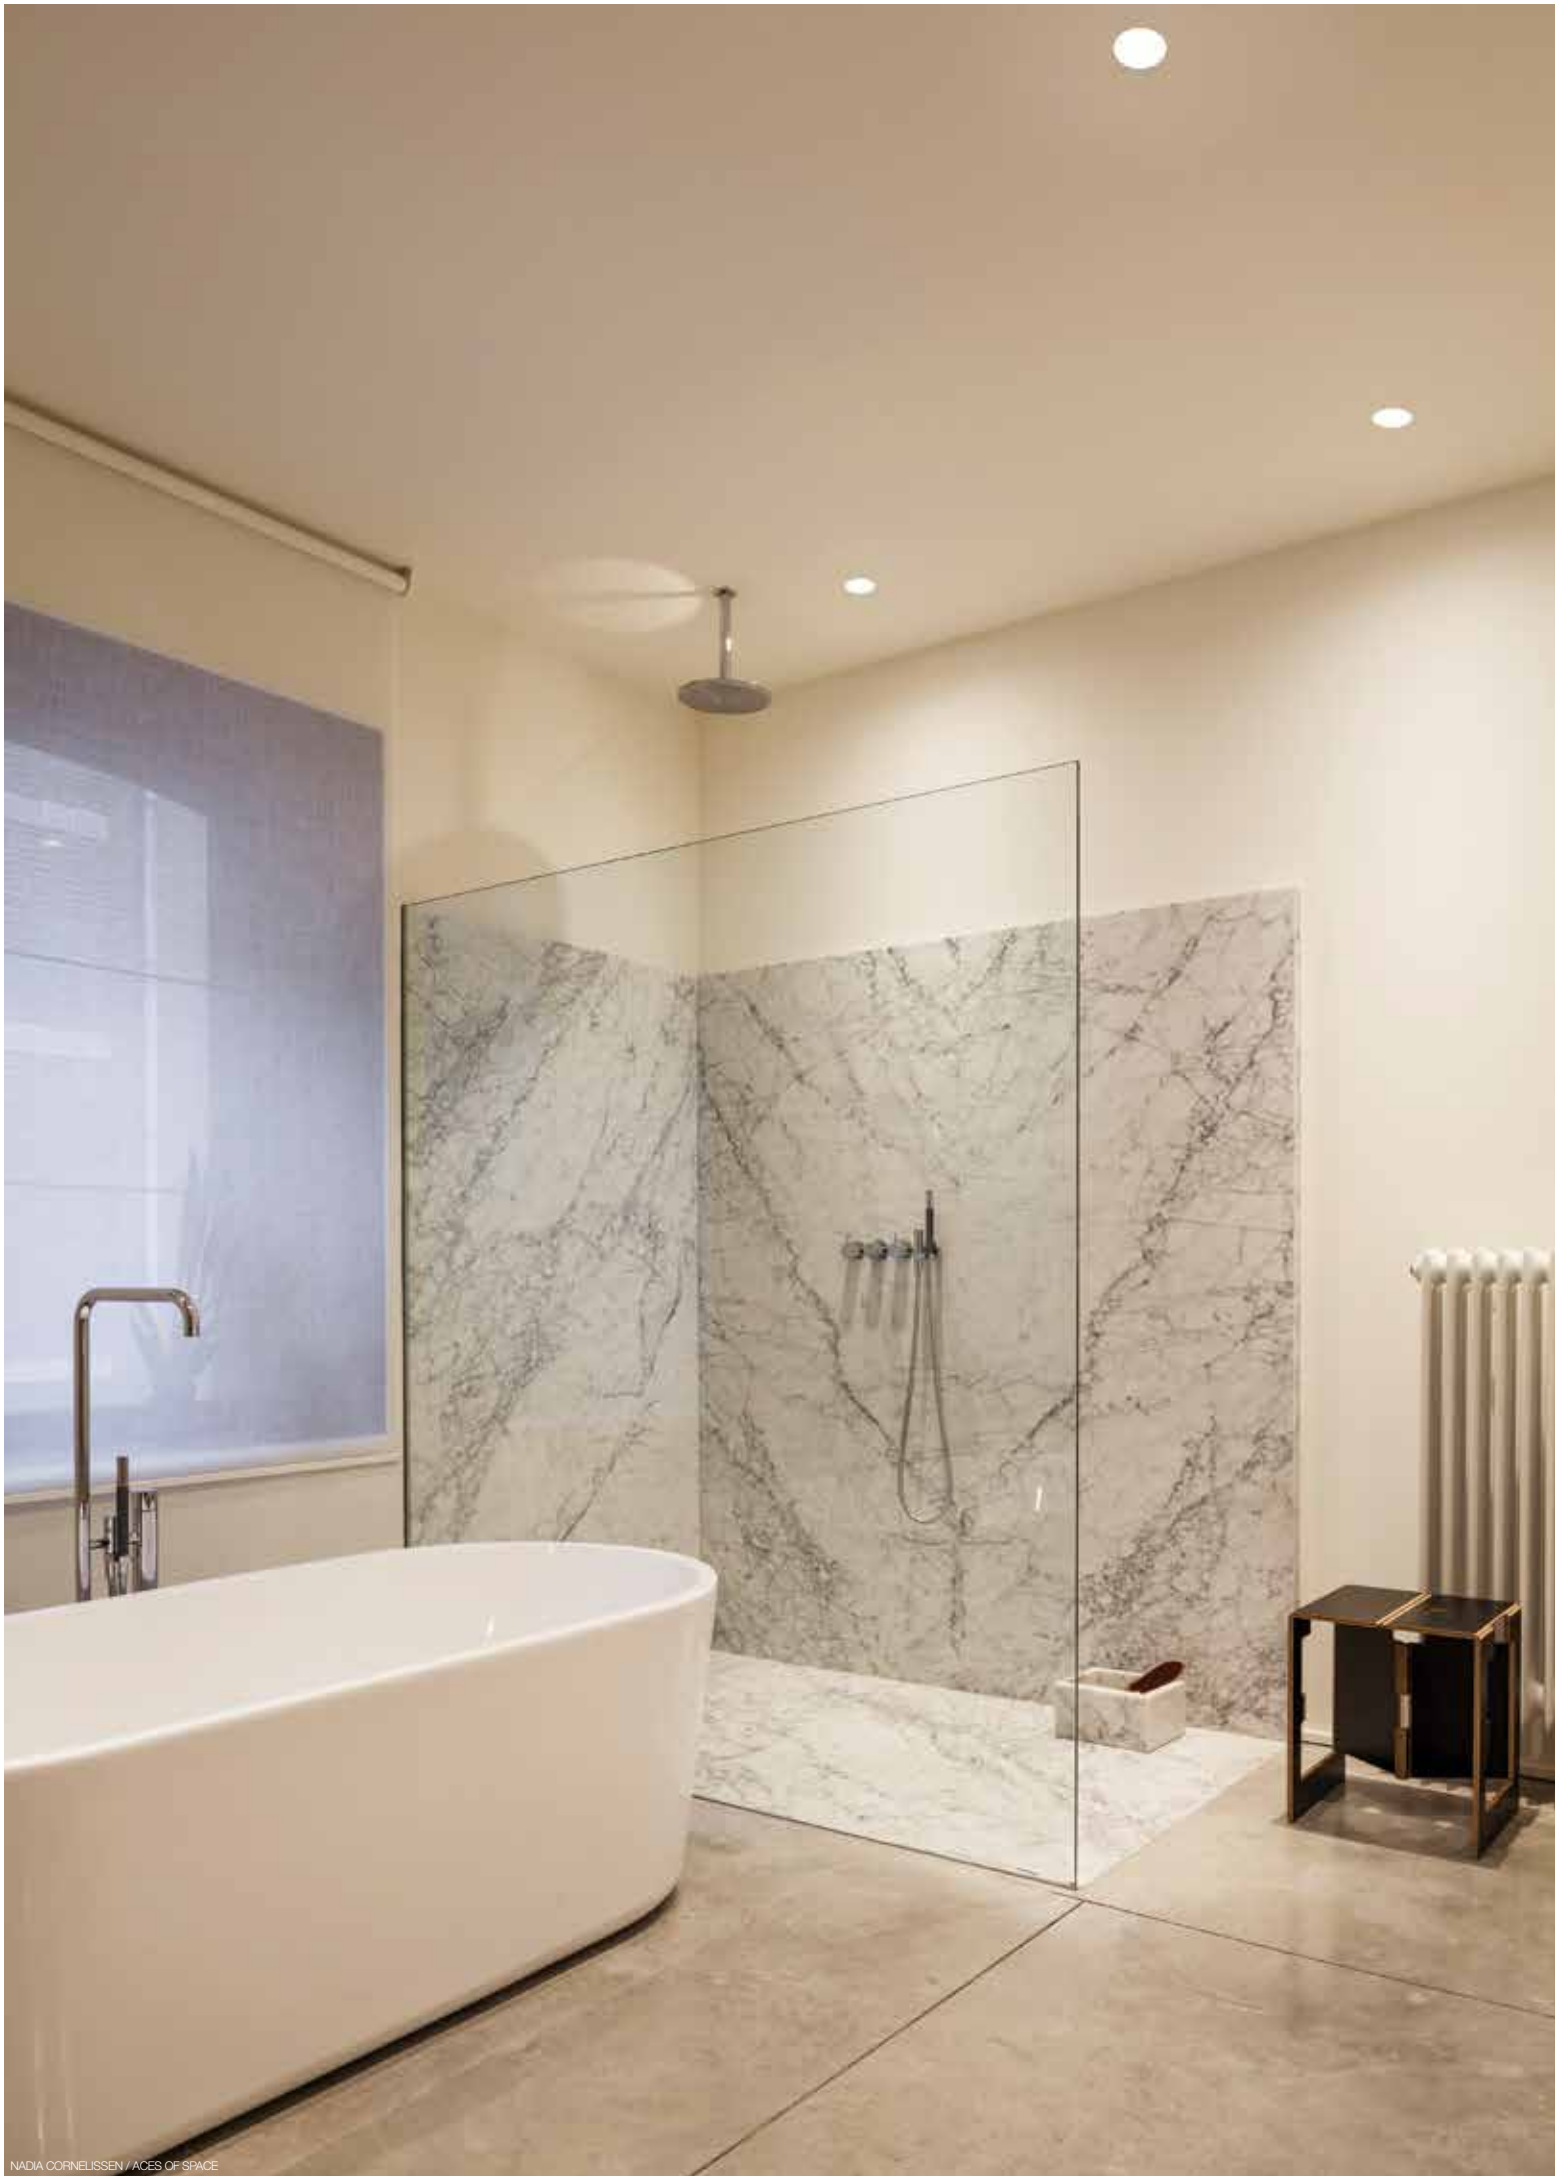

NADIA CORNELISSEN / ACES OF SPACE

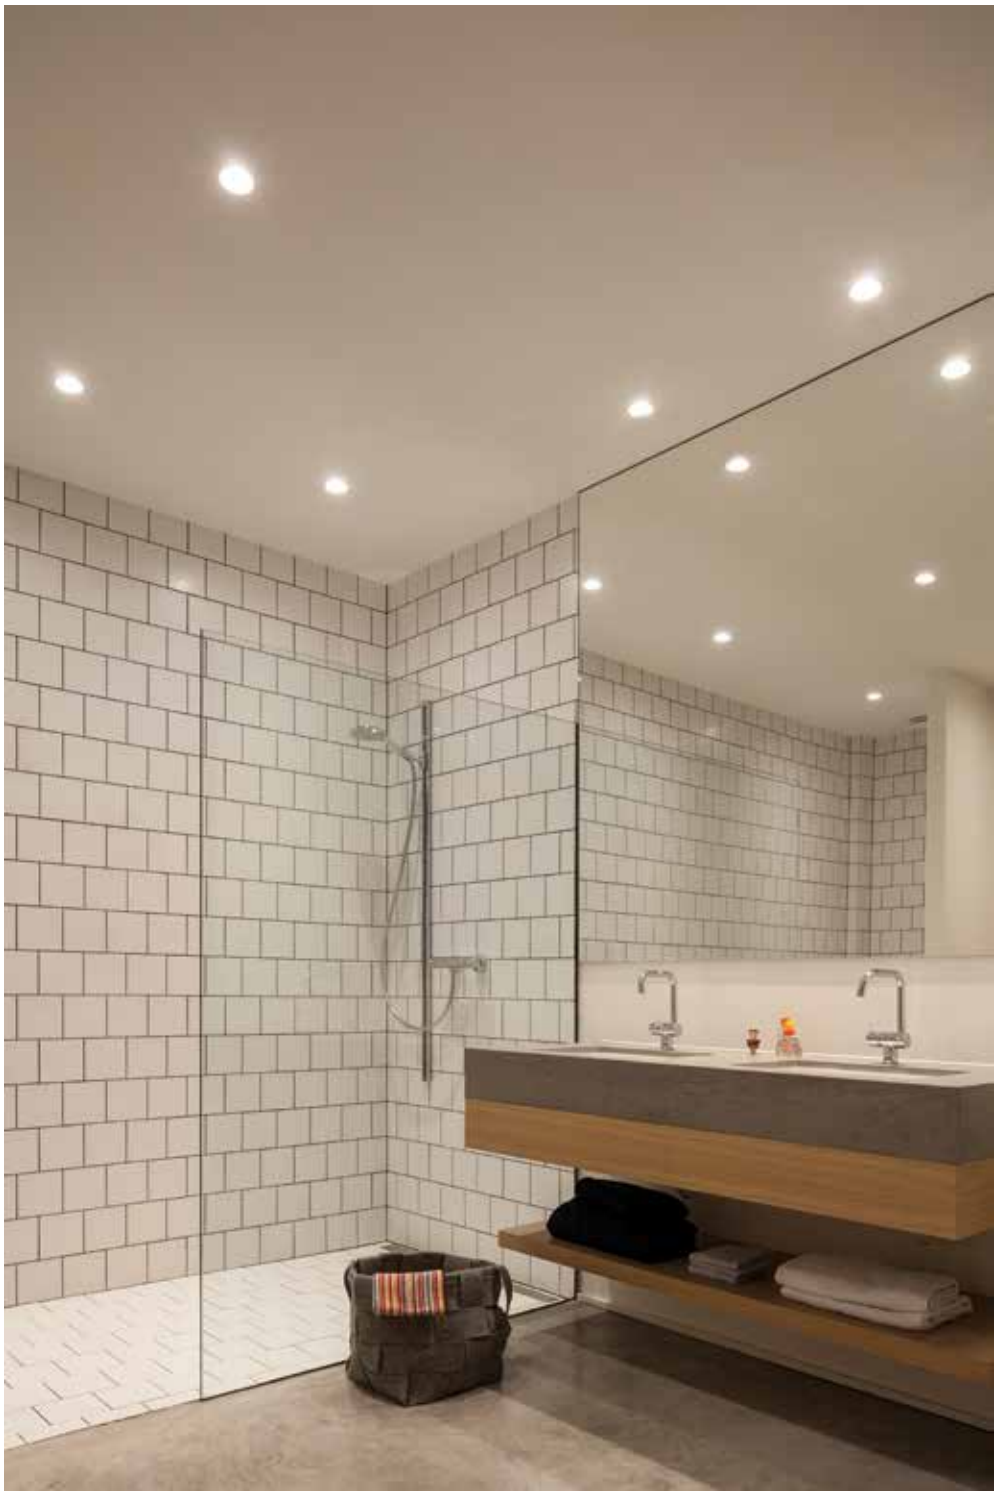



FULL INFO / PAG TEC

Options

INSTALLATION

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

PLASTERKIT 169 **207 01 169**	270 x 270	230 x 270
PLASTERKIT 174 **207 01 174**	280 x 280	220 x 260

Fixation S1

4000K

3000K


REFLECTOR FL-33°

2700K

REFLECTOR FL-33°

Diro LED +





156 x 125 max.25

CRI > 80

ON REQUEST

680lm (7W)
958lm (10W)

DIRO LED + S1 WW ◇
202 29 28102 ◇
◇ = ALU/ W

618lm (7W)
876lm (10W)

DIRO LED + S1 HW ◇
202 29 28103 ◇
◇ = ALU/ W


FIXED
INCL.1 x PC SBL
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,6 IP20 IP43

OPTIONS
PLASTERKIT 169
LED POWER SUPPLY 350-500mA-DC / DIM

Diro 126 SBL





156 x 100 max.25

DIRO 126 SBL S1 ◇
202 29 26 ◇
◇ = ALU / W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG


1 x TC-DEL 26W

0,9 IP20 IP43 0,1

OPTIONS
PLASTERKIT 169

Diro 226 SBL





216 x 125 max.25

DIRO 226 SBL S1 ◇
202 29 226 ◇
◇ = ALU / W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG

2 x TC-DEL 26W

0,9 IP20 IP43 0,1

OPTIONS
PLASTERKIT 174



FULL INFO / PAG TEC


Requirements

PLASTERKIT 181 **207 01 181**	250 x 250	170 x 170

MOUNTING KIT R143 TRIMLESS
202 15 61 97

152 x 125 / 140 / 150 max.25

0,4



FULL INFO / PAG TEC


Options


CONTROL GEAR	C A B
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Grand Diro Trimless









ØKIT x 125

GRAND DIRO TRIMLESS 111 ◇
202 15 61 01 ◇
◇ = W-W
ADJUSTABLE 0°- 50° / 360°
G53 / 12V / EXCL.TRANSFO

1 x QR-LP111 max.100W

CE 0,5 IP20 1,0

REQUIREMENTS
MOUNTING KIT R143 TRIMLESS
202 15 61 97

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ØKIT x 150

GRAND DIRO TRIMLESS D 111 ◇
202 15 61 00 ◇
◇ = B / W
ADJUSTABLE 0°- 20° / 360°
G53 / 12V / EXCL.TRANSFO

1 x QR-LP111 max.100W


CE 0,3 IP20 1,0

REQUIREMENTS
MOUNTING KIT R143 TRIMLESS
202 15 61 97

OPTIONS
TRANSFO

Grand Diro ST





152 x 130 max.25

GRAND DIRO ST 111 ◇
202 15 62 01 ◇
◇ = W-W
ADJUSTABLE 0°- 50° / 360°
G53 / 12V / EXCL.TRANSFO

1 x QR-LP111 max.100W

CE 1,3 IP20 1,0

OPTIONS
PLASTERKIT 181
led LED SOLUTION - PAG TEC 4-5
TRANSFO



FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 171 **207 01 171**	230 x 230	220 x 220

CONTROL GEAR

TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ **413 03 01 ◇** ◇ = B	Ø50
LINEAR SPREAD LENS 50 **413 03 02**	Ø50
SPREAD LENS 50 **413 03 03**	Ø50
SOFTENING LENS 50 **413 03 04**	Ø50
GLASS SBL 50 **413 03 05**	Ø50
CONE 111 ◇ **201 28 00 ◇** ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A ◇** ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
LENS 111 **201 47 11**	Ø100




RODI FRAME B + GRID SNAP-IN 83033 C + HONEYCOMB 50

Fixation S1

Rodi SI



RODI FRAME W + GRID SNAP-IN 83033 W

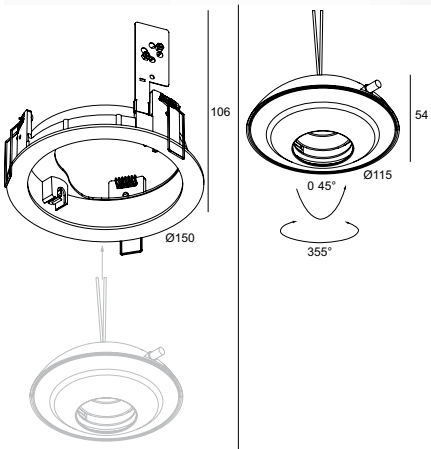

140 x 100* max.25

RODI FRAME S1 ◇
202 33 01 ◇
◇ = B / W

0,3

REQUIREMENTS
GRID SNAP-IN

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**GRID SNAP-IN 83033** ◇ **202 970 21 832** ◇ ◇ = B / C / W	**GRID SNAP-IN 93033** ◇ **202 970 21 932** ◇ ◇ = B / C / W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**GRID SNAP-IN 82733** ◇ **202 970 21 822** ◇ ◇ = B / C / W	**GRID SNAP-IN 92733** ◇ **202 970 21 922** ◇ ◇ = B / C / W

ADJUSTABLE 0°- 45° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

0,5 IP20


OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

*SNAP-IN ◇ = C : MIN. 200mm

Rodi





146 x 100 max.30


RODI 111 S1 ◇
202 37 12 ◇
◇ = A / W
ADJUSTABLE 0°- 30° / 350°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W

0,4 IP20 1,0

OPTIONS
PLASTERKIT 171
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



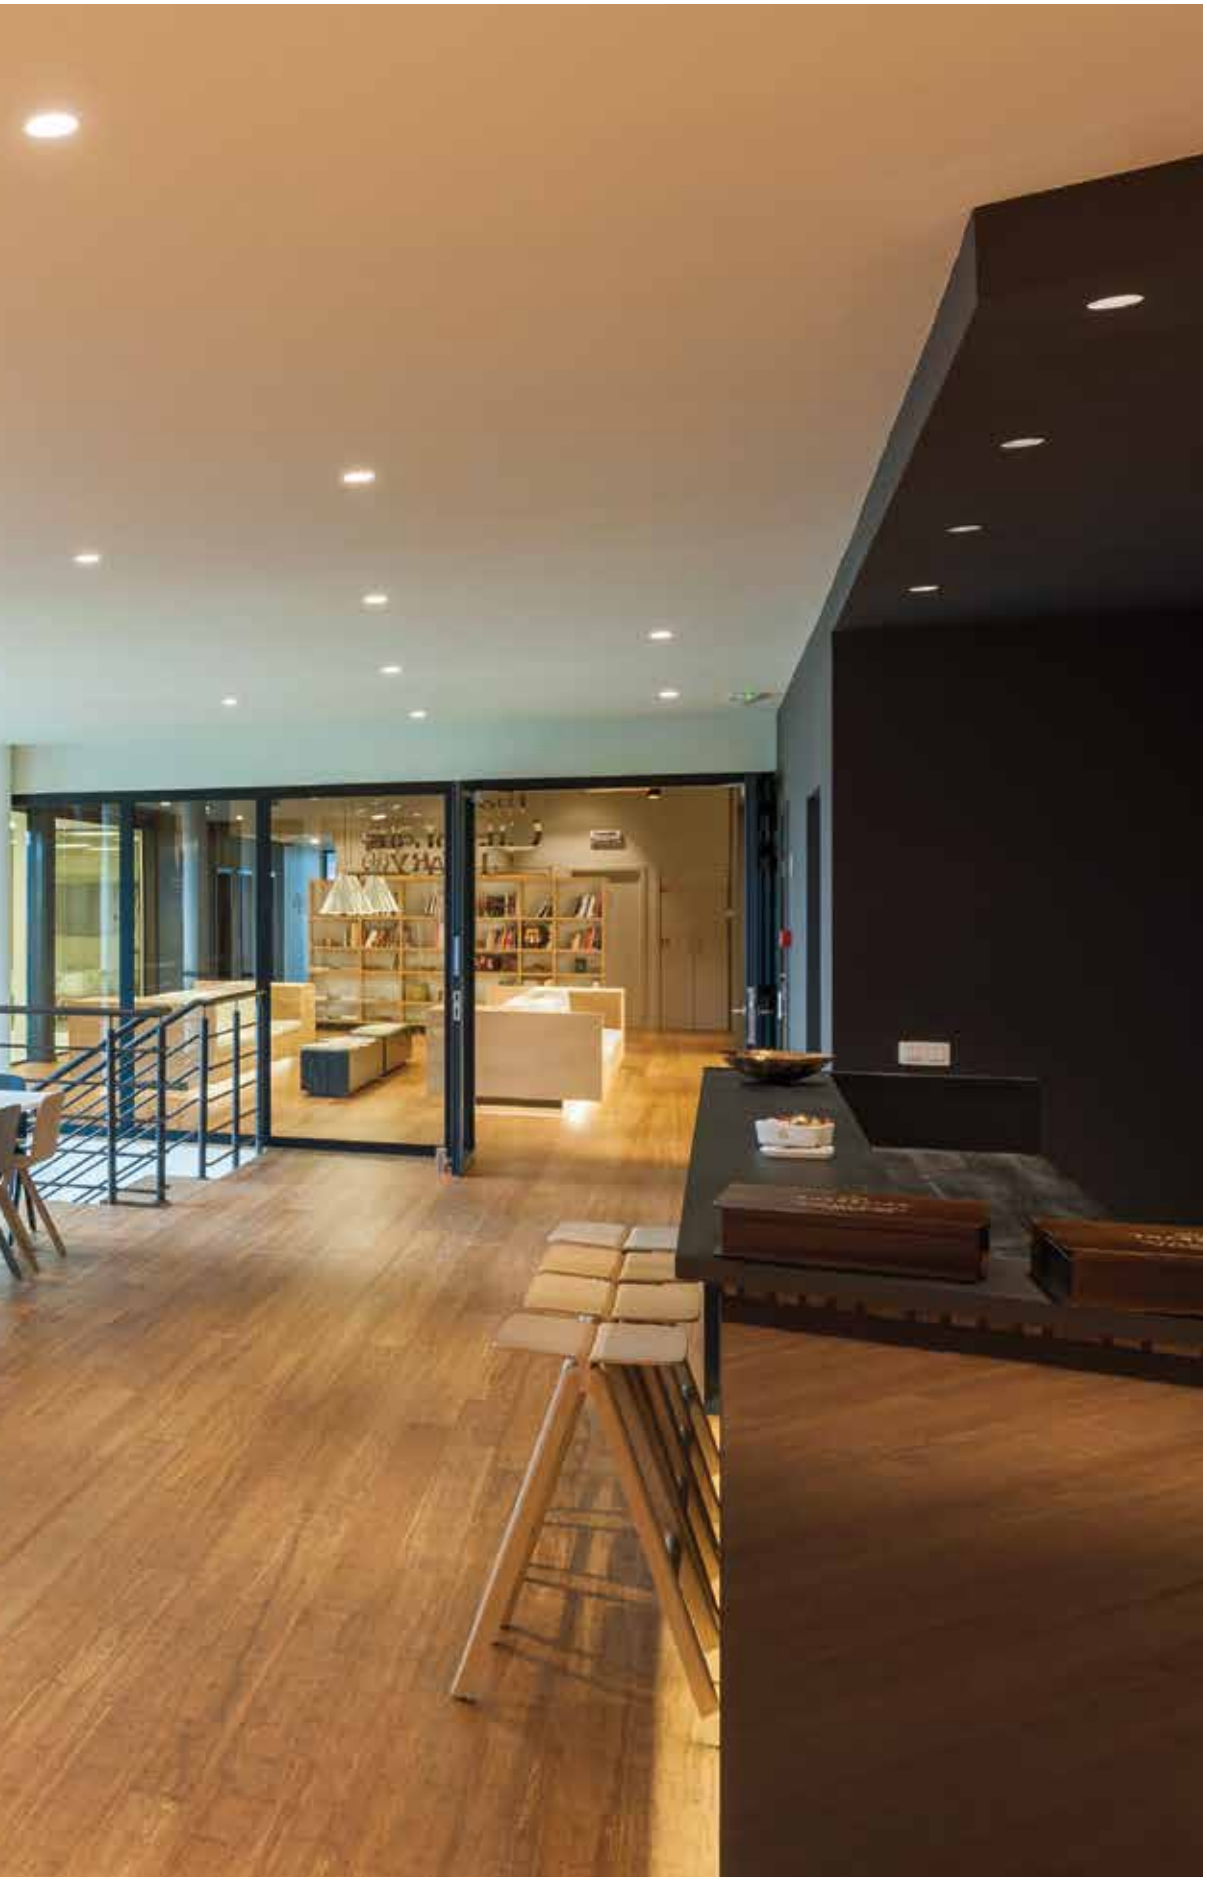





ABC PROJECTS / ANJA VERROEYE

Options

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

C-Max

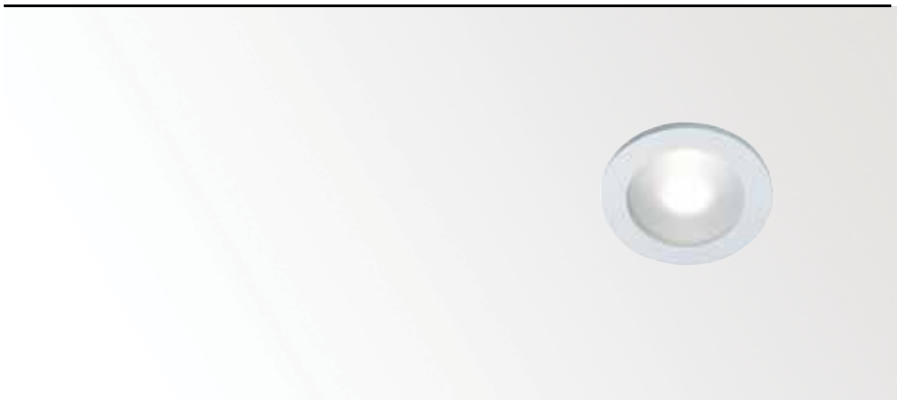




S1

82 x 100 max.35

C-MAX S1 ◇
202 23 05 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO




S1

82 x 100 max.35

C-MAX Hi S1 ◇
202 23 25 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5




S2

82 x 100 max.35

C-MAX S2 ◇
202 23 15 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO




S2

82 x 100 max.35

C-MAX Hi S2 ◇
202 23 35 ◇
◇ = A / ALU / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 IP44 IP20 IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5





BURO II & ARCHI-I

FULL INFO / PAG TEC

Options

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



led

Leds Swing





53 x 50 max.15

LEDS SWING S1 NW ◇
302 23 04 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1-1,6W / 4000K

LEDS SWING S1 WW ◇
302 23 02 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1-1,6W / 3000K

ADJUSTABLE 0°-30°
INCL.1 x LENS 10°
EXCL.LED POWER SUPPLY 350-500mA-DC

IP20


OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

new

led

Micro Deep Ringo






38 x 80 max.35

MICRO DEEP RINGO S1 WW ◇
302 22 831 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1-1,6W / 3000K
INCL.1 x LENS SP-10°
EXCL.LED POWER SUPPLY 350-500mA-DC

IP20

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

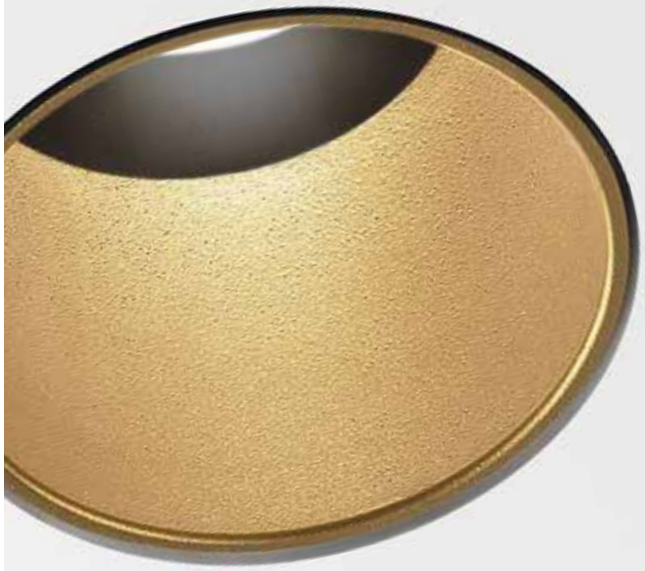


MINI DEEP RINGO TRIMLESS B +
SPY TUBE MMAT

FULL INFO / PAG TEC

Requirements


MOUNTING KIT R60 TRIMLESS O.F.A.
415 91 60




92 max.25

0,4


SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



TUBE SBL ◇
415 32 05 ◇
◇ = W
INCL.GLASS SBL



TUBE SL ◇
415 32 04 ◇
◇ = W
INCL.SOFTENING LENS




Options


CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



MOUNTING KIT R60 TRIMLESS O.F.A. +
MINI DEEP RINGO TRIMLESS +
SPY TUBE

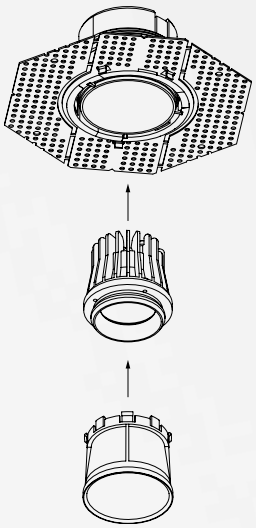

MOUNTING KIT R60 TRIMLESS O.F.A. +
MINI DEEP RINGO TRIMLESS +
TUBE SBL

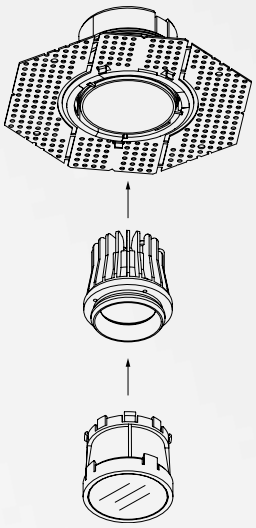




MINI DEEP RINGO TRIMLESS +
TUBE SBL



MINI DEEP RINGO TRIMLESS +
TUBE SL




MINI DEEP RINGO TRIMLESS + TUBE SL W

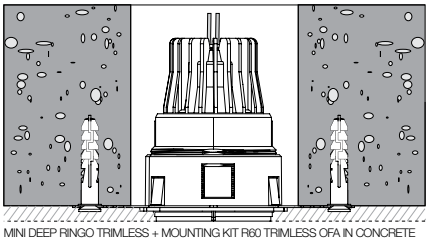


MINI DEEP RINGO TRIMLESS + MOUNTING KIT R60 TRIMLESS OFA IN CONCRETE

Mini Deep Ringo Trimless

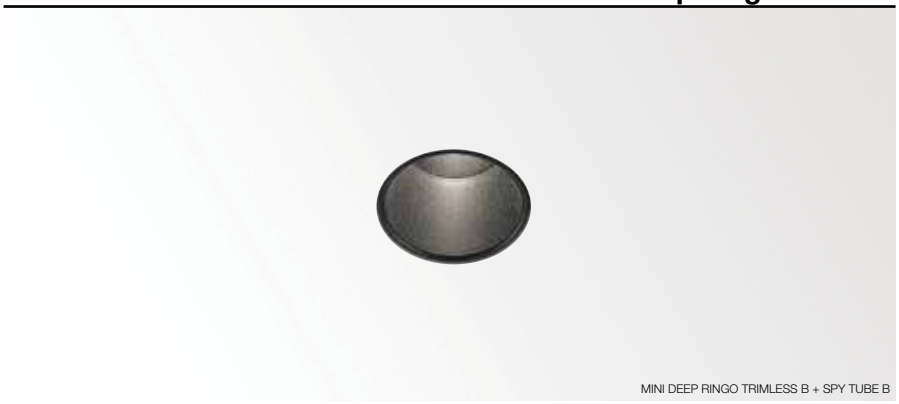

MINI DEEP RINGO TRIMLESS B + SPY TUBE B



ØKIT x 100

	CRI > 80		
4000K			
	ON REQUEST		
3000K	307lm (3,3W)	475lm (6W)	638lm (7W)
LENS SP-10°	**MINI DEEP RINGO TRIMLESS 83010** ◇ **415 312 831** ◇ ◇ = B		
LENS FL-20°		**MINI DEEP RINGO TRIMLESS 83020** ◇ **415 312 832** ◇ ◇ = B	
REFLECTOR WFL-40°			**MINI DEEP RINGO TRIMLESS 83040** ◇ **415 311 833** ◇ ◇ = B
2700K	294lm (3,3W)	450lm (6W)	595lm (7W)
LENS SP-10°	**MINI DEEP RINGO TRIMLESS 82710** ◇ **415 312 821** ◇ ◇ = B		
LENS FL-20°		**MINI DEEP RINGO TRIMLESS 82720** ◇ **415 312 822** ◇ ◇ = B	
REFLECTOR WFL-40°			**MINI DEEP RINGO TRIMLESS 82740** ◇ **415 311 823** ◇ ◇ = B
	FIXED INCL.1 x POWERLED WHITE [B] 3,3W EXCL.LED POWER SUPPLY 1050mA-DC 0,2 IP20 REQUIREMENTS MOUNTING KIT R60 TRIMLESS O.F.A. 415 91 60 SPY TUBE 414 01 00 or TUBE SBL 415 32 05 or TUBE SL 415 32 04 OPTIONS LED POWER SUPPLY 1050mA-DC / DIM	FIXED INCL.1 x POWERLED WHITE [C] 6W EXCL.LED POWER SUPPLY 500mA-DC 0,2 IP20 REQUIREMENTS MOUNTING KIT R60 TRIMLESS O.F.A. 415 91 60 SPY TUBE 414 01 00 or TUBE SBL 415 32 05 or TUBE SL 415 32 04 OPTIONS LED POWER SUPPLY 500mA-DC / DIM	FIXED INCL.1 x POWERLED WHITE [D] 7W EXCL.LED POWER SUPPLY 350mA-DC 0,2 IP20 REQUIREMENTS MOUNTING KIT R60 TRIMLESS O.F.A. 415 91 60 SPY TUBE 414 01 00 or TUBE SBL 415 32 05 or TUBE SL 415 32 04 OPTIONS LED POWER SUPPLY 350mA-DC / DIM



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories

MINI REO HONEYCOMB◇ Ø37 / H6
415 03 01◇
◇= B / W



MINI REO SOFTENING LENS◇ Ø37 / H6
415 03 04◇
◇= B / W




MINI REO GLASS SBL◇ Ø37 / H6
415 03 05◇
◇= B / W



Mini Deep Ringo





Ø67 x 90 min.5

	CRI > 80		
4000K			
	ON REQUEST		
3000K	307lm (3,3W)	475lm (6W)	638lm (7W)
LENS SP-10°	**MINI DEEP RINGO 83010** ◇ **415 122 831** ◇ ◇ = B / MMAT / W		
LENS FL-20°		**MINI DEEP RINGO 83020** ◇ **415 122 832** ◇ ◇ = B / MMAT / W	
REFLECTOR WFL-40°			**MINI DEEP RINGO 83040** ◇ **415 121 833** ◇ ◇ = B / MMAT / W
2700K	294lm (3,3W)	450lm (6W)	595lm (7W)
LENS SP-10°	**MINI DEEP RINGO 82710** ◇ **415 122 821** ◇ ◇ = B / MMAT / W		
LENS FL-20°		**MINI DEEP RINGO 82720** ◇ **415 122 822** ◇ ◇ = B / MMAT / W	
REFLECTOR WFL-40°			**MINI DEEP RINGO 82740** ◇ **415 121 823** ◇ ◇ = B / MMAT / W
	FIXED INCL.1 x POWERLED WHITE [B] 3,3W EXCL.LED POWER SUPPLY 1050mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 1050mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	FIXED INCL.1 x POWERLED WHITE [C] 6W EXCL.LED POWER SUPPLY 500mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL	FIXED INCL.1 x POWERLED WHITE [D] 7W EXCL.LED POWER SUPPLY 350mA-DC 0,3 IP20 OPTIONS LED POWER SUPPLY 350mA-DC / DIM ACCESSORIES MINI REO HONEYCOMB MINI REO SOFTENING LENS MINI REO GLASS SBL



DB ARCHITECTEN







FULL INFO / PAG TEC

Requirements

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION
PLASTERKIT 101
202 11 19

205 x 205

80 x 180

CONTROL GEAR
LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 50W
200 46 06

86 x 31 x 20

TRANSFO 100W
200 46 10

107 x 35 x 21

DIM8: dimming by falling edge dimmer

Fixation S1

4000K

3000K

REFLECTOR FL-33°

2700K

REFLECTOR FL-33°

new

SOFT DIM


INFO SOFT DIM
PAG TEC 9

2700-1800K

REFLECTOR FL-40°

Deep Ringo LED





76 x 90 min.5

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
DEEP RINGO LED 3033 ◇ **202 272 28122 ◇** ◇ = B / MMAT / W	**DEEP RINGO LED 3033-9 ◇** **202 272 29122 ◇** ◇ = B / MMAT / W
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
DEEP RINGO LED 2733 ◇ **202 272 28123 ◇** ◇ = B / MMAT / W	**DEEP RINGO LED 2733-9 ◇** **202 272 29123 ◇** ◇ = B / MMAT / W

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20 IP43 IP20 IP20

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

850lm (10W)
DEEP RINGO LED SOFT ◇ **202 272 28120 ◇** ◇ = B / MMAT / W


FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,3 IP20 IP43 IP20 IP20

REQUIREMENTS
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

Deep Ringo Hi





76 x 105 max.15


DEEP RINGO Hi S1 ◇
202 11 26 ◇
◇ = B / W
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W

0,1 IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5

Deep Ringo





76 x 100 max.15

DEEP RINGO S1 ◇
202 11 16 ◇
◇ = ALU / B / C / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,1 IP20 0,5

OPTIONS
PLASTERKIT 101
led LED SOLUTION - PAG TEC 4-5
TRANSFO







ABC PROJECTS - ANJA VERROEYE



FULL INFO / PAG TEC

Requirements

CONTROL GEAR		
LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8	150 x 45 x 30	SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 161 207 01 161	200 x 200	175 x 175
CONCRETE BOX 161 270 11 161	202 x 202 x 186	207 x 207
MOUNTING KIT 75 202 00 75	117 x 117 x 22	Ø121

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

DIM8: dimming by falling edge dimmer


Fixation S1 | Fixation S2




DEEP RINGO S LED 3033 S1 B

Deep Ringo S LED








	75 x 75 x 90 max.25		75 x 75 x 90	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**DEEP RINGO S LED 3033 S1** ◇ **202 28 28122** ◇ ◇ = B / W / MMAT	**DEEP RINGO S LED 3033-9 S1** ◇ **202 28 29122** ◇ ◇ = B / W / MMAT	**DEEP RINGO S LED 3033 S2** ◇ **202 282 28122** ◇ ◇ = B / W / MMAT	**DEEP RINGO S LED 3033-9 S2** ◇ **202 282 29122** ◇ ◇ = B / W / MMAT
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**DEEP RINGO S LED 2733 S1** ◇ **202 28 28123** ◇ ◇ = B / W / MMAT	**DEEP RINGO S LED 2733-9 S1** ◇ **202 28 29123** ◇ ◇ = B / W / MMAT	**DEEP RINGO S LED 2733 S2** ◇ **202 282 28123** ◇ ◇ = B / W / MMAT	**DEEP RINGO S LED 2733-9 S2** ◇ **202 282 29123** ◇ ◇ = B / W / MMAT
	FIXED INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350-500mA-DC / DIM		FIXED INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP43 IP20 IP20 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350-500mA-DC / DIM	
2700-1800K	850lm (10W)		850lm (10W)	
REFLECTOR FL-40°	**DEEP RINGO S LED SOFT S1** ◇ **202 28 28120** ◇ ◇ = B / W / MMAT		**DEEP RINGO S LED SOFT S2** ◇ **202 282 28120** ◇ ◇ = B / W / MMAT	
	FIXED INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP43 IP20 IP20 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75		FIXED INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP43 IP20 IP20 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75	

new
SOFT DIM
INFO SOFT DIM
PAG TEC 9

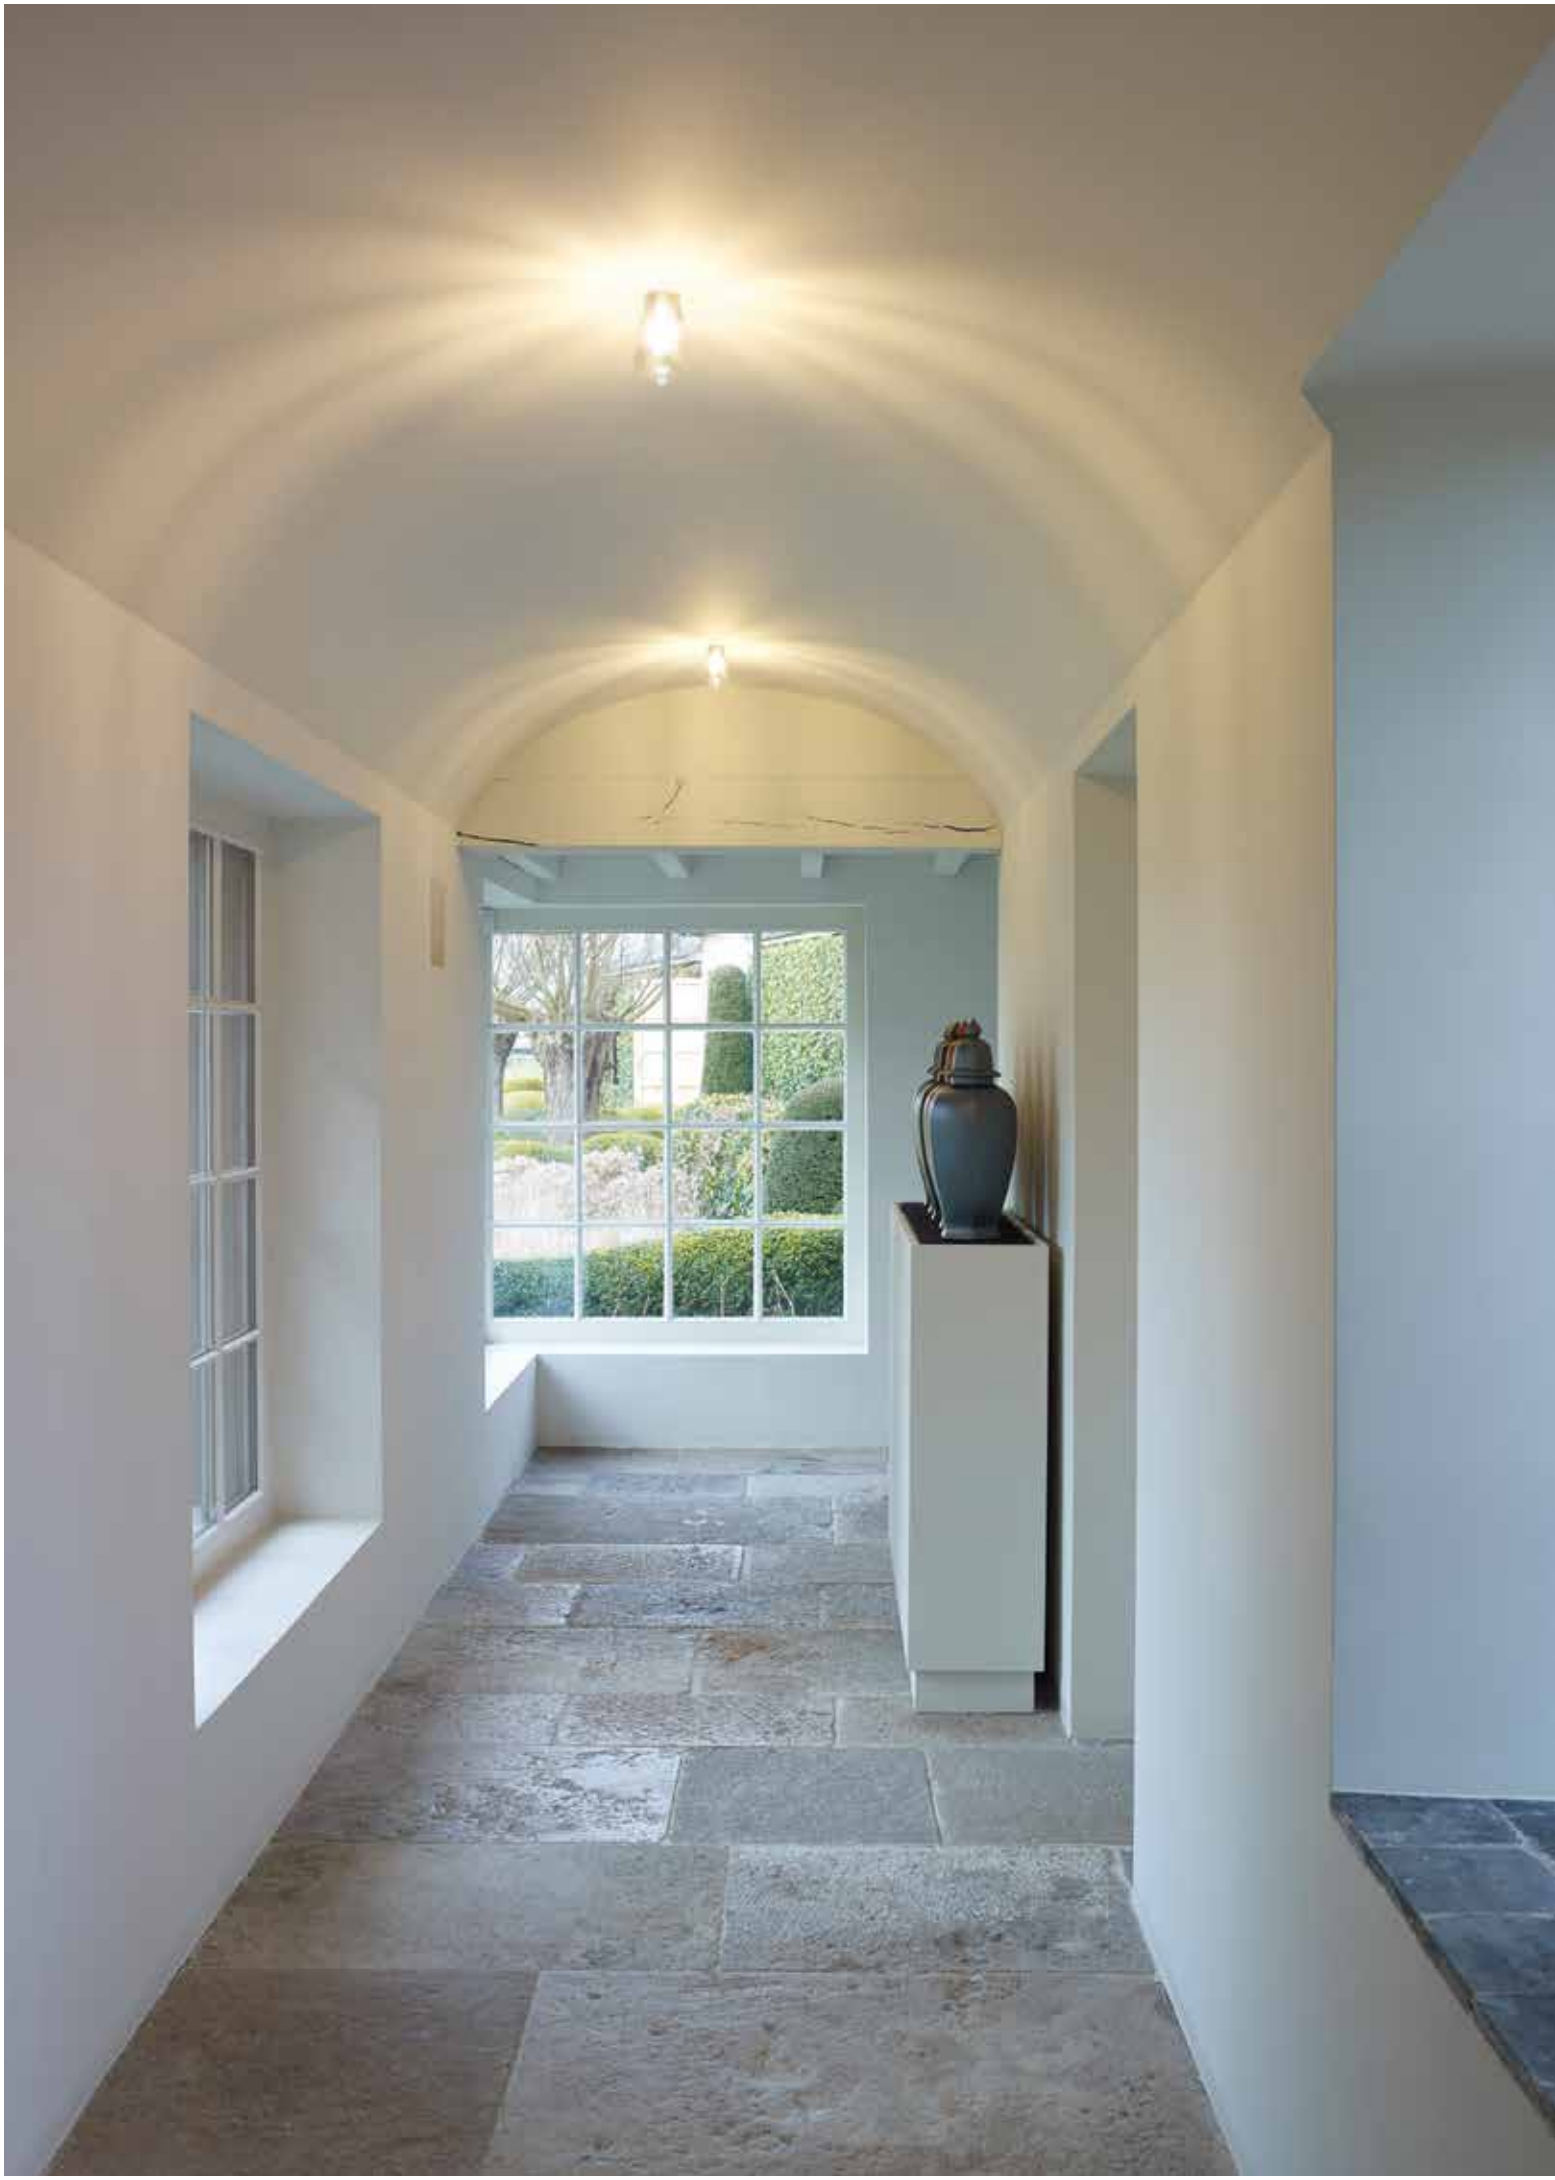


FULL INFO / PAG TEC

Requirements

MOUNTING KIT R60 TRIMLESS O.F.A.
415 91 60

92 max.25

0,4



Options


CONTROL GEAR
SPY TUBE ◇
414 01 00 ◇
◇ = MMAT / W



new

Twenty-7 Trimless





ØKIT x 100

TWENTY-7 TRIMLESS
415 35 00
FIXED
INCL.1 x SPY TUBE B
E27Ls / 100-240V / 50-60Hz
1 x A60 max.20W

IP20 0,1

REQUIREMENTS
MOUNTING KIT R60 TRIMLESS O.F.A.
415 91 60

OPTIONS
led LED SOLUTION - PAG TEC 4-5
SPY TUBE MMAT / W

FULL INFO / PAG TEC

Options

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21


FULL INFO / PAG TEC

Accessories

TUBE R ◇ **202 02 08 ◇** ◇ = B	Ø50 / Ø52 x 18
TUBE C ◇ **202 02 05 ◇** ◇ = B	Ø50 / Ø52 x 27



RINGO S1 A + TUBE R



Ringo






70 x 70 max.15

RINGO S1 ◇
202 11 13 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE R



70 x 70 max.15

RINGO Hi S1 ◇
202 11 1310 ◇
◇ = A / ALU / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5




70 x 70

RINGO S2 ◇
202 01 13 ◇
◇ = ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE R




70 x 70

RINGO Hi S2 ◇
202 01 1310 ◇
◇ = ALU / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5

Circle






82 x 70 max.15

CIRCLE S1 ◇
202 11 10 ◇
◇ = A / ALU / B / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
TUBE C



82 x 70

CIRCLE Hi S1 ◇
202 11 1010 ◇
◇ = A / ALU / W (max.35W)
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5




82 x 70

CIRCLE S2 ◇
202 01 10 ◇
◇ = A / ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
TUBE C




82 x 70

CIRCLE Hi S2 ◇
202 01 1010 ◇
◇ = A / ALU / W (max.35W)
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

Circle S






82 x 70 max.15

CIRCLE S S1 ◇
202 11 40 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
TUBE C



82 x 70

CIRCLE S Hi S1 ◇
202 11 4010 ◇
◇ = ALU / W (max.35W)
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO




82 x 70

CIRCLE S S2 ◇
202 01 40 ◇
◇ = ALU / W
ADJUSTABLE 0°- 30° / 350°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
TUBE C



82 x 70

CIRCLE S Hi S2 ◇
202 01 4010 ◇
◇ = ALU / W (max.35W)
ADJUSTABLE 0°- 30° / 350°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

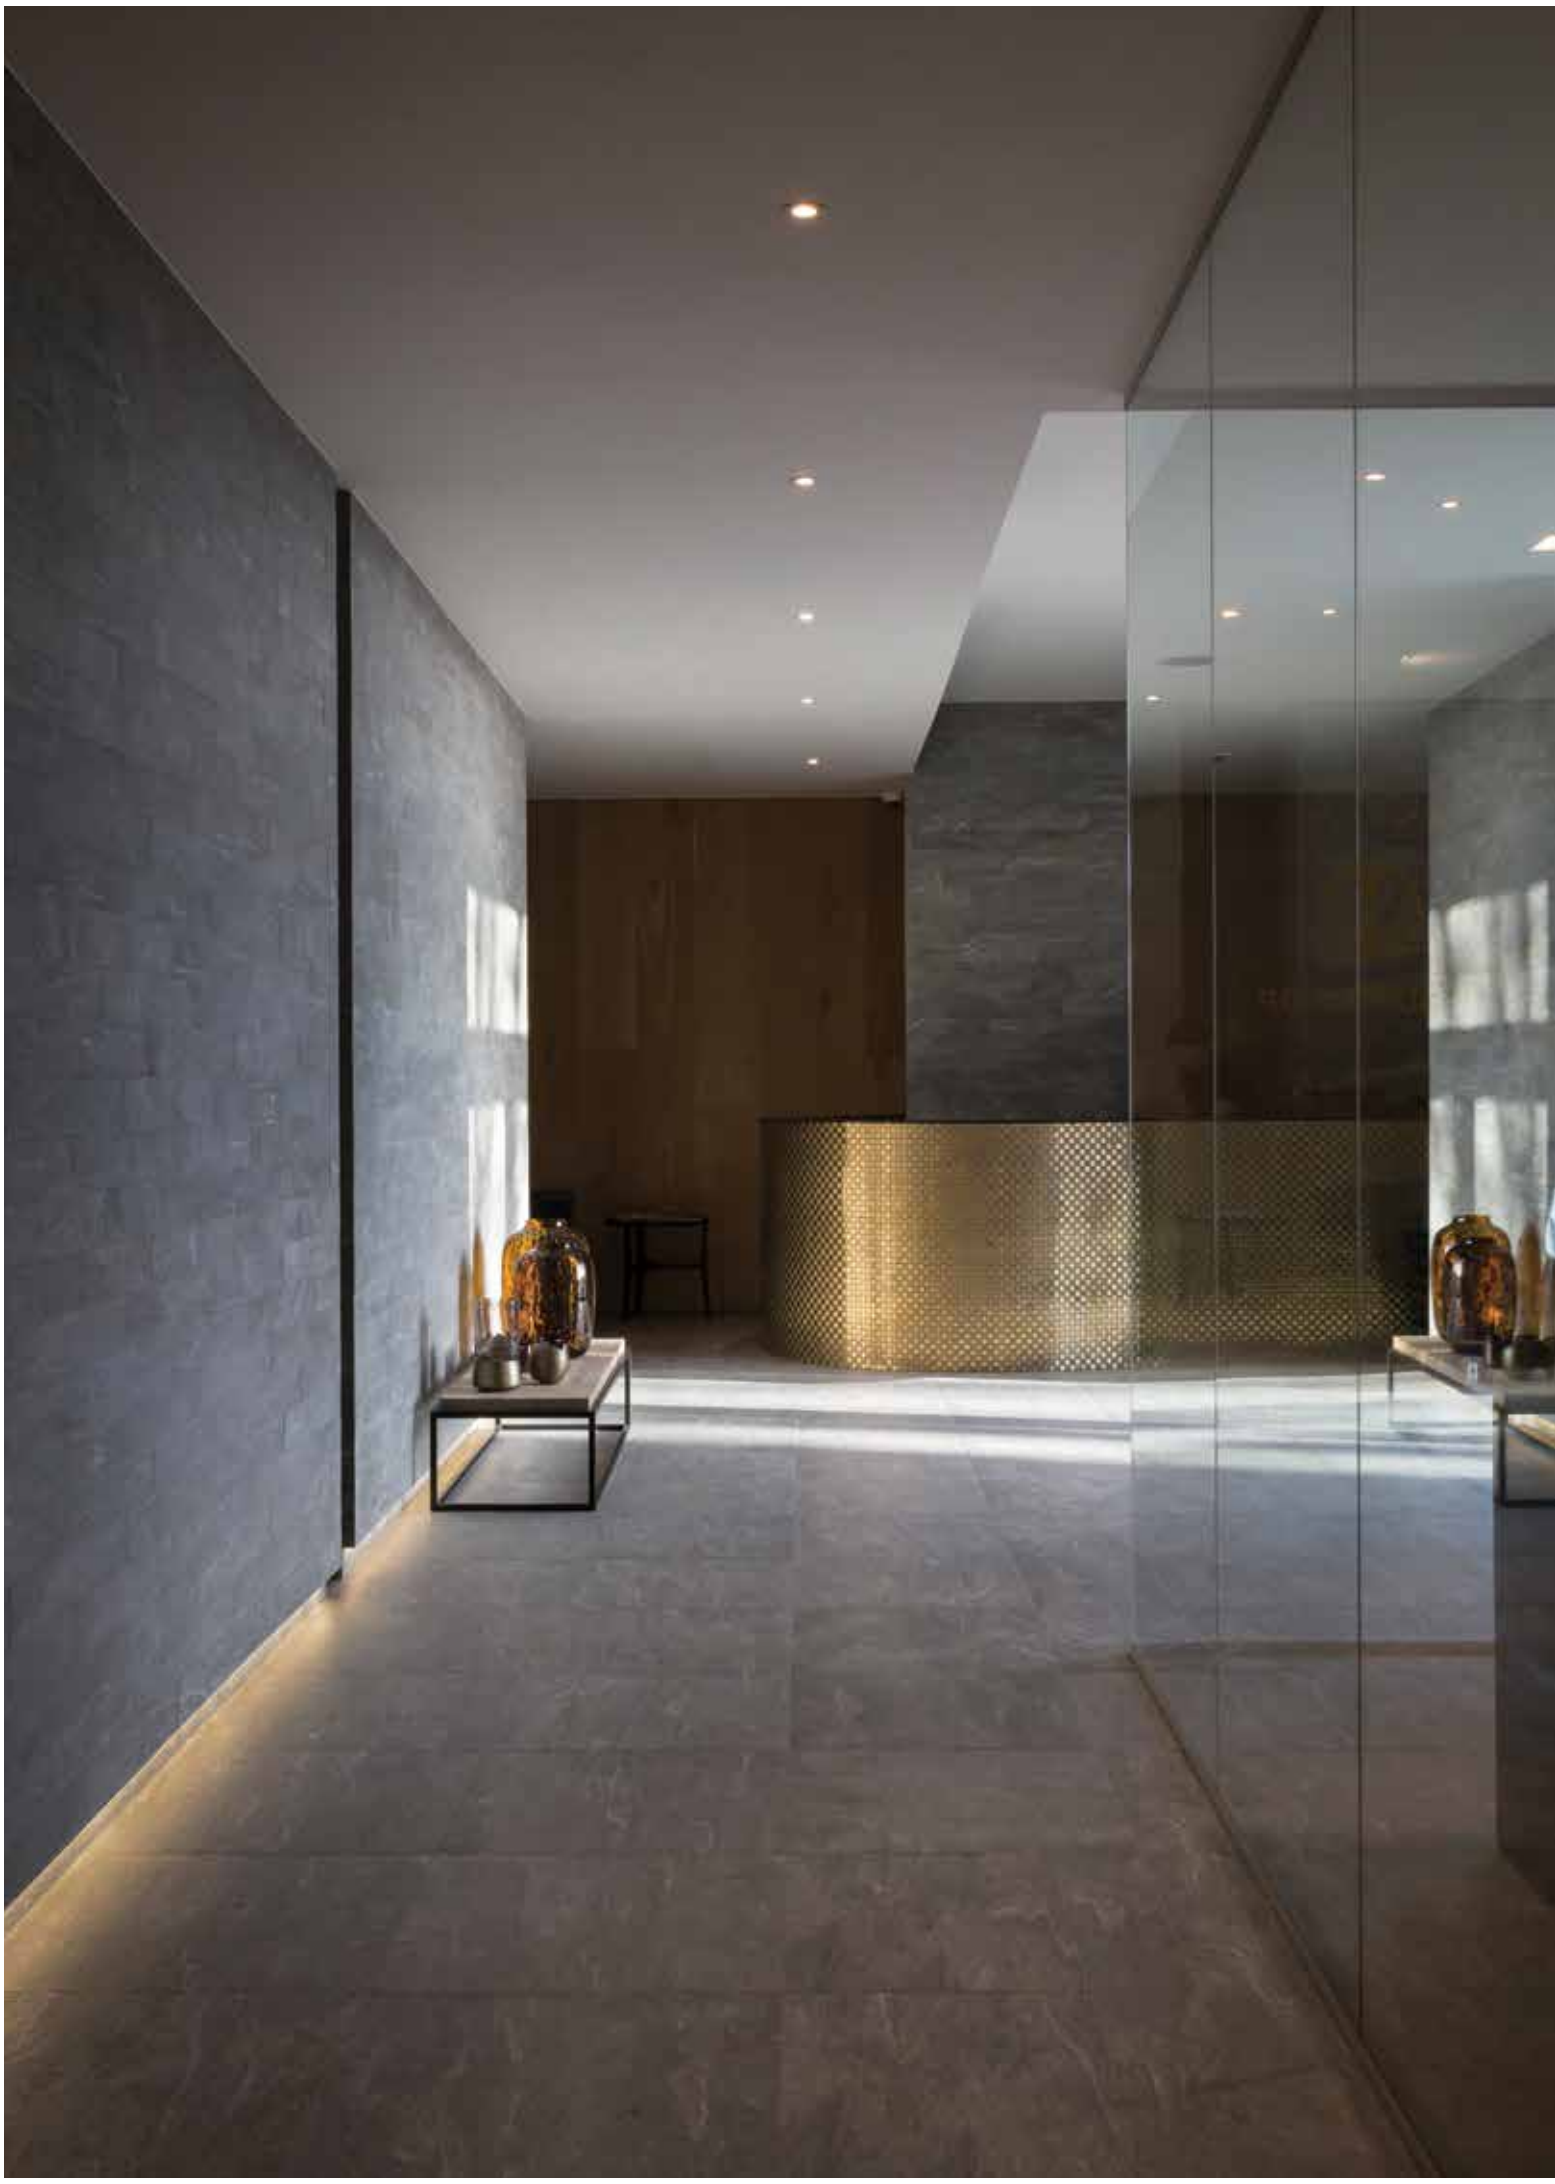



FULL INFO / PAG TEC

Requirements

CONTROL GEAR

LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8
150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION

PLASTERKIT 185
207 01 185
200 x 200
133-180

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG TEC

Accessories

OPTO CLIP◇
201 02 00◇
◇ = B
Ø102 / Ø83 / H22



HONEYCOMB 78◇
201 02 01◇
◇ = B
Ø78



SOFTENING LENS 78
201 02 04
Ø78



DIM8: dimming by falling edge dimmer




YOU-TURN OPTO + OPTO CLIP + SOFTEN NG LENS 78

led

You-Turn Opto





121 x 110 max.30

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K ●		
	ON REQUEST	
3000K ●	1930lm (18W) 2592lm (25W)	1639lm (18W) 2200lm (25W)
REFLECTOR SP-15°	**YOU-TURN OPTO 20 83015 ◇** **313 011 21 831 ◇** ◇ = W-B	**YOU-TURN OPTO 20 93015 ◇** **313 011 21 931 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN OPTO 20 83033 ◇** **313 011 21 832 ◇** ◇ = W-B	**YOU-TURN OPTO 20 93033 ◇** **313 011 21 932 ◇** ◇ = W-B
REFLECTOR WFL-55°	**YOU-TURN OPTO 20 83055 ◇** **313 011 21 833 ◇** ◇ = W-B	**YOU-TURN OPTO 20 93055 ◇** **313 011 21 933 ◇** ◇ = W-B
2700K ●	1787lm (18W) 2399lm (25W)	1453lm (18W) 1951lm (25W)
REFLECTOR SP-15°	**YOU-TURN OPTO 20 82715 ◇** **313 011 21 821 ◇** ◇ = W-B	**YOU-TURN OPTO 20 92715 ◇** **313 011 21 921 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN OPTO 20 82733 ◇** **313 011 21 822 ◇** ◇ = W-B	**YOU-TURN OPTO 20 92733 ◇** **313 011 21 922 ◇** ◇ = W-B
REFLECTOR WFL-55°	**YOU-TURN OPTO 20 82755 ◇** **313 011 21 823 ◇** ◇ = W-B	**YOU-TURN OPTO 20 92755 ◇** **313 011 21 923 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE [J] 18-25W
INCL.1 x EFT FILTER*
EXCL.LED POWER SUPPLY 500-700mA-DC

0,9 IP20

OPTIONS
PLASTERKIT 185
LED POWER SUPPLY 500 / 700mA-DC / DIM


ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78


*EFT / EQUALISING FILTER TECHNOLOGY

You-Turn Reo









	121 x 110 max.30		121 x 110 max.30	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)	1930lm (18W) 2592lm (25W)	1639lm (18W) 2200lm (25W)
REFLECTOR FL-33°	**YOU-TURN REO 3033** ◇ **313 01 28122** ◇ ◇ = W-B	**YOU-TURN REO 3033-9** ◇ **313 01 29122** ◇ ◇ = W-B	**YOU-TURN REO 20 83033** ◇ **313 010 21 832** ◇ ◇ = W-B	**YOU-TURN REO 20 93033** ◇ **313 010 21 932** ◇ ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN REO 3050** ◇ **313 01 28132** ◇ ◇ = W-B	**YOU-TURN REO 3050-9** ◇ **313 01 29132** ◇ ◇ = W-B	**YOU-TURN REO 20 83050** ◇ **313 010 21 833** ◇ ◇ = W-B	**YOU-TURN REO 20 93050** ◇ **313 010 21 933** ◇ ◇ = W-B
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)	1787lm (18W) 2399lm (25W)	1453lm (18W) 1951lm (25W)
REFLECTOR FL-33°	**YOU-TURN REO 2733** ◇ **313 01 28123** ◇ ◇ = W-B	**YOU-TURN REO 2733-9** ◇ **313 01 29123** ◇ ◇ = W-B	**YOU-TURN REO 20 82733** ◇ **313 010 21 822** ◇ ◇ = W-B	**YOU-TURN REO 20 92733** ◇ **313 010 21 922** ◇ ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN REO 2750** ◇ **313 01 28133** ◇ ◇ = W-B	**YOU-TURN REO 2750-9** ◇ **313 01 29133** ◇ ◇ = W-B	**YOU-TURN REO 20 82750** ◇ **313 010 21 823** ◇ ◇ = W-B	**YOU-TURN REO 20 92750** ◇ **313 010 21 923** ◇ ◇ = W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC 0,7 IP20 OPTIONS PLASTERKIT 185 LED POWER SUPPLY 350-500mA-DC / DIM		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE [J] 18-25W EXCL.LED POWER SUPPLY 500-700mA-DC 0,8 IP20 OPTIONS PLASTERKIT 185 LED POWER SUPPLY 500 / 700mA-DC / DIM	

new SOFT DIM

INFO SOFT DIM
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**YOU-TURN REO SOFT** ◇ **313 01 28120** ◇ ◇ = W-B	
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC 0,7 IP20 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 185	

play.deltalight.com/youturn

reddot design award winner 2012

Delta'11 Awards Silver Delta



FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 185 **207 01 185**	200 x 200	133-180


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37









up to 93% efficiency





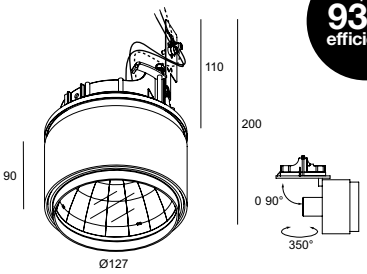

121 x 110 max.30

YOU-TURN 111 ◇
313 01 12 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.75W
CE 0,6 IP20 1,0

OPTIONS
PLASTERKIT 185
TRANSFO

121 x 110 max.30

YOU-TURN H111 ◇
313 01 19 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / EXCL.EVG
1 x HIR111-CE-P max.70W
CE 0,6 IP20 1,0

OPTIONS
PLASTERKIT 185
BALLASTSET HID

121 x 110 max.30

YOU-TURN HIT SP15 ◇
313 01 130 SP15 ◇
◇ = W-B
INCL. REFLECTOR SP-15° + GLASS

YOU-TURN HIT FL24 ◇
313 01 130 FL24 ◇
◇ = W-B
INCL. REFLECTOR FL-24° + GLASS

YOU-TURN HIT WFL43 ◇
313 01 130 WFL43 ◇
◇ = W-B
INCL. REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / EXCL.EVG
1 x HIT max.70W
CE 0,9 IP20 1,0

OPTIONS
PLASTERKIT 185
BALLASTSET HID


play.deltalight.com/youturn

reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta



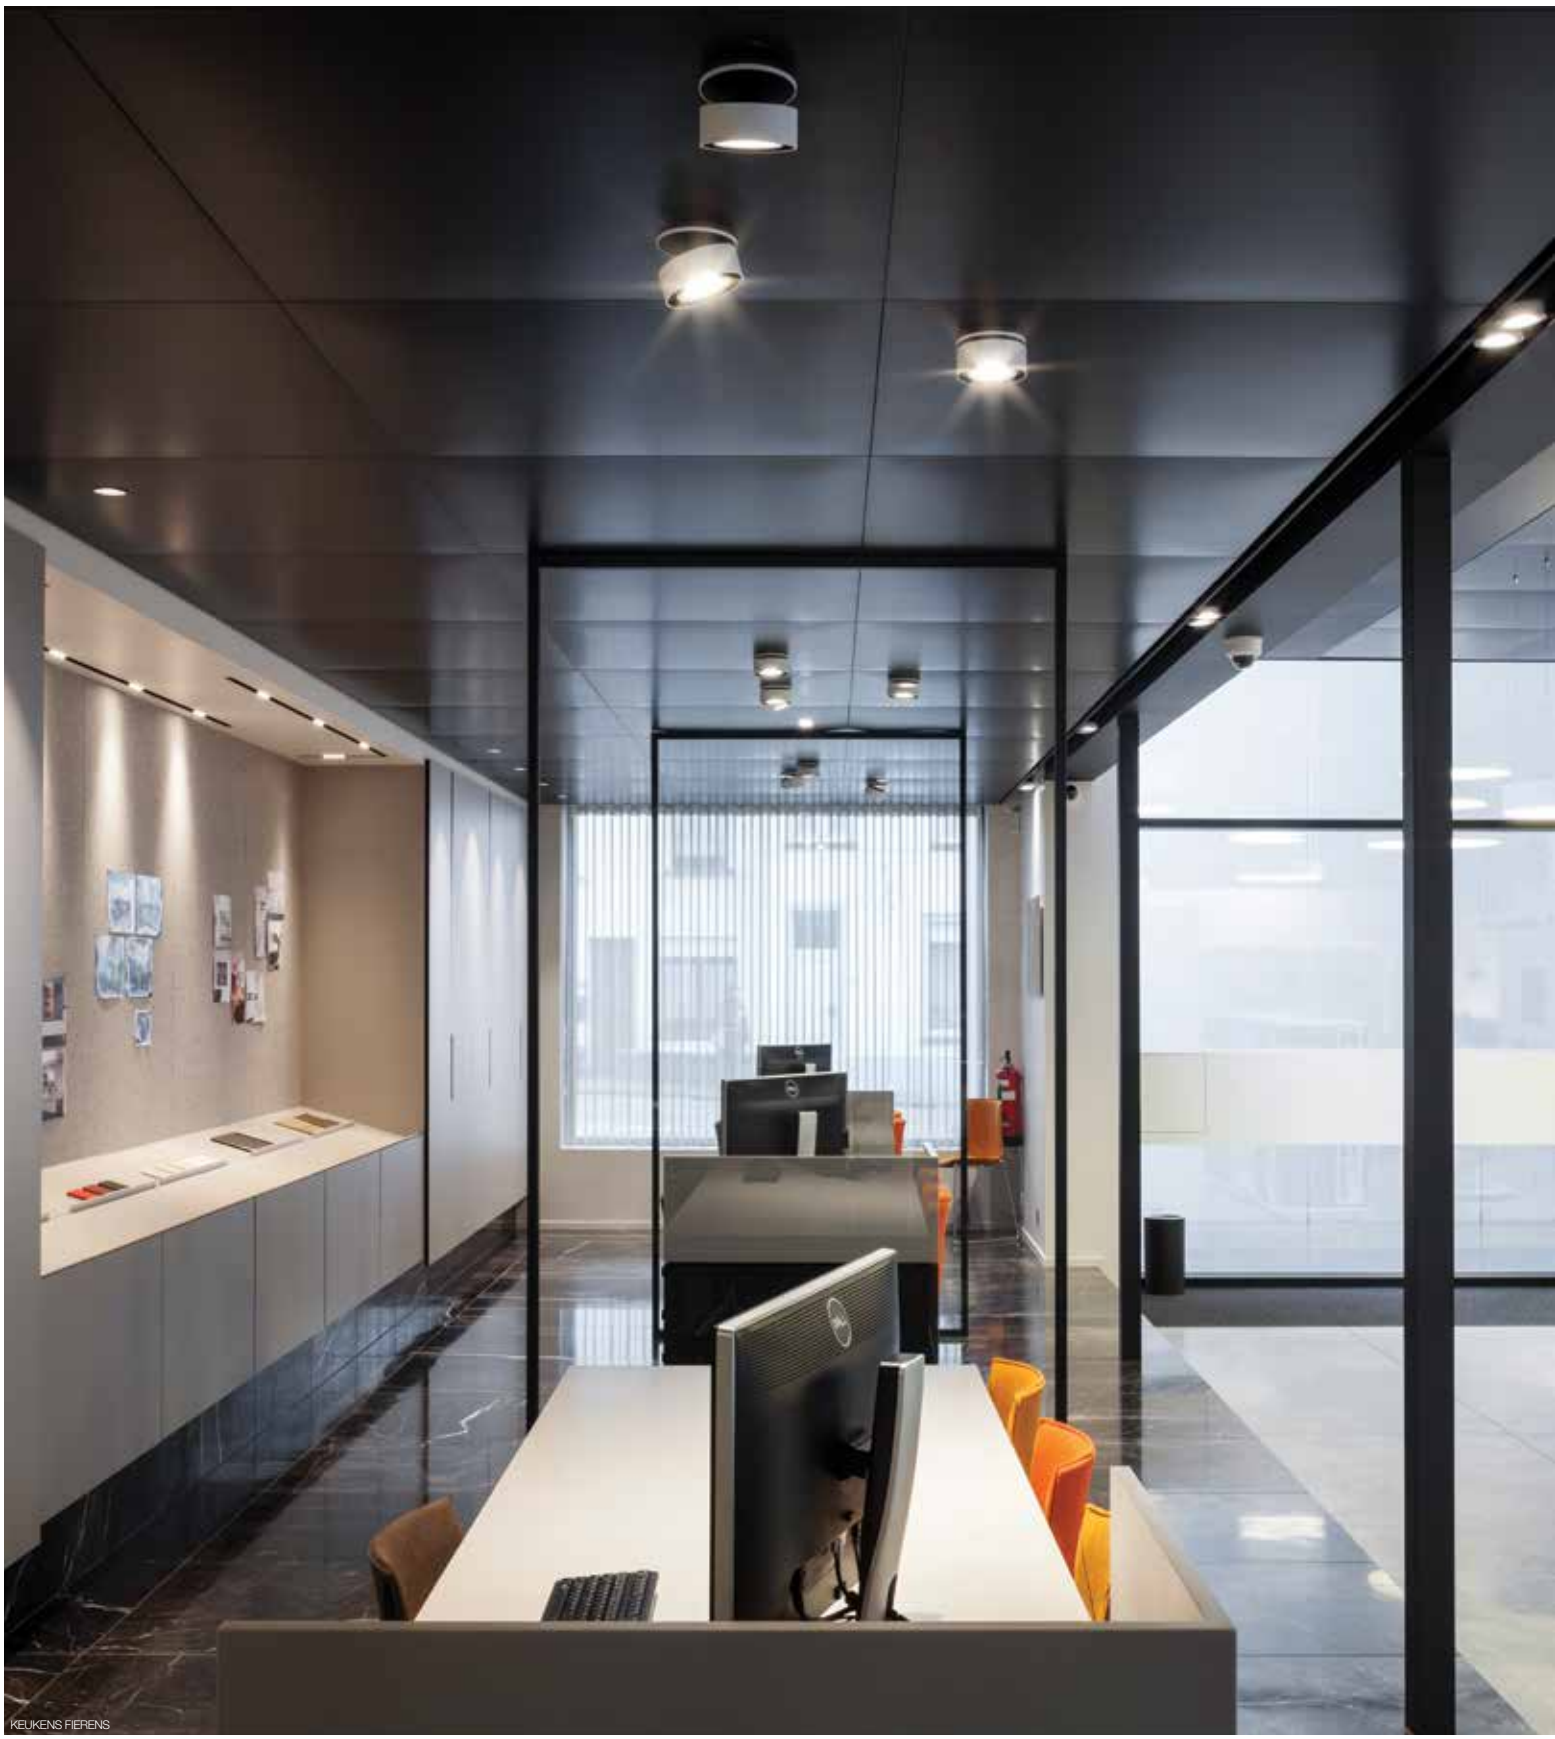

KEUKENS FIERENS



HENK PIJPAERT ENGINEERING







FULL INFO / PAG TEC

Options


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



Mini Spy





Ø46 x 40 max.25

MINI SPY ◇
414 13 839 ◇
◇ = W-W
ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE [A] 1,1-1,6W / 3000K
INCL.1 x LENS 19°
EXCL.LED POWER SUPPLY 350-500mA-DC

0,1 IP20

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

play.deltalight.com/ers

PATENTED EX-CENTRIC ROTATION SYSTEM®




FULL INFO / PAG TEC

Requirements


MOUNTING KIT MIDISPY TRIMLESS
414 90 02

83 9 or 12

0,4



MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W




Options


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER









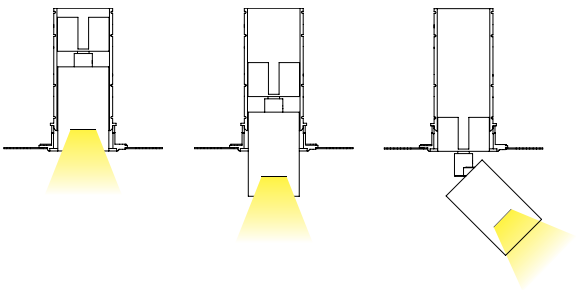


Midispy Trimless

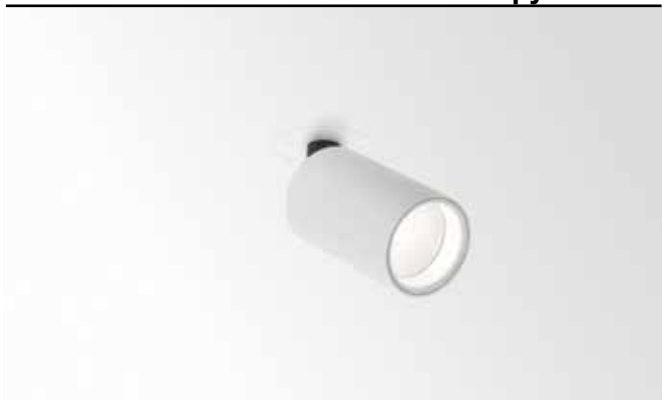



	ØKIT x 130	ØKIT x 130	
	CRI > 80	**CRI > 80**	**CRI > 90**
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W)	570lm (6W) 780lm (9W)	427lm (6W) 585lm (9W)
LENS FL-20°	**MIDISPY TRIMLESS 83020** ◇ **414 222 832** ◇ ◇ = B / W		
REFLECTOR WFL-40°		**MIDISPY TRIMLESS 83040** ◇ **414 221 833** ◇ ◇ = B / W	**MIDISPY TRIMLESS 93040** ◇ **414 221 933** ◇ ◇ = B / W
2700K	360lm (4,1W)	530lm (6W) 726lm (9W)	400lm (6W) 548lm (9W)
LENS FL-20°	**MIDISPY TRIMLESS 82720** ◇ **414 222 822** ◇ ◇ = B / W		
REFLECTOR WFL-40°		**MIDISPY TRIMLESS 82740** ◇ **414 221 823** ◇ ◇ = B / W	**MIDISPY TRIMLESS 92740** ◇ **414 221 923** ◇ ◇ = B / W
	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE [C] 4,1W EXCL.LED POWER SUPPLY 350mA-DC IP20 REQUIREMENTS MOUNTING KIT MIDISPY TRIMLESS 414 90 02 MIDISPY TUBE OPTIONS LED POWER SUPPLY 350mA-DC / DIM	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE [E] 6-9W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 REQUIREMENTS MOUNTING KIT MIDISPY TRIMLESS 414 90 02 MIDISPY TUBE OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM	



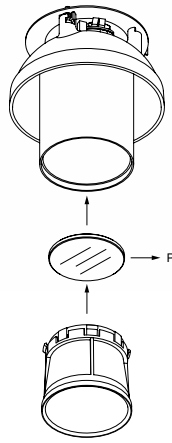


SPY TUBE W


SPY TUBE B


SPY TUBE MMAT


FULL INFO / PAG TEC

Requirements


MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA

133

0,4



SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



Options

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 50

Accessories

HONEYCOMB 50 ◇ **413 03 01 ◇** ◇ = B	Ø50	
LINEAR SPREAD LENS 50 **413 03 02**	Ø50	
SPREAD LENS 50 **413 03 03**	Ø50	
SOFTENING LENS 50 **413 03 04**	Ø50	
GLASS SBL 50 **413 03 05**	Ø50	

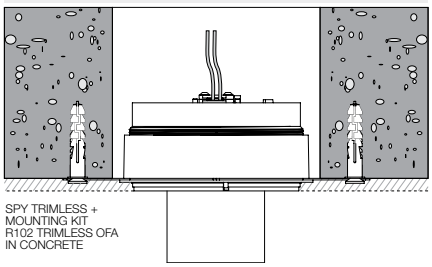

4000K

3000K


REFLECTOR FL-33°

2700K

REFLECTOR FL-33°

Spy Trimless



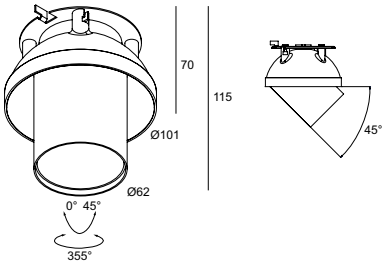

ØKIT x 80

CRI > 80	CRI > 90
ON REQUEST	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
SPY TRIMLESS 3033 ◇ **414 31 832** ◇ ◇ = W	**SPY TRIMLESS 3033-9** ◇ **414 31 932** ◇ ◇ = W
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
SPY TRIMLESS 2733 ◇ **414 31 822** ◇ ◇ = W	**SPY TRIMLESS 2733-9** ◇ **414 31 922** ◇ ◇ = W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,7 IP20


REQUIREMENTS
MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA
SPY TUBE
414 01 00

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

Spy ST



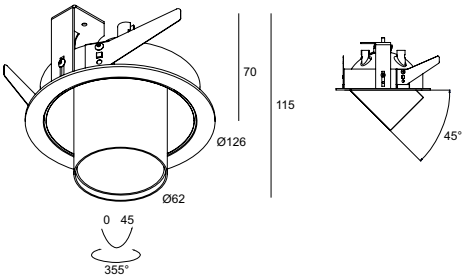

114x 80 max.25

CRI > 80	CRI > 90
ON REQUEST	
680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
SPY ST 3033 ◇ **414 33 832** ◇ ◇ = W-W	**SPY ST 3033-9** ◇ **414 33 932** ◇ ◇ = W-W
618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
SPY ST 2733 ◇ **414 33 822** ◇ ◇ = W-W	**SPY ST 2733-9** ◇ **414 33 922** ◇ ◇ = W-W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,7 IP20

REQUIREMENTS
SPY TUBE
414 01 00


OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

play.deltalight.com/ers

PATENTED EX-CENTRIC ROTATION SYSTEM®



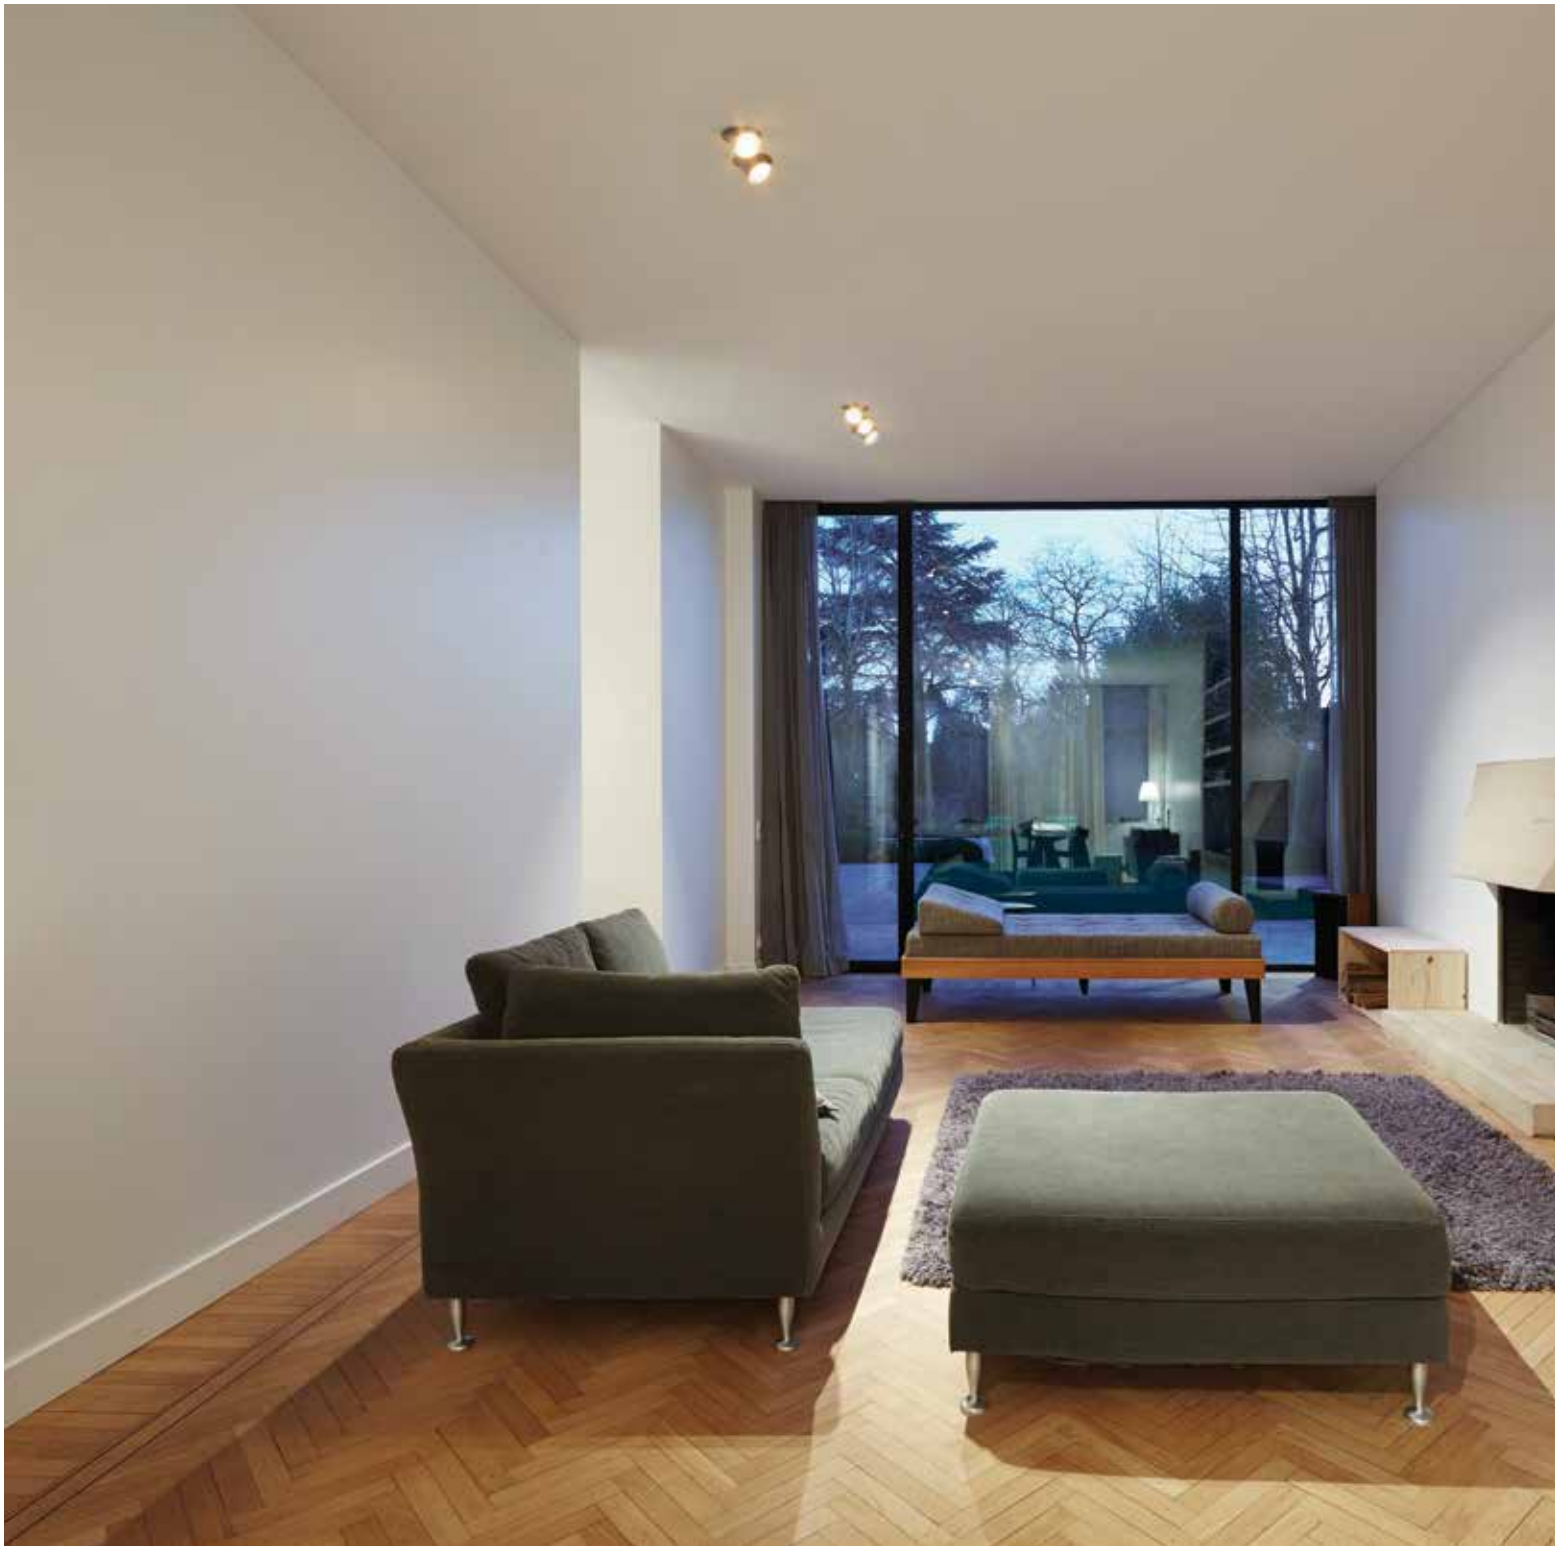






VERFAILLE INTERIEUR





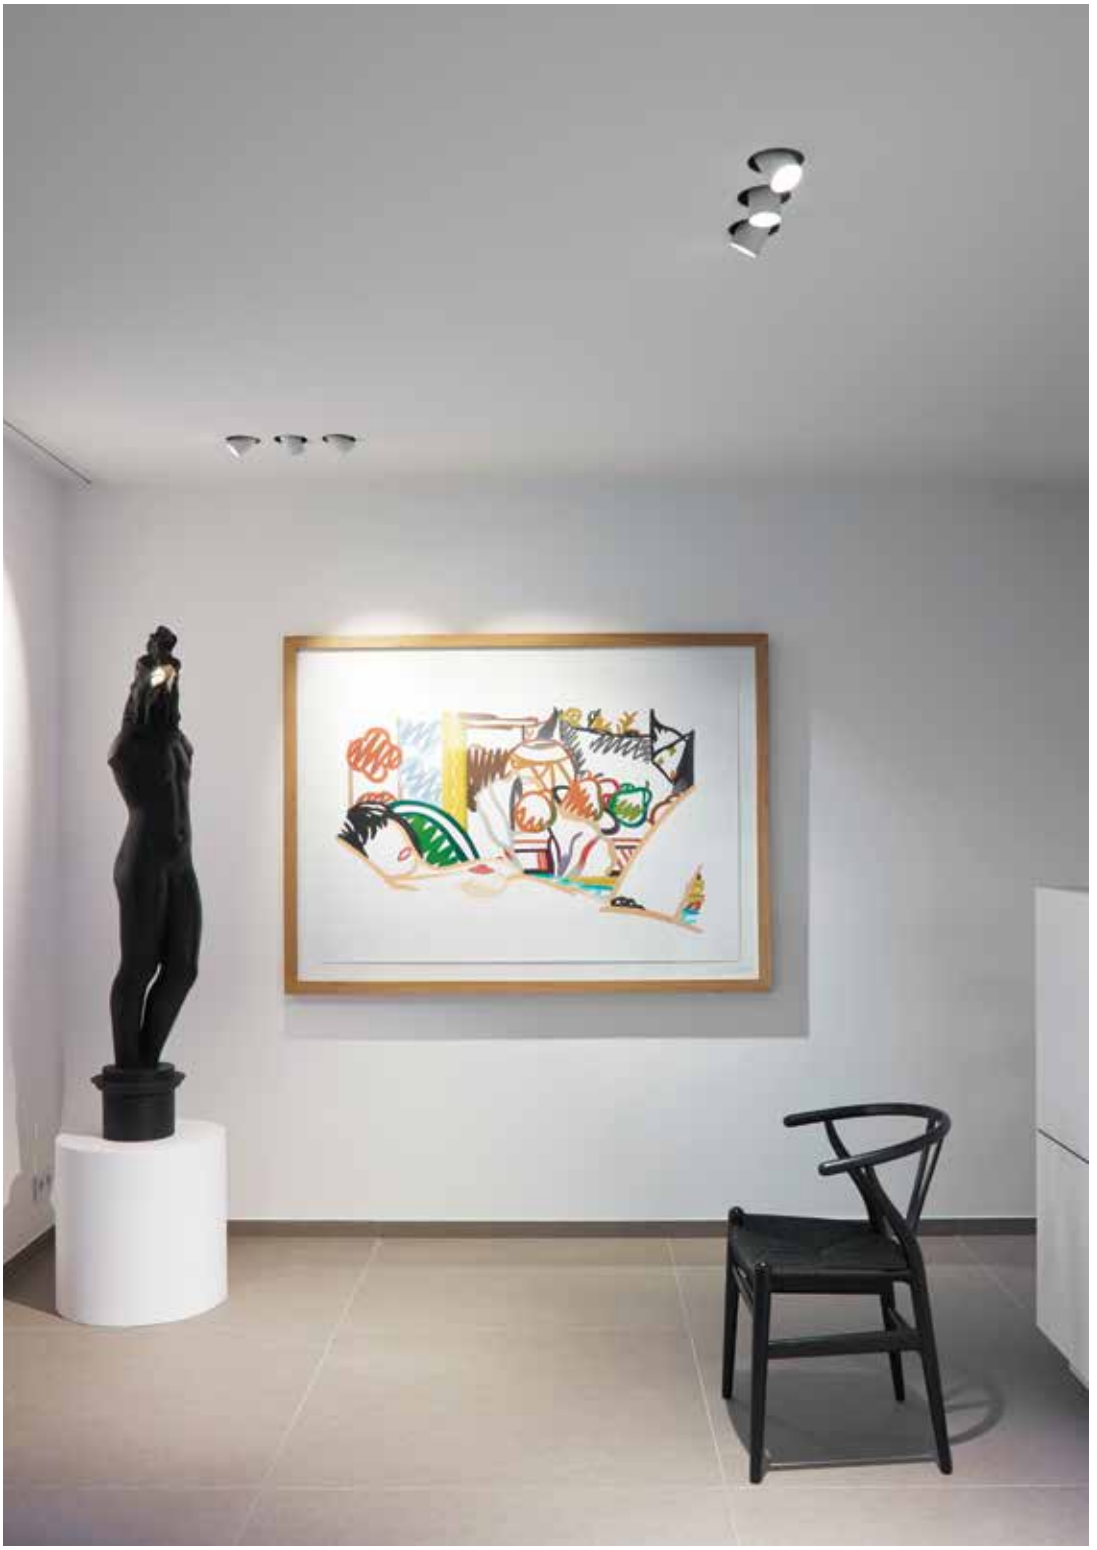




FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W



Options


CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



INSTALLATION

MOUNTING KIT FLUSH SPY 140 x 82 x 22 83 x 40
414 90 01












Midispy Clip






	50 x 40	50 x 40	
	CRI > 80	**CRI > 80**	**CRI > 90**
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W) 475lm (6W)	570lm (6W) 780lm (9W)	427lm (6W) 585lm (9W)
LENS FL-20°	**MIDISPY CLIP 83020** ◇ **414 242 832** ◇ ◇ = B-B / W-B / W-W		
REFLECTOR WFL-40°		**MIDISPY CLIP 83040** ◇ **414 241 833** ◇ ◇ = B-B / W-B / W-W	**MIDISPY CLIP 93040** ◇ **414 241 933** ◇ ◇ = B-B / W-B / W-W
2700K	360lm (4,1W) 450lm (6W)	530lm (6W) 726lm (9W)	400lm (6W) 548lm (9W)
LENS FL-20°	**MIDISPY CLIP 82720** ◇ **414 242 822** ◇ ◇ = B-B / W-B / W-W		
REFLECTOR WFL-40°		**MIDISPY CLIP 82740** ◇ **414 241 823** ◇ ◇ = B-B / W-B / W-W	**MIDISPY CLIP 92740** ◇ **414 241 923** ◇ ◇ = B-B / W-B / W-W
	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE [C] 4,1-6W EXCL.LED POWER SUPPLY 350-500mA-DC 0,2 IP20 REQUIREMENTS MIDISPY TUBE OPTIONS MOUNTING KIT FLUSH SPY LED POWER SUPPLY 350-500mA-DC / DIM	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE [E] 6-9W EXCL.LED POWER SUPPLY 350-500mA-DC 0,2 IP20 REQUIREMENTS MIDISPY TUBE OPTIONS MOUNTING KIT FLUSH SPY LED POWER SUPPLY 350-500mA-DC / DIM	

FULL INFO / PAG TEC

Requirements

SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



Options

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



INSTALLATION



MOUNTING KIT FLUSH SPY 140 x 82 x 22 83 x 40
414 90 01



FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03




SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05






SPY TUBE W


SPY TUBE B



SPY TUBE MMAT

new

led

Spy Clip HP





50 x 40

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**SPY CLIP HP 83033 ◇** **414 341 21 831 ◇** ◇ = B-B / W-B / W-W	**SPY CLIP HP 93033 ◇** **414 341 21 931 ◇** ◇ = B-B / W-B / W-W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**SPY CLIP HP 82733 ◇** **414 341 21 821 ◇** ◇ = B-B / W-B / W-W	**SPY CLIP HP 92733 ◇** **414 341 21 921 ◇** ◇ = B-B / W-B / W-W

ADJUSTABLE 0-90° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

0,4 IP20


REQUIREMENTS
SPY TUBE

OPTIONS
MOUNTING KIT FLUSH SPY
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

Spy Clip





	50 x 40	50 x 40	
	CRI > 80	**CRI > 80**	**CRI > 90**
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W) 475lm (6W)	703lm (6,2W) 945lm (9,3W)	550lm (6,2W) 739lm (9,3W)
LENS SP-15°	**SPY CLIP 83015** ◇ **414 342 831** ◇ ◇ = B-B / W-B / W-W		
REFLECTOR SP-18°		**SPY CLIP 83018** ◇ **414 341 81831** ◇ ◇ = B-B / W-B / W-W	**SPY CLIP 93018** ◇ **414 341 81931** ◇ ◇ = B-B / W-B / W-W
REFLECTOR FL-33°		**SPY CLIP 83033** ◇ **414 341 81832** ◇ ◇ = B-B / W-B / W-W	**SPY CLIP 93033** ◇ **414 341 81932** ◇ ◇ = B-B / W-B / W-W
2700K	360lm (4,1W) 450lm (6W)	665lm (6,2W) 893lm (9,3W)	519lm (6,2W) 698lm (9,3W)
LENS SP-15°	**SPY CLIP 82715** ◇ **414 342 821** ◇ ◇ = B-B / W-B / W-W		
REFLECTOR SP-18°		**SPY CLIP 82718** ◇ **414 341 81821** ◇ ◇ = B-B / W-B / W-W	**SPY CLIP 92718** ◇ **414 341 81921** ◇ ◇ = B-B / W-B / W-W
REFLECTOR FL-33°		**SPY CLIP 82733** ◇ **414 341 81822** ◇ ◇ = B-B / W-B / W-W	**SPY CLIP 92733** ◇ **414 341 81922** ◇ ◇ = B-B / W-B / W-W
	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE [C] 4,1-6W EXCL.LED POWER SUPPLY 350-500mA-DC 0,4 IP20 REQUIREMENTS SPY TUBE OPTIONS MOUNTING KIT FLUSH SPY LED POWER SUPPLY 350-500mA-DC / DIM ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE [H] 6,2-9,3W EXCL.LED POWER SUPPLY 350-500mA-DC 0,4 IP20 REQUIREMENTS SPY TUBE OPTIONS MOUNTING KIT FLUSH SPY LED POWER SUPPLY 350-500mA-DC / DIM ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	



FULL INFO / PAG TEC

Option

HOLE IN ONE R15 PLATE◇ Ø324 x 38 — 305 x 140
202 93 01◇ — max.30
◇ = A / W
0,6



INSTALLATION

PUT CLICKPLATE 171 x Ø137
202 91 04 00
0,2



EXAMPLE:
PUT CLICKPLATE +
PUT 50 CLICK


CONTROL GEAR


TRANSFO 50W 86 x 31 x 20
200 46 06


TRANSFO 100W 107 x 35 x 21
200 46 10

BALLASTSET HID 135 140 x 64 x 32
200 45 135

BALLASTSET HID 170 186 x 90 x 37
200 45 170









Requirements

PUT 111 CENTER
202 91 01 11
FIXED
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W
0,2




OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

PUT C20 CENTER
202 91 01 20
FIXED
E27Hs / EXCL.KVG-EVG
1 x HIPAR20 35W
0,4




OPTIONS
BALLASTSET HID

PUT C30 CENTER
202 91 01 30
FIXED
E27Hs / EXCL.KVG-EVG
1 x HIPAR30 max.70W
0,3




OPTIONS
BALLASTSET HID

PUT 111 CLICK
202 91 02 11
ADJUSTABLE
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.50W
0,2




OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

PUT 50 CLICK
202 91 02 05
ADJUSTABLE
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
0,1



OPTIONS
PUT CLICK PLATE
TRANSFO

PUT C20 CLICK
202 91 02 20
ADJUSTABLE
E27Hs / EXCL.KVG-EVG
1 x HIPAR20 35W
0,4




OPTIONS
PUT CLICK PLATE
BALLASTSET HID


Hole In One




ADVISED COMBINATIONS




1 x HOLE IN ONE R15
202 91 98 01
1 x PUT 111 CENTER
202 91 01 11
3 x PUT 50 CLICK
202 91 02 05



1 x HOLE IN ONE R15
202 91 98 01
1 x PUT C30 CENTER
202 91 01 30
3 x PUT 111 CLICK
202 91 02 11



1 x HOLE IN ONE R15
202 91 98 01
1 x PUT 111 CENTER
202 91 01 11
3 x PUT 111 CLICK
202 91 02 11



222 x 180 + H (PUT... CENTER) max.12

HOLE IN ONE R15
202 91 98 01
MOUNTING BOX
EXCL.PUT... CENTER
EXCL.PUT... CLICK
EXCL.PUT CLICKPLATE
EXCL.PUT CLICKPLATE + PUT... CLICK

2,0

REQUIREMENTS
PUT.. CENTER
PUT.. CLICK

OPTIONS
HOLE IN ONE R15 PLATE



HOLE IN ONE + R15 PLATE





CARREE
OVERVIEW



TRIMLESS



ST (Small Trim)



(Trim)




Carree RS (Fixed)



Carree RS **OK** (Adjustable)

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2025328123 or www.deltalight.com/carree-st-l

MINI CARREE ST OK



59 x 59

55 x 55

ADJUSTABLE 0-20°

QR-CBC35

PAG INT 162

MINI CARREE ST



66 x 66


61 x 61

FIXED

led

PAG INT 163

CARREE ST



68 x 68


64 x 64

FIXED

QR-C51

PAG INT 178

CARREE TRIMLESS LED



77 x 77


Ø 121

FIXED

led

PAG INT 166

CARREE TRIMLESS OK



77 x 77


Ø 121

ADJUSTABLE 0-20°

led / QR-C51

PAG INT 167

CARREE II



78 x 78

64 x 64

FIXED

QPAR51

PAG INT 179

CARREE II OK



90 x 90

75 x 75

ADJUSTABLE 0-30°

QR-C51 /QPAR51

PAG INT 179

CARREE 150 LED



79 x 110

104 x 75

FIXED

led

PAG INT 189

CARREE 145



90 x 122

110 x 78

ADJUSTABLE 10-45°

QR-C51

PAG INT 189

CARREE 235



90 x 157

145 x 78

1x FIXED +
1x ADJUSTABLE 10-45°

QR-C51

PAG INT 189

CARREE MAX



95 x 95

82 x 82

FIXED

QR-C51 /QPAR51

PAG INT 183

CARREE RS



95 x 95

Ø 89

FIXED

led / QR-C51 /
QPAR51

PAG INT 185

CARREE ST LED



79 x 79

75 x 75

FIXED

led

PAG INT 170

CARREE ST OK LED



79 x 79

75 x 75

ADJUSTABLE 0-30°

led

PAG INT 171

CARREE ST L LED



79 x 79

75 x 75

FIXED

led

PAG INT 174

CARREE SC OK



79 x 79

75 x 75

ADJUSTABLE 0-25°

led

PAG INT 175

CARREE ST OK



79 x 79

75 x 75

ADJUSTABLE 0-20°

QR-C51 / HIPAR51

PAG INT 178

CARREE GT



81 x 81


75 x 75

FIXED

led / QR-CB51 / QPAR51

PAG INT 182

GRAND CARREE



150 x 150

142 x 142

FIXED

led / TC-DEL

PAG INT 191

FULL INFO / PAG TEC


Options


INSTALLATION	C A B	
PLASTERKIT 163 **207 01 163**	165 x 165	145 x 145
PLASTERKIT 190 **207 01 190**	180 x 180	140 x 140
CONCRETE BOX 163 **270 11 163**	167 x 167 x 155	172 x 172
MOUNTING KIT 55 **202 00 55**	93 x 93 x 22	Ø89


CONTROL GEAR	C A B
LED POWER SUPPLY **ALL INFO ON FOLD-OUT COVER**	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

Fixation S1

Mini Carree ST OK

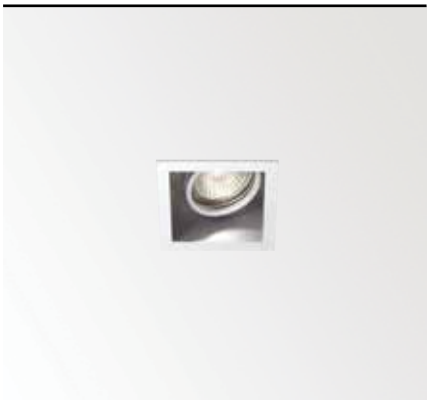





55 x 55 x 80 max.30


MINI CARREE ST OK S1 ◇
202 19 24 ◇
◇ = A / W
ADJUSTABLE 0°-20°
GZ4 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.35W

CE 0,2 IP20 0,5

OPTIONS
PLASTERKIT 163
CONCRETE BOX 163
MOUNTING KIT 55
TRANSFO

Mini Carree ST






61 x 61 x 80 max.35

	CRI > 80		
4000K			
	ON REQUEST		
3000K	307lm (3,3W)	475lm (6W)	638lm (7W)
LENS SP-10°	**MINI CARREE ST 83010 S1** ◇ **202 192 831** ◇ ◇ = A / W		
LENS FL-20°		**MINI CARREE ST 83020 S1** ◇ **202 192 832** ◇ ◇ = A / W	
REFLECTOR WFL-40°			**MINI CARREE ST 83040 S1** ◇ **202 191 833** ◇ ◇ = A / W
2700K	294lm (3,3W)	450lm (6W)	595lm (7W)
LENS SP-10°	**MINI CARREE ST 82710 S1** ◇ **202 192 821** ◇ ◇ = A / W		
LENS FL-20°		**MINI CARREE ST 82720 S1** ◇ **202 192 822** ◇ ◇ = A / W	
REFLECTOR WFL-40°			**MINI CARREE ST 82740 S1** ◇ **202 191 823** ◇ ◇ = A / W
	FIXED INCL.1 x POWERLED WHITE [B] 3,3W EXCL.LED POWER SUPPLY 1050mA-DC 0,4 IP20 OPTIONS PLASTERKIT 190 LED POWER SUPPLY 1050mA-DC / DIM	FIXED INCL.1 x POWERLED WHITE [C] 6W EXCL.LED POWER SUPPLY 500mA-DC 0,4 IP20 OPTIONS PLASTERKIT 190 LED POWER SUPPLY 500mA-DC / DIM	FIXED INCL.1 x POWERLED WHITE [D] 7W EXCL.LED POWER SUPPLY 350mA-DC 0,4 IP20 OPTIONS PLASTERKIT 190 LED POWER SUPPLY 350mA-DC / DIM



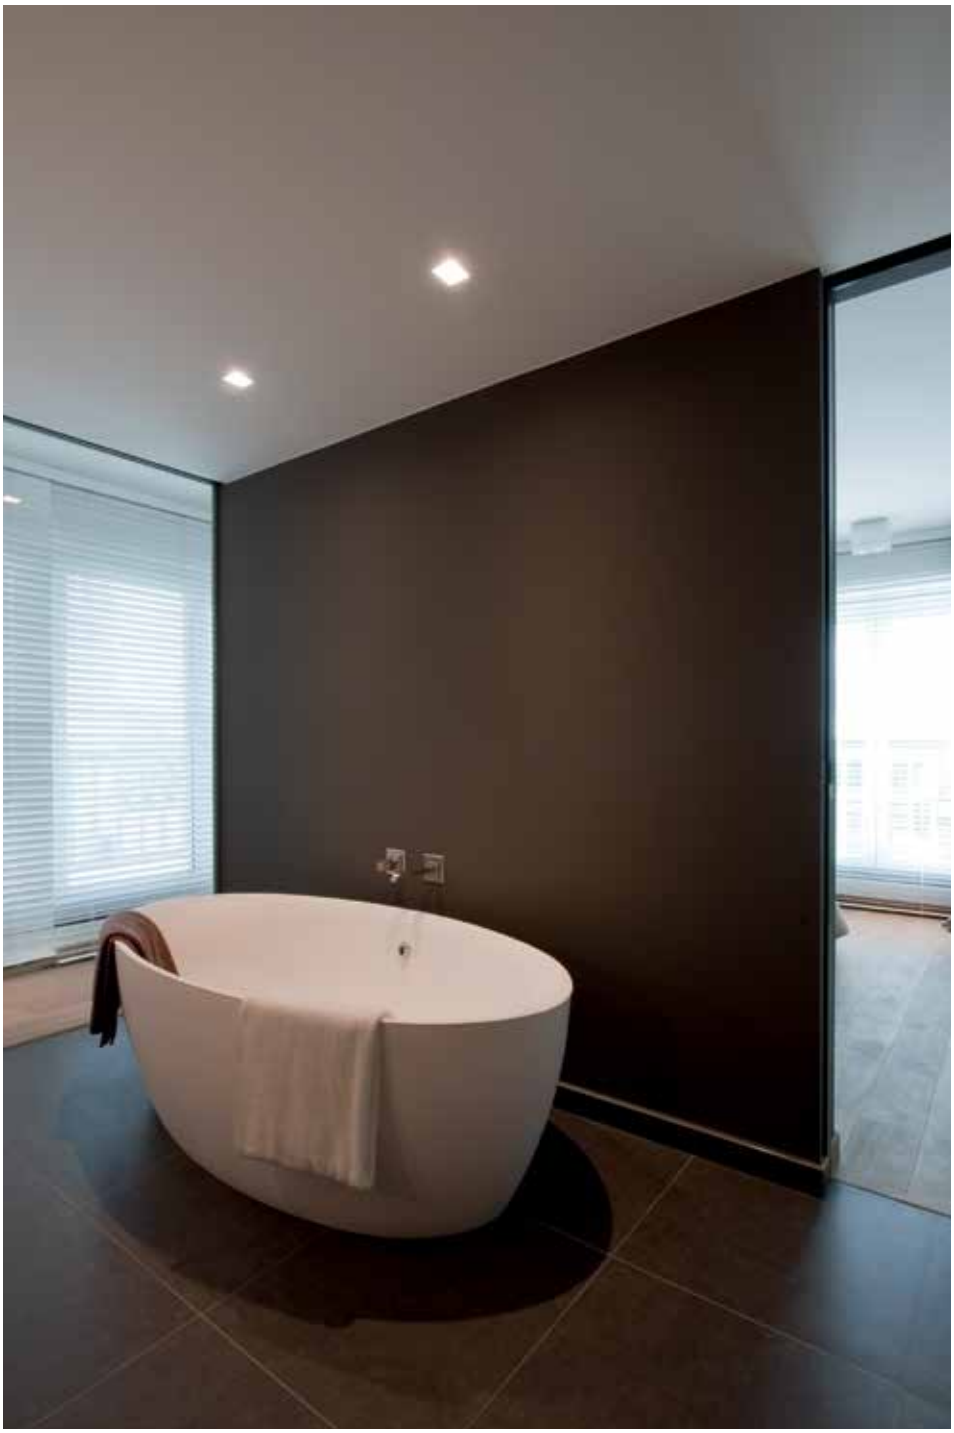


FULL INFO / PAG TEC

Requirements

INSTALLATION


MOUNTING KIT 75 TRIMLESS
202 01 75



121 9 or 12

0,1

MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA



182

0,2

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8
150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



TRANSFO 50W
200 46 06
86 x 31 x 20

TRANSFO 100W
200 46 10
107 x 35 x 21

FULL INFO / PAG TEC

Accessories

ANTI GLARE TUBE ◇
201 34 00 ◇
◇ = B / W
max. 20W
Ø52 x 63





DIM8: dimming by falling edge dimmer



led

Carree Trimless LED

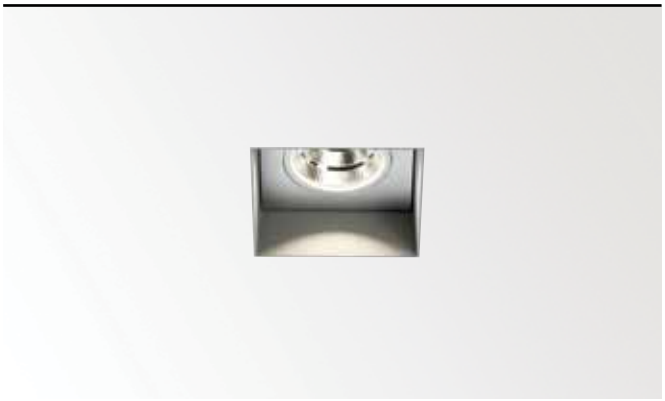



Ø KIT x 75 9 or 12

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE TRIMLESS LED 3033 S1 ◇** **202 51 28122 ◇** ◇ = A / W	**CARREE TRIMLESS LED 3033-9 S1 ◇** **202 51 29122 ◇** ◇ = A / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE TRIMLESS LED 2733 S1 ◇** **202 51 28123 ◇** ◇ = A / W	**CARREE TRIMLESS LED 2733-9 S1 ◇** **202 51 29123 ◇** ◇ = A / W


FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20

REQUIREMENTS
MOUNTING KIT 75 TRIMLESS
202 01 75
or
MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA


OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

CARREE TRIMLESS LED + MOUNTING KIT 75 TRIMLESS O.F.A. IN CONCRETE

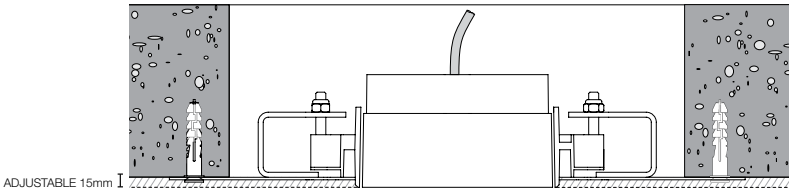

Carree Trimless OK LED





Ø KIT x 85

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE TRIMLESS OK LED 3033** ◇ **202 510 28122** ◇ ◇ = A / B / W	**CARREE TRIMLESS OK LED 3033-9** ◇ **202 510 29122** ◇ ◇ = A / B / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE TRIMLESS OK LED 2733** ◇ **202 510 28123** ◇ ◇ = A / B / W	**CARREE TRIMLESS OK LED 2733-9** ◇ **202 510 29123** ◇ ◇ = A / B / W

ADJUSTABLE 0°- 25°
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20 IP23

REQUIREMENTS
MOUNTING KIT 75 TRIMLESS
202 01 75
or
MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

SOFT DIM
NFO SOFT D M
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**CARREE TRIMLESS OK LED SOFT** ◇ **202 510 28120** ◇ ◇ = A / B / W	

ADJUSTABLE 0°- 25°
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC


0,3 IP20 IP23

REQUIREMENTS
MOUNTING KIT 75 TRIMLESS
202 01 75
or
MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA

LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

Carree Trimless OK



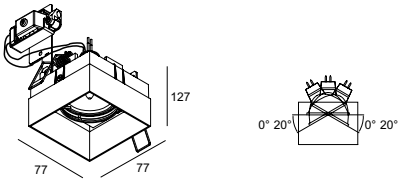

Ø KIT x 130 9 or 12

CARREE TRIMLESS OK S1 ◇
202 51 51 ◇
◇ = A / B / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

CE 0,3 IP20 0,5

REQUIREMENTS
MOUNTING KIT 75 TRIMLESS
202 01 75
or
MOUNTING KIT 75 TRIMLESS O.F.A.
202 01 75 OFA

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE





Carree Trimless OK + Anti Glare Tube



HOMODECO ARCHITECTS



FULL INFO / PAG TEC

Requirements

CONTROL GEAR	
LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8	150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC


Options

INSTALLATION		
PLASTERKIT 161 207 01 161	200 x 200	175 x 175
CONCRETE BOX 161 270 11 161	202 x 202 x 186	207 x 207
MOUNTING KIT 75 202 00 75	117 x 117 x 22	Ø121

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

DIM8: dimming by fal ing edge dimmer






Carree ST OK LED W

led

Carree ST LED





75 x 75 x 80 max.35

	CRI > 80	**CRI > 90**
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE ST LED 3033 S1 ◇** **202 50 28122 ◇** ◇ = A / W	**CARREE ST LED 3033-9 S1 ◇** **202 50 29122 ◇** ◇ = A / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE ST LED 2733 S1 ◇** **202 50 28123 ◇** ◇ = A / W	**CARREE ST LED 2733-9 S1 ◇** **202 50 29123 ◇** ◇ = A / W

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC


0,4 IP20

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED POWER SUPPLY 350-500mA-DC / DIM


Carree ST OK LED



S1



S2



	75 x 75 x 75 max.35		75 x 75 x 75	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE ST OK LED 3033 S1 ◇** **202 501 28122 ◇** ◇ = A / W	**CARREE ST OK LED 3033-9 S1 ◇** **202 501 29122 ◇** ◇ = A / W	**CARREE ST OK LED 3033 S2 ◇** **202 502 28122 ◇** ◇ = A / W	**CARREE ST OK LED 3033-9 S2 ◇** **202 502 29122 ◇** ◇ = A / W
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE ST OK LED 2733 S1 ◇** **202 501 28123 ◇** ◇ = A / W	**CARREE ST OK LED 2733-9 S1 ◇** **202 501 29123 ◇** ◇ = A / W	**CARREE ST OK LED 2733 S2 ◇** **202 502 28123 ◇** ◇ = A / W	**CARREE ST OK LED 2733-9 S2 ◇** **202 502 29123 ◇** ◇ = A / W
	ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP23 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 LED POWER SUPPLY 350-500mA-DC / DIM		ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP23 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350-500mA-DC / DIM	

SOFT DIM

NFO SOFT D M
PAG TEC 9

2700-1800K	850lm (10W)		850lm (10W)	
REFLECTOR FL-40°	**CARREE ST OK LED SOFT S1 ◇** **202 501 28120 ◇** ◇ = A / W		**CARREE ST OK LED SOFT S2 ◇** **202 502 28120 ◇** ◇ = A / W	
	ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP23 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161		ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP23 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75	






TDR Ca

FULL INFO / PAG TEC

Requirements

CONTROL GEAR	A-B-C	
LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8	150 x 45 x 30	

SOFT DIM

FULL INFO / PAG TEC

Options


INSTALLATION	A-B-C	
PLASTERKIT 161 207 01 161	200 x 200	175 x 175
CONCRETE BOX 161 270 11 161	202 x 202 x 186	207 x 207
MOUNTING KIT 75 202 00 75	117 x 117 x 22	Ø121

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

DIM8: dimming by fal ing edge dimmer

Fixation S1 | Fixation S2

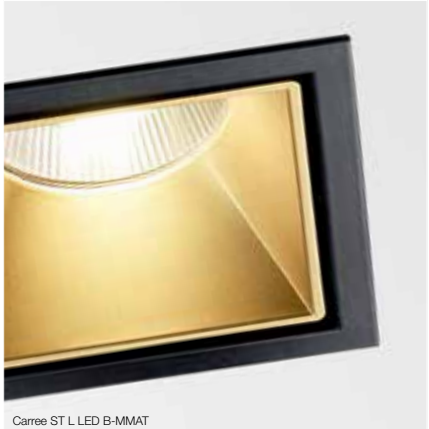


Carree ST L LED B-MMAT

led

Carree ST L LED





75 x 75 x 80 max.35

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE ST L LED 3033 S1** ◇ **202 53 28122** ◇ ◇ = **W-B** / W-W / B-MMAT	**CARREE ST L LED 3033-9 S1** ◇ **202 53 29122** ◇ ◇ = **W-B** / W-W / B-MMAT
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE ST L LED 2733 S1** ◇ **202 53 28123** ◇ ◇ = **W-B** / W-W / B-MMAT	**CARREE ST L LED 2733-9 S1** ◇ **202 53 29123** ◇ ◇ = **W-B** / W-W / B-MMAT

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

IP20 IP43 IP20 IP20

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED POWER SUPPLY 350-500mA-DC / DIM

SOFT DIM

INFO SOFT DIM
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**CARREE ST L LED SOFT S1** ◇ **202 53 28120** ◇ ◇ = W-B / W-W / B-MMAT	

FIXED
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

IP20 IP43 IP20 IP20


REQUIREMENTS
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75


Carree SC OK



S1



S2



	75 x 75 x 75 max.35		75 x 75 x 75	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE SC OK 3033 S1** ◇ **202 471 28122** ◇ ◇ = W-B	**CARREE SC OK 3033-9 S1** ◇ **202 471 29122** ◇ ◇ = W-B	**CARREE SC OK 3033 S2** ◇ **202 472 28122** ◇ ◇ = W-B	**CARREE SC OK 3033-9 S2** ◇ **202 472 29122** ◇ ◇ = W-B
2700K	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE SC OK 2733 S1** ◇ **202 471 28123** ◇ ◇ = W-B	**CARREE SC OK 2733-9 S1** ◇ **202 471 29123** ◇ ◇ = W-B	**CARREE SC OK 2733 S2** ◇ **202 472 28123** ◇ ◇ = W-B	**CARREE SC OK 2733-9 S2** ◇ **202 472 29123** ◇ ◇ = W-B
	ADJUSTABLE 0°- 25° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC 0,4 IP20 IP23 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 LED POWER SUPPLY 350-500mA-DC / DIM		ADJUSTABLE 0°- 25° INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC 0,4 IP20 IP23 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350-500mA-DC / DIM	
2700-1800K	850lm (10W)		850lm (10W)	
REFLECTOR FL-40°	**CARREE SC OK SOFT S1** ◇ **202 471 28120** ◇ ◇ = W-B		**CARREE SC OK SOFT S2** ◇ **202 472 28120** ◇ ◇ = W-B	
	ADJUSTABLE 0°- 25° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC 0,4 IP20 IP23 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161		ADJUSTABLE 0°- 25° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC 0,4 IP20 IP23 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161	

SOFT DIM

INFO SOFT DIM
PAG TEC 9



90DEGREES



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 161 **207 01 161**	200 x 200	175 x 175
PLASTERKIT 162 **207 01 162**	200 x 200	155 x 155
CONCRETE BOX 161 **270 11 161**	202 x 202 x 186	207 x 207
CONCRETE BOX 162 **270 11 162**	202 x 202 x 186	207 x 207
CONCRETE PACK S75 **207 02 9071**	250 x 220 x 150	-
CONCRETE PACK C S75 **207 02 9071 C**	310 x 250 x 150	-
CONCRETE PACK T S75 **207 02 9071 T**	450 x 250 x 150	-
EXPOSED CONCRETE PACK S75 **207 02 9093**	250 x 200 x 150	-
EXPOSED CONCRETE PACK C S75 **207 02 9093 C**	310 x 250 x 150	-
EXPOSED CONCRETE PACK T S75 **207 02 9093 T**	450 x 250 x 150	-
MOUNTING KIT 64 **202 00 64**	97 x 97 x 22	Ø105
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121

CONTROL GEAR	A B C	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories


	A B C	
ANTI GLARE TUBE ◇ **201 34 00** ◇ ◇ = B / W max. 20W	Ø52 x 63	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	

Fixation S1 | Fixation S2

Carree ST

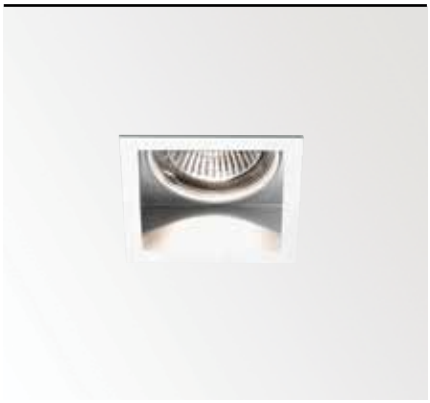

S1



64 x 64 x 90 max.35

CARREE ST S1 ◇
202 50 50 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-C51 max.50W

CE 0,2 IP20 0,5


OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
MOUNTING KIT 64
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

Carree ST OK



S1





75 x 75 x 80 max.35


CARREE ST OK S1 ◇
202 50 51 ◇
◇ = A / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


CE 0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

S2





75 x 75 x 80

CARREE ST OK S2 ◇
202 50 53 ◇
◇ = A / W
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

CE 0,3 IP20 0,5


OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
CONCRETE PACK S75 / C S75 / T S75
EXPOSED CONCRETE PACK S75 / C S75 / T S75
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

Carree II



S1



64 x 64 x 90 max.35


CARREE II S1 ◇
202 20 31 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 0,5

OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
MOUNTING KIT 64
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

S1




64 x 64 x 100 max.35

CARREE II Hi S1 ◇
202 20 33 ◇
◇ = A / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,2 IP20 0,5

OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
MOUNTING KIT 64
LED SOLUTION - PAG TEC 4-5

S2



64 x 64 x 90

CARREE II S2 ◇
202 20 32 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 0,5


OPTIONS
PLASTERKIT 162
CONCRETE BOX 162
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

Carree II OK



S1



75 x 75 x 80 max.35


CARREE II OK S1 ◇
202 21 31 ◇
◇ = A / ALU-B / C-B / W
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

S1




75 x 75 x 90 max.35

CARREE II OK Hi S1 ◇
202 21 33 ◇
◇ = A / W (max.35W)
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
LED SOLUTION - PAG TEC 4-5

S2



75 x 75 x 80


CARREE II OK S2 ◇
202 21 32 ◇
◇ = A / ALU-B / C-B / W
ADJUSTABLE 0°- 30°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
CONCRETE PACK S75 / C S75 / T S75
EXPOSED CONCRETE PACK S75 / C S75 / T S75
LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

S2



75 x 75 x 90

CARREE II OK Hi S2 ◇
202 21 34 ◇
◇ = A / W (max.35W)
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,3 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
CONCRETE PACK S75 / C S75 / T S75
EXPOSED CONCRETE PACK S75 / C S75 / T S75
LED SOLUTION - PAG TEC 4-5



INTERIEURBURO VANDECANDELAERE



FULL INFO / PAG TEC

Requirements

CONTROL GEAR		
LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8	150 x 45 x 30	SOFT DIM

FULL INFO / PAG TEC


Options


INSTALLATION		
PLASTERKIT 111 202 25 19	185 x 185	90 x 180
PLASTERKIT 161 207 01 161	200 x 200	175 x 175
CONCRETE BOX 111 202 25 18	185 x 185 x 160	190 x 190
CONCRETE BOX 161 270 11 161	202 x 202 x 186	207 x 207
MOUNTING KIT 75 202 00 75	117 x 117 x 22	Ø121
CONTROL GEAR		
LED POWER SUPPLY ALL INFO ON FOLD-OUT COVER		
TRANSFO 50W 200 46 06	86 x 31 x 20	
TRANSFO 100W 200 46 10	107 x 35 x 21	

DIM8: dimming by falling edge dimmer

Fixation S1 | Fixation S2

Carree GT LED

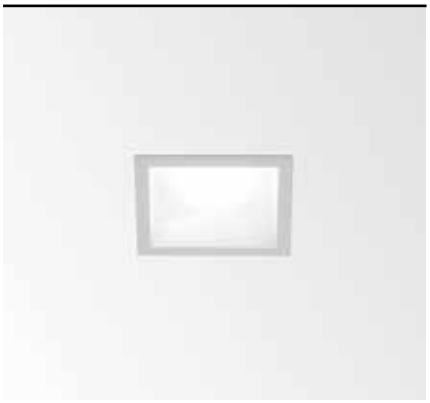



75 x 75 x 110 max.35

	CRI > 80
4000K	
	ON REQUEST
3000K	680lm (7W) 958lm (10W)
REFLECTOR FL-33°	**CARREE GT LED 3033 S1** ◇ **202 49 28122** ◇ ◇ = A / W
2700K	618lm (7W) 876lm (10W)
REFLECTOR FL-33°	**CARREE GT LED 2733 S1** ◇ **202 49 28123** ◇ ◇ = A / W
	FIXED INCL.1 x POWERLED WHITE [I] 7-10W EXCL.LED POWER SUPPLY 350-500mA-DC IP20 IP44 IP20 IP20 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75 LED POWER SUPPLY 350-500mA-DC / DIM


SOFT DIM

INFO SOFT DIM PAG TEC 9

2700-1800K	850lm (10W)
REFLECTOR FL-40°	**CARREE GT LED SOFT S1** ◇ **202 49 28120** ◇ ◇ = A / W
	FIXED INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC IP20 IP44 IP20 IP20 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS PLASTERKIT 161 CONCRETE BOX 161 MOUNTING KIT 75

Carree GT






75 x 75 x 100 max.35

CARREE GT S1 ◇
202 50 11 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-CB51 max.50W

0,4 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
ledLED SOLUTION - PAG TEC 4-5
TRANSFO




75 x 75 x 110


CARREE GT Hi S1 ◇
202 52 11 ◇
◇ = A / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,4 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 161
CONCRETE BOX 161
MOUNTING KIT 75
ledLED SOLUTION - PAG TEC 4-5

Carree Max

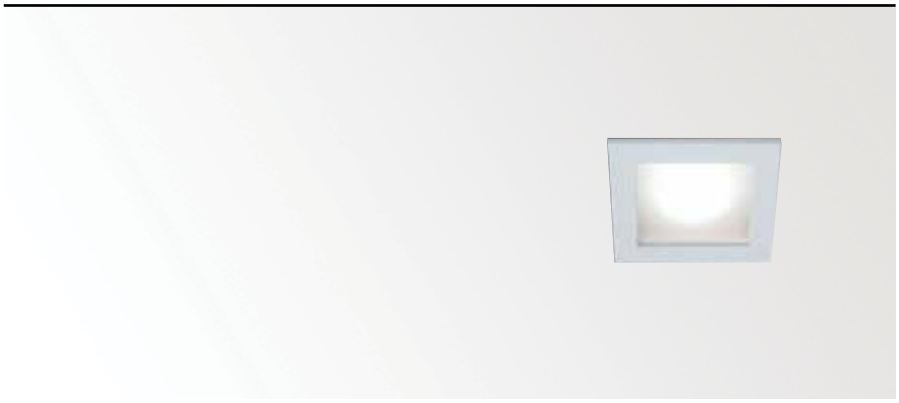




82 x 82 x 100 max.35

CARREE MAX S1 ◇
202 22 05 ◇

◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
ledLED SOLUTION - PAG TEC 4-5
TRANSFO




82 x 82 x 100

CARREE MAX S2 ◇
202 22 15 ◇
◇ = A / ALU / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
ledLED SOLUTION - PAG TEC 4-5
TRANSFO




82 x 82 x 100 max.35

CARREE MAX Hi S1 ◇
202 22 25 ◇

◇ = A / ALU / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
ledLED SOLUTION - PAG TEC 4-5



82 x 82 x 100

CARREE MAX Hi S2 ◇
202 22 35 ◇
◇ = A / ALU / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,3 IP20 IP44 IP20 IP20 0,5

OPTIONS
PLASTERKIT 111
CONCRETE BOX 111
ledLED SOLUTION - PAG TEC 4-5

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 108 **202 20 19**	185 x 185	75 x 80
CONCRETE BOX 108 **202 20 18**	185 x 185 x 160	190 x 190

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories


ANTI GLARE TUBE ◇ **201 34 00 ◇** ◇ = B / W max. 20W	Ø52 x 63
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Fixation S1 | Fixation S2

new

Carree Rs LED





89 x 80 min.5


	CRI > 80	CRI > 90
4000K ●		
	ON REQUEST	
3000K ●	680lm (7W) 958lm (10W)	566lm (7W) 803lm (10W)
REFLECTOR FL-33°	**CARREE Rs LED 3033 ◇** **202 46 28122 ◇** ◇ = A / W	**CARREE Rs LED 3033-9 ◇** **202 46 29122 ◇** ◇ = A / W
2700K ●	618lm (7W) 876lm (10W)	525lm (7W) 742lm (10W)
REFLECTOR FL-33°	**CARREE Rs LED 2733 ◇** **202 46 28123 ◇** ◇ = A / W	**CARREE Rs LED 2733-9 ◇** **202 46 29123 ◇** ◇ = A / W

FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC


0,4 IP20 IP23

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

Carree Rs

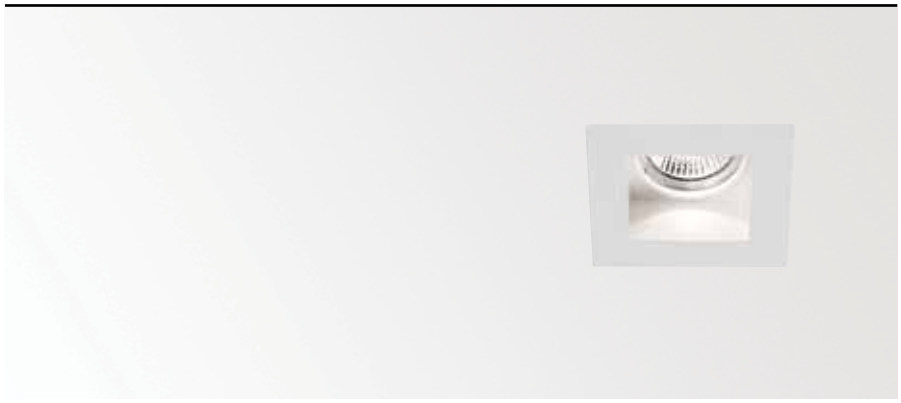

S1



89 x 90 max.35

CARREE Rs50 S1 ◇
202 20 06 ◇


◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

S1



89 x 100 max.35


CARREE Rs50 Hi S1 ◇
202 20 07 ◇

◇ = A / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5

S2



89 x 90


CARREE Rs50 S2 ◇
202 20 16 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50

S2




89 x 100


CARREE Rs50 Hi S2 ◇
202 20 17 ◇
◇ = A / W (max.35W)
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 0,5

OPTIONS
PLASTERKIT 108
CONCRETE BOX 108
led LED SOLUTION - PAG TEC 4-5

Carree Rs OK

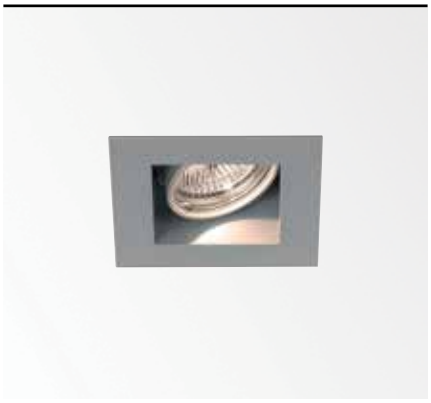




89 x 100 min.5

CARREE Rs50 OK ◇
202 20 161 ◇
◇ = A / W
ADJUSTABLE 0°-12° / 0°-20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
ANTI GLARE TUBE
DICROIC FILTER 50




89 x 110 min.5

CARREE Rs50 OK Hi ◇
202 20 171 ◇
◇ = A / W (max.35W)
ADJUSTABLE 0°-12° / 0°-20°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

IP20 0,5

OPTIONS
led LED SOLUTION - PAG TEC 4-5

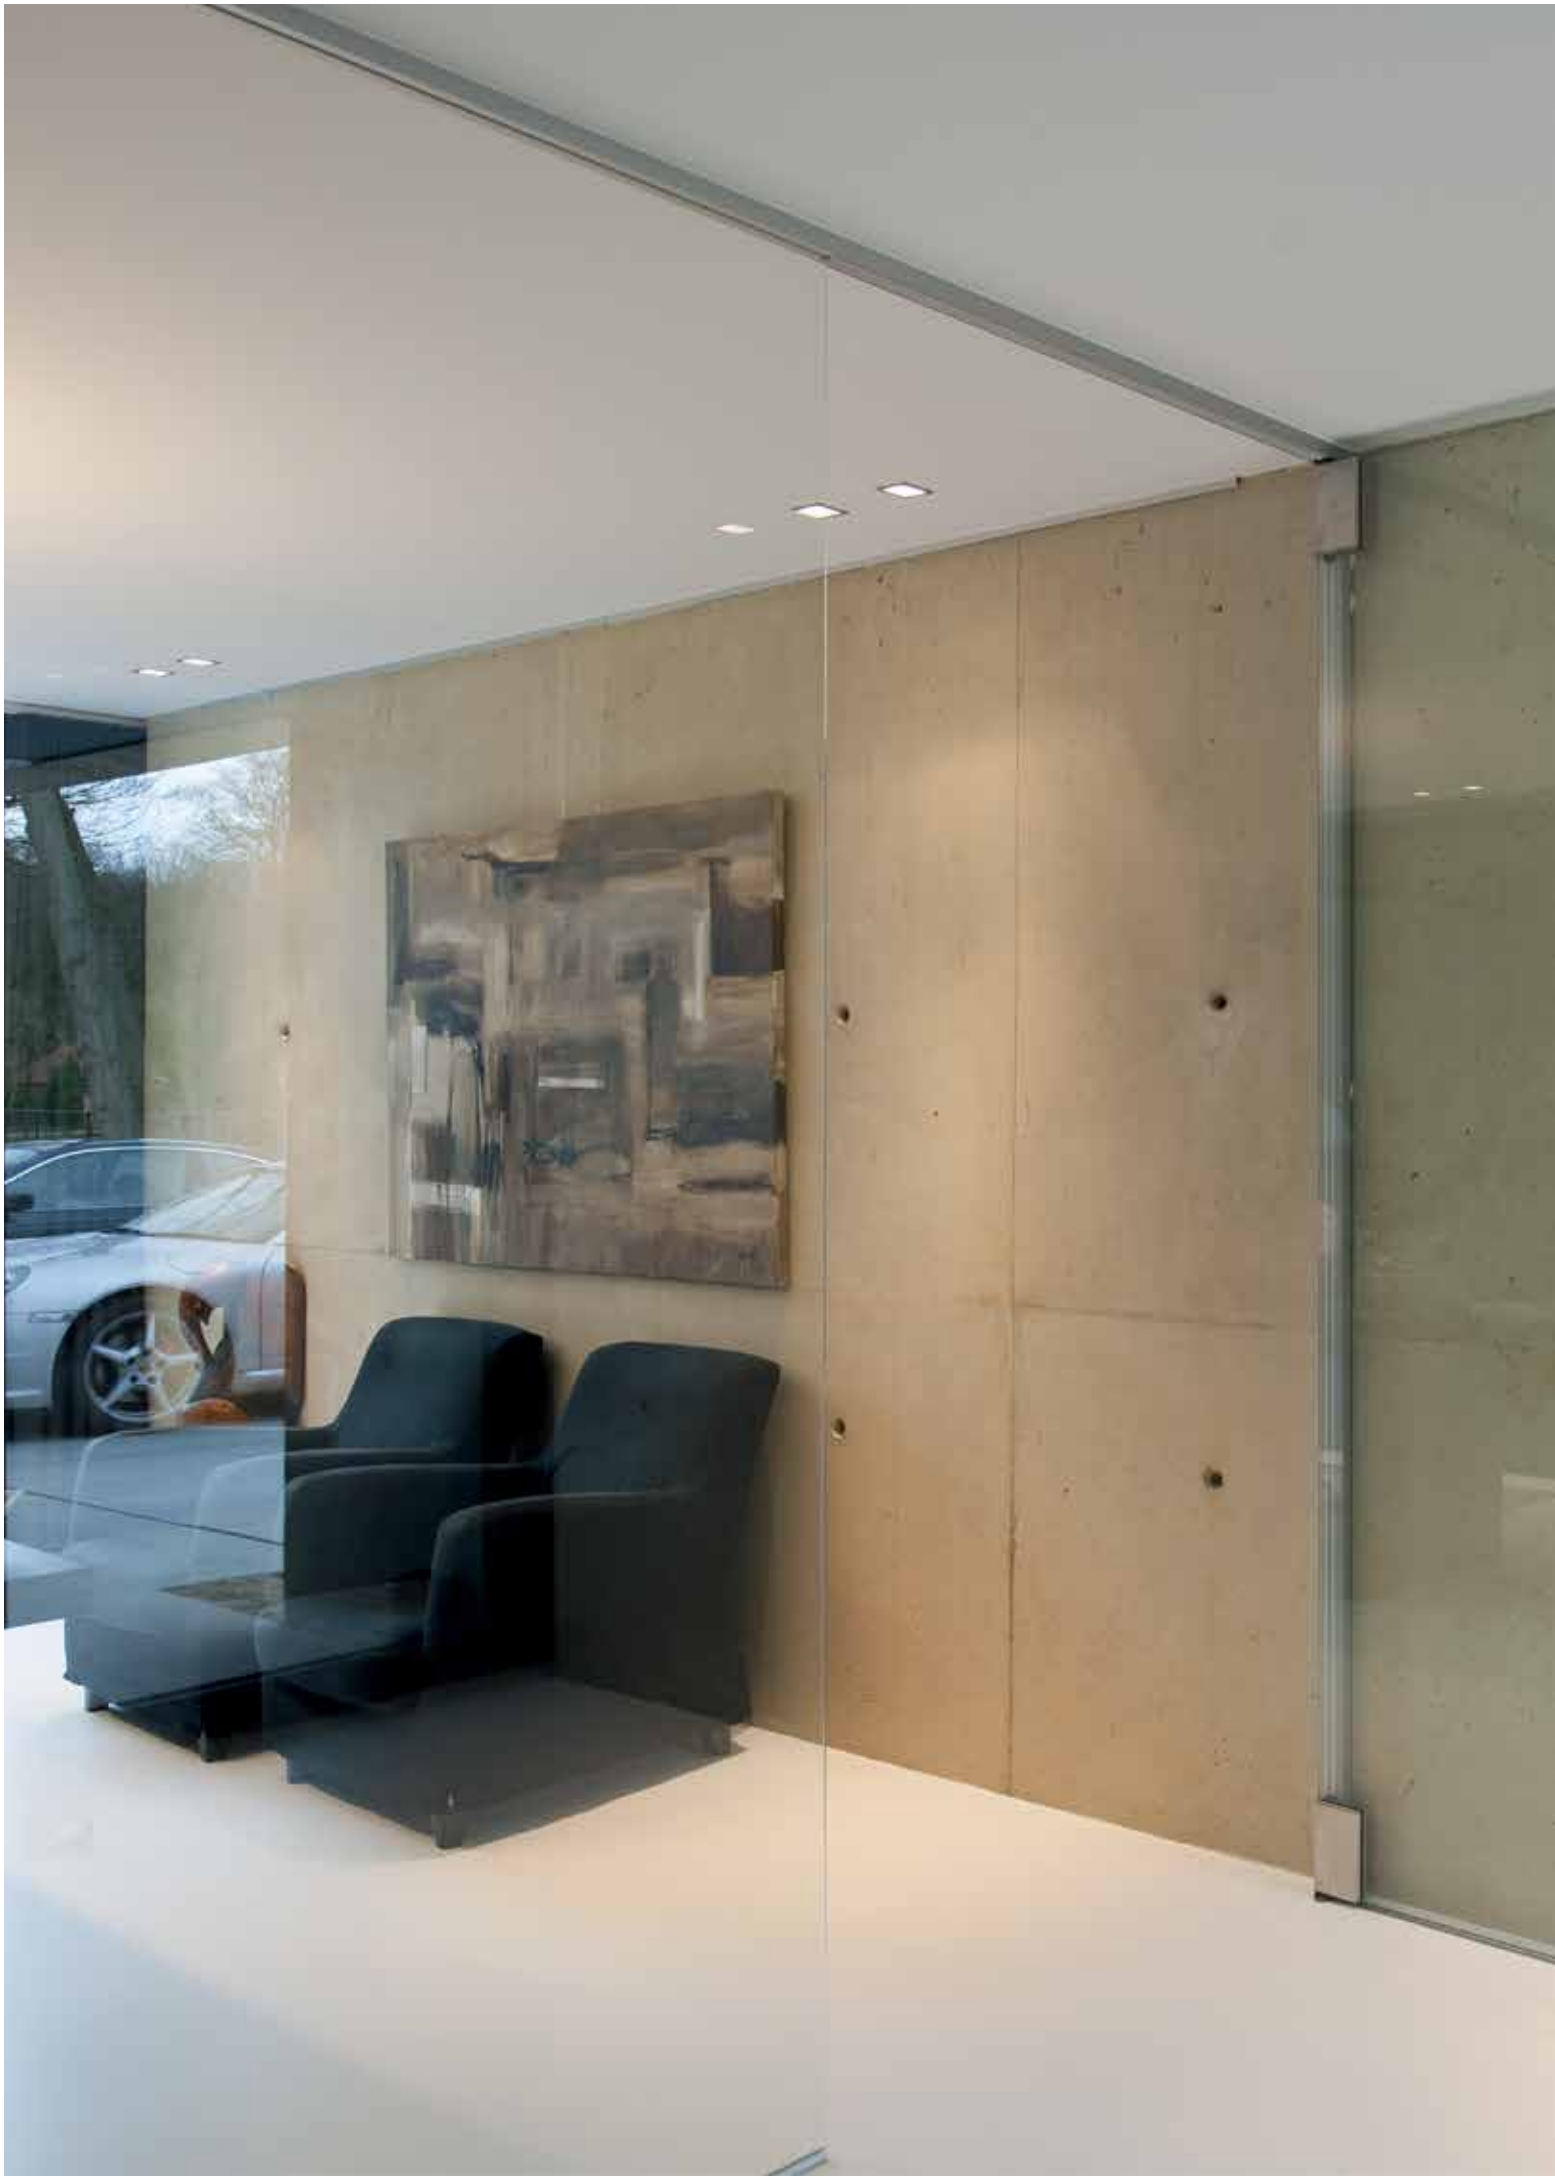





FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 189 **207 01 189**	160 x 247 x 12	190 x 85
CONCRETE BOX 189 **270 11 189**	160 x 247 x 76	165 x 255
PLASTERKIT 109 **202 21 29**	140 x 260	85 x 230
CONCRETE BOX 109 **202 21 28**	140 x 260 x 120	145 x 265
PLASTERKIT 110 **202 21 59**	140 x 260	85 x 120
CONCRETE BOX 110 **202 21 58**	140 x 260 x 120	145 x 265

CONTROL GEAR	
LED POWER SUPPLY **ALL INFO ON FOLD-OUT COVER**	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC


Accessories

DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W


Fixation S1

Carree 150 LED



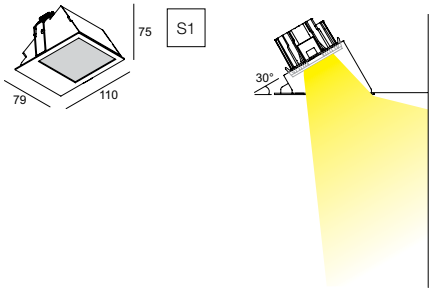

104 x 75 x 85 max.35


CARREE 150 LED S1 ◇
202 48 28 ◇
◇ = A / W
FIXED
INCL.LINEAR SPREAD LENS
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,5 IP20 IP44 IP20 IP20

OPTIONS
PLASTERKIT 189
CONCRETE BOX 189
LED POWER SUPPLY 350-500mA-DC / DIM

Carree 145





110 x 78 x 90 max.35

CARREE 145 S1 ◇
202 21 15 ◇
◇ = A / W
ADJUSTABLE 10° - 45°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W


0,4 IP20 0,5

OPTIONS
PLASTERKIT 110
CONCRETE BOX 110
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
DICROIC FILTER 50

Carree 235





145 x 78 x 90 max.35

CARREE 235 S1 ◇
202 21 20 ◇
◇ = A / W
1 x ADJUSTABLE 10°- 45°
1 x FIXED
GX5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W

0,4 IP20 0,5

OPTIONS
PLASTERKIT 109
CONCRETE BOX 109
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
DICROIC FILTER 50


67


FULL INFO / PAG TEC


Options

INSTALLATION		
PLASTERKIT 167	200 x 200	150 x 150
207 01 167		

Grand Carree







new led

142 x 142 x 120 max.25

GRAND CARREE LED ◇
202 281 83 ◇
◇ = W
FIXED
INCL.PC SBL
INCL.LEDCLUSTER 12,6W / CRI>80 / 3000K / 1680lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 1,3 IP20

OPTIONS
PLASTERKIT 167

142 x 142 x 120 max.25

GRAND CARREE 126 SBL ◇
202 28 26 ◇
◇ = A / W
FIXED
INCL.1 x PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-DEL 26W

CE 1,3 IP20 0,1

OPTIONS
PLASTERKIT 167

MINIGRID IN
OVERVIEW



Minigrid In **ZB**



Minigrid In **TRIMLESS**



Minigrid In (Trim)



Minigrid In **Reo**



Minigrid In **HP** (High Power)

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2027428123 or www.deltalight.com/minigrid-in-reo

MINIGRID IN ZB REO



●● ●●

ADJUSTABLE 0-30°

led

PAG INT 195

MINIGRID IN ZB



● ●● ●●●

ADJUSTABLE 0-30°


QR-CBC51 / QR-C51

QR-LP70 / QPAR51

PAG INT 197

MINIGRID IN TRIMLESS SI REO

new



● ●●

ADJUSTABLE 0-30°/350°

led

PAG INT 199

MINIGRID IN TRIMLESS HP




● ●●

ADJUSTABLE 0-20°/350°

led

PAG INT 203

MINIGRID IN TRIMLESS



● ●● ●●●

ADJUSTABLE 0-30°

QR-CBC51 / QR-C51

QR-LP70 / QPAR51

PAG INT 207

MINIGRID IN SI REO

new



● ●●

ADJUSTABLE 0-30°/350°

led

PAG INT 211

MINIGRID IN HP



● ●●

ADJUSTABLE 0-20°/350°

led

PAG INT 213

MINIGRID IN




● ●● ●●●

ADJUSTABLE 0-30°

QR-CBC51 / QR-C51

QR-LP70 / QPAR51

PAG INT 215

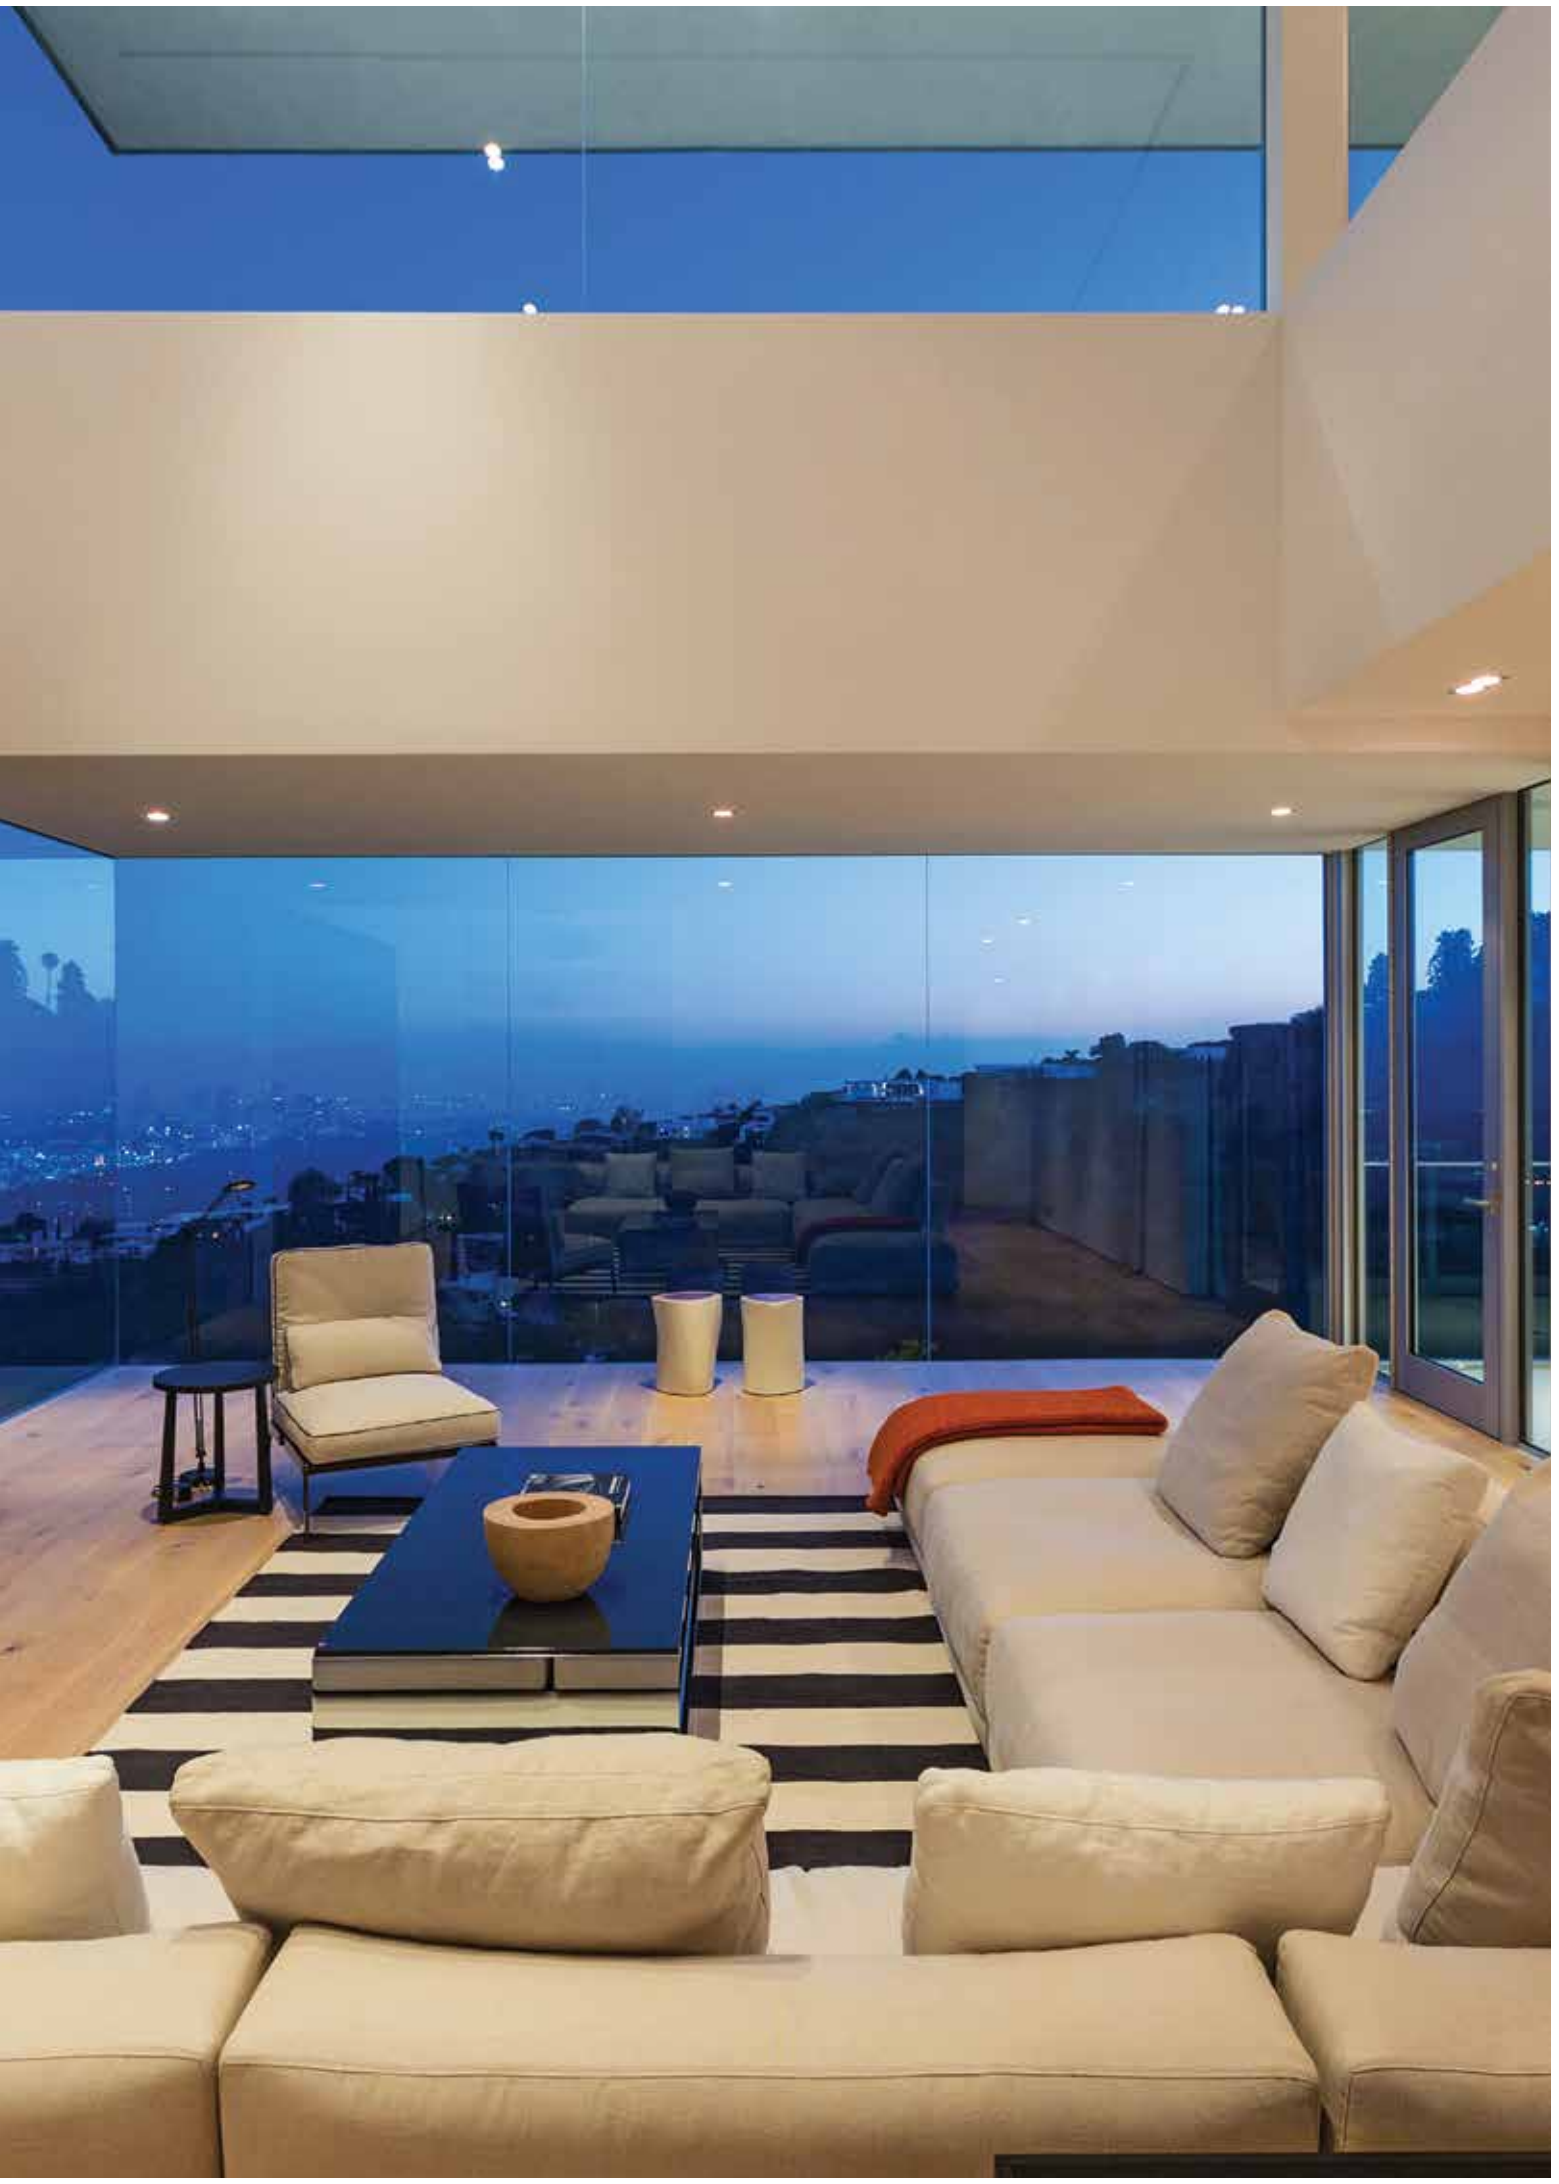



ABC PROJECTS - ANJA VERROEYE

FULL INFO / PAG TEC

Requirements

CONTROL GEAR

LED POWER SUPPLY
650mA-DC DIM8
300 90 915 ED8

150 x 45 x 30

SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION

MINIGRID IN ZB 1 BOX L 140 x 140 x 128 141 x 141
202 70 98 01

MINIGRID IN ZB 2 BOX L 140 x 250 x 128 141 x 251
202 70 98 02

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER


DIM8: dimming by falling edge dimmer


led

Minigrid In ZB Reo









	109 x 109 x 113		219 x 109 x 113	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	703lm (6,2W) 945lm (9,3W)	550lm (6,2W) 739lm (9,3W)	2 x 703lm (6,2W) 2 x 945lm (9,3W)	2 x 550lm (6,2W) 2 x 739lm (9,3W)
REFLECTOR SP-18°	**MINIGRID IN ZB 1 REO 83018 ◇** **202 70 81831 ◇** ◇ = A / W	**MINIGRID IN ZB 1 REO 93018 ◇** **202 70 81931 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 83018 ◇** **202 70 82831 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 93018 ◇** **202 70 82931 ◇** ◇ = A / W
REFLECTOR FL-33°	**MINIGRID IN ZB 1 REO 83033 ◇** **202 70 81832 ◇** ◇ = A / W	**MINIGRID IN ZB 1 REO 93033 ◇** **202 70 81932 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 83033 ◇** **202 70 82832 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 93033 ◇** **202 70 82932 ◇** ◇ = A / W
2700K	665lm (6,2W) 893lm (9,3W)	519lm (6,2W) 698lm (9,3W)	2 x 665lm (6,2W) 2 x 893lm (9,3W)	2 x 519lm (6,2W) 2 x 698lm (9,3W)
REFLECTOR SP-18°	**MINIGRID IN ZB 1 REO 82718 ◇** **202 70 81821 ◇** ◇ = A / W	**MINIGRID IN ZB 1 REO 92718 ◇** **202 70 81921 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 82718 ◇** **202 70 82821 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 92718 ◇** **202 70 82921 ◇** ◇ = A / W
REFLECTOR FL-33°	**MINIGRID IN ZB 1 REO 82733 ◇** **202 70 81822 ◇** ◇ = A / W	**MINIGRID IN ZB 1 REO 92733 ◇** **202 70 81922 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 82733 ◇** **202 70 82822 ◇** ◇ = A / W	**MINIGRID IN ZB 2 REO 92733 ◇** **202 70 82922 ◇** ◇ = A / W
	ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE [H] 6,2-9,3W EXCL.LED POWER SUPPLY 350-500mA-DC III CE 0,5 IP20 IP23 OPTIONS MINIGRID IN ZB 1 BOX L LED POWER SUPPLY 350-500mA-DC / DIM		ADJUSTABLE 0°- 30° INCL.2 x POWERLED WHITE [H] 6,2-9,3W EXCL.LED POWER SUPPLY 350-500mA-DC III CE 0,9 IP20 IP23 OPTIONS MINIGRID IN ZB 2 BOX L LED POWER SUPPLY 350-500mA-DC / DIM	

new SOFT DIM

NFO SOFT D M
PAG TEC 9

2700-1800K	850lm (10W)		2 x 850lm (10W)	
REFLECTOR FL-40°	**MINIGRID IN ZB 1 REO SOFT ◇** **202 70 01 802 ◇** ◇ = A / W		**MINIGRID IN ZB 2 REO SOFT ◇** **202 70 02 802 ◇** ◇ = A / W	
	ADJUSTABLE 0°- 30° INCL.1 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC III CE 0,5 IP20 IP23 REQUIREMENTS LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS MINIGRID IN ZB 1 BOX L		ADJUSTABLE 0°- 30° INCL.2 x POWERLED WHITE 10W EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC III CE 0,9 IP20 IP23 REQUIREMENTS 2 x LED POWER SUPPLY 650mA-DC DIM8 300 90 915 ED8 OPTIONS MINIGRID IN ZB 2 BOX L	



FULL INFO / PAG TEC

Options

INSTALLATION		
MINIGRID IN ZB 1 BOX L **202 70 98 01**	140 x 140 x 128	141 x 141
MINIGRID IN ZB 2 BOX L **202 70 98 02**	140 x 250 x 128	141 x 251
MINIGRID IN ZB 3 BOX L **202 70 98 03**	140 x 357 x 128	141 x 358

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories


CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W ◁ QR-CB51 max. 24°	Ø75 / Ø42 / H23
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Minigrid In ZB



109 x 109 x 113

MINIGRID IN ZB 1 50 ◇
202 70 55 01 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W



0,4 IP20 0,5


OPTIONS
MINIGRID IN ZB 1 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50



219 x 109 x 113

MINIGRID IN ZB 2 50 ◇
202 70 55 02 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
2 x QR-CBC51 max.35W



0,8 IP20 0,5


OPTIONS
MINIGRID IN ZB 2 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50



326 x 109 x 113

MINIGRID IN ZB 3 50 ◇
202 70 55 03 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
3 x QR-C51 max.50W
3 x QR-CBC51 max.35W




1,2 IP20 0,5

OPTIONS
MINIGRID IN ZB 3 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

109 x 109 x 113

MINIGRID IN ZB 1 QR ◇
202 70 00 01 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W




0,4 IP20 1,0

OPTIONS
MINIGRID IN ZB 1 BOX L
TRANSFO

219 x 109 x 113

MINIGRID IN ZB 2 QR ◇
202 70 00 02 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
2 x QR-LP70 max.50W




0,8 IP20 0,5

OPTIONS
MINIGRID IN ZB 2 BOX L
TRANSFO

326 x 109 x 113

MINIGRID IN ZB 3 QR ◇
202 70 00 03 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
3 x QR-LP70 max.50W




1,2 IP20 1,0

OPTIONS
MINIGRID IN ZB 3 BOX L
TRANSFO

109 x 109 x 113

MINIGRID IN ZB 1 50 Hi ◇
202 70 66 01 ◇
◇ = A
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W




0,4 IP20 0,5

OPTIONS
MINIGRID IN ZB 1 BOX L
led LED SOLUTION - PAG TEC 4-5

219 x 109 x 113

MINIGRID IN ZB 2 50 Hi ◇
202 70 66 02 ◇
◇ = A
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W



0,8 IP20 0,5

OPTIONS
MINIGRID IN ZB 2 BOX L
led LED SOLUTION - PAG TEC 4-5



FULL INFO / PAG TEC

Requirements

CONTROL GEAR


LED POWER SUPPLY 150 x 45 x 30
650mA-DC DIM8
300 90 915 ED8

SOFT DIM

MINIGRID IN 1 MOUNTING KIT
202 71 95 01

130 x 130 max.25


0,5



MINIGRID IN 2 MOUNTING KIT
202 71 95 02

130 x 233 max.25


0,8



MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L

145 x 145 max.25


0,9



MINIGRID IN 2 MOUNTING KIT LARGE
202 71 95 02L

145 x 233 max.25

1,0



CONCRETE PACK MGIT1 133 x 160 x 133 160 x 160 x 140
202 71 96 01

CONCRETE PACK MGIT2 234 x 160 x 133 260 x 160 x 140
202 71 96 02

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



DIM8: dimming by falling edge dimmer




MINIGRID IN TRIMLESS 1 FRAME B + MINIGRID SNAP-IN REO 83018 B

Minigrid In Trimless SI Reo



MINIGRID IN TRIMLESS 2 FRAME B + 2 x MINIGRID SNAP-IN REO 83018 W




KIT x 85

MINIGRID IN TRIMLESS 1 FRAME ◇
202 73 01 ◇
◇ = B / W

0,2

REQUIREMENTS
MINIGRID SNAP-IN
+
MINIGRID IN 1 MOUNTING KIT
202 71 95 01
or
MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L
or
CONCRETE PACK MGIT1
202 71 96 01




KIT x 85

MINIGRID IN TRIMLESS 2 FRAME ◇
202 73 02 ◇
◇ = B / W

0,3

REQUIREMENTS
2 x MINIGRID SNAP-IN
+
MINIGRID IN 2 MOUNTING KIT
202 71 95 02
or
MINIGRID IN 2 MOUNTING KIT LARGE
202 71 95 02L
or
CONCRETE PACK MGIT2
202 71 96 02



	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	703lm (6,2W) 945lm (9,3W)	550lm (6,2W) 739lm (9,3W)
REFLECTOR SP-18°	**MINIGRID SNAP-IN REO 83018 ◇** **202 790 81831 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 93018 ◇** **202 790 81931 ◇** ◇ = B / W
REFLECTOR FL-33°	**MINIGRID SNAP-IN REO 83033 ◇** **202 790 81832 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 93033 ◇** **202 790 81932 ◇** ◇ = B / W
2700K	665lm (6,2W) 893lm (9,3W)	519lm (6,2W) 698lm (9,3W)
REFLECTOR SP-18°	**MINIGRID SNAP-IN REO 82718 ◇** **202 790 81821 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 92718 ◇** **202 790 81921 ◇** ◇ = B / W
REFLECTOR FL-33°	**MINIGRID SNAP-IN REO 82733 ◇** **202 790 81822 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 92733 ◇** **202 790 81922 ◇** ◇ = B / W

ADJUSTABLE 0°- 20° / 350°
INCL.1 x POWERLED WHITE [H] 6,2-9,3W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20 IP23

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

SOFT DIM

INFO SOFT DIM
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**MINIGRID SNAP-IN REO SOFT ◇** **202 790 81120 ◇** ◇ = B / W	


ADJUSTABLE 0°- 20° / 350°
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,5 IP20 IP23

REQUIREMENTS
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8



VERSLUYS BOUWGROEP - CORPORATE BU LDING - OSTEND BELGIUM

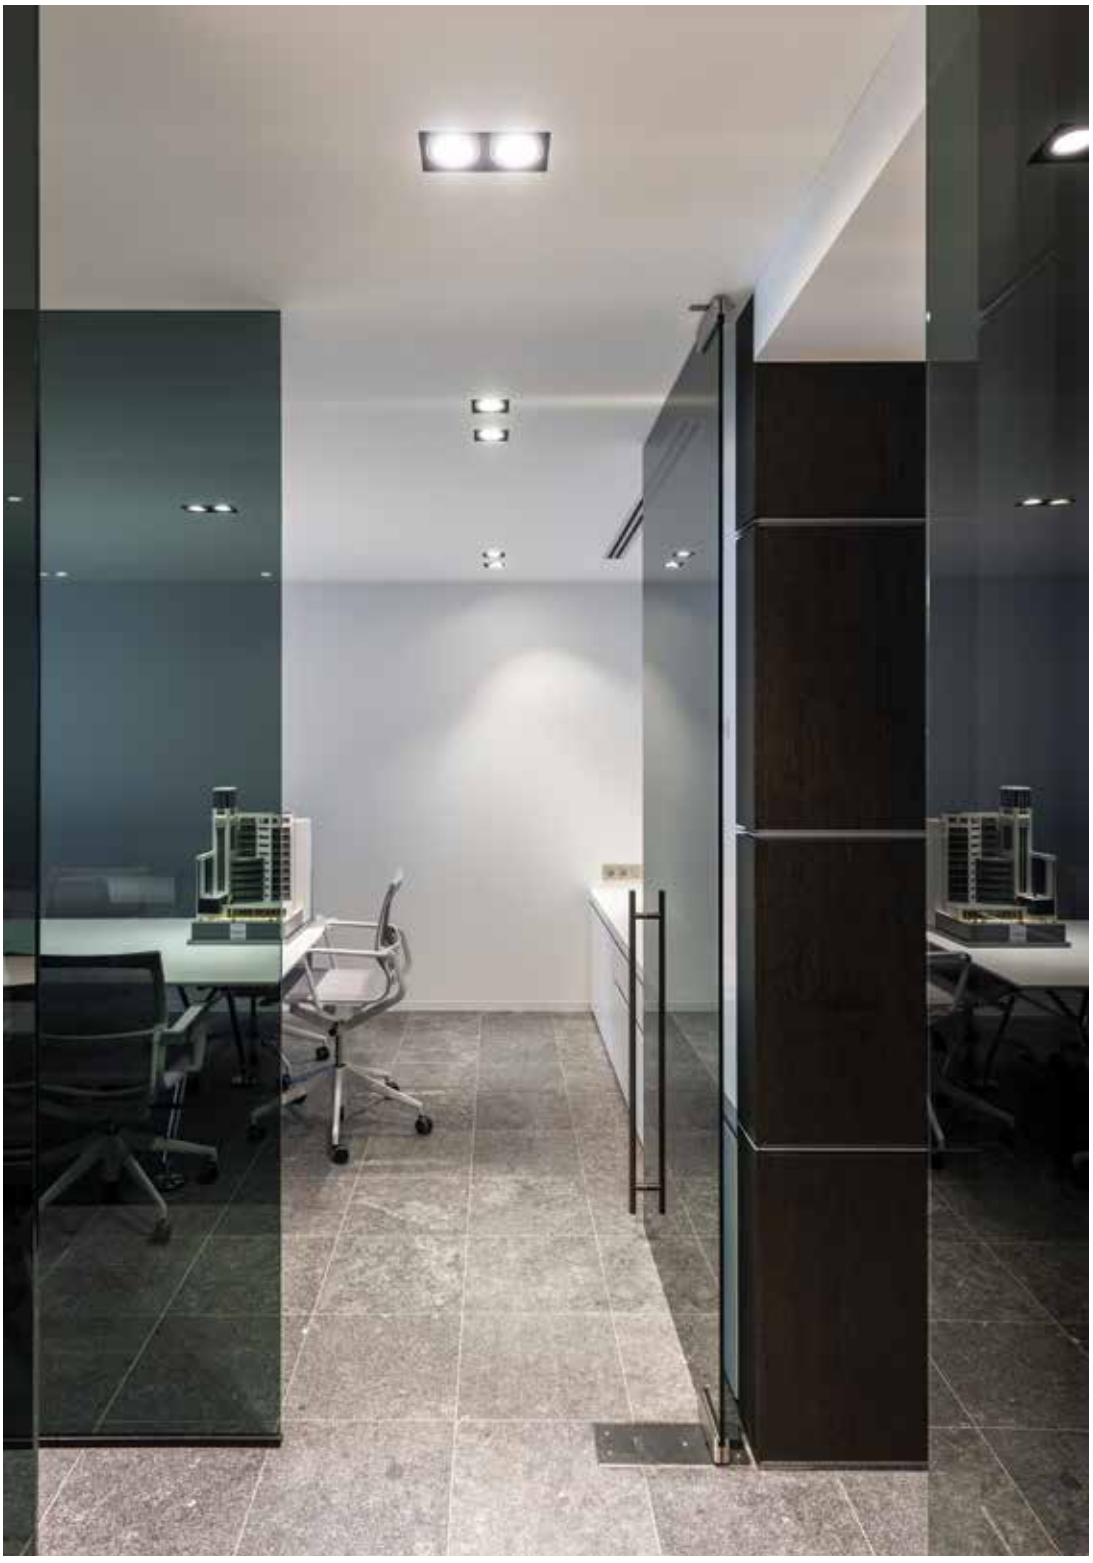



MOOD INTERIEUR


FULL INFO / PAG TEC

Requirements

MINIGRID IN 1 MOUNTING KIT HP
202 71 95 01 HP

130 x 130 max.25


0,5



MINIGRID IN 2 MOUNTING KIT HP
202 71 95 02 HP

130 x 233 max.25

0,8



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG 50

Accessories

HONEYCOMB 70 ◇ **201 04 01 ◇** ◇ = B	Ø70	
LINEAR SPREAD LENS 70 **201 04 02**	Ø70	
SPREAD LENS 70 **201 04 03**	Ø70	
SOFTENING LENS 70 **201 04 04**	Ø70	
GLASS SBL 70 **201 04 05**	Ø70	




MINIGRID TRIMLESS 1 HP W-B + HONEYCOMB 70


led

Minigrid In Trimless HP









	KIT x 150		KIT x 150	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)	2x 1930lm (18W)	2x 1639lm (18W)
REFLECTOR SP-17°	**MINIGRID IN TRIMLESS 1 HP 83017 ◇** **202 731 211831 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 93017 ◇** **202 731 211931 ◇** ◇ = W B	**MINIGRID IN TRIMLESS 2 HP 83017 ◇** **202 731 212831 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 93017 ◇** **202 731 212931 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN TRIMLESS 1 HP 83037 ◇** **202 731 211832 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 93037 ◇** **202 731 211932 ◇** ◇ = W B	**MINIGRID IN TRIMLESS 2 HP 83037 ◇** **202 731 212832 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 93037 ◇** **202 731 212932 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN TRIMLESS 1 HP 83060 ◇** **202 731 211833 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 93060 ◇** **202 731 211933 ◇** ◇ = W B	**MINIGRID IN TRIMLESS 2 HP 83060 ◇** **202 731 212833 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 93060 ◇** **202 731 212933 ◇** ◇ = W-B
2700K	1787lm (18W)	1453lm (18W)	2x 1787lm (18W)	2x 1453lm (18W)
REFLECTOR SP-17°	**MINIGRID IN TRIMLESS 1 HP 82717 ◇** **202 731 211821 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 92717 ◇** **202 731 211921 ◇** ◇ = W B	**MINIGRID IN TRIMLESS 2 HP 82717 ◇** **202 731 212821 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 92717 ◇** **202 731 212921 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN TRIMLESS 1 HP 82737 ◇** **202 731 211822 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 92737 ◇** **202 731 211922 ◇** ◇ = W B	**MINIGRID IN TRIMLESS 2 HP 82737 ◇** **202 731 212822 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 92737 ◇** **202 731 212922 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN TRIMLESS 1 HP 82760 ◇** **202 731 211823 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 1 HP 92760 ◇** **202 731 211923 ◇** ◇ = W B	**MINIGRID IN TRIMLESS 2 HP 82760 ◇** **202 731 212823 ◇** ◇ = W-B	**MINIGRID IN TRIMLESS 2 HP 92760 ◇** **202 731 212923 ◇** ◇ = W-B
	ADJUSTABLE 0°- 22° / 350° INCL.1 x POWERLED WHITE [J] 18W EXCL.LED POWER SUPPLY 500mA-DC 0,5 IP20 REQUIREMENTS MINIGRID IN 1 MOUNTING KIT HP 202 71 95 01 HP OPTIONS LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES HONEYCOMB 70 LINEAR SPREAD LENS 70 SPREAD LENS 70 SOFTENING LENS 70 GLASS SBL 70		ADJUSTABLE 0°- 22° / 350° INCL.2 x POWERLED WHITE [J] 18W EXCL.LED POWER SUPPLY 500mA-DC 0,9 IP20 REQUIREMENTS MINIGRID IN 2 MOUNTING KIT HP 202 71 95 02 HP OPTIONS LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES HONEYCOMB 70 LINEAR SPREAD LENS 70 SPREAD LENS 70 SOFTENING LENS 70 GLASS SBL 70	







FULL INFO / PAG TEC

Options

INSTALLATION		
MINIGRID IN 1 MK **202 71 95 01**	128 x 128 x 100	130 x 130
MINIGRID IN 1 MK L **202 71 95 01L**	245 x 245 x 100	145 x 145
MINIGRID IN 2 MK **202 71 95 02**	128 x 231 x 100	130 x 233
MINIGRID IN 2 MK L **202 71 95 02L**	342 x 245 x 100	145 x 233
CONCRETE PACK MGIT1 **202 71 96 01**	133 x 160 x 133	160 x 160 x 140
CONCRETE PACK MGIT2 **202 71 96 02**	234 x 160 x 133	260 x 160 x 140
MINIGRID IN TRIMLESS 3 KIT **202 71 97 03**	112 x 314 x 54	315 x 113


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories

CONE 50 ◇ **201 31 50 ◇** ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CLIP 50 ◇ **201 30 98 ◇** ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Minigrid In Trimless

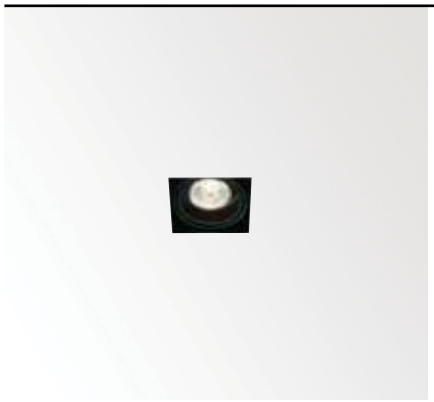






108 x 108 x 140 max.40

MINIGRID IN TRIMLESS 1 50 ◇
202 71 55 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W




0,4 IP20 0,5

OPTIONS
MINIGRID IN 1 MOUNTING KIT
MINIGRID IN 1 MOUNTING KIT LARGE
CONCRETE PACK MGIT 1
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

211 x 108 x 140 max.40

MINIGRID IN TRIMLESS 2 50 ◇
202 71 55 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
2 x QR-CBC51 max.35W




0,8 IP20 0,5

OPTIONS
MINIGRID IN 2 MOUNTING KIT
MINIGRID IN 2 MOUNTING KIT LARGE
CONCRETE PACK MGIT 2
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

310 x 108 x 140 max.40

MINIGRID IN TRIMLESS 3 50 ◇
202 71 55 03 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
3 x QR-C51 max.50W
3 x QR-CBC51 max.35W




1,1 IP20 0,5

OPTIONS
MINIGRID IN TRIMLESS 3 KIT
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50

108 x 108 x 140 max.40

MINIGRID IN TRIMLESS 1 QR ◇
202 71 00 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W




0,4 IP20 1,0

OPTIONS
MINIGRID IN 1 MOUNTING KIT
MINIGRID IN 1 MOUNTING KIT LARGE
CONCRETE PACK MGIT 1
TRANSFO

211 x 108 x 140 max.40

MINIGRID IN TRIMLESS 2 QR ◇
202 71 00 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
2 x QR-LP70 max.50W




0,8 IP20 1,0

OPTIONS
MINIGRID IN 2 MOUNTING KIT
MINIGRID IN 2 MOUNTING KIT LARGE
CONCRETE PACK MGIT 2
TRANSFO

310 x 108 x 140 max.40

MINIGRID IN TRIMLESS 3 QR ◇
202 71 00 03 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
3 x QR-LP70 max.50W




1,1 IP20 1,0

OPTIONS
MINIGRID IN TRIMLESS 3 KIT
TRANSFO

108 x 108 x 140 max.40

MINIGRID IN TRIMLESS 1 50 Hi ◇
202 71 66 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W




0,4 IP20 0,5

OPTIONS
MINIGRID IN 1 MOUNTING KIT
MINIGRID IN 1 MOUNTING KIT LARGE
CONCRETE PACK MGIT 1
led LED SOLUTION - PAG TEC 4-5


211 x 108 x 140 max.40

MINIGRID IN TRIMLESS 2 50 Hi ◇
202 71 66 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W



0,8 IP20 0,5

OPTIONS
MINIGRID IN 2 MOUNTING KIT
MINIGRID IN 2 MOUNTING KIT LARGE
CONCRETE PACK MGIT 2
led LED SOLUTION - PAG TEC 4-5

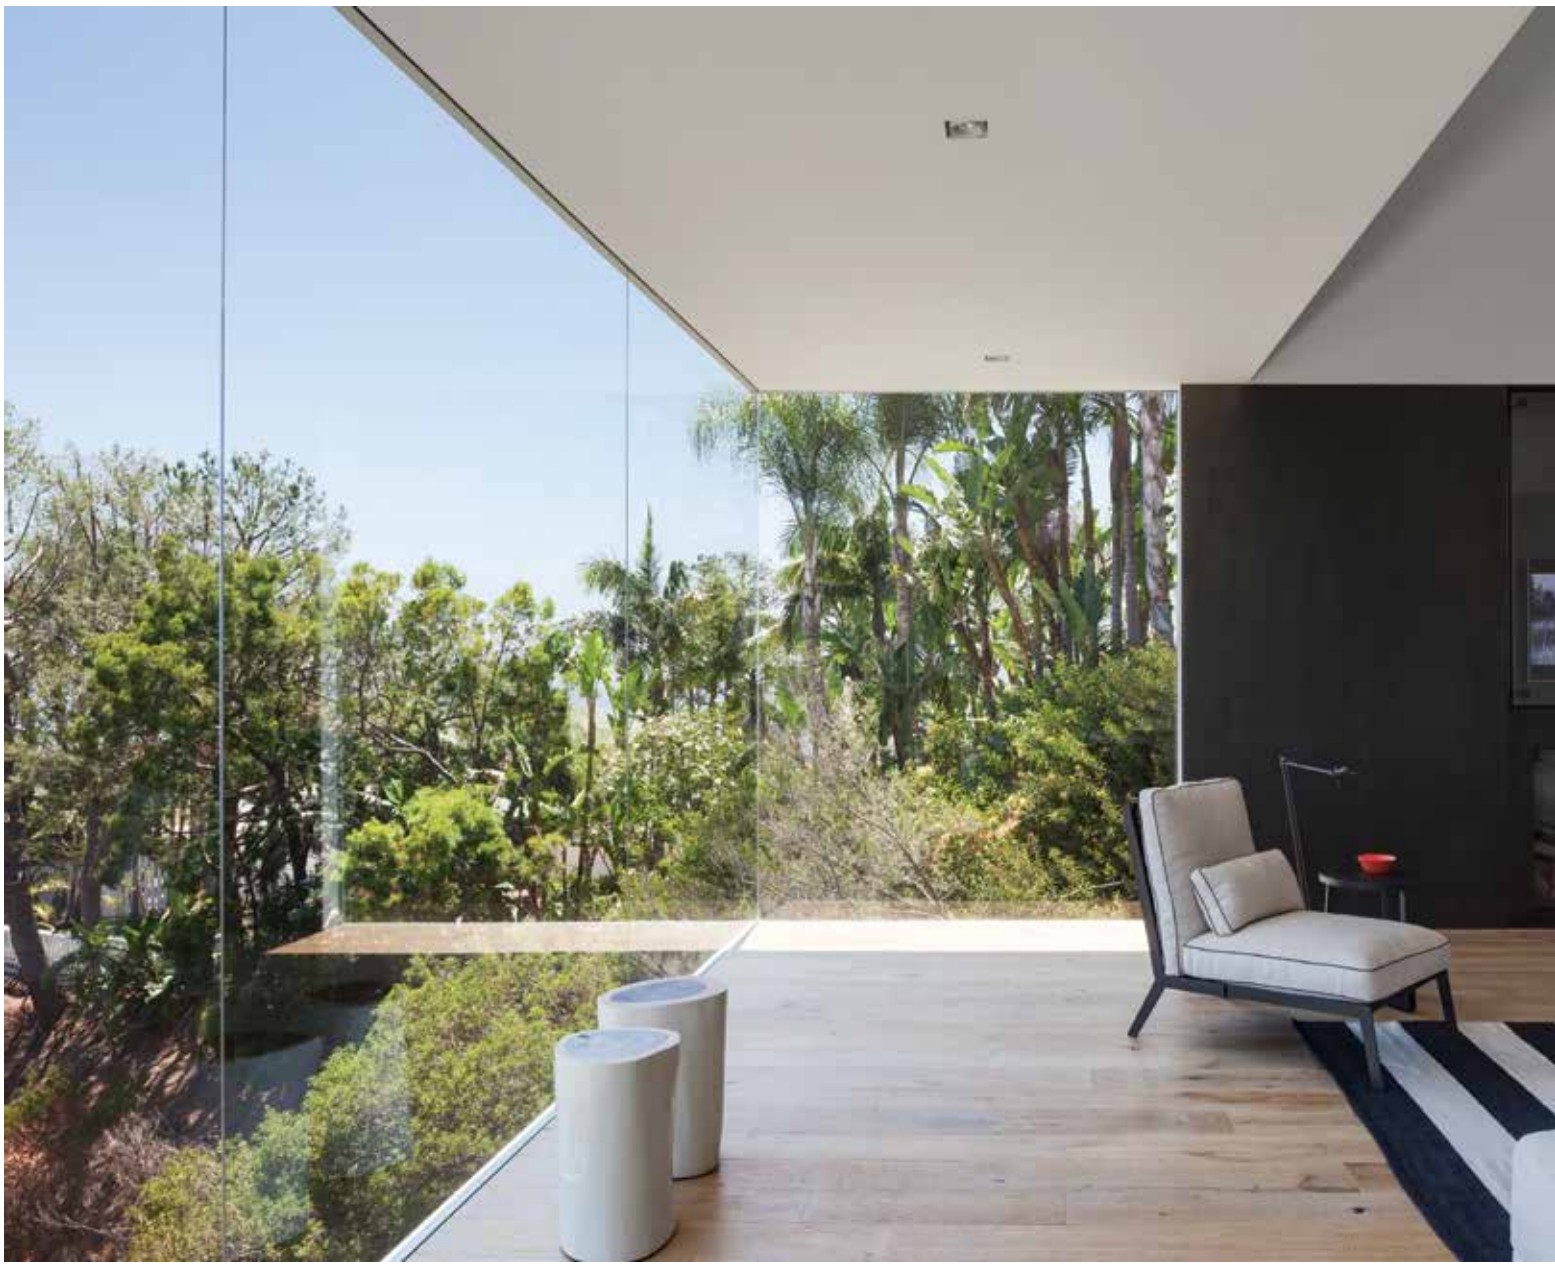







FULL INFO / PAG TEC

Requirements

CONTROL GEAR		
LED POWER SUPPLY **650mA-DC DIM8** **300 90 915 ED8**	150 x 45 x 30	SOFT DIM

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 127 **202 72 99 02**	215 x 250	120 x 225

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

DIM8: dimming by falling edge dimmer




MINIGRID IN 1 FRAME W-B + MINIGRID SNAP-IN REO 83018 B

Minigrid In SI Reo



MINIGRID IN TRIMLESS 1 FRAME W-B + MINIGRID SNAP-IN REO 83018 W




111 x 111 x 70 max.22

MINIGRID IN 1 FRAME ◇
202 74 01 ◇
◇ = W-B / W-W

0,3

REQUIREMENTS
MINIGRID SNAP-IN

OPTIONS
PLASTERKIT 126




214 x 111 x 70 max.22

MINIGRID IN 2 FRAME ◇
202 74 02 ◇
◇ = W-B / W-W

0,4

REQUIREMENTS
2 x MINIGRID SNAP-IN

OPTIONS
PLASTERKIT 127



	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	703lm (6,2W) 945lm (9,3W)	550lm (6,2W) 739lm (9,3W)
REFLECTOR SP-18°	**MINIGRID SNAP-IN REO 83018** ◇ **202 790 81831** ◇ ◇ = B / W	**MINIGRID SNAP-IN REO 93018** ◇ **202 790 81931** ◇ ◇ = B / W
REFLECTOR FL-33°	**MINIGRID SNAP-IN REO 83033** ◇ **202 790 81832** ◇ ◇ = B / W	**MINIGRID SNAP-IN REO 93033** ◇ **202 790 81932** ◇ ◇ = B / W
2700K	665lm (6,2W) 893lm (9,3W)	519lm (6,2W) 698lm (9,3W)
REFLECTOR SP-18°	**MINIGRID SNAP-IN REO 82718** ◇ **202 790 81821** ◇ ◇ = B / W	**MINIGRID SNAP-IN REO 92718** ◇ **202 790 81921** ◇ ◇ = B / W
REFLECTOR FL-33°	**MINIGRID SNAP-IN REO 82733** ◇ **202 790 81822** ◇ ◇ = B / W	**MINIGRID SNAP-IN REO 92733** ◇ **202 790 81922** ◇ ◇ = B / W

ADJUSTABLE 0°- 20° / 350°
INCL.1 x POWERLED WHITE [H] 6,2-9,3W
EXCL.LED POWER SUPPLY 350-500mA-DC

0,3 IP20 IP23

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

SOFT DIM
NFO SOFT D M
PAG TEC 9

2700-1800K	850lm (10W)	
REFLECTOR FL-40°	**MINIGRID SNAP-IN REO SOFT** ◇ **202 790 81120** ◇ ◇ = B / W	

ADJUSTABLE 0°- 20° / 350°
INCL.1 x POWERLED WHITE 10W
EXCL.DIMMABLE LED POWER SUPPLY 650mA-DC

0,5 IP20 IP23

REQUIREMENTS
LED POWER SUPPLY 650mA-DC DIM8
300 90 915 ED8

reddot design award winner 2011

GREEN GOOD DESIGN award



FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 127 **202 72 99 02**	215 x 250	120 x 225

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG 50

Accessories

HONEYCOMB 70 ◇ **201 04 01 ◇** ◇ = B	Ø70	
LINEAR SPREAD LENS 70 **201 04 02**	Ø70	
SPREAD LENS 70 **201 04 03**	Ø70	
SOFTENING LENS 70 **201 04 04**	Ø70	
GLASS SBL 70 **201 04 05**	Ø70	




MINIGRID IN HP + SOFTENING LENS


led

Minigrid In HP









	111 x 111 x 150 max.22		214 x 111 x 150 max.22	
	CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)	2x 1930lm (18W)	2x 1639lm (18W)
REFLECTOR SP-17°	**MINIGRID IN 1 HP 83017 ◇** **202 741 211831 ◇** ◇ = W-B	**MINIGRID IN 1 HP 93017 ◇** **202 741 211931 ◇** ◇ = W-B	**MINIGRID IN 2 HP 83017 ◇** **202 741 212831 ◇** ◇ = W-B	**MINIGRID IN 2 HP 93017 ◇** **202 741 212931 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN 1 HP 83037 ◇** **202 741 211832 ◇** ◇ = W-B	**MINIGRID IN 1 HP 93037 ◇** **202 741 211932 ◇** ◇ = W-B	**MINIGRID IN 2 HP 83037 ◇** **202 741 212832 ◇** ◇ = W-B	**MINIGRID IN 2 HP 93037 ◇** **202 741 212932 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN 1 HP 83060 ◇** **202 741 211833 ◇** ◇ = W-B	**MINIGRID IN 1 HP 93060 ◇** **202 741 211933 ◇** ◇ = W-B	**MINIGRID IN 2 HP 83060 ◇** **202 741 212833 ◇** ◇ = W-B	**MINIGRID IN 2 HP 93060 ◇** **202 741 212933 ◇** ◇ = W-B
2700K	1787lm (18W)	1453lm (18W)	2x 1787lm (18W)	2x 1453lm (18W)
REFLECTOR SP-17°	**MINIGRID IN 1 HP 82717 ◇** **202 741 211821 ◇** ◇ = W-B	**MINIGRID IN 1 HP 92717 ◇** **202 741 211921 ◇** ◇ = W-B	**MINIGRID IN 2 HP 82717 ◇** **202 741 212821 ◇** ◇ = W-B	**MINIGRID IN 2 HP 92717 ◇** **202 741 212921 ◇** ◇ = W-B
REFLECTOR FL-37°	**MINIGRID IN 1 HP 82737 ◇** **202 741 211822 ◇** ◇ = W-B	**MINIGRID IN 1 HP 92737 ◇** **202 741 211922 ◇** ◇ = W-B	**MINIGRID IN 2 HP 82737 ◇** **202 741 212822 ◇** ◇ = W-B	**MINIGRID IN 2 HP 92737 ◇** **202 741 212922 ◇** ◇ = W-B
REFLECTOR WFL-60°	**MINIGRID IN 1 HP 82760 ◇** **202 741 211823 ◇** ◇ = W-B	**MINIGRID IN 1 HP 92760 ◇** **202 741 211923 ◇** ◇ = W-B	**MINIGRID IN 2 HP 82760 ◇** **202 741 212823 ◇** ◇ = W-B	**MINIGRID IN 2 HP 92760 ◇** **202 741 212923 ◇** ◇ = W-B
	ADJUSTABLE 0°- 22° / 350° INCL.1 x POWERLED WHITE [J] 18W EXCL.LED POWER SUPPLY 500mA-DC 0,8 IP20 OPTIONS PLASTERKIT 126 LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES HONEYCOMB 70 LINEAR SPREAD LENS 70 SPREAD LENS 70 SOFTENING LENS 70 GLASS SBL 70		ADJUSTABLE 0°- 22° / 350° INCL.2 x POWERLED WHITE [J] 18W EXCL.LED POWER SUPPLY 500mA-DC 1,4 IP20 OPTIONS PLASTERKIT 127 LED POWER SUPPLY 500mA-DC / DIM ACCESSORIES HONEYCOMB 70 LINEAR SPREAD LENS 70 SPREAD LENS 70 SOFTENING LENS 70 GLASS SBL 70	



EQUIPAL

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 127 **202 72 99 02**	215 x 250	120 x 225
PLASTERKIT 128 **202 72 99 03**	215 x 350	120 x 330


CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21


FULL INFO / PAG TEC

Accessories

	A B C
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
DICROIC FILTER 50 **201 30 11** ● **201 30 12** ● **201 30 13** ● **201 30 14** ●	Ø50 max. 20W

Minigrid In

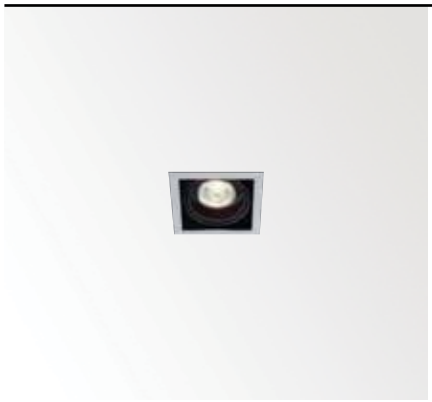




111 x 111 x 140 max.20

MINIGRID IN 1 50 ◇
202 72 55 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W
1 x QR-CBC51 max.35W

0,5 IP20 0,5

OPTIONS
PLASTERKIT 126
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50




111 x 111 x 140 max.20

MINIGRID IN 1 QR ◇
202 72 00 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
1 x QR-LP70 max.50W

0,5 IP20 1,0

OPTIONS
PLASTERKIT 126
TRANSFO




111 x 111 x 140 max.20

MINIGRID IN 1 50 Hi ◇
202 72 66 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

0,5 IP20 0,5

OPTIONS
PLASTERKIT 126
led LED SOLUTION - PAG TEC 4-5






214 x 111 x 140 max.20

MINIGRID IN 2 50 ◇
202 72 55 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
2 x QR-C51 max.50W
2 x QR-CBC51 max.35W

0,9 IP20 0,5

OPTIONS
PLASTERKIT 127
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50




214 x 111 x 140 max.20

MINIGRID IN 2 QR ◇
202 72 00 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
2 x QR-LP70 max.50W

0,9 IP20 1,0

OPTIONS
PLASTERKIT 127
TRANSFO




214 x 111 x 140 max.20

MINIGRID IN 2 50 Hi ◇
202 72 66 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W

0,9 IP20 0,5

OPTIONS
PLASTERKIT 127
led LED SOLUTION - PAG TEC 4-5






312 x 111 x 140 max.20

MINIGRID IN 3 50 ◇
202 72 55 03 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
GU5.3 / 12V / EXCL.TRANSFO
3 x QR-C51 max.50W
3 x QR-CBC51 20-35 W

1,3 IP20 0,5

OPTIONS
PLASTERKIT 128
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 50
CLIP 50 + DICROIC FILTER 50



312 x 111 x 140 max.20

MINIGRID IN 3 QR ◇
202 72 00 03 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
BA15d / 12V / EXCL.TRANSFO
3 x QR-LP70 max.50W

1,3 IP20 1,0

OPTIONS
PLASTERKIT 128
TRANSFO

GRID IN
OVERVIEW


Grid in Reo **ZB** (+ZB Box)


Grid in Reo **TRIMLESS**


Grid in Reo


Grid in **REO**


Grid in **OPTO**


Grid in **HP** (High Power)

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/202690209122 or www.deltalight.com/grid-in-hp

GRID IN ZB REO



ADJUSTABLE 0-20°/360°

led

PAG INT 219

GRID IN ZB



ADJUSTABLE 0-30°

QR-LP111

PAG INT 220

GRID IN TRIMLESS SI



ADJUSTABLE 0-20°/360°

led

PAG INT 225

GRID IN TRIMLESS REO



ADJUSTABLE 0-20°/360°

led

PAG INT 227

GRID IN TRIMLESS OPTO



ADJUSTABLE 0-20°/360°

led

PAG INT 229

GRID IN TRIMLESS HP



ADJUSTABLE 0-20°/340°

led

PAG INT 231

GRID IN TRIMLESS



ADJUSTABLE 0-30°

QR-LP111

HIR-CE111

PAG INT 233

GRID IN SI



ADJUSTABLE 0-20°/360°

led

PAG INT 241

GRID IN REO



ADJUSTABLE 0-20°/360°

led

PAG INT 243

GRID IN OPTO



ADJUSTABLE 0-20°/340°

led

PAG INT 245

GRID IN HP



ADJUSTABLE 0-20°/340°

led

PAG INT 247

GRID IN



ADJUSTABLE 0-30°

QR-LP111

HIR-CE111

HIT-TC

PAG INT 248


P8 ARCHITECTEN



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
GRID IN ZB 1 LED BOX **202 601 98 01**	183 x 183 x 100	184 x 184
GRID IN ZB 2 LED BOX **202 601 98 02**	183 x 336 x 100	184 x 337


CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

Grid In ZB Reo









	152 x 152 x 86		305 x 152 x 86	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W) 2123lm (19,2W)	1639lm (18W) 1803lm (19,2W)	2 x 1930lm (18W) 2 x 2123lm (19,2W)	2 x 1639lm (18W) 2 x 1803lm (19,2W)
REFLECTOR FL-33°	**GRID IN ZB 1 REO 20 83033 ◇** **202 600 211832 ◇** ◇ = W	**GRID IN ZB 1 REO 20 93033 ◇** **202 600 211932 ◇** ◇ = W	**GRID IN ZB 2 REO 20 83033 ◇** **202 600 212832 ◇** ◇ = W	**GRID IN ZB 2 REO 20 93033 ◇** **202 600 212932 ◇** ◇ = W
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	1787lm (18W) 1966lm (19,2W)	1453lm (18W) 1598lm (19,2W)	2 x 1787lm (18W) 2 x 1966lm (19,2W)	2 x 1453lm (18W) 2 x 1598lm (19,2W)
REFLECTOR FL-33°	**GRID IN ZB 1 REO 20 82733 ◇** **202 600 211822 ◇** ◇ = W	**GRID IN ZB 1 REO 20 92733 ◇** **202 600 211922 ◇** ◇ = W	**GRID IN ZB 2 REO 20 82733 ◇** **202 600 212822 ◇** ◇ = W	**GRID IN ZB 2 REO 20 92733 ◇** **202 600 212922 ◇** ◇ = W
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE [J] 18-19,2W EXCL.LED POWER SUPPLY 500-550mA-DC 1,3 IP20 OPTIONS GRID IN ZB 1 LED BOX LED POWER SUPPLY 500-550mA-DC / DIM		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE [J] 18-19,2W EXCL.LED POWER SUPPLY 500-550mA-DC 2,2 IP20 OPTIONS GRID IN ZB 2 LED BOX LED POWER SUPPLY 500-550mA-DC / DIM	



GRID IN ZB 2 REO 203033 W-B



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
GRID IN ZB 1 BOX L **202 60 98 01**	183 x 183 x 128	184 x 184
GRID IN ZB 2 BOX L **202 60 98 02**	183 x 336 x 128	184 x 337
GRID IN ZB 3 BOX L **202 60 98 03**	183 x 483 x 128	184 x 484
GRID IN ZB 4 BOX L **202 60 98 04**	336 x 336 x 128	337 x 337


CONTROL GEAR	A B C
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21

FULL INFO / PAG TEC

Accessories

	A B C	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
COLOUR FILTER 111 **201 27 11** 🔵 **201 27 12** 🟢 **201 27 13** 🔴 **201 27 14** 🟡	Ø100	
LENS 111 **201 47 11**	Ø100	





152 x 152 x 114

GRID IN ZB 1 QR ◇
202 60 00 01 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W


IP20 1,0

OPTIONS
GRID IN ZB 1 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

Grid In ZB





305 x 152 x 114


GRID IN ZB 2 QR ◇
202 60 00 02 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W

1,4 IP20 1,0

OPTIONS
GRID IN ZB 2 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111





452 x 152 x 114


GRID IN ZB 3 QR ◇
202 60 00 03 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
3 x QR-LP111 max.100W

2,0 IP20 1,0

OPTIONS
GRID IN ZB 3 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111





305 x 305 x 114

GRID IN ZB 4 QR ◇
202 60 00 04 ◇
◇ = A / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

2,6 IP20 1,0

OPTIONS
GRID IN ZB 4 BOX L
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111





CLAUDIA URIBE






FULL INFO / PAG TEC

Requirements


GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01



173 x 173 x 110 max.25

0,4


GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02



312 x 173 x 110 max.25

0,4


GRID IN TRIMLESS 1 MK L
202 61 95 01L



173 x 173 x 110

0,7

GRID IN TRIMLESS 2 MK L
202 61 95 02L



312 x 173 x 110

0,9

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03



SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05







GRID IN TRIMLESS 1 FRAME B +
GRID SNAP-IN 83033 C + HONEYCOMB 50


Grid In Trimless SI



GRID IN TRIMLESS 2 FRAME B + 2 x GRID SNAP-IN 83033 W







KIT x 80*

GRID IN TRIMLESS 1 FRAME ◇
202 98 01 ◇
◇ = B / W

0,5

REQUIREMENTS
GRID SNAP-IN
+
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
202 61 95 01L

KIT x 80*

GRID IN TRIMLESS 2 FRAME ◇
202 98 02 ◇
◇ = B / W

0,8

REQUIREMENTS
2 x GRID SNAP-IN
+
GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02
or
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
202 61 95 02L

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**GRID SNAP-IN 83033** ◇ **202 970 21 832** ◇ ◇ = B / C / W	**GRID SNAP-IN 93033** ◇ **202 970 21 932** ◇ ◇ = B / C / W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**GRID SNAP-IN 82733** ◇ **202 970 21 822** ◇ ◇ = B / C / W	**GRID SNAP-IN 92733** ◇ **202 970 21 922** ◇ ◇ = B / C / W

ADJUSTABLE 0°- 45° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

0,5 IP20

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

*SNAP-IN ◇ = C : MIN. 200mm


VERSLUYS BOUWGROEP - CORPORATE BUILDING - OSTEND BELGIUM


FULL INFO / PAG TEC

Requirements

GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02

312 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110


0,7



GRID IN TRIMLESS 2 MK L
202 61 95 02L

312 x 173 x 110

0,9



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



4000K

3000K

REFLECTOR FL-33°

REFLECTOR WFL-50°


2700K


REFLECTOR FL-33°

REFLECTOR WFL-50°

led

Grid In Trimless Reo

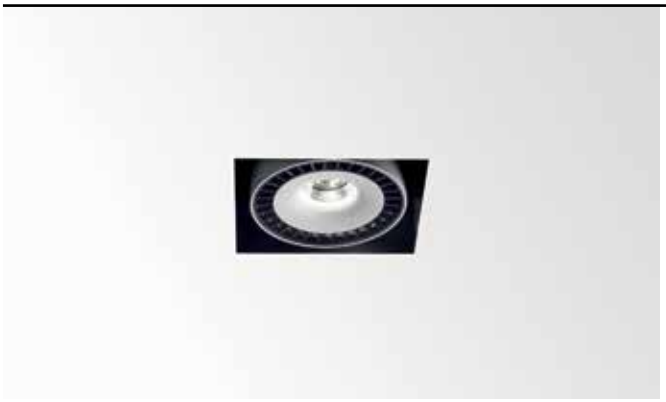



KIT x 110 max.40

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
1930lm (18W) 2123lm (19,2W)	1639lm (18W) 1803lm (19,2W)
GRID IN TRIMLESS 1 REO 20 83033 ◇ **202 680 211832** ◇ ◇ = W-B	**GRID IN TRIMLESS 1 REO 20 93033** ◇ **202 680 211932** ◇ ◇ = W-B
ON REQUEST	ON REQUEST
1787lm (18W) 1966lm (19,2W)	1453lm (18W) 1598lm (19,2W)
GRID IN TRIMLESS 1 REO 20 82733 ◇ **202 680 211822** ◇ ◇ = W-B	**GRID IN TRIMLESS 1 REO 20 92733** ◇ **202 680 211922** ◇ ◇ = W-B
ON REQUEST	ON REQUEST


ADJUSTABLE 0°- 20° / 360°
INCL.1 x POWERLED WHITE [J] 18-19,2W
EXCL.LED POWER SUPPLY 500-550mA-DC

1,0 IP20

REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
202 61 95 01L

OPTIONS
LED POWER SUPPLY 500-550mA-DC / DIM





KIT x 110 max.40

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2 x 1930lm (18W) 2 x 2123lm (19,2W)	2 x 1639lm (18W) 2 x 1803lm (19,2W)
GRID IN TRIMLESS 2 REO 20 83033 ◇ **202 680 212832** ◇ ◇ = W-B	**GRID IN TRIMLESS 2 REO 20 93033** ◇ **202 680 212932** ◇ ◇ = W-B
ON REQUEST	ON REQUEST
2 x 1787lm (18W) 2 x 1966lm (19,2W)	2 x 1453lm (18W) 2 x 1598lm (19,2W)
GRID IN TRIMLESS 2 REO 20 82733 ◇ **202 680 212822** ◇ ◇ = W-B	**GRID IN TRIMLESS 2 REO 20 92733** ◇ **202 680 212922** ◇ ◇ = W-B
ON REQUEST	ON REQUEST

ADJUSTABLE 0°- 20° / 360°
INCL.2 x POWERLED WHITE [J] 18-19,2W
EXCL.LED POWER SUPPLY 500-550mA-DC

1,8 IP20

REQUIREMENTS
GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02
or
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
202 61 95 02L

OPTIONS
LED POWER SUPPLY 500-550mA-DC / DIM




FULL INFO / PAG TEC

Requirements

GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02

312 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110


0,7



GRID IN TRIMLESS 2 MK L
202 61 95 02L

312 x 173 x 110

0,9



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories



OPTO CLIP◇ Ø102 / Ø83 / H22
201 02 00◇
◇ = B



HONEYCOMB 78◇ Ø78
201 02 01◇
◇ = B



SOFTENING LENS 78 Ø78
201 02 04





GRID IN TRIMLESS 1 OPTO W-B + OPTO CLIP + SOFTENING LENS 78

4000K

3000K

REFLECTOR SP-15°

REFLECTOR FL-33°

REFLECTOR WFL-55°

2700K

REFLECTOR SP-15°


REFLECTOR FL-33°

REFLECTOR WFL-55°


led

Grid In Trimless Opto









KIT x 110 max.40

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
1930lm (18W) 2123lm (19,2W)	1639lm (18W) 1803lm (19,2W)
GRID IN TRIMLESS 1 OPTO 20 83015 ◇ **202 681 211831 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 20 93015 ◇** **202 681 211931 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 20 83033 ◇ **202 681 211832 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 20 93033 ◇** **202 681 211932 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 20 83055 ◇ **202 681 211833 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 20 93055 ◇** **202 681 211933 ◇** ◇ = W-B
1787lm (18W) 1966lm (19,2W)	1453lm (18W) 1598lm (19,2W)
GRID IN TRIMLESS 1 OPTO 20 82715 ◇ **202 681 211821 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 20 92715 ◇** **202 681 211921 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 20 82733 ◇ **202 681 211822 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 20 92733 ◇** **202 681 211922 ◇** ◇ = W-B
GRID IN TRIMLESS 1 OPTO 20 82755 ◇ **202 681 211823 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 OPTO 20 92755 ◇** **202 681 211923 ◇** ◇ = W-B

ADJUSTABLE 0°- 20° / 360°
INCL.1 x POWERLED WHITE [J] 18-19,2W
INCL.1 x EFT FILTER*
EXCL.LED POWER SUPPLY 500-550mA-DC

1,1 IP20

REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
202 61 95 01L

OPTIONS
LED POWER SUPPLY 500-550mA-DC / DIM

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

KIT x 110 max.40

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2 x 1930lm (18W) 2 x 2123lm (19,2W)	2 x 1639lm (18W) 2 x 1803lm (19,2W)
GRID IN TRIMLESS 2 OPTO 20 83015 ◇ **202 681 212831 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 20 93015 ◇** **202 681 212931 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 20 83033 ◇ **202 681 212832 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 20 93033 ◇** **202 681 212932 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 20 83055 ◇ **202 681 212833 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 20 93055 ◇** **202 681 212933 ◇** ◇ = W-B
2 x 1787lm (18W) 2 x 1966lm (19,2W)	2 x 1453lm (18W) 2 x 1598lm (19,2W)
GRID IN TRIMLESS 2 OPTO 20 82715 ◇ **202 681 212821 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 20 92715 ◇** **202 681 212921 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 20 82733 ◇ **202 681 212822 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 20 92733 ◇** **202 681 212922 ◇** ◇ = W-B
GRID IN TRIMLESS 2 OPTO 20 82755 ◇ **202 681 212823 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 OPTO 20 92755 ◇** **202 681 212923 ◇** ◇ = W-B

ADJUSTABLE 0°- 20° / 360°
INCL.2 x POWERLED WHITE [J] 18-19,2W
INCL.2 x EFT FILTER*
EXCL.LED POWER SUPPLY 500-550mA-DC

1,9 IP20

REQUIREMENTS
GRID IN TRIMLESS 2 MOUNTING KIT
202 61 95 02
or
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
202 61 95 02L

OPTIONS
LED POWER SUPPLY 500-550mA-DC / DIM

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

*EFT / EQUALISING FILTER TECHNOLOGY



FULL INFO / PAG TEC


Requirements

INSTALLATION

GRID IN TRIMLESS 1 MOUNTING KIT HP
202 61 95 01 HP

173 x 173 max.25


0,5



GRID IN TRIMLESS 2 MOUNTING KIT HP
202 61 95 02 HP

312 x 173 max.25

0,7



CONTROL GEAR

LED POWER SUPPLY 103 x 67 x 30
600-700mA-DC / 38W
300 90 66

LED POWER SUPPLY 103 x 67 x 30
600-700mA-DC / 35W Dim2
300 90 66 ED2

FULL INFO / PAG 132

Accessories


HONEYCOMB 87 ◇ Ø87
201 01 01 ◇
◇ = B

LINEAR SPREAD LENS 87 Ø87
201 01 02

SPREAD LENS 87 Ø87
201 01 03

SOFTENING LENS 87 Ø87
201 01 04

GLASS SBL 87 Ø87
201 01 05



DIM2: dimming by push button / Dali


3000K

REFLECTOR FL-27°


REFLECTOR WFL-50°

Grid In Trimless HP









KIT x 180		KIT x 180	
CRI > 80	**CRI > 90**	**CRI > 80**	**CRI > 90**
3000lm (26W)	3000lm (33W)	2x 3000lm (2x 26W)	2x 3000lm (2x 33W)
GRID IN TRIMLESS 1 HP 303027 ◇ **202 684 20122 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 HP 303027-9 ◇** **202 684 209122 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 HP 303027 ◇** **202 684 20222 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 HP 303027-9 ◇** **202 684 209222 ◇** ◇ = W-B
GRID IN TRIMLESS 1 HP 303050 ◇ **202 684 20132 ◇** ◇ = W-B	**GRID IN TRIMLESS 1 HP 303050-9 ◇** **202 684 209132 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 HP 303050 ◇** **202 684 20232 ◇** ◇ = W-B	**GRID IN TRIMLESS 2 HP 303050-9 ◇** **202 684 209232 ◇** ◇ = W-B
ADJUSTABLE 0°- 20° / 340° INCL.1 x POWERLED WHITE EXCL.1 x LED POWER SUPPLY 600mA-DC	ADJUSTABLE 0°- 20° / 340° INCL.1 x POWERLED WHITE EXCL.1 x LED POWER SUPPLY 700mA-DC	ADJUSTABLE 0°- 20° / 340° INCL.2 x POWERLED WHITE EXCL.2 x LED POWER SUPPLY 600mA-DC	ADJUSTABLE 0°- 20° / 340° INCL.2 x POWERLED WHITE EXCL.2 x LED POWER SUPPLY 700mA-DC
2,1 IP20		3,3 IP20	
REQUIREMENTS GRID IN TRIMLESS 1 MOUNTING KIT HP 202 61 95 01 HP LED POWER SUPPLY 600-700mA-DC / 38W 300 90 66 or LED POWER SUPPLY 600-700mA-DC / 35W / DIM2 300 90 66 ED2		REQUIREMENTS GRID IN TRIMLESS 2 MOUNTING KIT HP 202 61 95 02 HP 2 x LED POWER SUPPLY 600-700mA-DC / 38W 300 90 66 or 2 x LED POWER SUPPLY 600-700mA-DC / 35W / DIM2 300 90 66 ED2	
ACCESSORIES HONEYCOMB 87 LINEAR SPREAD LENS 87 SPREAD LENS 87 SOFTENING LENS 87 GLASS SBL 87		ACCESSORIES HONEYCOMB 87 LINEAR SPREAD LENS 87 SPREAD LENS 87 SOFTENING LENS 87 GLASS SBL 87	



FULL INFO / PAG TEC

Options

INSTALLATION		
GRID IN TRIMLESS 1 MK **202 61 95 01**	171 x 171 x 55	173 x 173
GRID IN TRIMLESS 1 MK L **202 61 95 01L**	293 x 293 x 55	173 x 173
EXPOSED CONCRETE PACK GIT 1 **202 61 96 01**	220 x 262 x 210	-
GRID IN TRIMLESS 2 MK **202 61 95 02**	171 x 310 x 55	312 x 173
GRID IN TRIMLESS 2 MK L **202 61 95 02L**	432 x 293 x 55	312 x 173
EXPOSED CONCRETE PACK GIT 2 **202 61 96 02**	220 x 401 x 210	-


CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37


FULL INFO / PAG TEC

Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 111 **201 47 11**	Ø100	

Grid In Trimless 1

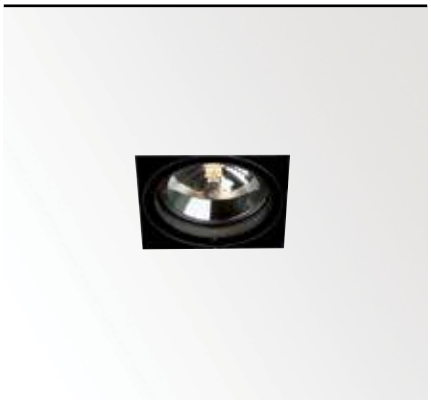




157 x 157 x 120 max.40

GRID IN TRIMLESS 1 QR ◇
202 61 00 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W

CE 0,7 IP20 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 1
LED SOLUTION - PAG TEC 4-5
TRANSFO
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



157 x 157 x 160 max.40


GRID IN TRIMLESS 1 H111 ◇
202 61 88 01 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
1 x HIR-CE111 max.70W

CE 0,8 IP20 1,0

OPTIONS
GRID IN TRIMLESS 1 MOUNTING KIT
GRID IN TRIMLESS 1 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 1
BALLASTSET HID

Grid In Trimless 2






296 x 157 x 120 max.40

GRID IN TRIMLESS 2 QR ◇
202 61 00 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W

CE 1,2 IP20 1,0

OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 2
LED SOLUTION - PAG TEC 4-5
TRANSFO
ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



296 x 157 x 160 max.40

GRID IN TRIMLESS 2 H111 ◇
202 61 88 02 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
2 x HIR-CE111 max.70W

CE 1,4 IP20 1,0

OPTIONS
GRID IN TRIMLESS 2 MOUNTING KIT
GRID IN TRIMLESS 2 MOUNTING KIT LARGE
EXPOSED CONCRETE PACK GIT 2
BALLASTSET HID



FULL INFO / PAG TEC

Options

INSTALLATION	A~B	C
GRID IN TRIMLESS 3 MK **202 61 95 03**	453 x 171 x 55	455 x 173
EXPOSED CONCRETE PACK GIT 3 **202 61 96 03**	220 x 544 x 210	-
GRID IN TRIMLESS 4 MK **202 61 95 04**	308 x 308 x 54	309 x 309
GRID IN TRIMLESS 4LINE MK **202 61 95 04L**	593 x 171 x 55	595 x 173
EXPOSED CONCRETE PACK GIT 4LINE **202 61 96 04L**	220 x 684 x 210	-

CONTROL GEAR	A~B	C
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories

	A~B	C
CONE 111◇ **201 28 00◇** ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111◇ **201 27 99 A ◇** ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 111 **201 47 11**	Ø100	

Grid In Trimless 3





439 x 157 x 120 max.40

GRID IN TRIMLESS 3 QR ◇
202 61 00 03 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
3 x QR-LP111 max.100W


1,7 IP20 1,0

OPTIONS
GRID IN TRIMLESS 3 MOUNTING KIT
EXPOSED CONCRETE PACK GIT 3
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

Grid In Trimless 4





579 x 157 x 120 max.40


GRID IN TRIMLESS 4LINE QR ◇
202 61 00 04L ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

2,0 IP20 1,0

OPTIONS
GRID IN TRIMLESS 4LINE MOUNTING KIT
EXPOSED CONCRETE PACK GIT 4LINE
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111






304 x 304 x 120 max.40

GRID IN TRIMLESS 4 QR ◇
202 61 00 04 ◇
◇ = A / B / W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W

2,0 IP20 1,0

OPTIONS
GRID IN TRIMLESS 4 MOUNTING KIT
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

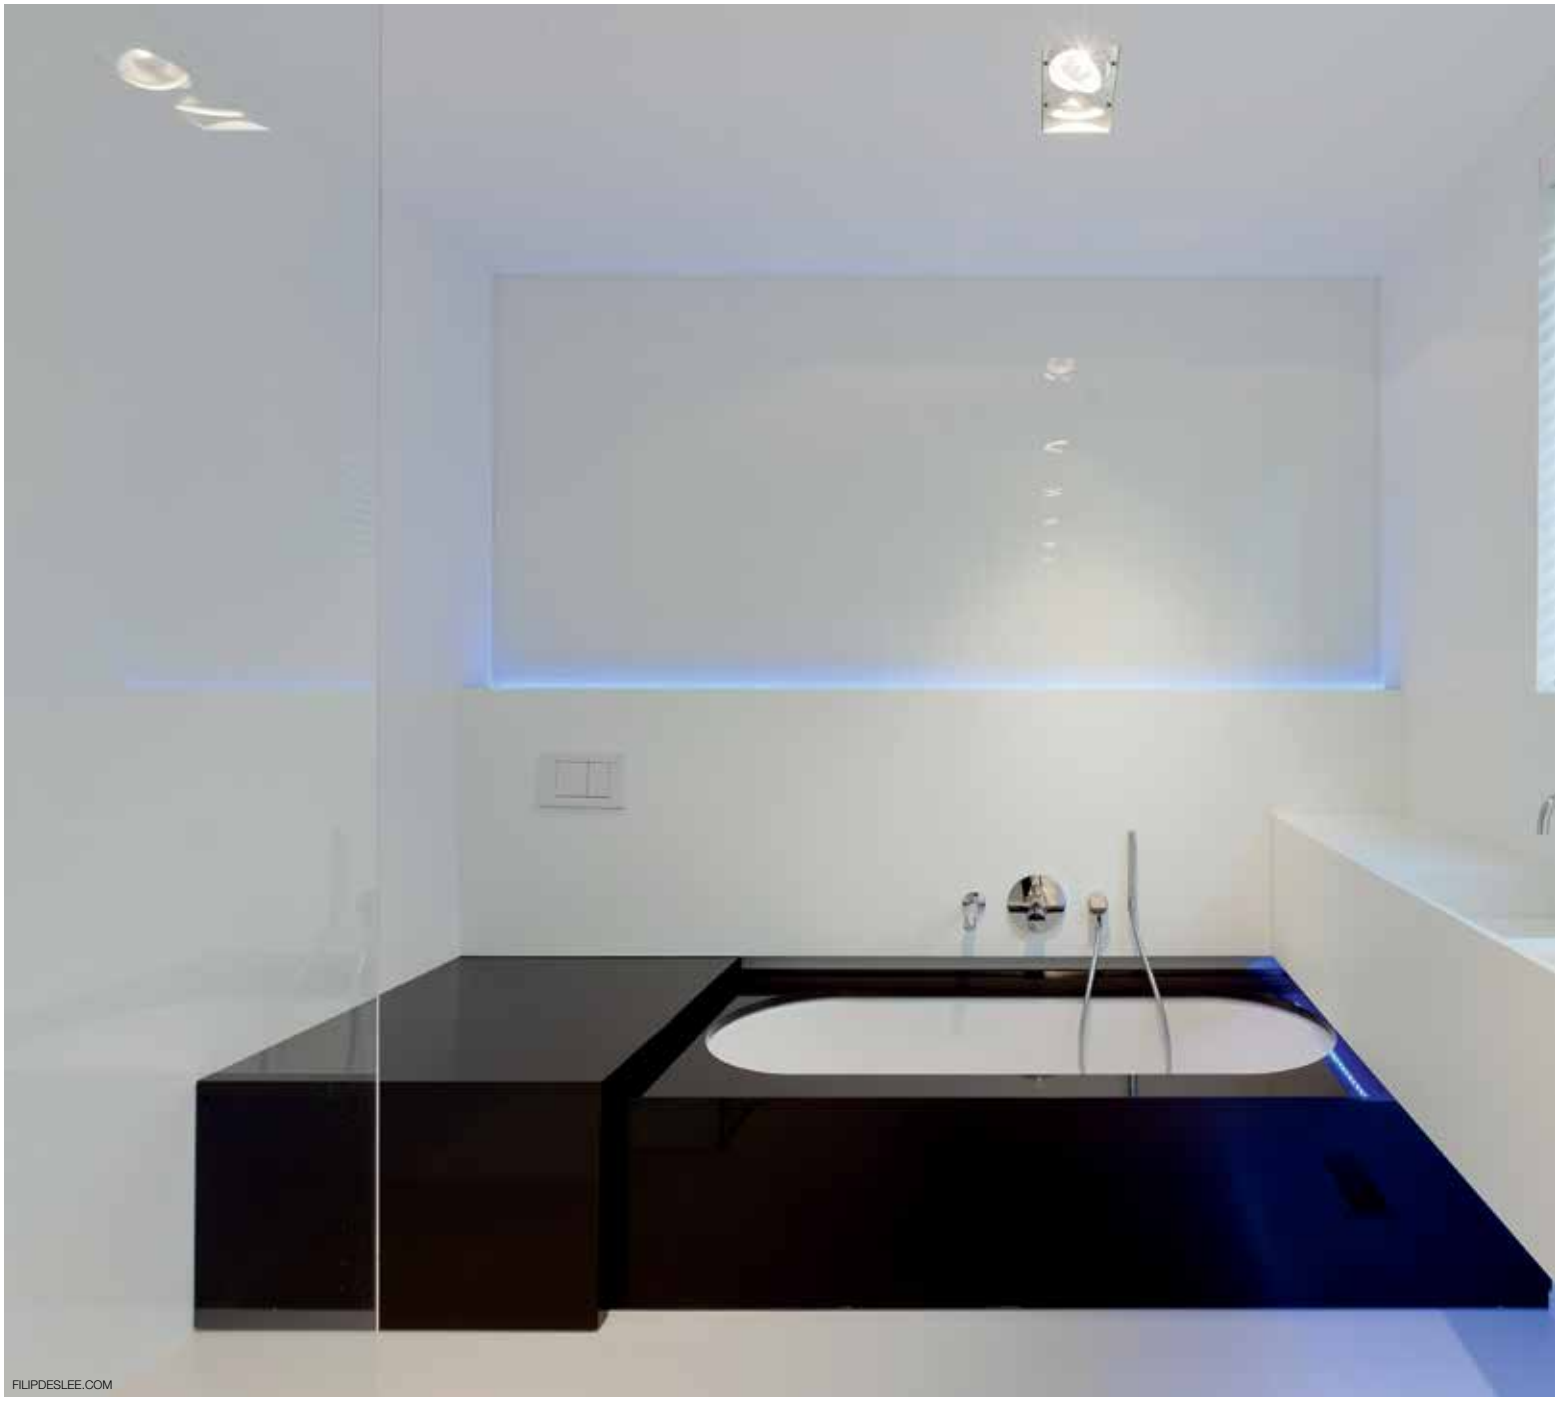

FILIPDESLEE.COM








ARCERO



OBUMEX

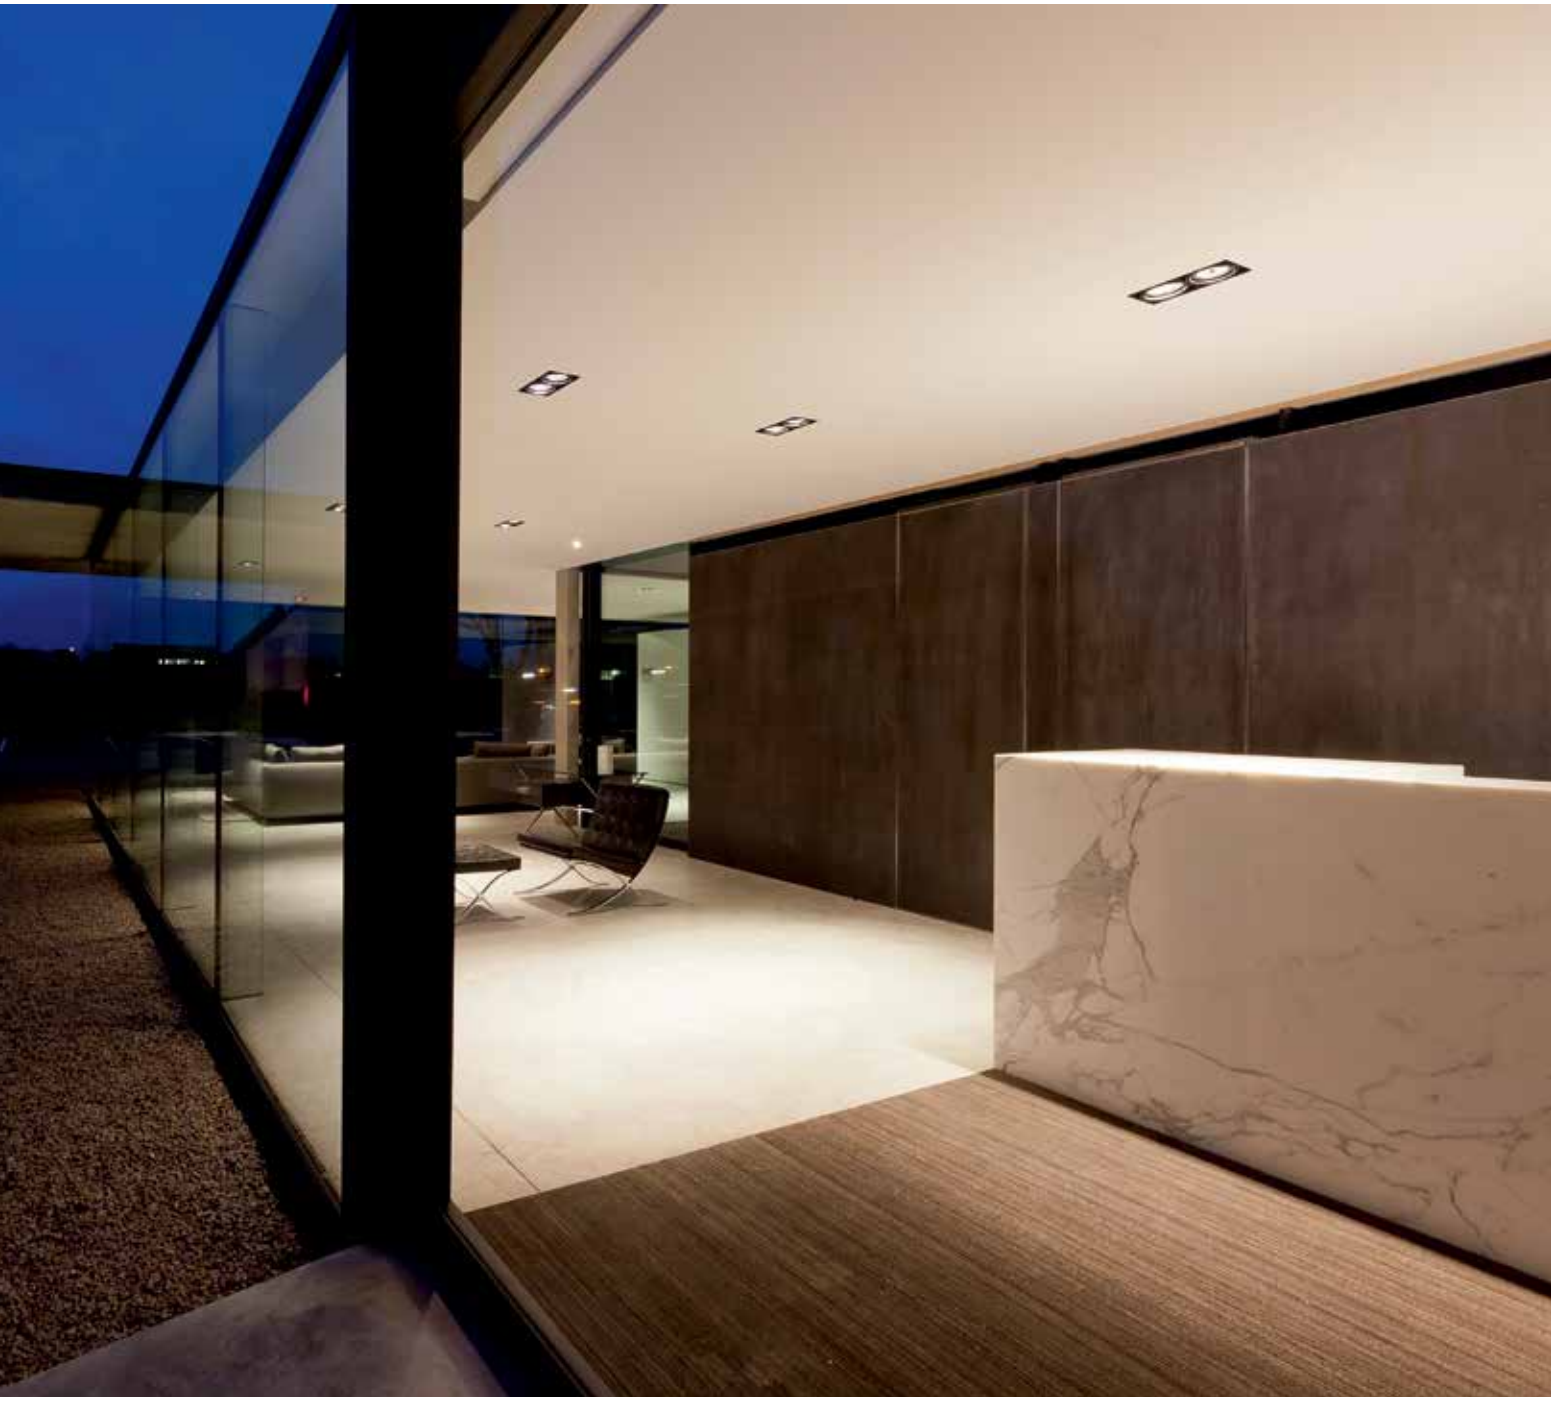



GRID IN 1 FRAME W +
GRID SNAP-IN 83033 C + HONEYCOMB 50

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 194 **207 01 194**	275 x 409	190 x 317
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 194 **270 11 194**	260 x 399 x 120	265 x 405

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC


Accessories

HONEYCOMB 50 ◇ **413 03 01 ◇** ◇ = B	Ø50	
LINEAR SPREAD LENS 50 **413 03 02**	Ø50	
SPREAD LENS 50 **413 03 03**	Ø50	
SOFTENING LENS 50 **413 03 04**	Ø50	
GLASS SBL 50 **413 03 05**	Ø50	

Grid In SI



GRID IN 2 FRAME W-W + 2 x GRID SNAP-IN 83033 W




170 x 160 x 80* max.25

GRID IN 1 FRAME ◇
202 97 01 ◇
◇ = W-B / W-W

1,3

REQUIREMENTS
GRID SNAP-IN

OPTIONS
PLASTERKIT 120
CONCRETE BOX 120




310 x 160 x 80* max.25

GRID IN 2 FRAME ◇
202 97 02 ◇
◇ = W-B / W-W

1,9

REQUIREMENTS
2 x GRID SNAP-IN

OPTIONS
PLASTERKIT 194
CONCRETE BOX 194



	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K ●		
	ON REQUEST	
3000K ●	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**GRID SNAP-IN 83033** ◇ **202 970 21 832** ◇ ◇ = B / C / W	**GRID SNAP-IN 93033** ◇ **202 970 21 932** ◇ ◇ = B / C / W
2700K ●	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**GRID SNAP-IN 82733** ◇ **202 970 21 822** ◇ ◇ = B / C / W	**GRID SNAP-IN 92733** ◇ **202 970 21 922** ◇ ◇ = B / C / W


ADJUSTABLE 0°- 45° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

CE 0,5 IP20

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

*SNAP-IN ◇ = C : MIN. 200mm

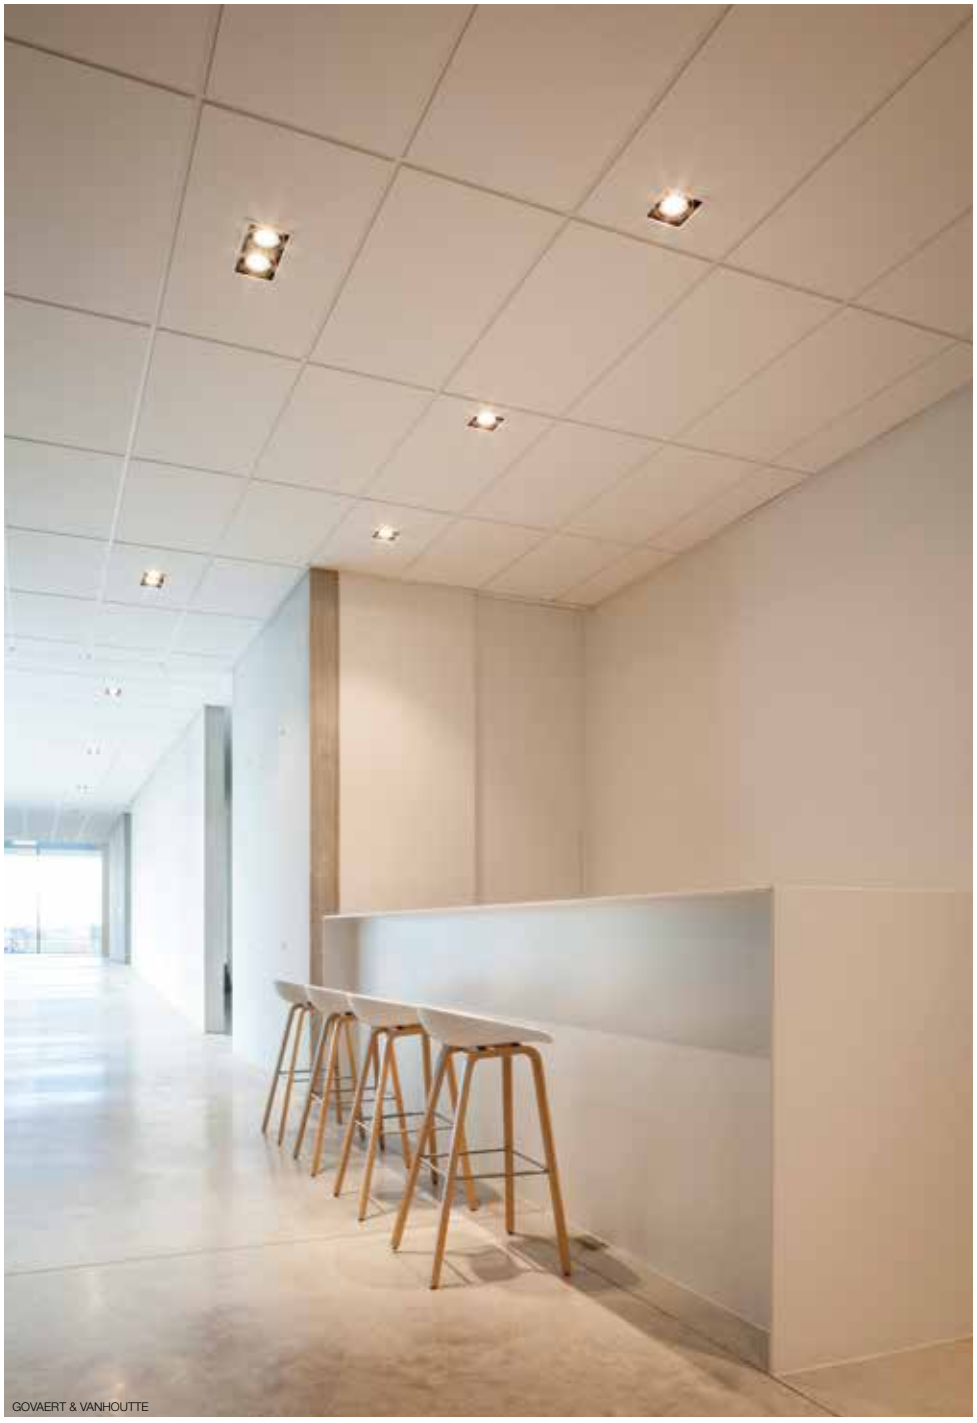

GOVAERT & VANHOUTTE

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 121 **202 62 98 02**	260 x 399 x 120	265 x 405

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER


led

Grid In Reo









	167 x 167 x 110 max.15		306 x 167 x 110 max.15	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W) 2123lm (19,2W)	1639lm (18W) 1803lm (19,2W)	2 x 1930lm (18W) 2 x 2123lm (19,2W)	2 x 1639lm (18W) 2 x 1803lm (19,2W)
REFLECTOR FL-33°	**GRID IN 1 REO 20 83033** ◇ **202 690 211832** ◇ ◇ = W-B	**GRID IN 1 REO 20 93033** ◇ **202 690 211932** ◇ ◇ = W-B	**GRID IN 2 REO 20 83033** ◇ **202 690 212832** ◇ ◇ = W-B	**GRID IN 2 REO 20 93033** ◇ **202 690 212932** ◇ ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
2700K	1787lm (18W) 1966lm (19,2W)	1453lm (18W) 1598lm (19,2W)	2 x 1787lm (18W) 2 x 1966lm (19,2W)	2 x 1453lm (18W) 2 x 1598lm (19,2W)
REFLECTOR FL-33°	**GRID IN 1 REO 20 82733** ◇ **202 690 211822** ◇ ◇ = W-B	**GRID IN 1 REO 20 92733** ◇ **202 690 211922** ◇ ◇ = W-B	**GRID IN 2 REO 20 82733** ◇ **202 690 212822** ◇ ◇ = W-B	**GRID IN 2 REO 20 92733** ◇ **202 690 212922** ◇ ◇ = W-B
REFLECTOR WFL-50°	ON REQUEST	ON REQUEST	ON REQUEST	ON REQUEST
	ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE [J] 18-19,2W EXCL.LED POWER SUPPLY 500-550mA-DC 1,3 IP20 OPTIONS PLASTERKIT 120 CONCRETE BOX 120 LED POWER SUPPLY 500-550mA-DC / DIM		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE [J] 18-19,2W EXCL.LED POWER SUPPLY 500-550mA-DC 2,2 IP20 OPTIONS PLASTERKIT 121 CONCRETE BOX 121 LED POWER SUPPLY 500-550mA-DC / DIM	



FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 121 **202 62 98 02**	260 x 399 x 120	265 x 405

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



FULL INFO / PAG TEC

Accessories

OPTO CLIP◇ **201 02 00◇** ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01◇** ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	




GR D N 1 OPTO W-B + OPTO CL P + HONEYCOMB 78


led

Grid In Opto









	167 x 167 x 110 max.15		306 x 167 x 110 max.15	
	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	1930lm (18W) 2123lm (19,2W)	1639lm (18W) 1803lm (19,2W)	2 x 1930lm (18W) 2 x 2123lm (19,2W)	2 x 1639lm (18W) 2 x 1803lm (19,2W)
REFLECTOR SP-15°	**GRID IN 1 OPTO 20 83015** ◇ **202 691 211831** ◇ ◇ = W-B	**GRID IN 1 OPTO 20 93015** ◇ **202 691 211931** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 83015** ◇ **202 691 212831** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 93015** ◇ **202 691 212931** ◇ ◇ = W-B
REFLECTOR FL-33°	**GRID IN 1 OPTO 20 83033** ◇ **202 691 211832** ◇ ◇ = W-B	**GRID IN 1 OPTO 20 93033** ◇ **202 691 211932** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 83033** ◇ **202 691 212832** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 93033** ◇ **202 691 212932** ◇ ◇ = W-B
REFLECTOR WFL-55°	**GRID IN 1 OPTO 20 83055** ◇ **202 691 211833** ◇ ◇ = W-B	**GRID IN 1 OPTO 20 93055** ◇ **202 691 211933** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 83055** ◇ **202 691 212833** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 93055** ◇ **202 691 212933** ◇ ◇ = W-B
2700K	1787lm (18W) 1966lm (19,2W)	1453lm (18W) 1598lm (19,2W)	2 x 1787lm (18W) 2 x 1966lm (19,2W)	2 x 1453lm (18W) 2 x 1598lm (19,2W)
REFLECTOR SP-15°	**GRID IN 1 OPTO 20 82715** ◇ **202 691 211821** ◇ ◇ = W-B	**GRID IN 1 OPTO 20 92715** ◇ **202 691 211921** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 82715** ◇ **202 691 212821** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 92715** ◇ **202 691 212921** ◇ ◇ = W-B
REFLECTOR FL-33°	**GRID IN 1 OPTO 20 82733** ◇ **202 691 211822** ◇ ◇ = W-B	**GRID IN 1 OPTO 20 92733** ◇ **202 691 211922** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 82733** ◇ **202 691 212822** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 92733** ◇ **202 691 212922** ◇ ◇ = W-B
REFLECTOR WFL-55°	**GRID IN 1 OPTO 20 82755** ◇ **202 691 211823** ◇ ◇ = W-B	**GRID IN 1 OPTO 20 92755** ◇ **202 691 211923** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 82755** ◇ **202 691 212823** ◇ ◇ = W-B	**GRID IN 2 OPTO 20 92755** ◇ **202 691 212923** ◇ ◇ = W-B
	ADJUSTABLE 0°- 20° / 360° INCL.1 x POWERLED WHITE [J] 18-19,2W INCL.1 x EFT FILTER* EXCL.LED POWER SUPPLY 500-550mA-DC 1,4 IP20 OPTIONS PLASTERKIT 120 CONCRETE BOX 120 LED POWER SUPPLY 500-550mA-DC / DIM ACCESSORIES OPTO CLIP + HONEYCOMB 78 OPTO CLIP + SOFTENING LENS 78		ADJUSTABLE 0°- 20° / 360° INCL.2 x POWERLED WHITE [J] 18-19,2W INCL.2 x EFT FILTER* EXCL.LED POWER SUPPLY 500-550mA-DC 2,3 IP20 OPTIONS PLASTERKIT 121 CONCRETE BOX 121 LED POWER SUPPLY 500-550mA-DC / DIM ACCESSORIES OPTO CLIP + HONEYCOMB 78 OPTO CLIP + SOFTENING LENS 78	

*EFT / EQUALISING FILTER TECHNOLOGY



FULL INFO / PAG TEC

Options


INSTALLATION		
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310

CONTROL GEAR	
LED POWER SUPPLY 600-700mA-DC / 38W **300 90 66**	103 x 67 x 30
LED POWER SUPPLY 600-700mA-DC / 35W Dim2 **300 90 66 ED2**	103 x 67 x 30

FULL INFO / PAG 132

Accessories

HONEYCOMB 87 ◇ **201 01 01 ◇** ◇ = B	Ø87
LINEAR SPREAD LENS 87 **201 01 02**	Ø87
SPREAD LENS 87 **201 01 03**	Ø87
SOFTENING LENS 87 **201 01 04**	Ø87
GLASS SBL 87 **201 01 05**	Ø87



DIM2: dimming by push button / Dali



GRD N 1 HP W-B + SOFTENING LENS 87

3000K


REFLECTOR FL-27°


REFLECTOR WFL-50°

Grid In HP









167 x 167 x 180 max.30

306 x 167 x 180 max.30

CRI > 80	CRI > 90	CRI > 80	CRI > 90
3000lm (26W)	3000lm (33W)	2x 3000lm (2x 26W)	2x 3000lm (2x 33W)
GRID IN 1 HP 303027 ◇ **202 694 20122** ◇ ◇ = W-B	**GRID IN 1 HP 303027-9** ◇ **202 694 209122** ◇ ◇ = W-B	**GRID IN 2 HP 303027** ◇ **202 694 20222** ◇ ◇ = W-B	**GRID IN 2 HP 303027-9** ◇ **202 694 209222** ◇ ◇ = W-B
GRID IN 1 HP 303050 ◇ **202 694 20132** ◇ ◇ = W-B	**GRID IN 1 HP 303050-9** ◇ **202 694 209132** ◇ ◇ = W-B	**GRID IN 2 HP 303050** ◇ **202 694 20232** ◇ ◇ = W-B	**GRID IN 2 HP 303050-9** ◇ **202 694 209232** ◇ ◇ = W-B
ADJUSTABLE 0°- 20° / 340° INCL.1 x POWERLED WHITE EXCL.1 x LED POWER SUPPLY 600mA-DC	ADJUSTABLE 0°- 20° / 340° INCL.1 x POWERLED WHITE EXCL.1 x LED POWER SUPPLY 700mA-DC	ADJUSTABLE 0°- 20° / 340° INCL.2 x POWERLED WHITE EXCL.2 x LED POWER SUPPLY 600mA-DC	ADJUSTABLE 0°- 20° / 340° INCL.2 x POWERLED WHITE EXCL.2 x LED POWER SUPPLY 700mA-DC
CE 2,4 IP20		CE 3,6 IP20	

REQUIREMENTS
LED POWER SUPPLY 600-700mA-DC / 38W
300 90 66
or
LED POWER SUPPLY 600-700mA-DC / 35W / DIM2
300 90 66 ED2

OPTIONS
PLASTERKIT 120

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

REQUIREMENTS
2 x LED POWER SUPPLY 600-700mA-DC / 38W
300 90 66
or
2 x LED POWER SUPPLY 600-700mA-DC / 35W / DIM2
300 90 66 ED2

OPTIONS
PLASTERKIT 121

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 121 **202 62 99 02**	260 x 399	190 x 310
CONCRETE BOX 120 **202 62 98 01**	230 x 260 x 120	235 x 265
CONCRETE BOX 121 **202 62 98 02**	260 x 399 x 120	265 x 405

CONTROL GEAR	
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

FULL INFO / PAG TEC


Accessories


CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 111 **201 17 00**	Ø100
LENS 111 **201 47 11**	Ø100


Grid In 1



GRID IN 1 HIC A-B







up to **93%** efficiency

167 x 167 x 120 max.15

GRID IN 1 QR ◇
202 62 00 01 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
1,0 IP20 1,0

OPTIONS
PLASTERKIT 120
CONCRETE BOX 120
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

167 x 167 x 160 max.15

GRID IN 1 H111 ◇
202 62 88 01 ◇
◇ = A-B / A-A / W-W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
1 x HIR-CE111 max.70W
1,1 IP20 1,0

OPTIONS
PLASTERKIT 120
BALLASTSET HID

167 x 167 x 210 max.15

GRID IN 1 HIC SP15 ◇
202 62 660 01 SP15 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN 1 HIC FL24 ◇
202 62 660 01 FL24 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN 1 HIC WFL43 ◇
202 62 660 01 WFL43 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR WFL-43° + GLASS


ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
1,4 IP20 IP23 1,0

OPTIONS
PLASTERKIT 120
BALLASTSET HID

Grid In 2



GRID IN 2 QR W-W




306 x 167 x 120 max.15

GRID IN 2 QR ◇
202 62 00 02 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
CE 1,6 IP20 1,0

OPTIONS
PLASTERKIT 121
CONCRETE BOX 121
led LED SOLUTION - PAG TEC 4-5
TRANSFO


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



306 x 167 x 160 max.15

GRID IN 2 H111 ◇
202 62 88 02 ◇
◇ = A-B / A-A / W-W
ADJUSTABLE 0°- 30°
GX8.5 / EXCL.EVG
2 x HIR-CE111 max.70W
CE 1,8 IP20 1,0

OPTIONS
PLASTERKIT 121
BALLASTSET HID



up to 93% efficiency

306 x 167 x 210 max.15


GRID IN 2 HIC SP15 ◇
202 62 660 02 SP15 ◇
◇ = A-B / W-W
INCL.2 x REFLECTOR SP-15° + GLASS

GRID IN 2 HIC FL24 ◇
202 62 660 02 FL24 ◇
◇ = A-B / W-W
INCL.2 x REFLECTOR FL-24° + GLASS

GRID IN 2 HIC WFL43 ◇
202 62 660 02 WFL43 ◇
◇ = A-B / W-W
INCL.2 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
2 x HIT-TC max.70W
CE 2,4 IP20 IP23 1,0

OPTIONS
PLASTERKIT 121
BALLASTSET HID



up to 93% efficiency

306 x 167 x 210 max.15

GRID IN 2 CR SP15 ◇
202 62 060 12 SP15 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN 2 CR FL24 ◇
202 62 060 12 FL24 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN 2 CR WFL43 ◇
202 62 060 12 WFL43 ◇
◇ = A-B / W-W
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
1 x QR-LP111 max.100W
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
CE 2,4 IP20 1,0

OPTIONS
PLASTERKIT 121
TRANSFO
BALLASTSET HID

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

FULL INFO / PAG TEC

Options


INSTALLATION	C A B	
PLASTERKIT 122 **202 62 99 03**	260 x 537	190 x 450
PLASTERKIT 123 **202 62 99 04**	399 x 399	310 x 310
PLASTERKIT 124 **202 62 99 04L**	260 x 680	190 x 610
CONCRETE BOX 122 **202 62 98 03**	260 x 537 x 120	265 x 538
CONCRETE BOX 123 **202 62 98 04**	399 x 399 x 120	405 x 405
CONCRETE BOX 124 **202 62 98 04L**	260 x 680 x 120	265 x 685


CONTROL GEAR	C A B
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21
BALLASTSET HID 135 **200 45 135**	140 x 64 x 32
BALLASTSET HID 170 **200 45 170**	186 x 90 x 37

FULL INFO / PAG TEC

Accessories

	C A B	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 111 **201 47 11**	Ø100	





up to **93%** efficiency

450 x 167 x 120 max.15

GRID IN 3 QR ◇
202 62 00 03 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
3 x QR-LP111 max.100W

CE 2,1 IP20 1,0

OPTIONS
PLASTERKIT 122
CONCRETE BOX 122
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

450 x 167 x 210 max.15

GRID IN 3 HIC SP15 ◇
202 62 660 03 SP15 ◇
◇ = A-B
INCL.3 x REFLECTOR SP-15° + GLASS

GRID IN 3 HIC FL24 ◇
202 62 660 03 FL24 ◇
◇ = A-B
INCL.3 x REFLECTOR FL-24° + GLASS

GRID IN 3 HIC WFL43 ◇
202 62 660 03 WFL43 ◇
◇ = A-B
INCL.3 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G8.5 / EXCL.EVG
3 x HIT-TC max.70W


CE 3,2 IP20 IP23 1,0

OPTIONS
PLASTERKIT 122
BALLASTSET HID

Grid In 3



GRID IN 3 CR A-B



up to 93% efficiency

450 x 167 x 210 max.15

GRID IN 3 CR SP15 ◇
202 62 060 13 SP15 ◇
◇ = A-B
INCL.1 x REFLECTOR SP-15° + GLASS

GRID IN 3 CR FL24 ◇
202 62 060 13 FL24 ◇
◇ = A-B
INCL.1 x REFLECTOR FL-24° + GLASS

GRID IN 3 CR WFL43 ◇
202 62 060 13 WFL43 ◇
◇ = A-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
2 x QR-LP111 max.100W
G8.5 / EXCL.EVG
1 x HIT-TC max.70W
CE 3,2 IP20 1,0


OPTIONS
PLASTERKIT 122
TRANSFO
BALLASTSET HID

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

Grid In 4



GRID IN 4 LINE QR A-B



590 x 167 x 120 max.15


GRID IN 4LINE QR ◇
202 62 00 04L ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W
CE 2,5 IP20 1,0

OPTIONS
PLASTERKIT 124
CONCRETE BOX 124
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



GRID IN 4 QR A-B



306 x 306 x 120 max.15

GRID IN 4 QR ◇
202 62 00 04 ◇
◇ = A-A / A-B / W-W
ADJUSTABLE 0°- 30°
G53 / 12V / EXCL.TRANSFO
4 x QR-LP111 max.100W
CE 2,5 IP20 1,0


OPTIONS
PLASTERKIT 123
CONCRETE BOX 123
led LED SOLUTION - PAG TEC 4-5
TRANSFO

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111




MARTIN'S HOTELS



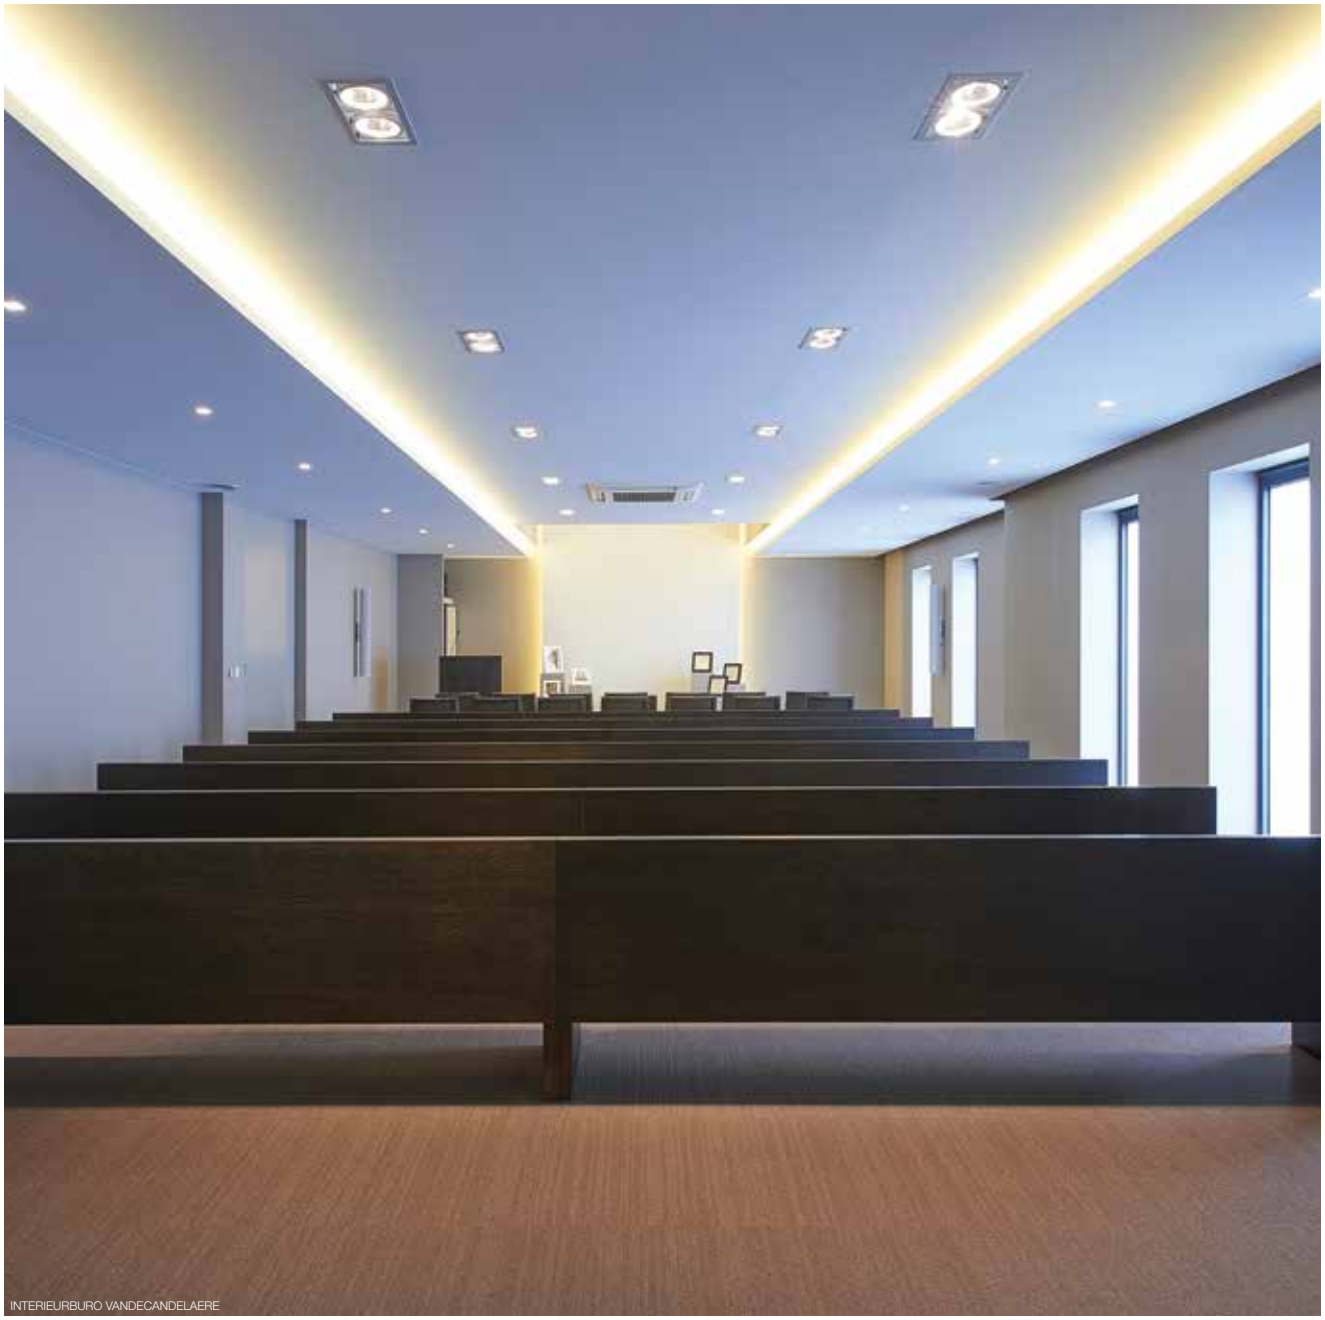


INTERIEURBURO VANDECANDELAERE



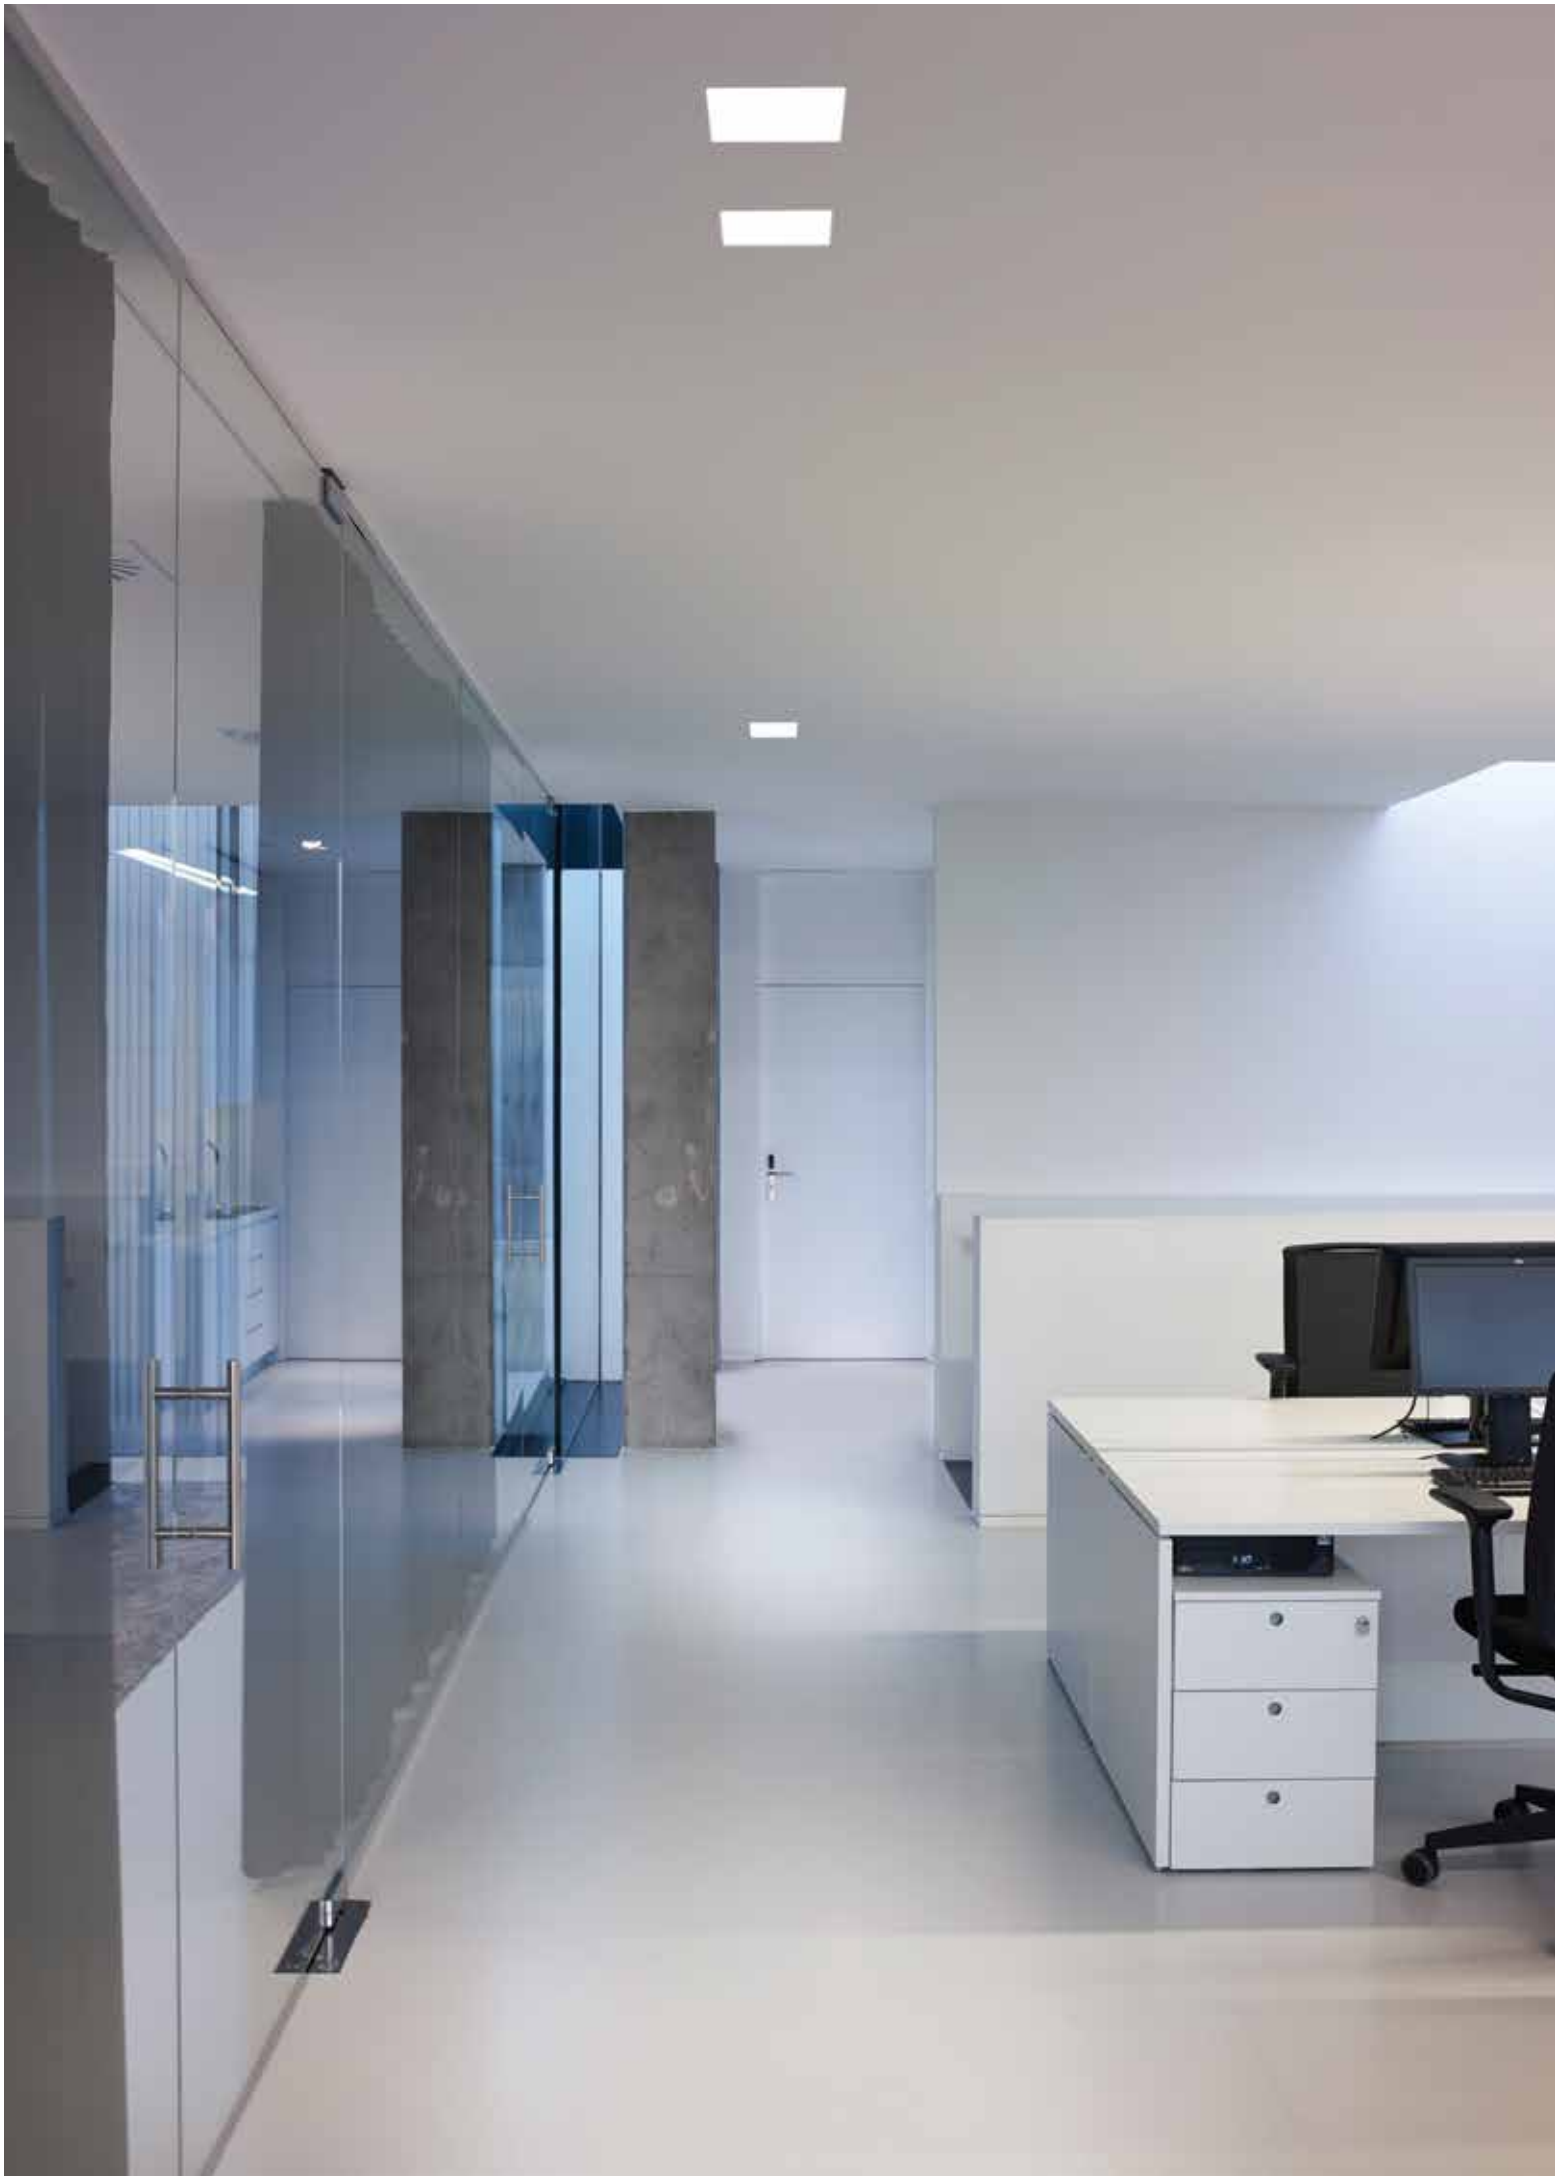


Maestro S LED



197 x 197 x 100 max.35

MAESTRO S LED 155
202 96 11 83
INCL.PC SBL
INCL.LED CLUSTER 6,3W / CRI>80 / 3000K / 840lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz
INCL.MOUNTING BOX


CE 1,2 IP20



197 x 336 x 100 max.35

MAESTRO S LED 295
202 96 12 83
INCL.PC SBL
INCL.LED CLUSTER 22,1W / CRI>80 / 3000K / 2940lm
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz
INCL.MOUNTING BOX


CE 1,9 IP20

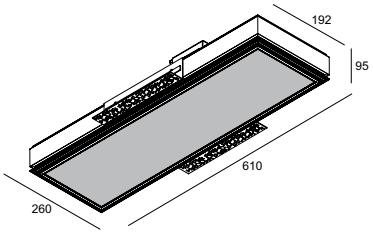

197 x 616 x 100 max.35

MAESTRO S LED 575
202 96 14 83
INCL.PC SBL
INCL.LED CLUSTER 44,1W / CRI>80 / 3000K / 5880lm
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz
INCL.MOUNTING BOX

CE 2,6 IP20

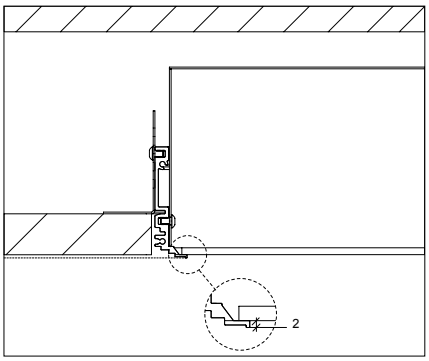



MAESTRO s LED 295

FULL INFO / PAG TEC


Requirements

INSTALLATION

MINIGRID IN 1 MOUNTING KIT
202 71 95 01

130 x 130 max.25


0,5



MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L

145 x 145 max.25


0,9



GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110

0,7



FULL INFO / PAG TEC


Options

INSTALLATION		
PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120
PLASTERKIT 188 **207 01 188**	125 x 173	80 x 115

led

Streamer Trimless W





KIT x 135


STREAMER TRIMLESS W M DIM1 ◇
202 591 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.2 x POWERLED WHITE 7W / 3000K ● / 680lm
INCL.LED POWER SUPPLY 350mA-DC ED1
120-240V / 50-60Hz

CE 1,0 IP20

REQUIREMENTS
MINIGRID IN 1 MOUNTING KIT
202 71 95 01
or
MINIGRID IN 1 MOUNTING KIT L
202 71 95 01 L





KIT x 175


STREAMER TRIMLESS W L350 DIM1 ◇
202 591 312 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 7W / 3000K ● / 680lm
INCL.LED POWER SUPPLY 350mA-DC ED1

STREAMER TRIMLESS W L500 DIM1 ◇
202 591 322 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 10W / 3000K ● / 958lm
INCL.LED POWER SUPPLY 500mA-DC ED1


FIXED
DIMMING BY 1-10V
120-240V / 50-60Hz

CE 1,7 IP20

REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT L
202 61 95 01 L

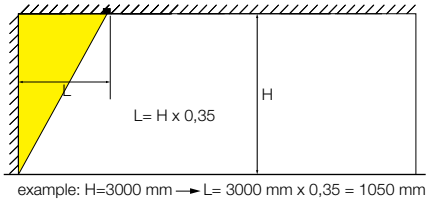

example: H=3000 mm → L= 3000 mm x 0,35 = 1050 mm

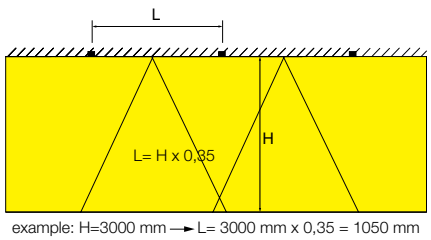


example: H=3000 mm → L= 3000 mm x 0,35 = 1050 mm

led

Streamer W





110 x 62 x 90 max.25


STREAMER W S DIM1 ◇
202 592 112 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.1 x POWERLED WHITE 10W / 3000K / 958lm
INCL.LED POWER SUPPLY 500mA-DC ED1
120-240V / 50-60Hz

□ CE 0,6 IP20

OPTIONS
PLASTERKIT 188





108 x 108 x 135 max.25


STREAMER W M DIM1 ◇
202 592 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.2 x POWERLED WHITE 7W / 3000K / 680lm
INCL.LED POWER SUPPLY 350mA-DC ED1
120-240V / 50-60Hz

□ CE 1,1 IP20

OPTIONS
PLASTERKIT 126





164 x 164 x 175 max.25

STREAMER W L350 DIM1 ◇
202 592 312 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 7W / 3000K / 680lm
INCL.LED POWER SUPPLY 350mA-DC ED1

STREAMER W L500 DIM1 ◇
202 592 322 ED1 ◇
◇ = W
INCL.3 x POWERLED WHITE 10W / 3000K / 958lm
INCL.LED POWER SUPPLY 500mA-DC ED1

FIXED
DIMMING BY 1-10V
120-240V / 50-60Hz

□ CE 2,0 IP20

OPTIONS
PLASTERKIT 120





FULL INFO / PAG TEC


Requirements

INSTALLATION

MINIGRID IN 1 MOUNTING KIT
202 71 95 01

130 x 130 max.25


0,5



MINIGRID IN 1 MOUNTING KIT LARGE
202 71 95 01L

145 x 145 max.25


0,9



GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01

173 x 173 x 110 max.25


0,4



GRID IN TRIMLESS 1 MK L
202 61 95 01L

173 x 173 x 110

0,7




FULL INFO / PAG TEC


Options

PLASTERKIT 120 **202 62 99 01**	260 x 230	190 x 170
PLASTERKIT 126 **202 72 99 01**	215 x 215	120 x 120

led

Streamer Trimless

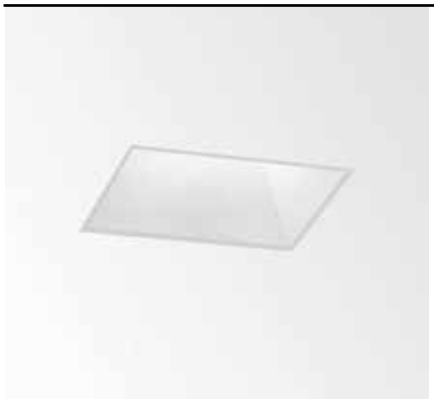



KIT x 100


STREAMER TRIMLESS M DIM1 ◇
202 581 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.POWERLED WHITE 10W / 3000K / 958lm
INCL.LED POWER SUPPLY 500mA-DC ED1
120-240V / 50-60Hz

0,4 IP20

REQUIREMENTS
MINIGRID IN 1 MOUNTING KIT
202 71 95 01
or
MINIGRID IN 1 MOUNTING KIT L
202 71 95 01 L





KIT x 165

STREAMER TRIMLESS L DIM1 ◇
202 581 312 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.LEDCLUSTER 27W / 3000K / 3680lm
INCL.LED POWER SUPPLY 1A-DC ED1
120-240V / 50-60Hz

1,9 IP20


REQUIREMENTS
GRID IN TRIMLESS 1 MOUNTING KIT
202 61 95 01
or
GRID IN TRIMLESS 1 MOUNTING KIT L
202 61 95 01 L


led

Streamer









108 x 108 x 100 max.25

STREAMER M DIM1 ◇
202 582 212 ED1 ◇
◇ = W

FIXED
DIMMING BY 1-10V
INCL.POWERLED WHITE 10W / 3000K / 958lm
INCL.LED POWER SUPPLY 500mA-DC ED1
120-240V / 50-60Hz

□ CE 0,4 IP20

OPTIONS
PLASTERKIT 126

164 x 164 x 165 max.25

STREAMER L DIM1 ◇
202 582 312 ED1 ◇
◇ = W
FIXED
DIMMING BY 1-10V
INCL.LEDCLUSTER 27W / 3000K / 3680lm
INCL.LED POWER SUPPLY 1A-DC ED1
120-240V / 50-60Hz

□ CE 2,2 IP20

OPTIONS
PLASTERKIT 120



GOVAERT & VANHOUTTE





FULL INFO / PAG TEC


Options

	C A B	
PLASTERKIT 172 **207 01 172**	390 x 390	275 x 275



DOWNFORCE R A + DOWNFORCE R GLASS B

Downforce R




260 x 150 max.25

DOWNFORCE R ◇
202 42 23 ◇
◇ = A / B / W
EXCL.DOWNFORCE R COVER
EXCL.DOWNFORCE R GLASS
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x TC-DEL 26W
2 x TC-TEL 32W
1,5 IP20 0,1

OPTIONS
PLASTERKIT 172

ACCESSORIES
DOWNFORCE R COVER
DOWNFORCE R GLASS




260 x 150 max.25

DOWNFORCE R EVG DIM 2 ◇
202 42 23 ED2 ◇
◇ = A / B / W
EXCL.DOWNFORCE R COVER
EXCL.DOWNFORCE R GLASS
DIMMING BY SWITCH DIM / DALI
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x TC-DEL 26W
2 x TC-TEL 32W
1,6 IP20 0,1

OPTIONS
PLASTERKIT 172

ACCESSORIES
DOWNFORCE R COVER
DOWNFORCE R GLASS




DOWNFORCE R COVER ◇
202 42 00 ◇
◇ = A / B / W
0,2



DOWNFORCE R A + COVER A



DOWNFORCE R EVG DIM 2 A + COVER B



DOWNFORCE R GLASS ◇
202 42 04 ◇
◇ = B / W
0,5



DOWNFORCE R W + GLASS B



DOWNFORCE R EVG DIM 2 W + GLASS W



GOVAERT & VANHOUTTE

FULL INFO / PAG TEC


Options

PLASTERKIT 173 **207 01 173**	350 x 350	275 x 275



DOWNFORCE S B + DOWNFORCE S COVER W + DOWNFORCE S RASTER W

Downforce S




up to 76% efficiency

260 x 260 x 160 max.25

DOWNFORCE S ◇
202 43 23 ◇
◇ = A / B / W
EXCL.DOWNFORCE S COVER
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x TC-DEL 26W
2 x TC-TEL 32W
CE 1,6 IP20 0,1

OPTIONS
PLASTERKIT 173

ACCESSORIES
DOWNFORCE S COVER
DOWNFORCE S COVER + DOWNFORCE S GLASS
DOWNFORCE S COVER + DOWNFORCE S RASTER
DOWNFORCE S COVER + DOWNFORCE S ANTI-GLARE




up to 76% efficiency

260 x 260 x 160 max.25

DOWNFORCE S EVG DIM 2 ◇
202 43 23 ED2 ◇
◇ = A / B / W
EXCL.DOWNFORCE S COVER
DIMMING BY SWITCH DIM / DALI
GX24q-3+q-4 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x TC-DEL 26W
2 x TC-TEL 32W
CE 1,7 IP20 0,1

OPTIONS
PLASTERKIT 173

ACCESSORIES
DOWNFORCE S COVER
DOWNFORCE S COVER + DOWNFORCE S GLASS
DOWNFORCE S COVER + DOWNFORCE S RASTER
DOWNFORCE S COVER + DOWNFORCE S ANTI-GLARE




DOWNFORCE S COVER ◇
202 43 00 ◇
◇ = A / B / W
0,2



DOWNFORCE S B + COVER W




DOWNFORCE S B + COVER W



DOWNFORCE S GLASS
202 43 04
0,4

DOWNFORCE S GLASS SBL
202 43 04 SBL
0,4




+ COVER ◇
202 43 00 ◇
◇ = A / B / W
0,2




DOWNFORCE S W + COVER W + GLASS



DOWNFORCE S EVG DIM 2 W + COVER A + GLASS



DOWNFORCE S RASTER ◇
202 43 07 ◇
◇ = A / B / W
0,1



+ COVER ◇
202 43 00 ◇
◇ = A / B / W
0,2



DOWNFORCE S W + COVER A + RASTER W



DOWNFORCE S EVG DIM 2 W + COVER A + RASTER W

SUPERNOVA
OVERVIEW


Supernova XS **RECESSED**


Supernova **TRIMLESS**


Supernova **SEMI**


SBL


PRISMATIC


Full


Line

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/27489120 or www.deltalight.com/supernova-trimless

SUPERNOVA XS RECESSED



Ø 260 - Ø 330

ADJUSTABLE 0-8° / 360°

led SBL: FULL

PAG INT 271

SUPERNOVA TRIMLESS

Ø 675 - Ø 975 - Ø 1275

FIXED

led SBL: FULL & LINE

T16

PAG INT 273

SUPERNOVA SEMI



Ø 672 - Ø 972 - Ø 1272

FIXED

T16

PAG INT 277

SUPERNOVA



Ø 650 - Ø 950 - Ø 1250

FIXED

led SBL: FULL & LINE
PRISMA: LINE

T16

PAG INT 279





FULL INFO / PAG TEC


Requirements

INSTALLATION

SUPERNOVA XS RECESSED KIT 260
274 88 029

301 x 200 max.25


1,1





SUPERNOVA XS RECESSED KIT 330
274 88 036

371 x 200 max.25

1,4









led

Supernova XS Recessed





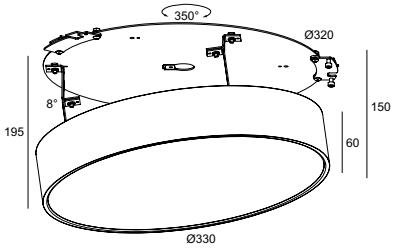

SUPERNOVA XS RECESSED 260 ◇
274 86 2515 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 15W / 3000K / 1580lm
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

CE 2,2 IP40

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 260
274 88 029

SUPERNOVA XS RECESSED 330 ◇
274 86 3224 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 22W / 3000K / 2600lm
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz

CE 2,7 IP40

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 330
274 88 036

1-10V DIM new

SUPERNOVA XS RECESSED 260 DIM1 ◇
274 86 2515 ED1 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 15W / 3000K / 1580lm
INCL.LED POWER SUPPLY 600mA-DC
DIMMING BY 1-10V
110-240V / 50-60Hz

CE 2,2 IP40

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 260
274 88 029

1-10V DIM new

SUPERNOVA XS RECESSED 330 DIM1 ◇
274 86 3224 ED1 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 22W / 3000K / 2600lm
INCL.LED POWER SUPPLY 1050mA-DC
DIMMING BY 1-10V
220-240V / 50-60Hz

CE 2,7 IP40

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 330
274 88 036

DALI DIM new

SUPERNOVA XS RECESSED 260 DIM5 ◇
274 86 2515 ED5 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 15W / 3000K / 1580lm
INCL.LED POWER SUPPLY 600mA-DC
DIMMING BY DALI
110-240V / 50-60Hz

CE 2,2 IP40

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 260
274 88 029

DALI DIM new

SUPERNOVA XS RECESSED 330 DIM5 ◇
274 86 3224 ED5 ◇
◇ = W
INCL.1 x PC SBL
ADJUSTABLE 0°/8°
INCL.LED CLUSTER 22W / 3000K / 2600lm
INCL.LED POWER SUPPLY 1050mA-DC
DIMMING BY DALI
220-240V / 50-60Hz

CE 2,7 IP40

REQUIREMENTS
SUPERNOVA XS RECESSED KIT 330
274 88 036

AWARD DESIGN PLUS light+building
reddot design award winner 2013
GOOD DESIGN award



ARCHION

FULL INFO / PAG TEC

Options

CONTROL GEAR

DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 20x SUPERNOVA 6528 EVG DIM1
max. 9x SUPERNOVA 9526 EVG DIM1
max. 4x SUPERNOVA 12528 EVG DIM1

FULL



1-10V DIM

new

LINE





1-10V DIM


DALI DIM


led


Supernova Trimless

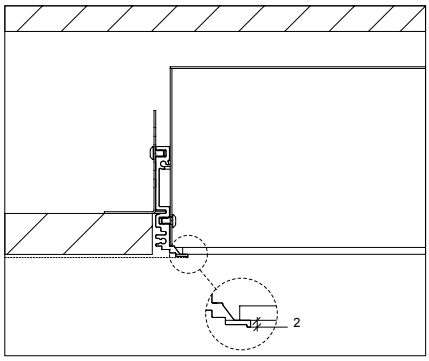

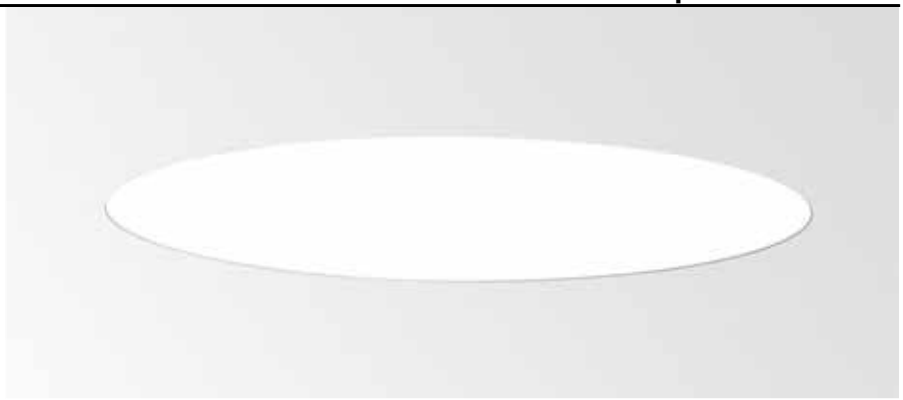








685 x 200 max.25	985 x 200 max.25	1285 x 200 max.25
6160lm	14140lm	28050lm
SUPERNOVA TRIMLESS 6528 EVG DIM1 **274 89 6528 ED1** INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 46W / 3000K INCL.1 x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 6,8 IP20 OPTIONS DALI TO 1-10V CONVERTER	**SUPERNOVA TRIMLESS 9528 EVG DIM1** **274 89 9528 ED1** INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 105W / 3000K INCL.2 x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 8,9 IP20 OPTIONS DALI TO 1-10V CONVERTER	**SUPERNOVA TRIMLESS 12528 EVG DIM1** **274 89 12528 ED1** INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 208W / 3000K INCL.3 x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 10,8 IP20 OPTIONS DALI TO 1-10V CONVERTER
7840lm	19600lm	31360lm
SUPERNOVA LINE TRIMLESS 6583 **274 89 06 83** INCL.PC SBL	**SUPERNOVA LINE TRIMLESS 9583** **274 89 09 83** INCL.PC SBL	**SUPERNOVA LINE TRIMLESS 12583** **274 89 12 83** INCL.PC SBL
SUPERNOVA LINE TRIMLESS 6583 DIM1 **274 89 06 83 ED1** INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE TRIMLESS 9583 DIM1** **274 89 09 83 ED1** INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE TRIMLESS 12583 DIM1** **274 89 12 83 ED1** INCL.PC SBL DIMMING BY 1-10V
SUPERNOVA LINE TRIMLESS 6583 DIM5 **274 89 06 83 ED5** INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE TRIMLESS 9583 DIM5** **274 89 09 83 ED5** INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE TRIMLESS 12583 DIM5** **274 89 12 83 ED5** INCL.PC SBL DIMMING BY DALI
INCL.LEDCLUSTER 59W / 3000K INCL.1 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 6,6 IP20	INCL.LEDCLUSTER 147W / 3000K INCL.2 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 8,9 IP20	INCL.LEDCLUSTER 235W / 3000K INCL.2 x LED POWER SUPPLY 2800mA-DC 220-240V / 0 I 50-60Hz CE 10,8 IP20


GOOD DESIGN award





ARCHION


Supernova Trimless

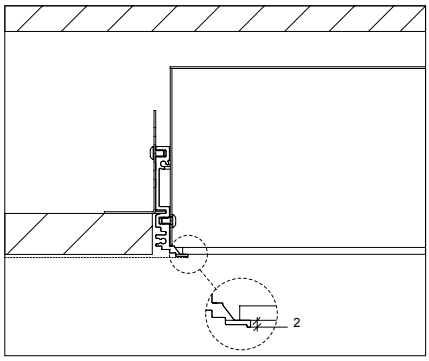

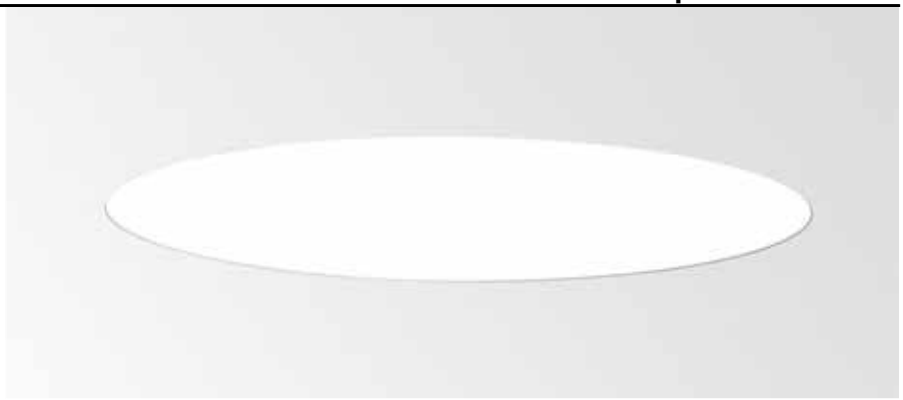







685 x 200 max.25

SUPERNOVA TRIMLESS 65
274 89 60
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI-EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
8,3 IP20 0,1

685 x 200 max.25

SUPERNOVA TRIMLESS 65 EVG DIM 2 ◇
274 89 60 ED2
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W
8,3 IP20 0,1

985 x 200 max.25

SUPERNOVA TRIMLESS 95
274 89 90
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI-EVG
4 x T16 14/24W
4 x T16 21/39W
10,4 IP20 0,1

985 x 200 max.25

SUPERNOVA TRIMLESS 95 EVG DIM 2 ◇
274 89 90 ED2
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W
10,4 IP20 0,1

1285 x 200 max.25

SUPERNOVA TRIMLESS 125
274 89 120
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 4 x 2 ~ 2 x 1~MULTI-EVG
2 x T16 14/24W
4 x T16 21/39W
4 x T16 28/54W
12,6 IP20 0,1

1285 x 200 max.25


SUPERNOVA TRIMLESS 125 EVG DIM 2 ◇
274 89 120 ED2
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 4 x 2 ~ 2 x 1~MULTI EVG DIM
2 x T16 14/24W
4 x T16 21/39W
4 x T16 28/54W
12,6 IP20 0,1

GOOD DESIGN award





CONSTRUCTORA JK SALCEDO


Supernova Semi

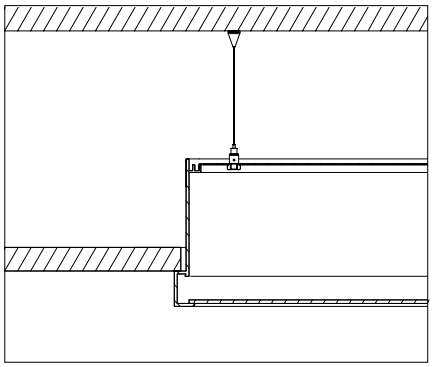









652 x 120

SUPERNOVA SEMI 65 ◇
274 88 60 ◇
◇ = B / W
INCL.PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI-EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
11,0 IP20 0,1

952 x 120

SUPERNOVA SEMI 95 ◇
274 88 90 ◇
◇ = B / W
INCL.PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI-EVG
4 x T16 14/24W
4 x T16 21/39W
15,5 IP20 0,1

1252 x 120

SUPERNOVA SEMI 125 ◇
274 88 120 ◇
◇ = B / W
INCL.PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI-EVG
2 x T16 14/24W
4 x T16 21/39W
4 x T16 28/54W
20,0 IP20 0,1

GOOD DESIGN award

FULL INFO / PAG TEC


Requirements

INSTALLATION

SUPERNOVA 65 RECESSED KIT
274 94 0710

735 x 200 max.25


3,1



SUPERNOVA 95 RECESSED KIT
274 94 1010

1035 x 200 max.25


3,1



SUPERNOVA 125 RECESSED KIT
274 94 1310

1335 x 200 max.25


4,6




FULL INFO / PAG TEC

Options

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²



CONTROL GEAR

DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 20x SUPERNOVA 6528 EVG DIM1
max. 9x SUPERNOVA 9526 EVG DIM1
max. 4x SUPERNOVA 12528 EVG DIM1

FULL



1-10V DIM

new

LINE





1-10V DIM


DALI DIM


Supernova



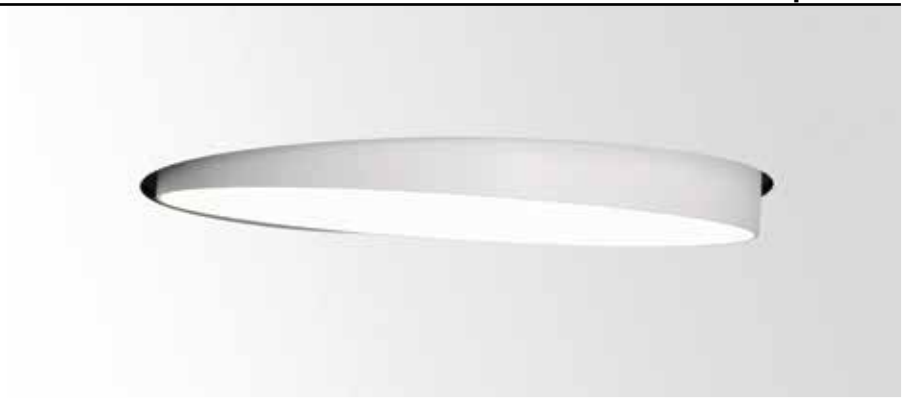







6160lm	14140lm	28050lm
SUPERNOVA 6528 EVG DIM 1 ◇ **274 95 6528 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 51W / 3000K INCL.1x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 8,7 IP20 0,1 REQUIREMENTS SUPERNOVA 65 RECESSED KIT 274 94 0710 OPTIONS SUSPENSION SET 18 3m ED1 DALI TO 1-10V CONVERTER	**SUPERNOVA 9528 EVG DIM 1** ◇ **274 95 9528 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 114W / 3000K INCL.2x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 12,7 IP20 0,1 REQUIREMENTS SUPERNOVA 95 RECESSED KIT 274 94 1010 OPTIONS SUSPENSION SET 18 3m ED1 DALI TO 1-10V CONVERTER	**SUPERNOVA 12528 EVG DIM 1** ◇ **274 95 12528 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 225W / 3000K INCL.3x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 16,6 IP20 0,1 REQUIREMENTS SUPERNOVA 125 RECESSED KIT 274 94 1310 OPTIONS SUSPENSION SET 18 3m ED1 DALI TO 1-10V CONVERTER
7840lm	19600lm	31360lm
SUPERNOVA LINE 6583 ◇ **274 95 06 83** ◇ ◇ = W INCL.PC SBL	**SUPERNOVA LINE 9583** ◇ **274 95 09 83** ◇ ◇ = W INCL.PC SBL	**SUPERNOVA LINE 12583** ◇ **274 95 12 83** ◇ ◇ = W INCL.PC SBL
SUPERNOVA LINE 6583 DIM1 ◇ **274 95 06 83 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE 9583 DIM1** ◇ **274 95 09 83 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE 12583 DIM1** ◇ **274 95 12 83 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V
SUPERNOVA LINE 6583 DIM5 ◇ **274 95 06 83 ED5** ◇ ◇ = W INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE 9583 DIM5** ◇ **274 95 09 83 ED5** ◇ ◇ = W INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE 12583 DIM5** ◇ **274 95 12 83 ED5** ◇ ◇ = W INCL.PC SBL DIMMING BY DALI
INCL.LEDCLUSTER 59W / 3000K INCL.1 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 8,7 IP20 REQUIREMENTS SUPERNOVA 65 RECESSED KIT 274 94 0710 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)	INCL.LEDCLUSTER 147W / 3000K INCL.2 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 12,7 IP20 REQUIREMENTS SUPERNOVA 95 RECESSED KIT 274 94 1010 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)	INCL.LEDCLUSTER 235W / 3000K INCL.2 x LED POWER SUPPLY 2800mA-DC 220-240V / 0 I 50-60Hz CE 16,6 IP20 REQUIREMENTS SUPERNOVA 125 RECESSED KIT 274 94 1310 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)

GOOD DESIGN award



FULL INFO / PAG TEC


Requirements

INSTALLATION

SUPERNOVA 65 RECESSED KIT
274 94 0710

735 x 200 max.25


3,1



SUPERNOVA 95 RECESSED KIT
274 94 1010

1035 x 200 max.25


3,1




FULL INFO / PAG TEC

Options

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²





SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²




Supernova Prismatic



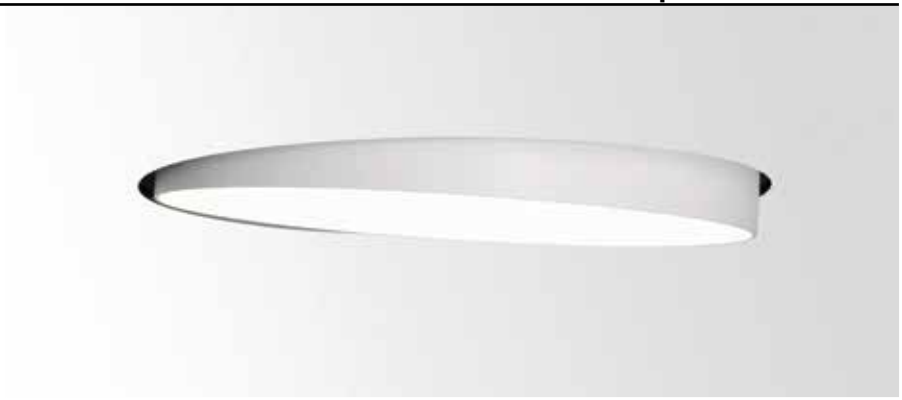





new

LINE



	7840lm	19600lm
	SUPERNOVA LINE 6583 PRISMATIC ◇ **274 95 06 83 PR ◇** ◇ = W INCL.PC PRISMATIC	**SUPERNOVA LINE 9583 PRISMATIC ◇** **274 95 09 83 PR ◇** ◇ = W INCL.PC PRISMATIC
1-10V DIM	**SUPERNOVA LINE 6583 PRISMATIC DIM1 ◇** **274 95 06 83 PR ED1 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY 1-10V	**SUPERNOVA LINE 9583 PRISMATIC DIM1 ◇** **274 95 09 83 PR ED1 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY 1-10V
DALI DIM	**SUPERNOVA LINE 6583 PRISMATIC DIM5 ◇** **274 95 06 83 PR ED5 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY DALI	**SUPERNOVA LINE 9583 PRISMATIC DIM5 ◇** **274 95 09 83 PR ED5 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY DALI
	INCL.LEDCLUSTER 59W / 3000K INCL.1 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 8,7 IP20 REQUIREMENTS SUPERNOVA 65 RECESSED KIT 274 94 0710 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)	INCL.LEDCLUSTER 147W / 3000K INCL.2 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 12,7 IP20 REQUIREMENTS SUPERNOVA 95 RECESSED KIT 274 94 1010 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)

GOOD DESIGN award



FULL INFO / PAG TEC


Requirements

INSTALLATION

SUPERNOVA 65 RECESSED KIT
274 94 0710

735 x 200 max.25


3,1



SUPERNOVA 95 RECESSED KIT
274 94 1010

1035 x 200 max.25


3,1



SUPERNOVA 125 RECESSED KIT
274 94 1310

1335 x 200 max.25


4,6




FULL INFO / PAG TEC

Options

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED2
328 18 43 ED2
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²





SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²





Supernova



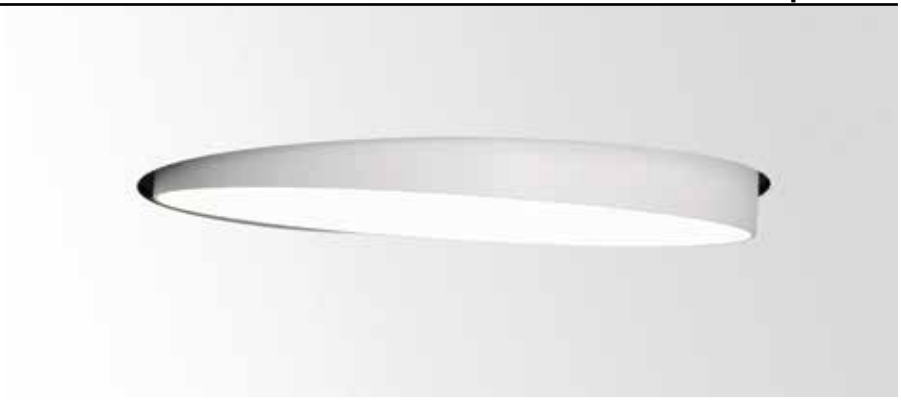







SUPERNOVA 65 ◇
274 95 60 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 50-60Hz / 1 x 3~MULTI EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
10,0 IP20 0,1

REQUIREMENTS
SUPERNOVA 65 RECESSED KIT
274 94 0710

OPTIONS
SUSPENSION SET 18 3m

SUPERNOVA 65 EVG DIM 2 ◇
274 95 60 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W
10,0 IP20 0,1

REQUIREMENTS
SUPERNOVA 65 RECESSED KIT
274 94 0710

OPTIONS
SUSPENSION SET 18 3m ED2

SUPERNOVA 95 ◇
274 95 90 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 50-60Hz / 4 x 2~MULTI EVG
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

REQUIREMENTS
SUPERNOVA 95 RECESSED KIT
274 94 1010

OPTIONS
SUSPENSION SET 18 3m

SUPERNOVA 95 EVG DIM 2 ◇
274 95 90 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

REQUIREMENTS
SUPERNOVA 95 RECESSED KIT
274 94 1010

OPTIONS
SUSPENSION SET 18 3m ED2

SUPERNOVA 125 ◇
274 95 120 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 50-60Hz / 5 x 2~MULTI EVG
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

REQUIREMENTS
SUPERNOVA 125 RECESSED KIT
274 94 1310

OPTIONS
SUSPENSION SET 18 3m

SUPERNOVA 125 EVG DIM 2 ◇
274 95 120 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 50-60Hz / 5 x 2~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

REQUIREMENTS
SUPERNOVA 125 RECESSED KIT
274 94 1310

OPTIONS
SUSPENSION SET 18 3m ED2

GOOD DESIGN award





SOM ARCHITECTEN








MERTI

FULL INFO / PAG TEC

Options


INSTALLATION

C
A B

SUPERDOME RECESSED KIT
321 96 1036


1105 x 1105 x 350 max.12

4,2



CONTROL GEAR


DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 9 x SUPERDOME 9528 RECESSED EVG DIM1

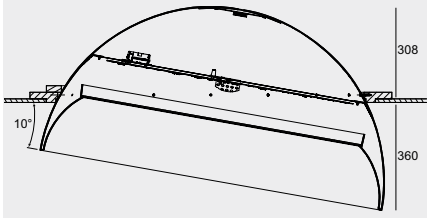

new

Superdome



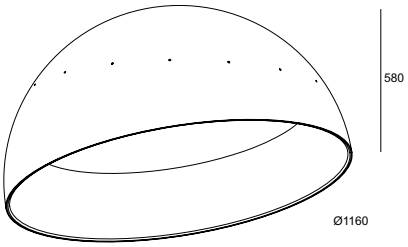

led

KIT x 350

SUPERDOME 9528 RECESSED EVG DIM1 ◇
321 96 9528 ED1 ◇
◇ = B-W / W-W
INCL.PC SBL
INCL.LEDCLUSTER 114W / 3000K / 14140lm
INCL.2 x LED POWER SUPPLY 350mA-DC
DIMMING BY 1-10V
120-240V / 50-60Hz

CE 29,0 IP20

OPTIONS
SUPERDOME RECESSED KIT
DALI TO 1-10V CONVERTER

KIT x 350

SUPERDOME E27 RECESSED ◇
321 96 327 ◇
◇ = B-W / W-W
INCL.PC SBL
E27Ls / 100-240V / 50-60Hz
3 x TC-TSE max.23W
3 x TCA-SE max.23W

CE 21,0 IP20 0,1

OPTIONS
SUPERDOME RECESSED KIT



ARCHION









INTERIOR
CEILING SURFACE / SUSPENDED

This chapter combines the ceiling surface mounted and ceiling suspended luminaires. These collections feature many carefully designed shapes for all preferences and purposes. We invite you to discover new levels in flexibility, exciting materials, colours and shapes, a wide variety of lighting effects and industry leading efficiency, enabling you to upgrade any project with customized lighting concepts.

www.deltalight.com/ICS / www.deltalight.com/ICP



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/321959528ED1 or www.deltalight.com/superdome



INDEX

INTERIOR CEILING SURFACE / SUSPENDED


TWEETER ON
INT 299


BOXTER
INT 332


MIDISPY ON
INT 361


SUPERNOVA XS
INT 386


CREDO
INT 422


GRAND PRIX
INT 443


YOU-TURN ON
INT 308


MINIGRID ON SI REO
INT 337


SPY ON
INT 364


SUPERNOVA
INT 391


PHANTOM II
INT 425


GIBBO
INT 445


BOXY R
INT 319


GRID ON SI REO
INT 339


MAXISPY ON
INT 371


SUPERNOVA SR
INT 407


RAND
INT 427


GABOO
INT 447


BOXY XL R
INT 323


LINK
INT 345


BOOSTER
INT 372


SPOTNIC
INT 412


OUTFIT
INT 435


McDELTA
INT 449


BOXY
INT 325


ULTRA
INT 353


SUPER-OH!
INT 377


SUNSET
INT 416


FLAC
INT 439


NYX
INT 449


BOXY XL S
INT 331


TWENTY-7
INT 359


PITCH
INT 383



SPATIO
INT 419


SFINKS
INT 441


HUSK
INT 451



METRONOME
INT 455



MICROLINE 30+
INT 485



JETI
INT 468



B-LINER 65
INT 487



BE COOL
INT 475



HEADLINER 75
INT 487



NEBEL
INT 477



NOBODY
INT 489



CUMULUS
INT 481

ENDLESS
INT 490



SUPERDOME
INT 483



LAY OUT
INT 495

B-LINER 65	INT 487
BE COOL®	INT 475
BOOSTER	INT 372
BOXTER	INT 332
BOXY	INT 324
BOXY R	INT 319
BOXY XL R	INT 323
BOXY XL S	INT 331
CREDO	INT 422
CUMULUS	INT 481
ENDLESS	INT 490
FLAC	INT 439
GABOO C	INT 447
GIBBO	INT 445
GRAND PRIX	INT 443
GRID ON	INT 339
HEADLINER 75	INT 487
HUSK	INT 451
JETI	INT 468
JETI LUSTER	INT 473
LAY OUT	INT 495
LINK	INT 345
MAXISPY ON	INT 371
MCDELTA	INT 449
METRONOME	INT 455
MICROLINE 30+	INT 485
MIDISPY ON	INT 361
MINIGRID ON SI REO	INT 337
NEBEL	INT 477
NOBODY	INT 489
NYX	INT 449
OUTFIT	INT 435
PHANTOM II	INT 425
PITCH	INT 383
RAND	INT 425
SFINKS	INT 441
SPATIO	INT 419
SPOTNIC	INT 412
SPY ON	INT 365
SUNSET	INT 416
SUPER-OH!	INT 377
SUPERDOME	INT 483
SUPERNOVA	INT 386
TWEETER ON	INT 299
TWENTY-7 ON	INT 359
ULTRA C	INT 357
ULTRA	INT 353
YOU-TURN ON	INT 308



GRAUX & BAEYENS

FULL INFO / PAG 50

Accessories

TWEETER CLIP ◇ Ø45 / H13
201 03 00 ◇
◇ = B / W



HONEYCOMB 40 ◇ Ø40
201 03 01 ◇
◇ = ALU / B



LINEAR SPREAD LENS 40 Ø40
201 03 02



SPREAD LENS 40 Ø40
201 03 03



SOFTENING LENS 40 Ø40
201 03 04




GLASS SBL 40 Ø40
201 03 05





TWEETER ON REO + TWEETER CLIP B +HONEYCOMB 40 ALU

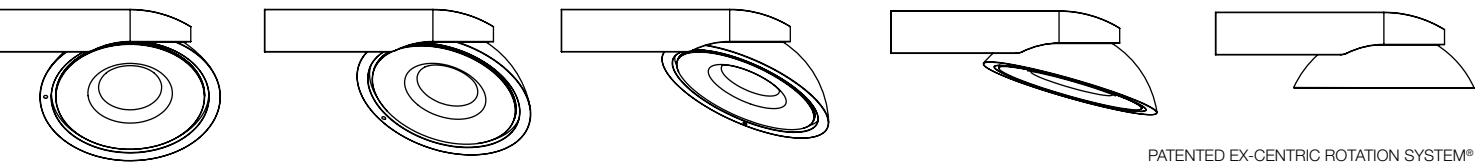



PATENTED EX-CENTRIC ROTATION SYSTEM®

Tweeter On







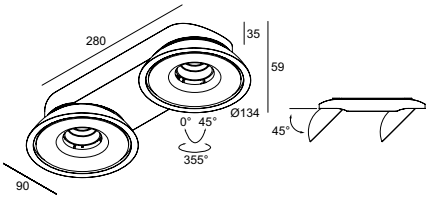

	CRI > 80	CRI > 90
4000K ●		
	ON REQUEST	
3000K ●	958lm (10W)	803lm (10W)
REFLECTOR FL-33°	**TWEETER ON 1 REO 3033** ◇ **206 31 12122** ◇ ◇ = W	**TWEETER ON 1 REO 3033-9** ◇ **206 31 129122** ◇ ◇ = W
REFLECTOR WFL-50°	**TWEETER ON 1 REO 3050** ◇ **206 31 12132** ◇ ◇ = W	**TWEETER ON 1 REO 3050-9** ◇ **206 31 129132** ◇ ◇ = W
2700K ●	876lm (10W)	742lm (10W)
REFLECTOR FL-33°	**TWEETER ON 1 REO 2733** ◇ **206 31 12123** ◇ ◇ = W	**TWEETER ON 1 REO 2733-9** ◇ **206 31 129123** ◇ ◇ = W
REFLECTOR WFL-50°	**TWEETER ON 1 REO 2750** ◇ **206 31 12133** ◇ ◇ = W	**TWEETER ON 1 REO 2750-9** ◇ **206 31 129133** ◇ ◇ = W

ADJUSTABLE 0-45° / 355°
INCL.1 x POWERLED WHITE 10W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

□ CE 0,7 IP20

ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40

	CRI > 80	CRI > 90
	ON REQUEST	
	2x 958lm (10W)	2x 803lm (10W)
	TWEETER ON 2 REO 3033 ◇ **206 31 12222** ◇ ◇ = W	**TWEETER ON 2 REO 3033-9** ◇ **206 31 129222** ◇ ◇ = W
	TWEETER ON 2 REO 3050 ◇ **206 31 12232** ◇ ◇ = W	**TWEETER ON 2 REO 3050-9** ◇ **206 31 129232** ◇ ◇ = W
	2x 876lm (10W)	2x 742lm (10W)
	TWEETER ON 2 REO 2733 ◇ **206 31 12223** ◇ ◇ = W	**TWEETER ON 2 REO 2733-9** ◇ **206 31 129223** ◇ ◇ = W
	TWEETER ON 2 REO 2750 ◇ **206 31 12233** ◇ ◇ = W	**TWEETER ON 2 REO 2750-9** ◇ **206 31 129233** ◇ ◇ = W

ADJUSTABLE 0-45° / 355°
INCL.2 x POWERLED WHITE 10W
INCL. DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

□ CE 1,1 IP20

ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40

play.deltalight.com/tweeter
play.deltalight.com/ers

PATENTED EX-CENTRIC ROTATION SYSTEM®

AWARD DESIGN PLUS light+building · top design award 2013 · reddot design award winner 2013 · if · interior innovation award 2013 Winner



FULL INFO / PAG TEC

Requirements

INSTALLATION	C A B
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41

FULL INFO / PAG 50

Accessories

TWEETER CLIP ◇ **201 03 00** ◇ ◇ = B / W	Ø45 / H13
HONEYCOMB 40 ◇ **201 03 01** ◇ ◇ = ALU / B	Ø40
LINEAR SPREAD LENS 40 **201 03 02**	Ø40
SPREAD LENS 40 **201 03 03**	Ø40
SOFTENING LENS 40 **201 03 04**	Ø40
GLASS SBL 40 **201 03 05**	Ø40


new


led

Tweeter On 4





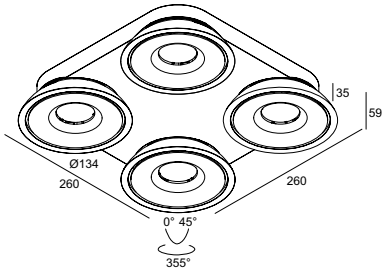

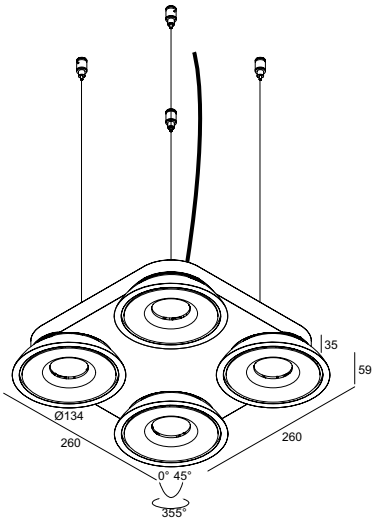

	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	4x 680lm (7W)	4x 566lm (7W)	4x 680lm (7W)	4x 566lm (7W)
REFLECTOR FL-33°	**TWEETER ON 4 REO 3033 ◇** **280 60 84 832 ◇** ◇ = W	**TWEETER ON 4 REO 3033-9 ◇** **280 60 84 932 ◇** ◇ = W	**TWEETER ON 4 C REO 3033 ◇** **280 61 84 832 ◇** ◇ = W	**TWEETER ON 4 C REO 3033-9 ◇** **280 61 84 932 ◇** ◇ = W
REFLECTOR WFL-50°	**TWEETER ON 4 REO 3050 ◇** **280 60 84 833 ◇** ◇ = W	**TWEETER ON 4 REO 3050-9 ◇** **280 60 84 933 ◇** ◇ = W	**TWEETER ON 4 C REO 3050 ◇** **280 61 84 833 ◇** ◇ = W	**TWEETER ON 4 C REO 3050-9 ◇** **280 61 84 933 ◇** ◇ = W
2700K	4x 618lm (7W)	4x 525lm (7W)	4x 618lm (7W)	4x 525lm (7W)
REFLECTOR FL-33°	**TWEETER ON 4 REO 2733 ◇** **280 60 84 822 ◇** ◇ = W	**TWEETER ON 4 REO 2733-9 ◇** **280 60 84 922 ◇** ◇ = W	**TWEETER ON 4 C REO 2733 ◇** **280 61 84 822 ◇** ◇ = W	**TWEETER ON 4 C REO 2733-9 ◇** **280 61 84 922 ◇** ◇ = W
REFLECTOR WFL-50°	**TWEETER ON 4 REO 2750 ◇** **280 60 84 823 ◇** ◇ = W	**TWEETER ON 4 REO 2750-9 ◇** **280 60 84 923 ◇** ◇ = W	**TWEETER ON 4 C REO 2750 ◇** **280 61 84 823 ◇** ◇ = W	**TWEETER ON 4 C REO 2750-9 ◇** **280 61 84 923 ◇** ◇ = W

ADJUSTABLE 0-45° / 355°
INCL.4 x POWERLED WHITE 7W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

□ CE 2,5 IP20

ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40

ADJUSTABLE 0-45° / 355°
INCL.4 x POWERLED WHITE 7W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
INCL.4 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 2 x 0.75mm²
220-240V / 50-60Hz

□ CE 2,8 IP20

REQUIREMENTS
CABLE BASE R / S

ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40


play.deltalight.com/ers

PATENTED EX-CENTRIC ROTATION SYSTEM®



REID-SENEPART ARCHITECTEN



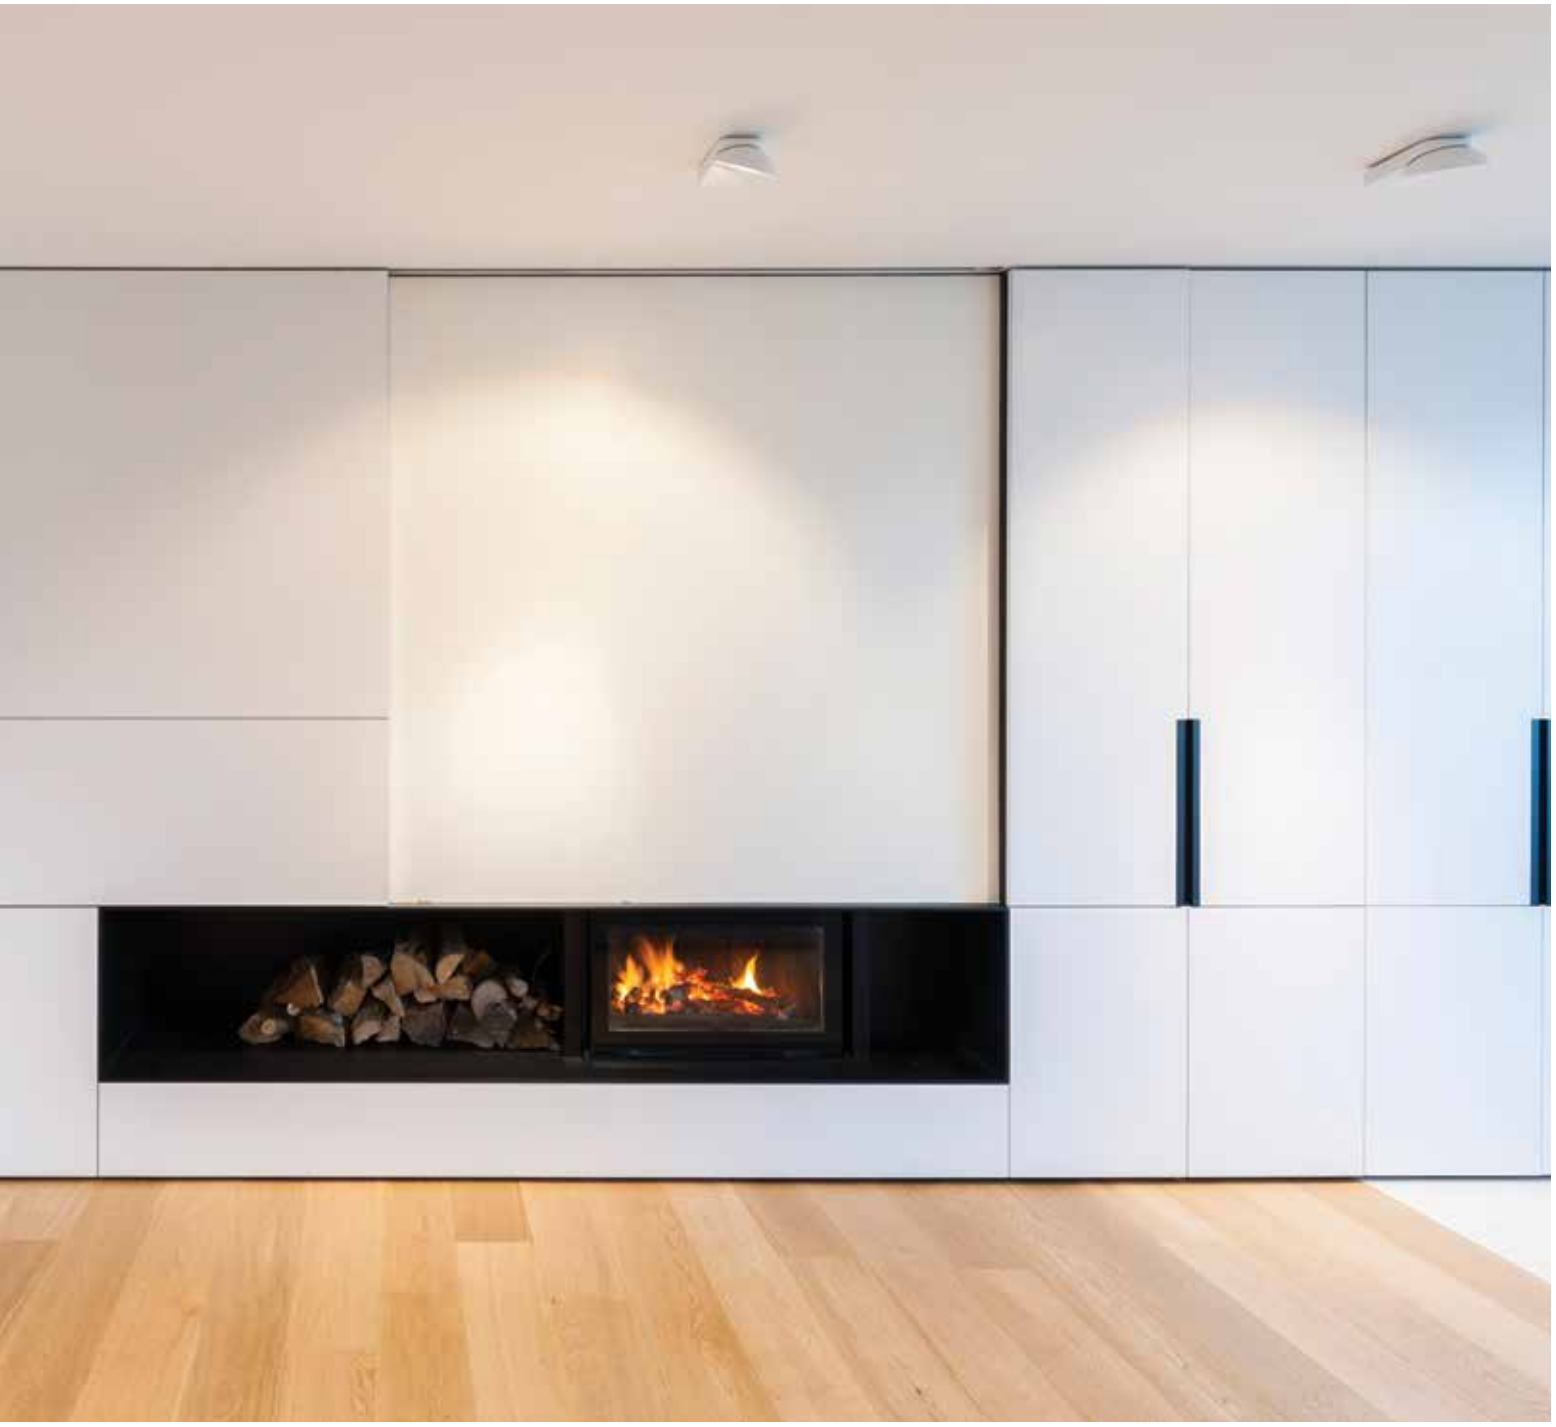





IN.ARCHITECTUUR



THE OFF/ WHITE COMPANY


Requirements

INSTALLATION

BOWL GLASS CLEAR
286 67 01

BOWL GLASS AMBER
286 67 02


BOWL GLASS OPAL WHITE
286 67 03



0,7

Tweeter On 1 BL





TWEETER ON 1 BL 830 ◇
206 33 8183 ◇
◇ = W
INCL.1 x POWERLED WHITE 9,3W / 3000K / 945lm

TWEETER ON 1 BL 827 ◇
206 33 8182 ◇
◇ = W
INCL.1 x POWERLED WHITE 9,3W / 2700K / 893lm

ADJUSTABLE 0-45° / 355°
INCL.LED POWER SUPPLY 500mA-DC
EXCL.BOWL GLASS
120-240V / 50-60Hz
MAINS DIMMING (FE)


0,8 IP20

REQUIREMENT
BOWL GLASS CLEAR
286 67 01
or
BOWL GLASS AMBER
286 67 02
or
BOWL GLASS OPAL WHITE
286 67 03

PATENTED EX-CENTRIC ROTATION SYSTEM®

Tweeter On 1 FRL





TWEETER ON 1 FRL 830 DIM1 ◇
206 31 21 83 ED1 ◇
◇ = W
INCL.1 x POWERLED WHITE 18W / 3000K / 1930lm

TWEETER ON 1 FRL 827 DIM1 ◇
206 31 21 82 ED1 ◇
◇ = W
INCL.1 x POWERLED WHITE 18W / 2700K / 1787lm

ADJUSTABLE 0-45° / 355°
INCL.1 x FRESNELL LENS 35°
INCL.LED POWER SUPPLY 500mA-DC
120-277V / 50-60Hz
DIMMING BY 1-10V

1,2 IP20

PATENTED EX-CENTRIC ROTATION SYSTEM®


BURO II & ARCHI-I

FULL INFO / PAG TEC


Accessories

OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	


YOU-TURN OPTO + OPTO CLIP + SOFTENING LENS 78

You-Turn On 111






YOU-TURN ON 111 T50 ◇
313 02 12 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
IP20 1,0

led

You-Turn On Reo





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	958lm (10W)	803lm (10W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 3033 ◇** **313 020 12122 ◇** ◇ = W-B	**YOU-TURN ON REO 3033-9 ◇** **313 020 129122 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 3050 ◇** **313 020 12132 ◇** ◇ = W-B	**YOU-TURN ON REO 3050-9 ◇** **313 020 129132 ◇** ◇ = W-B
REFLECTOR WFL-55°		
2700K	876lm (10W)	742lm (10W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 2733 ◇** **313 020 12123 ◇** ◇ = W-B	**YOU-TURN ON REO 2733-9 ◇** **313 020 129123 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 2750 ◇** **313 020 12133 ◇** ◇ = W-B	**YOU-TURN ON REO 2750-9 ◇** **313 020 129133 ◇** ◇ = W-B
REFLECTOR WFL-55°		


ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 10W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,0 IP20

led

You-Turn On Opto





CRI > 80	CRI > 90
ON REQUEST	
958lm (10W)	803lm (10W)
YOU-TURN ON OPTO 3015 ◇ **313 021 12112 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3015-9 ◇** **313 021 129112 ◇** ◇ = W-B
YOU-TURN ON OPTO 3033 ◇ **313 021 12122 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3033-9 ◇** **313 021 129122 ◇** ◇ = W-B
YOU-TURN ON OPTO 3055 ◇ **313 021 12132 ◇** ◇ = W-B	**YOU-TURN ON OPTO 3055-9 ◇** **313 021 129132 ◇** ◇ = W-B
876lm (10W)	742lm (10W)
YOU-TURN ON OPTO 2715 ◇ **313 021 12113 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2715-9 ◇** **313 021 129113 ◇** ◇ = W-B
YOU-TURN ON OPTO 2733 ◇ **313 021 12123 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2733-9 ◇** **313 021 129123 ◇** ◇ = W-B
YOU-TURN ON OPTO 2755 ◇ **313 021 12133 ◇** ◇ = W-B	**YOU-TURN ON OPTO 2755-9 ◇** **313 021 129133 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 10W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,1 IP20

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

play.deltalight.com/youturn

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta



RADEK TEICHMAN, JESTICO + WHILES





PAULOKAA DESIGN



FULL INFO / PAG TEC

Accessories


OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	



YOU-TURN OPTO + OPTO CL.P + HONEYCOMB 78

You-Turn On Reo 20





25W
1900-2600lm


	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	2592lm (25W)	2200lm (25W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 20 83033 ◇** **313 020 21 832 ◇** ◇ = W-B	**YOU-TURN ON REO 20 93033 ◇** **313 020 21 932 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 20 83050 ◇** **313 020 21 833 ◇** ◇ = W-B	**YOU-TURN ON REO 20 93050◇** **313 020 21 933 ◇** ◇ = W-B
REFLECTOR WFL-55°		
2700K	2399lm (25W)	2951lm (25W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 20 82733 ◇** **313 020 21 822 ◇** ◇ = W-B	**YOU-TURN ON REO 20 92733 ◇** **313 020 21 922 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 20 82750 ◇** **313 020 21 823 ◇** ◇ = W-B	**YOU-TURN ON REO 20 92750 ◇** **313 020 21 923 ◇** ◇ = W-B
REFLECTOR WFL-55°		

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 25W
INCL.DIMMABLE LED POWER SUPPLY 700mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

□ CE 1,5 IP20

You-Turn On Opto 20





CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2592lm (25W)	2200lm (25W)
YOU-TURN ON OPTO 20 83015 ◇ **313 021 21 831 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 93015 ◇** **313 021 21 931 ◇** ◇ = W-B
YOU-TURN ON OPTO 20 83033 ◇ **313 021 21 832 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 93033 ◇** **313 021 21 932 ◇** ◇ = W-B
YOU-TURN ON OPTO 20 83055 ◇ **313 021 21 833 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 93055 ◇** **313 021 21 933 ◇** ◇ = W-B
2399lm (25W)	2951lm (25W)
YOU-TURN ON OPTO 20 82715 ◇ **313 021 21 821 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 92715 ◇** **313 021 21 921 ◇** ◇ = W-B
YOU-TURN ON OPTO 20 82733 ◇ **313 021 21 822 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 92733 ◇** **313 021 21 922 ◇** ◇ = W-B
YOU-TURN ON OPTO 20 82755 ◇ **313 021 21 823 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 92755 ◇** **313 021 21 923 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 25W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 700mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

□ CE 1,6 IP20

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

play.deltalight.com/youturn

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012

GOOD DESIGN award Delta'11 Awards Silver Delta


ANARCHITECT


FULL INFO / PAG TEC


Accessories

OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	


YOU-TURN OPTO + OPTO CLIP + HONEYCOMB 78

You-Turn On Opto 30

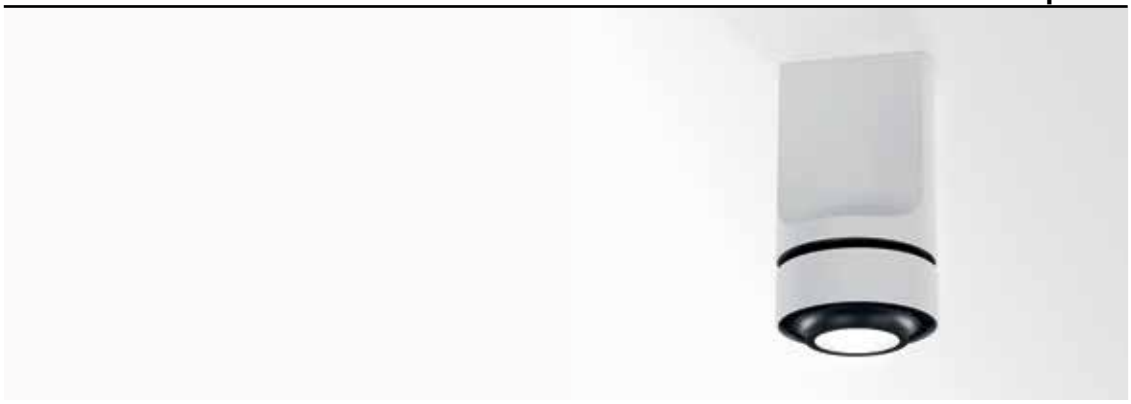



31,5W
2250-3000lm

1-10V DIM

DALI DIM

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	2981lm (31,5W)	2530lm (31,5W)	2981lm (31,5W)	2530lm (31,5W)
REFLECTOR SP-15°	**YOU-TURN ON OPTO 30 83015 DIM1◇** **313 031 21 831 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 93015 DIM1◇** **313 031 21 931 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 83015 DIM5◇** **313 031 21 831 ED5 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 93015 DIM5◇** **313 031 21 931 ED5 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN ON OPTO 30 83033 DIM1◇** **313 031 21 832 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 93033 DIM1◇** **313 031 21 932 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 83033 DIM5◇** **313 031 21 832 ED5 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 93033 DIM5◇** **313 031 21 932 ED5 ◇** ◇ = W-B
REFLECTOR WFL-55°	**YOU-TURN ON OPTO 30 83055 DIM1◇** **313 031 21 833 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 93055 DIM1◇** **313 031 21 933 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 83055 DIM5◇** **313 031 21 833 ED5 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 93055 DIM5◇** **313 031 21 933 ED5 ◇** ◇ = W-B
2700K	2759lm (31,5W)	2244lm (31,5W)	2759lm (31,5W)	2244lm (31,5W)
REFLECTOR SP-15°	**YOU-TURN ON OPTO 30 82715 DIM1◇** **313 031 21 821 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 92715 DIM1◇** **313 031 21 921 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 82715 DIM5◇** **313 031 21 821 ED5 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 92715 DIM5◇** **313 031 21 921 ED5 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN ON OPTO 30 82733 DIM1◇** **313 031 21 822 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 92733 DIM1◇** **313 031 21 922 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 82733 DIM5◇** **313 031 21 822 ED5 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 92733 DIM5◇** **313 031 21 922 ED5 ◇** ◇ = W-B
REFLECTOR WFL-55°	**YOU-TURN ON OPTO 30 82755 DIM1◇** **313 031 21 823 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 92755 DIM1◇** **313 031 21 923 ED1 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 82755 DIM5◇** **313 031 21 823 ED5 ◇** ◇ = W-B	**YOU-TURN ON OPTO 30 92755 DIM5◇** **313 031 21 923 ED5 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY 1-10V
110-240V / 50-60Hz

IP20

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY DALI
110-240V / 50-60Hz

IP20

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

*EFT / EQUALISING FILTER TECHNOLOGY


reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta

You-Turn On Reo 30





31,5W
2250-3000lm

I-10V DIM

DALI DIM

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	2981lm (31,5W)	2530lm (31,5W)	2981lm (31,5W)	2530lm (31,5W)
REFLECTOR FL-33°	**YOU-TURN ON REO 30 83033 DIM1 ◇** **313 030 21 832 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93033 DIM1 ◇** **313 030 21 932 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 83033 DIM5 ◇** **313 030 21 832 ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93033 DIM5 ◇** **313 030 21 932 ED5 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 30 83050 DIM1 ◇** **313 030 21 833 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93050 DIM1 ◇** **313 030 21 933 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 83050 DIM5 ◇** **313 030 21 833 ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93050 DIM5 ◇** **313 030 21 933 ED5 ◇** ◇ = W-B
2700K	2759lm (31,5W)	2244lm (31,5W)	2759lm (31,5W)	2244lm (31,5W)
REFLECTOR FL-33°	**YOU-TURN ON REO 30 82733 DIM1 ◇** **313 030 21 822 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92733 DIM1 ◇** **313 030 21 922 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 82733 DIM5 ◇** **313 030 21 822 ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92733 DIM5 ◇** **313 030 21 922 ED5 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 30 82750 DIM1 ◇** **313 030 21 823 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92750 DIM1 ◇** **313 030 21 923 ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 82750 DIM5 ◇** **313 030 21 823 ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92750 DIM5 ◇** **313 030 21 923 ED5 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY 1-10V
110-240V / 50-60Hz

IP20

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY DALI
110-240V / 50-60Hz

IP20


reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta

You-Turn On H111





YOU-TURN ON H111-35 ◇
313 02 1935 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W

IP20 1,0


YOU-TURN ON H111-70 ◇
313 02 1970 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W

IP20 1,0

You-Turn On HIT



up to 90% efficiency



YOU-TURN ON HIT-35 SP15 ◇
313 02 133 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-35 FL24 ◇
313 02 133 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-35 WFL43 ◇
313 02 133 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W

IP20 1,0

YOU-TURN ON HIT-70 SP15 ◇
313 02 137 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-70 FL24 ◇
313 02 137 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-70 WFL43 ◇
313 02 137 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W

IP20 1,0

reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta

FULL INFO / PAG TEC


Options

INSTALLATION

COVERSET R ◇
204 00 100 ◇ Ø100
◇ = ANO / W



SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

FULL INFO / PAG TEC

Accessories

BOXY HONEYCOMB ◇ Ø45 / H5
251 70 03 01 ◇
◇ = B / W



BOXY SOFTENING LENS ◇ Ø45 / H5
251 70 03 04 ◇
◇ = B / W



BOXY GLASS SBL ◇ Ø45 / H5
251 70 03 05 ◇
◇ = B / W





BOXY R 83033 B-B / W-W



BOXY R 83033 B-B + BOXY HONEYCOMB

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K ●		
	ON REQUEST	
3000K ●	945lm (9,3W)	739lm (9,3W)
REFLECTOR FL-33°	**BOXY R 83033** ◇ **251 70 81832** ◇ ◇ = B-B / B MMAT / W-B / W-W	**BOXY R 93033** ◇ **251 70 81932** ◇ ◇ = B-B / B-MMAT / W-B / W-W
2700K ●	893lm (9,3W)	698lm (9,3W)
REFLECTOR FL-33°	**BOXY R 82733** ◇ **251 70 81822** ◇ ◇ = B-B / B MMAT / W-B / W-W	**BOXY R 92733** ◇ **251 70 81922** ◇ ◇ = B-B / B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 9,3W
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz


IP53

OPTIONS
COVERSET R 100

ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL

Boxy R





DIM8

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
945lm (9,3W)	739lm (9,3W)
BOXY R 83033 DIM8 ◇ **251 70 81832 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY R 93033 DIM8 ◇** **251 70 81932 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W
893lm (9,3W)	698lm (9,3W)
BOXY R 82733 DIM8 ◇ **251 70 81822 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY R 92733 DIM8 ◇** **251 70 81922 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W


INCL.1 x POWERLED WHITE 9,3W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

□ CE 0,6 IP53

ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL

Boxy RB





DIM8

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
945lm (9,3W)	739lm (9,3W)
BOXY RB 83033 DIM8 ◇ **251 74 81832 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY RB 93033 DIM8 ◇** **251 74 81932 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W
893lm (9,3W)	698lm (9,3W)
BOXY RB 82733 DIM8 ◇ **251 74 81822 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY RB 92733 DIM8 ◇** **251 74 81922 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W


ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 9,3W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

□ CE 0,9 IP20

ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL

Boxy R C





DIM8

CRI > 80	CRI > 90 (> 97 ON REQUEST)
ON REQUEST	
945lm (9,3W)	739lm (9,3W)
BOXY R C 83033 DIM8 ◇ **251 75 81832 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY R C 93033 DIM8 ◇** **251 75 81932 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W
893lm (9,3W)	698lm (9,3W)
BOXY R C 82733 DIM8 ◇ **251 75 81822 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY R C 92733 DIM8 ◇** **251 75 81922 ED8 ◇** ◇ = B-B / B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 9,3W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
INCL.1 x CABLE 2 x 0.75mm²
INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m
110-240V / 50-60Hz

□ CE 0,9 IP20

OPTIONS
SUSPENSION + CONNECTION TRIMLESS

ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL









BOXY XL R W-B + HONEYCOMB 78

FULL INFO / PAG TEC


Options

INSTALLATION

COVERSET R ◇
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

FULL INFO / PAG TEC

Accessories

HONEYCOMB 78 ◇ Ø78
201 02 01 ◇
◇ = B



SOFTENING LENS 78 Ø78
201 02 04



GLASS SBL 78 Ø78
201 02 05



4000K

3000K

REFLECTOR FL-20°

REFLECTOR FL-37°


2700K

REFLECTOR FL-20°

REFLECTOR FL-37°

Boxy XL R





CRI > 80	CRI > 90
ON REQUEST	
1930lm (18W)	1639lm (18W)
BOXY XL R 83020 ◇ **251 71 21 831 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R 93020 ◇** **251 71 21 931 ◇** ◇ = B-B / B-MMAT / W-B / W-W
BOXY XL R 83037 ◇ **251 71 21 833 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R 93037 ◇** **251 71 21 933 ◇** ◇ = B-B / B-MMAT / W-B / W-W
1787lm (18W)	1453lm (18W)
BOXY XL R 82720 ◇ **251 71 21 821 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R 92720 ◇** **251 71 21 921 ◇** ◇ = B-B / B-MMAT / W-B / W-W
BOXY XL R 82737 ◇ **251 71 21 823 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R 92737 ◇** **251 71 21 923 ◇** ◇ = B-B / B-MMAT / W-B / W-W


INCL.1 x POWERLED WHITE 18W
INCL.LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

□ CE 1,5 IP20

ACCESSORIES
HONEYCOMB 78
SOFTENING LENS 78
GLASS SBL 78

Boxy XL R C



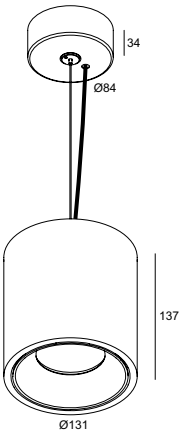

CRI > 80	CRI > 90
ON REQUEST	
1930lm (18W)	1639lm (18W)
BOXY XL R C 83020 ◇ **251 73 21 831 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R C 93020 ◇** **251 73 21 931 ◇** ◇ = B-B / B-MMAT / W-B / W-W
BOXY XL R C 83037 ◇ **251 73 21 833 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R C 93037 ◇** **251 73 21 933 ◇** ◇ = B-B / B-MMAT / W-B / W-W
1787lm (18W)	1453lm (18W)
BOXY XL R C 82720 ◇ **251 73 21 821 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R C 92720 ◇** **251 73 21 921 ◇** ◇ = B-B / B-MMAT / W-B / W-W
BOXY XL R C 82737 ◇ **251 73 21 823 ◇** ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL R C 92737 ◇** **251 73 21 923 ◇** ◇ = B-B / B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 18W
INCL.LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
INCL.1 x CABLE 2 x 0.75mm²
INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m
220-240V / 50-60Hz

◇ CE 1,8 IP20

OPTIONS
COVERSET R 90 - R 100
SUSPENSION + CONNECTION TRIMLESS

ACCESSORIES
HONEYCOMB 78
SOFTENING LENS 78
GLASS SBL 78



FULL INFO / PAG TEC

new Accessories

BOXY HONEYCOMB ◇ Ø45 / H5
251 70 03 01◇
◇ = B / W



BOXY SOFTENING LENS◇ Ø45 / H5
251 70 03 04◇
◇ = B / W



BOXY GLASS SBL ◇ Ø45 / H5
251 70 03 05◇
◇ = B / W







BOXY L+ LED 83033 W-W + BOXY HONEYCOMB B

Boxy L+ LED









	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K ●				
	ON REQUEST		ON REQUEST	
3000K ●	680lm (7W)	566lm (7W)	2x 680lm (7W)	2x 566lm (7W)
REFLECTOR FL-33°	**BOXY L+ LED 3033** ◇ **251 67 8122** ◇ ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY L+ LED 3033-9** ◇ **251 67 89122** ◇ ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY 2 L+ LED 3033** ◇ **251 67 8222** ◇ ◇ = A-A / B-B / B-MMAT / W-W	**BOXY 2 L+ LED 3033-9** ◇ **251 67 89222** ◇ ◇ = A-A / B-B / B-MMAT / W-W
2700K ●	618lm (7W)	525lm (7W)	2x 618lm (7W)	2x 525lm (7W)
REFLECTOR FL-33°	**BOXY L+ LED 2733** ◇ **251 67 8123** ◇ ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY L+ LED 2733-9** ◇ **251 67 89123** ◇ ◇ = A-A / B-B / B-MMAT / G-G / W-W	**BOXY 2 L+ LED 2733** ◇ **251 67 8223** ◇ ◇ = A-A / B-B / B-MMAT / W-W	**BOXY 2 L+ LED 2733-9** ◇ **251 67 89223** ◇ ◇ = A-A / B-B / B-MMAT / W-W

INCL.1 x POWERLED WHITE 7W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 0,6 IP53

ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL

INCL.2 x POWERLED WHITE 7W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,1 IP53

ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL



BOXY L+ LED 83033 A-A / B-B / G-G / W-W


FILIPDESLEE.COM

FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET S ◇
204 90 90 ◇ 90 x 90
◇ = ANO / W


CONTROL GEAR

TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

Boxy






BOXY ◇
251 67 20 ◇
◇ = ALU / B / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W
CE 0,3 IP20 0,5

OPTIONS
COVERSET S 90

Boxy +





BOXY + ◇
251 67 44 ◇
◇ = A / G / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 35W
CE 0,4 IP44 0,5


OPTIONS
COVERSET S 90

BOXY + 12V ◇
251 67 43 ◇
◇ = A / W
GU5.3 / 12V
1 x QR-C51 max.35W
CE 0,4 IP44 0,5

OPTIONS
COVERSET S 90
TRANSFO



LEVEL 3 INTERIEURARCHITECTEN

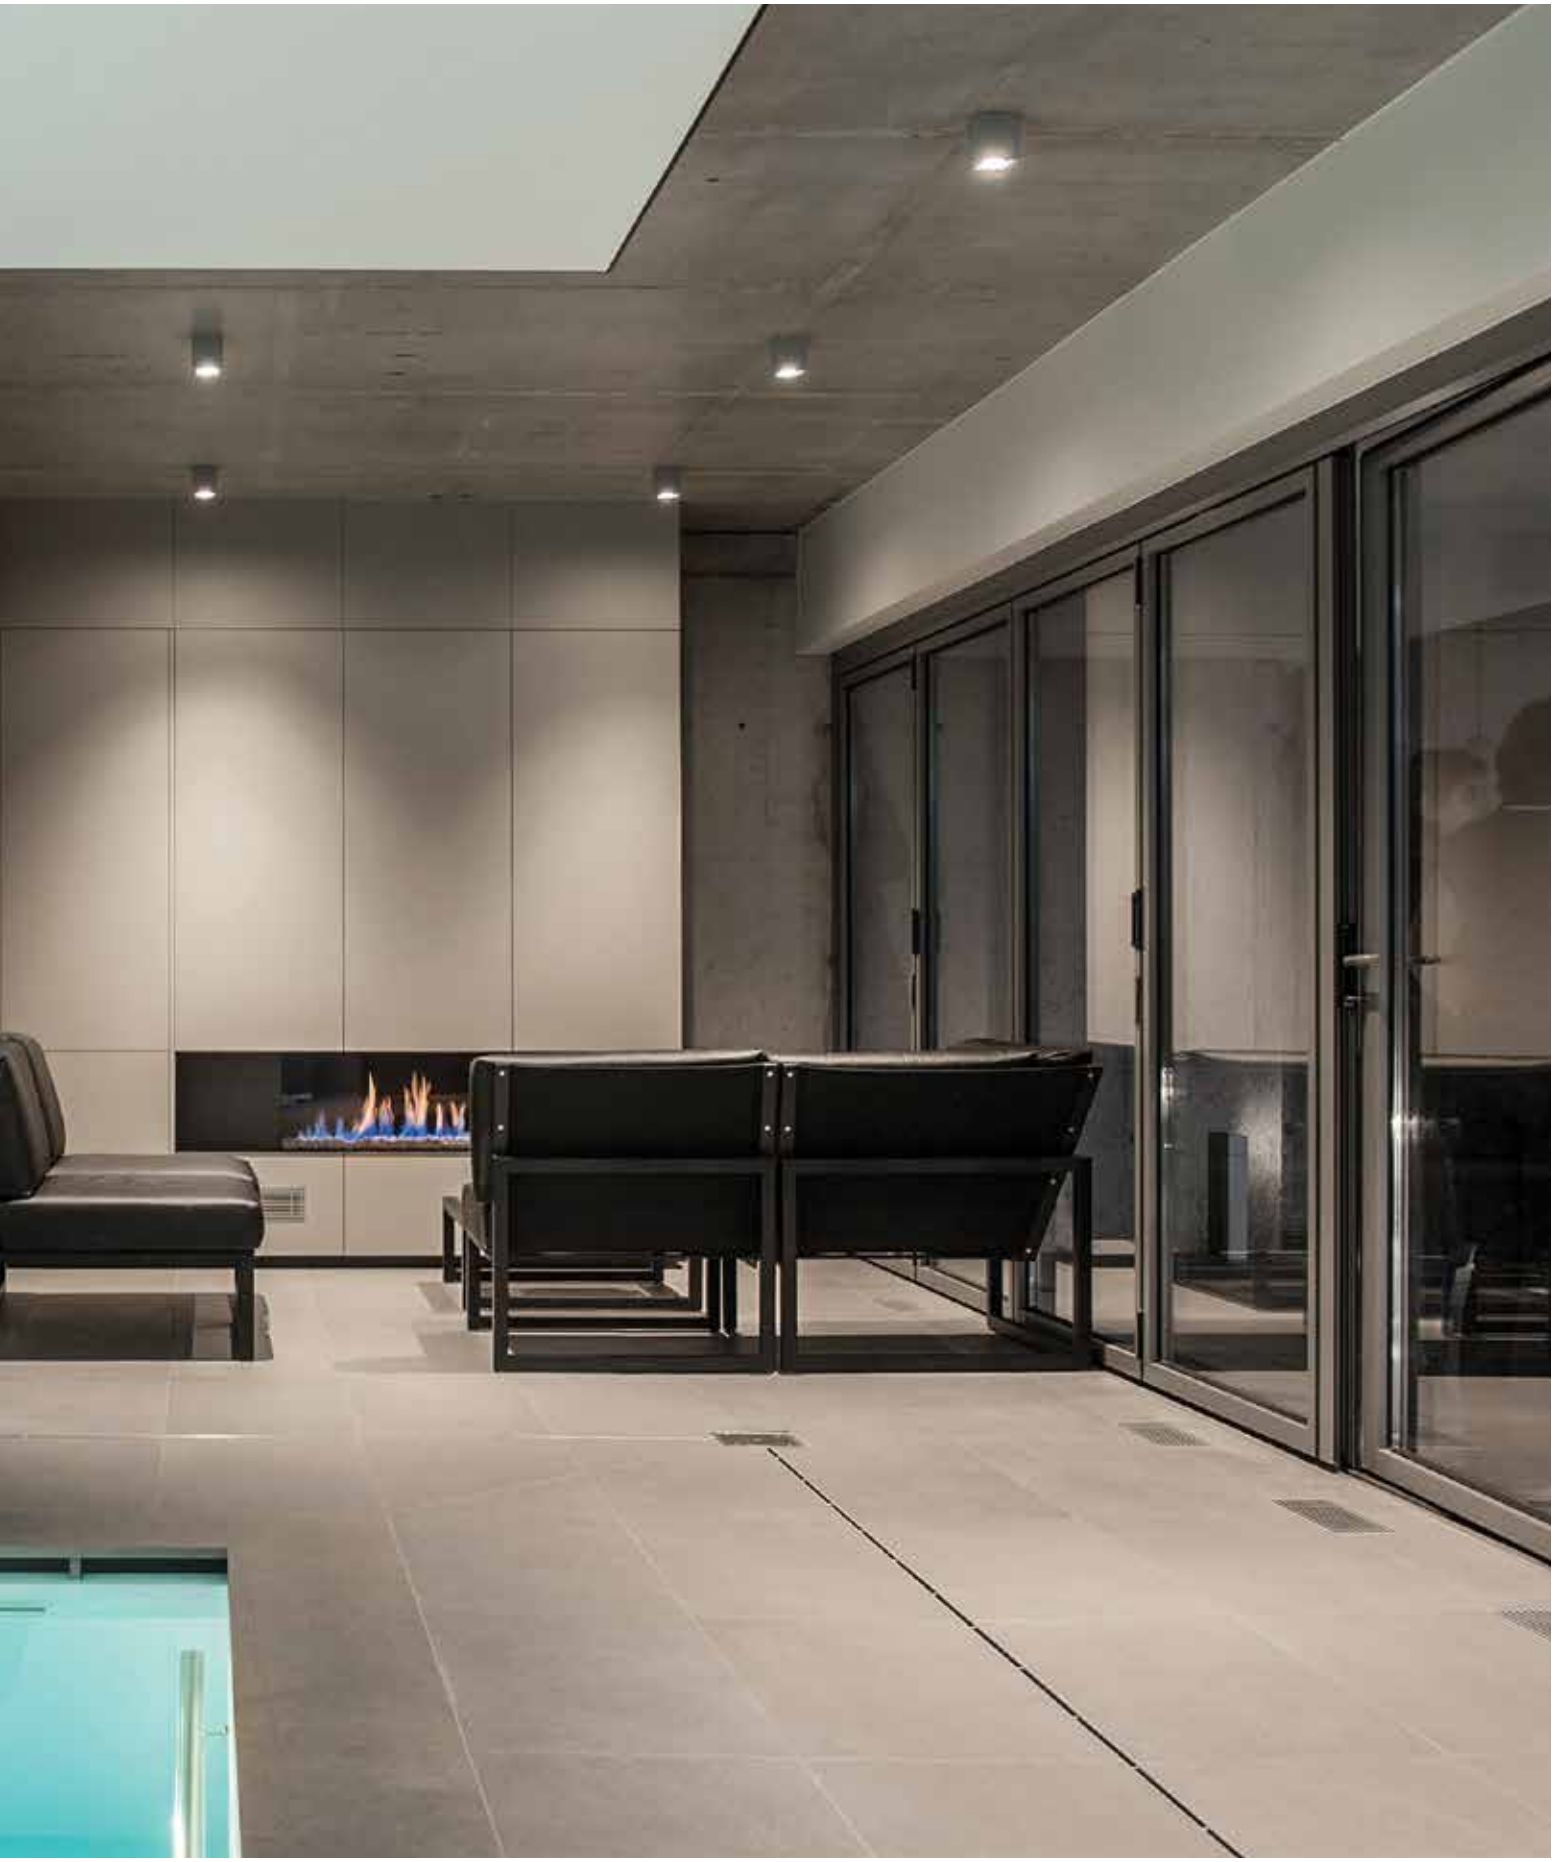




EGIDE MEERTENS

Accessories

HONEYCOMB 78 ◇ **201 02 01** ◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	
GLASS SBL 78 **201 02 05**	Ø78	

Boxy XL S





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-20°	**BOXY XL S 83020** ◇ **251 72 21 831** ◇ ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL S 93020** ◇ **251 72 21 931** ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFLECTOR FL-37°	**BOXY XL S 83037** ◇ **251 72 21 833** ◇ ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL S 93037** ◇ **251 72 21 933** ◇ ◇ = B-B / B-MMAT / W-B / W-W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-20°	**BOXY XL S 82720** ◇ **251 72 21 821** ◇ ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL S 92720** ◇ **251 72 21 921** ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFLECTOR FL-37°	**BOXY XL S 82737** ◇ **251 72 21 823** ◇ ◇ = B-B / B-MMAT / W-B / W-W	**BOXY XL S 92737** ◇ **251 72 21 923** ◇ ◇ = B-B / B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 18W
INCL.LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 1,6 IP20


ACCESSORIES
HONEYCOMB 78
SOFTENING LENS 78
GLASS SBL 78


led

Boxter LED









	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	680lm (7W)	566lm (7W)	2x 680lm (7W)	2x 566lm (7W)
REFLECTOR FL-33°	**BOXTER 1 LED 3033** ◇ **202 78 8122** ◇ ◇ = B-B / W-B	**BOXTER 1 LED 3033-9** ◇ **202 78 89122** ◇ ◇ = B-B / W-B	**BOXTER 2 LED 3033** ◇ **202 78 8222** ◇ ◇ = B-B / W-B	**BOXTER 2 LED 3033-9** ◇ **202 78 89222** ◇ ◇ = B-B / W-B
2700K	618lm (7W)	525lm (7W)	2x 618lm (7W)	2x 525lm (7W)
REFLECTOR FL-33°	**BOXTER 1 LED 2733** ◇ **202 78 8123** ◇ ◇ = B-B / W-B	**BOXTER 1 LED 2733-9** ◇ **202 78 89123** ◇ ◇ = B-B / W-B	**BOXTER 2 LED 2733** ◇ **202 78 8223** ◇ ◇ = B-B / W-B	**BOXTER 2 LED 2733-9** ◇ **202 78 89223** ◇ ◇ = B-B / W-B
	ADJUSTABLE 0°- 30°/360° INCL.1 x POWERLED WHITE 7W INCL. DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz CE 1,0 IP20		ADJUSTABLE 0°- 30°/360° INCL.2 x POWERLED WHITE 7W INCL. DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz CE 1,9 IP20	


reddot design award winner 2013




Boxter









BOXTER 1 50 ◇
202 78 55 01 ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 30°/360°
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.35W
1,0 IP20 0,5

BOXTER 2 50 ◇
202 78 55 02 ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 30°/360°
GU5.3 / 220-240V / 50-60Hz / TE
2 x QR-C51 max.35W
1,9 IP20 0,5


reddot design award winner 2013



GRAUX & BAEYENS







MINIGRID ON 1 BOX ◇
202 79 01 ◇
◇ = B / W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 1,1 IP20

REQUIREMENTS
MGRID SNAP-IN

MINIGRID ON 1 BOX DIM8 ◇
202 79 01 ED8 ◇
◇ = B / W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz


CE 1,1 IP20


REQUIREMENTS
MGRID SNAP-IN


Minigrid On SI Reo



MINIGRID ON 3 BOX W + 3 x MINIGRID SNAP-IN REO 83018 B



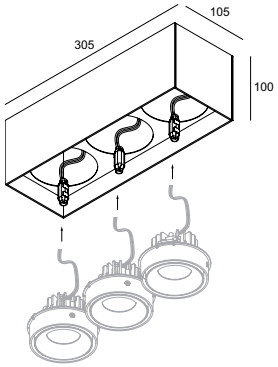



MINIGRID ON 2 BOX ◇
202 79 02 ◇
◇ = B / W
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

CE 1,4 IP20

REQUIREMENTS
2 x MGRID SNAP-IN

MINIGRID ON 3 BOX ◇
202 79 03 ◇
◇ = B / W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 1,7 IP20

REQUIREMENTS
3 x MGRID SNAP-IN

MINIGRID ON 2 BOX DIM8 ◇
202 79 02 ED8 ◇
◇ = B / W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

CE 1,4 IP20

REQUIREMENTS
2 x MGRID SNAP-IN

MINIGRID ON 3 BOX DIM8 ◇
202 79 03 ED8 ◇
◇ = B / W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

CE 1,7 IP20

REQUIREMENTS
3 x MGRID SNAP-IN

	CRI > 80	**CRI > 90**
4000K		
	ON REQUEST	
3000K	703lm (6,2W) 945lm (9,3W)	550lm (6,2W) 739lm (9,3W)
REFLECTOR SP-18°	**MINIGRID SNAP-IN REO 83018 ◇** **202 790 81831 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 93018 ◇** **202 790 81931 ◇** ◇ = B / W
REFLECTOR FL-33°	**MINIGRID SNAP-IN REO 83033 ◇** **202 790 81832 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 93033 ◇** **202 790 81932 ◇** ◇ = B / W
2700K	665lm (6,2W) 893lm (9,3W)	519lm (6,2W) 698lm (9,3W)
REFLECTOR SP-18°	**MINIGRID SNAP-IN REO 82718 ◇** **202 790 81821 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 92718 ◇** **202 790 81921 ◇** ◇ = B / W
REFLECTOR FL-33°	**MINIGRID SNAP-IN REO 82733 ◇** **202 790 81822 ◇** ◇ = B / W	**MINIGRID SNAP-IN REO 92733 ◇** **202 790 81922 ◇** ◇ = B / W

ADJUSTABLE 0°- 20° / 350°
INCL.1 x POWERLED WHITE 6,2-9,3W
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,3 IP20



MINIGRID ON 1 BOX W
+ MINIGRID SNAP-IN REO 83018 W



MINIGRID ON 1 BOX B
+ MINIGRID SNAP-IN REO 83018 W



MINIGRID ON 1 BOX B
+ MINIGRID SNAP-IN REO 83018 B



FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ **413 03 01 ◇** ◇ = B	Ø50	
LINEAR SPREAD LENS 50 **413 03 02**	Ø50	
SPREAD LENS 50 **413 03 03**	Ø50	
SOFTENING LENS 50 **413 03 04**	Ø50	
GLASS SBL 50 **413 03 05**	Ø50	





GRID IN 1 BOX W +
GRID SNAP-IN 83033 C + HONEYCOMB 50


Grid On SI



GRID ON 2 BOX W + 2 x GRID SNAP-IN 83033 W







GRID ON 1 BOX ◇
202 99 01 ◇
◇ = W / B
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 1,6 IP20

REQUIREMENTS
GRID SNAP-IN (◇ = B / W)

GRID ON 2 BOX ◇
202 99 02 ◇
◇ = W / B
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 2,7 IP20

REQUIREMENTS
2 x GRID SNAP-IN (◇ = B / W)

GRID ON 1 BOX 350mA ◇
202 99 011 ◇
◇ = W / B
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 1,6 IP20

REQUIREMENTS
GRID SNAP-IN (◇ = C)

GRID ON 2 BOX 350mA ◇
202 99 021 ◇
◇ = W / B
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 2,7 IP20

REQUIREMENTS
2 x GRID SNAP-IN (◇ = C)

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	1930lm (18W) (◇ = B / W) 1403lm (11,7W) (◇ = C)	1639lm (18W) (◇ = B / W) 1191lm (11,7W) (◇ = C)
REFLECTOR FL-33°	**GRID SNAP-IN 83033** ◇ **202 970 21 832** ◇ ◇ = B / C / W	**GRID SNAP-IN 93033** ◇ **202 970 21 932** ◇ ◇ = B / C / W
2700K	1787lm (18W) (◇ = B / W) 1299lm (11,7W) (◇ = C)	1453lm (18W) (◇ = B / W) 1056lm (11,7W) (◇ = C)
REFLECTOR FL-33°	**GRID SNAP-IN 82733** ◇ **202 970 21 822** ◇ ◇ = B / C / W	**GRID SNAP-IN 92733** ◇ **202 970 21 922** ◇ ◇ = B / C / W

ADJUSTABLE 0°- 45° / 355°
INCL.1 x POWERLED WHITE 18W (◇ = B / W)
INCL.1 x POWERLED WHITE 11,7W (◇ = C)
EXCL.LED POWER SUPPLY

CE 0,5 IP20

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50









new

Grid On









led


GRID ON 111 LED ◇
202 671 822 ◇
◇ = B / W
ADJUSTABLE 0°- 30° / 350°
IINCL.1 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE


CE 1,5 IP20

led

GRID ON 211 LED ◇
202 672 822 ◇
◇ = B / W
ADJUSTABLE 0°- 30° / 350°
INCL.2 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE

CE 2,5 IP20





GRID ON 111 ◇
202 671 11 ◇
◇ = B / W
ADJUSTABLE 0°- 30° / 350°
GX8.5//220-240V / 50-60Hz / TE

1 x QR-LP111 max.50W

CE 1,3 IP20 1,0

GRID ON 211 ◇
202 672 11 ◇
◇ = B / W
ADJUSTABLE 0°- 30° / 350°
GX8.5//220-240V / 50-60Hz / TE

2 x QR-LP111 max.50W

CE 2,1 IP20 1,0




P8 ARCHITECTEN

led

Link 1 Reo






	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**LINK 1 REO 3033** ◇ **315 41 8122** ◇ ◇ = W	**LINK 1 REO 3033-9** ◇ **315 41 89122** ◇ ◇ = W
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**LINK 1 REO 2733** ◇ **315 41 8123** ◇ ◇ = W	**LINK 1 REO 2733-9** ◇ **315 41 89123** ◇ ◇ = W

ADJUSTABLE 0°- 30° / 350°
INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,9 IP20

Link 1






LINK 111 ◇
315 11 00 ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W

CE 0,7 IP20 1,0


reddot design award winner 2011

GOOD DESIGN award

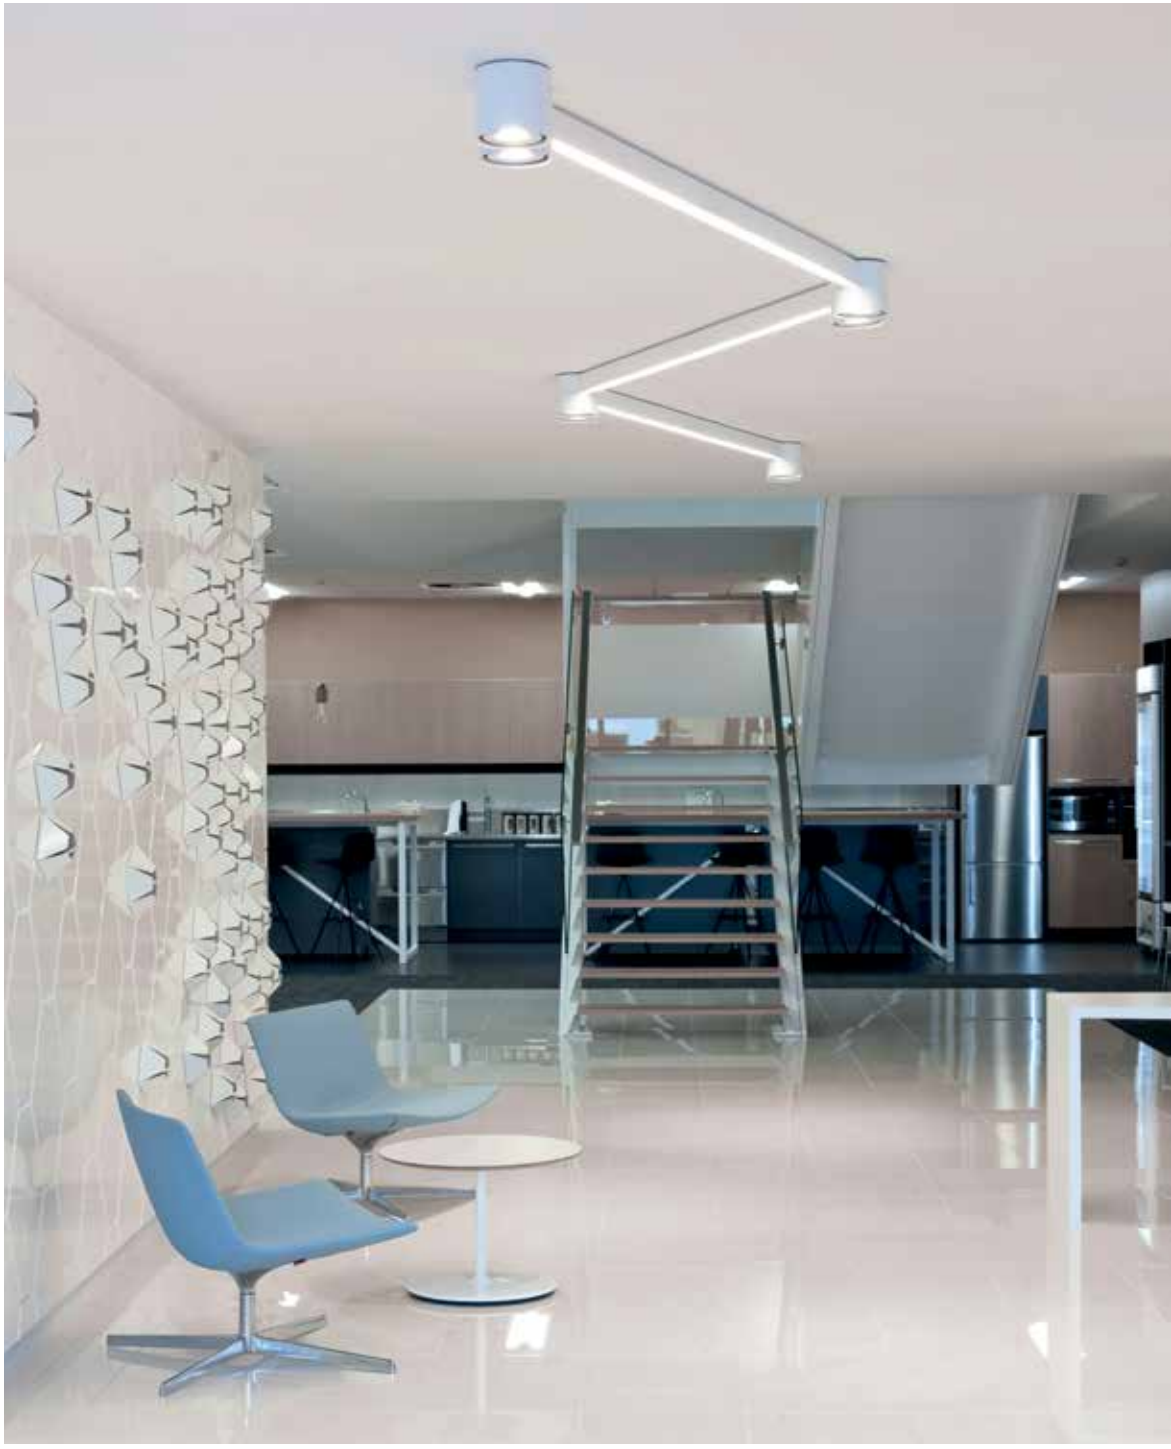

Link 2 Reo






	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2x 680lm (7W)	2x 566lm (7W)
REFLECTOR FL-33°	**LINK 2 REO 3033** ◇ **315 41 8222** ◇ ◇ = W	**LINK 2 REO 3033-9** ◇ **315 41 89222** ◇ ◇ = W
2700K	2x 618lm (7W)	2x 525lm (7W)
REFLECTOR FL-33°	**LINK 2 REO 2733** ◇ **315 41 8223** ◇ ◇ = W	**LINK 2 REO 2733-9** ◇ **315 41 89223** ◇ ◇ = W

ADJUSTABLE 0°- 30° / 350°
INCL.2 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,8 IP20

Link 2






LINK 211 ◇
315 12 00 ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 1,4 IP20 1,0

reddot design award winner 2011

GOOD DESIGN award

◀ Link Combinations see pages PRO 96-101

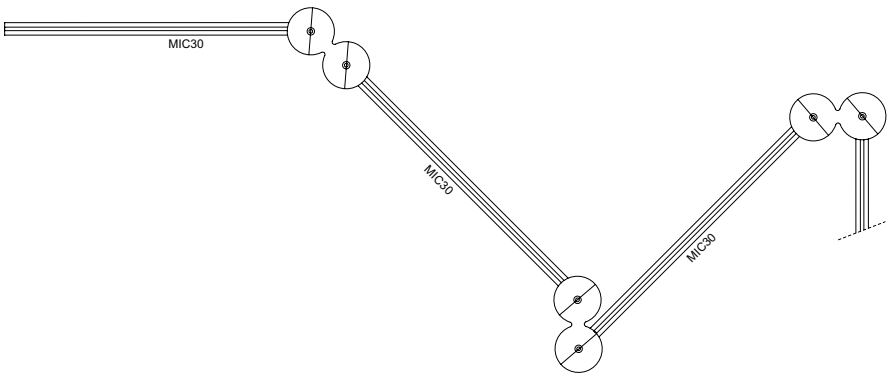





TANYA VAN LEEUWEN

Link 3 Reo








	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	3x 680lm (7W)	3x 566lm (7W)
REFLECTOR FL-33°	**LINK 3 REO 3033** ◇ **315 41 8322** ◇ ◇ = W	**LINK 3 REO 3033-9** ◇ **315 41 89322** ◇ ◇ = W
2700K	3x 618lm (7W)	3x 525lm (7W)
REFLECTOR FL-33°	**LINK 3 REO 2733** ◇ **315 41 8323** ◇ ◇ = W	**LINK 3 REO 2733-9** ◇ **315 41 89323** ◇ ◇ = W


ADJUSTABLE 0°- 30° / 350°
INCL.3 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 2,7 IP20

Link 3







LINK 311 ◇
315 13 00 ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W

CE 2,1 IP20 1,0

reddot design award winner 2011

GOOD DESIGN award


BECKERS NOYEZ ARCHITECTEN




P8 ARCHITECTEN



Ultra S D LED






	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**ULTRA S D LED 3033** ◇ **279 72 28122** ◇ ◇ = B-MMAT / W-B / W-W	**ULTRA S D LED 3033-9** ◇ **279 72 29122** ◇ ◇ = B-MMAT / W-B / W-W
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**ULTRA S D LED 2733** ◇ **279 72 28123** ◇ ◇ = B-MMAT / W-B / W-W	**ULTRA S D LED 2733-9** ◇ **279 72 29123** ◇ ◇ = B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 1,1 IP20

Ultra II S





ULTRA II S ◇
279 72 20 ◇
◇ = ALU / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

CE 0,5 IP20 0,5











FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION + CONNECTION TRIMLESS

328 10 02

INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard






SUSPENSION + CONNECTION TRIMLESS

led

Ultra C D LED





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**ULTRA C D LED 3033 ◇ 279 73 28122 ◇** ◇ = B-MMAT / W-B / W-W	**ULTRA C D LED 3033-9 ◇ 279 73 29122 ◇** ◇ = B-MMAT / W-B / W-W
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**ULTRA C D LED 2733 ◇ 279 73 28123 ◇** ◇ = B-MMAT / W-B / W-W	**ULTRA C D LED 2733-9 ◇ 279 73 29123 ◇** ◇ = B-MMAT / W-B / W-W

INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²
100-240V / 50-60Hz

IP20

OPTIONS
SUSPENSION + CONNECTION TRIMLESS




new

Twenty-7 On



TWENTY-7 ON + LED FILAMENT GL95 E27



TWENTY-7 ON ◇
279 70 00 ◇
◇ = B-B / W-B / W-W
FIXED
E27Ls / 100-240V / 50-60Hz
1 x A60 max.20W
CE 0,4 IP20 0,1

OPTIONS
led LED SOLUTION - PAG TEC 4-5




TWENTY-7 ON + LED FILAMENT T64 E27



FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



INSTALLATION




COVERSET R ◇

204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100

◇ = ANO / B / W












Midispy On






	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W) 475lm (6W)	570lm (6W) 780lm (9W)	427lm (6W) 585lm (9W)
LENS FL-20°	**MIDISPY ON 83020** ◇ **414 262 832** ◇ ◇ = B / W		
REFLECTOR WFL-40°		**MIDISPY ON 83040** ◇ **414 261 833** ◇ ◇ = B / W	**MIDISPY ON 93040** ◇ **414 261 933** ◇ ◇ = B / W
2700K	360lm (4,1W) 450lm (6W)	530lm (6W) 726lm (9W)	400lm (6W) 548lm (9W)
LENS FL-20°	**MIDISPY ON 82720** ◇ **414 262 822** ◇ ◇ = B / W		
REFLECTOR WFL-40°		**MIDISPY ON 82740** ◇ **414 261 823** ◇ ◇ = B / W	**MIDISPY ON 92740** ◇ **414 261 923** ◇ ◇ = B / W
	ADJUSTABLE 0°- 90° / 355° INCL.1 x POWERLED WHITE [C] 4,1-6W EXCL.LED POWER SUPPLY 350-500mA-DC 0,3 IP20 REQUIREMENTS MIDISPY TUBE OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM COVERSET R 62-90-100	ADJUSTABLE 0°- 90° / 355° INCL.1 x POWERLED WHITE [E] 6-9W EXCL.LED POWER SUPPLY 350-500mA-DC 0,3 IP20 REQUIREMENTS MIDISPY TUBE OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM COVERSET R 62-90-100	



FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W




4000K

3000K

REFLECTOR WFL-40°

2700K

REFLECTOR WFL-40°









4000K

3000K


REFLECTOR WFL-40°

2700K

REFLECTOR WFL-40°

Midispy On





CRI > 80	CRI > 90
ON REQUEST	
780lm (9W)	585lm (9W)
MIDISPY ON 1 83040 ◇ **414 259 1833 ◇** ◇ = B / W	**MIDISPY ON 1 93040 ◇** **414 259 1933 ◇** ◇ = B / W
726lm (9W)	548lm (9W)
MIDISPY ON 1 82740 ◇ **414 259 1823 ◇** ◇ = B / W	**MIDISPY ON 1 92740 ◇** **414 259 1923 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.1 x POWERLED WHITE 9W
INCL.LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 0,7 IP20

REQUIREMENTS
MIDISPY TUBE


DIM8

CRI > 80	CRI > 90
ON REQUEST	
570lm (6W)	427lm (6W)
MIDISPY ON 1 83040 DIM8 ◇ **414 251 1833 ED8 ◇** ◇ = B / W	**MIDISPY ON 1 93040 DIM8 ◇** **414 251 1933 ED8 ◇** ◇ = B / W
530lm (6W)	400lm (6W)
MIDISPY ON 1 82740 DIM8 ◇ **414 251 1823 ED8 ◇** ◇ = B / W	**MIDISPY ON 1 92740 DIM8 ◇** **414 251 1923 ED8 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.1 x POWERLED WHITE 6W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 0,7 IP20

REQUIREMENTS
MIDISPY TUBE



CRI > 80	CRI > 90
ON REQUEST	
2 x 780lm (9W)	2 x 585lm (9W)
MIDISPY ON 2 83040 ◇ **414 251 2833 ◇** ◇ = B / W	**MIDISPY ON 2 93040 ◇** **414 251 2933 ◇** ◇ = B / W
2 x 726lm (9W)	2 x 548lm (9W)
MIDISPY ON 2 82740 ◇ **414 251 2823 ◇** ◇ = B / W	**MIDISPY ON 2 92740 ◇** **414 251 2923 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.2 x POWERLED WHITE 9W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 1,0 IP20

REQUIREMENTS
2 x MIDISPY TUBE

DIM8


CRI > 80	CRI > 90
ON REQUEST	
2 x 570lm (6W)	2 x 427lm (6W)
MIDISPY ON 2 83040 DIM8 ◇ **414 251 2833 ED8 ◇** ◇ = B / W	**MIDISPY ON 2 93040 DIM8 ◇** **414 251 2933 ED8 ◇** ◇ = B / W
2 x 530lm (6W)	2 x 400lm (6W)
MIDISPY ON 2 82740 DIM8 ◇ **414 251 2823 ED8 ◇** ◇ = B / W	**MIDISPY ON 2 92740 DIM8 ◇** **414 251 2923 ED8 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.2 x POWERLED WHITE 6W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,0 IP20

REQUIREMENTS
2 x MIDISPY TUBE





CRI > 80	CRI > 90
ON REQUEST	
3 x 780lm (9W)	3 x 585lm (9W)
MIDISPY ON 3 83040 ◇ **414 251 3833 ◇** ◇ = B / W	**MIDISPY ON 3 93040 ◇** **414 251 3933 ◇** ◇ = B / W
3 x 726lm (9W)	3 x 548lm (9W)
MIDISPY ON 3 82740 ◇ **414 251 3823 ◇** ◇ = B / W	**MIDISPY ON 3 92740 ◇** **414 251 3923 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.3 x POWERLED WHITE 9W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 1,5 IP20

REQUIREMENTS
3 x MIDISPY TUBE

DIM8

CRI > 80	CRI > 90
ON REQUEST	
3 x 570lm (6W)	3 x 427lm (6W)
MIDISPY ON 3 83040 DIM8 ◇ **414 251 3833 ED8 ◇** ◇ = B / W	**MIDISPY ON 3 93040 DIM8 ◇** **414 251 3933 ED8 ◇** ◇ = B / W
3 x 530lm (6W)	3 x 400lm (6W)
MIDISPY ON 3 82740 DIM8 ◇ **414 251 3823 ED8 ◇** ◇ = B / W	**MIDISPY ON 3 92740 DIM8 ◇** **414 251 3923 ED8 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.3 x POWERLED WHITE 6W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz


CE 1,5 IP20

REQUIREMENTS
3 x MIDISPY TUBE

Requirements

FULL INFO / PAG TEC

SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



INSTALLATION



COVERSET R ◇
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



Accessories

FULL INFO / PAG TEC

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03




SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05






SPY TUBE W


SPY TUBE B



SPY TUBE MMAT

new

led

Spy On HP





	CRI > 80	CRI > 90
4000K ●		
	ON REQUEST	
3000K ●	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**SPY ON HP 83033** ◇ **414 361 21 831** ◇ ◇ = B / W	**SPY ON HP 93033** ◇ **414 361 21 931** ◇ ◇ = B / W
2700K ●	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**SPY ON HP 82733** ◇ **414 361 21 821** ◇ ◇ = B / W	**SPY ON HP 92733** ◇ **414 361 21 921** ◇ ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.1 x POWERLED WHITE [J] 18W
EXCL.LED POWER SUPPLY 500mA-DC

IP20


REQUIREMENTS
SPY TUBE

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM
COVERSET R 90-100

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

Spy On






	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W) 475lm (6W)	703lm (6,2W) 945lm (9,3W)	550lm (6,2W) 739lm (9,3W)
LENS SP-15°	**SPY ON 83015** ◇ **414 362 831** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPY ON 83018** ◇ **414 361 81831** ◇ ◇ = B / W	**SPY ON 93018** ◇ **414 361 81931** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPY ON 83033** ◇ **414 361 81832** ◇ ◇ = B / W	**SPY ON 93033** ◇ **414 361 81932** ◇ ◇ = B / W
2700K	360lm (4,1W) 450lm (6W)	665lm (6,2W) 893lm (9,3W)	519lm (6,2W) 698lm (9,3W)
LENS SP-15°	**SPY ON 82715** ◇ **414 362 821** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPY ON 82718** ◇ **414 361 81821** ◇ ◇ = B / W	**SPY ON 92718** ◇ **414 361 81921** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPY ON 82733** ◇ **414 361 81822** ◇ ◇ = B / W	**SPY ON 92733** ◇ **414 361 81922** ◇ ◇ = B / W
	ADJUSTABLE 0°- 90° / 355° INCL.1 x POWERLED WHITE [C] 4,1-6W EXCL.LED POWER SUPPLY 350-500mA-DC 0,5 IP20 REQUIREMENTS SPY TUBE OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM COVERSET R 90-100 ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	ADJUSTABLE 0°- 90° / 355° INCL.1 x POWERLED WHITE [H] 6,2-9,3W EXCL.LED POWER SUPPLY 350-500mA-DC 0,5 IP20 REQUIREMENTS SPY TUBE OPTIONS LED POWER SUPPLY 350-500mA-DC / DIM COVERSET R 90-100 ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	



FULL INFO / PAG TEC

Requirements

SPY TUBE S ◇
414 02 00 ◇
◇ = B / W



FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03




SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05






SPY TUBE S W


SPY TUBE S B


SPY TUBE S MMAT

4000K

3000K

REFLECTOR SP-18°

REFLECTOR FL-33°

2700K

REFLECTOR SP-18°


REFLECTOR FL-33°


Spy On














DIM8

CRI > 80	CRI > 90
ON REQUEST	
945lm (9,3W)	739lm (9,3W)
SPY ON 1 83018 DIM8 ◇ **414 351 81831 ED8 ◇** ◇ = B / W	**SPY ON 1 93018 DIM8 ◇** **414 351 81931 ED8 ◇** ◇ = B / W
SPY ON 1 83033 DIM8 ◇ **414 351 81832 ED8 ◇** ◇ = B / W	**SPY ON 1 93033 DIM8 ◇** **414 351 81932 ED8 ◇** ◇ = B / W
893lm (9,3W)	698lm (9,3W)
SPY ON 1 82718 DIM8 ◇ **414 351 81822 ED8 ◇** ◇ = B / W	**SPY ON 1 92718 DIM8 ◇** **414 351 81922 ED8 ◇** ◇ = B / W
SPY ON 1 82733 DIM8 ◇ **414 351 81821 ED8 ◇** ◇ = B / W	**SPY ON 1 92733 DIM8 ◇** **414 351 81921 ED8 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.1 x POWERLED WHITE 9,3W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

□ CE 0,8 IP20

REQUIREMENTS
SPY TUBE S

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

CRI > 80	CRI > 90
ON REQUEST	
2 x 945lm (9,3W)	2 x 739lm (9,3W)
SPY ON 2 83018 ◇ **414 351 82831 ◇** ◇ = B / W	**SPY ON 2 93018 ◇** **414 351 82931 ◇** ◇ = B / W
SPY ON 2 83033 ◇ **414 351 82832 ◇** ◇ = B / W	**SPY ON 2 93033 ◇** **414 351 82932 ◇** ◇ = B / W
2 x 893lm (9,3W)	2 x 698lm (9,3W)
SPY ON 2 82718 ◇ **414 351 82822 ◇** ◇ = B / W	**SPY ON 2 92718 ◇** **414 351 82922 ◇** ◇ = B / W
SPY ON 2 82733 ◇ **414 351 82821 ◇** ◇ = B / W	**SPY ON 2 92733 ◇** **414 351 82921 ◇** ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.2 x POWERLED WHITE 9,3W
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz

□ CE 1,2 IP20

REQUIREMENTS
2 x SPY TUBE S

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

CRI > 80	CRI > 90
ON REQUEST	
3 x 945lm (9,3W)	3 x 739lm (9,3W)
SPY ON 3 83018 ◇ **414 351 83831 ◇** ◇ = B / W	**SPY ON 3 93018 ◇** **414 351 83931 ◇** ◇ = B / W
SPY ON 3 83033 ◇ **414 351 83832 ◇** ◇ = B / W	**SPY ON 3 93033 ◇** **414 351 83932 ◇** ◇ = B / W
3 x 893lm (9,3W)	3 x 698lm (9,3W)
SPY ON 3 82718 ◇ **414 351 83822 ◇** ◇ = B / W	**SPY ON 3 92718 ◇** **414 351 83922 ◇** ◇ = B / W
SPY ON 3 82733 ◇ **414 351 83821 ◇** ◇ = B / W	**SPY ON 3 92733 ◇** **414 351 83921 ◇** ◇ = B / W


ADJUSTABLE 0°- 90° / 355°
INCL.3 x POWERLED WHITE 9,3W
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz


□ CE 1,9 IP20

REQUIREMENTS
3 x SPY TUBE S

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50



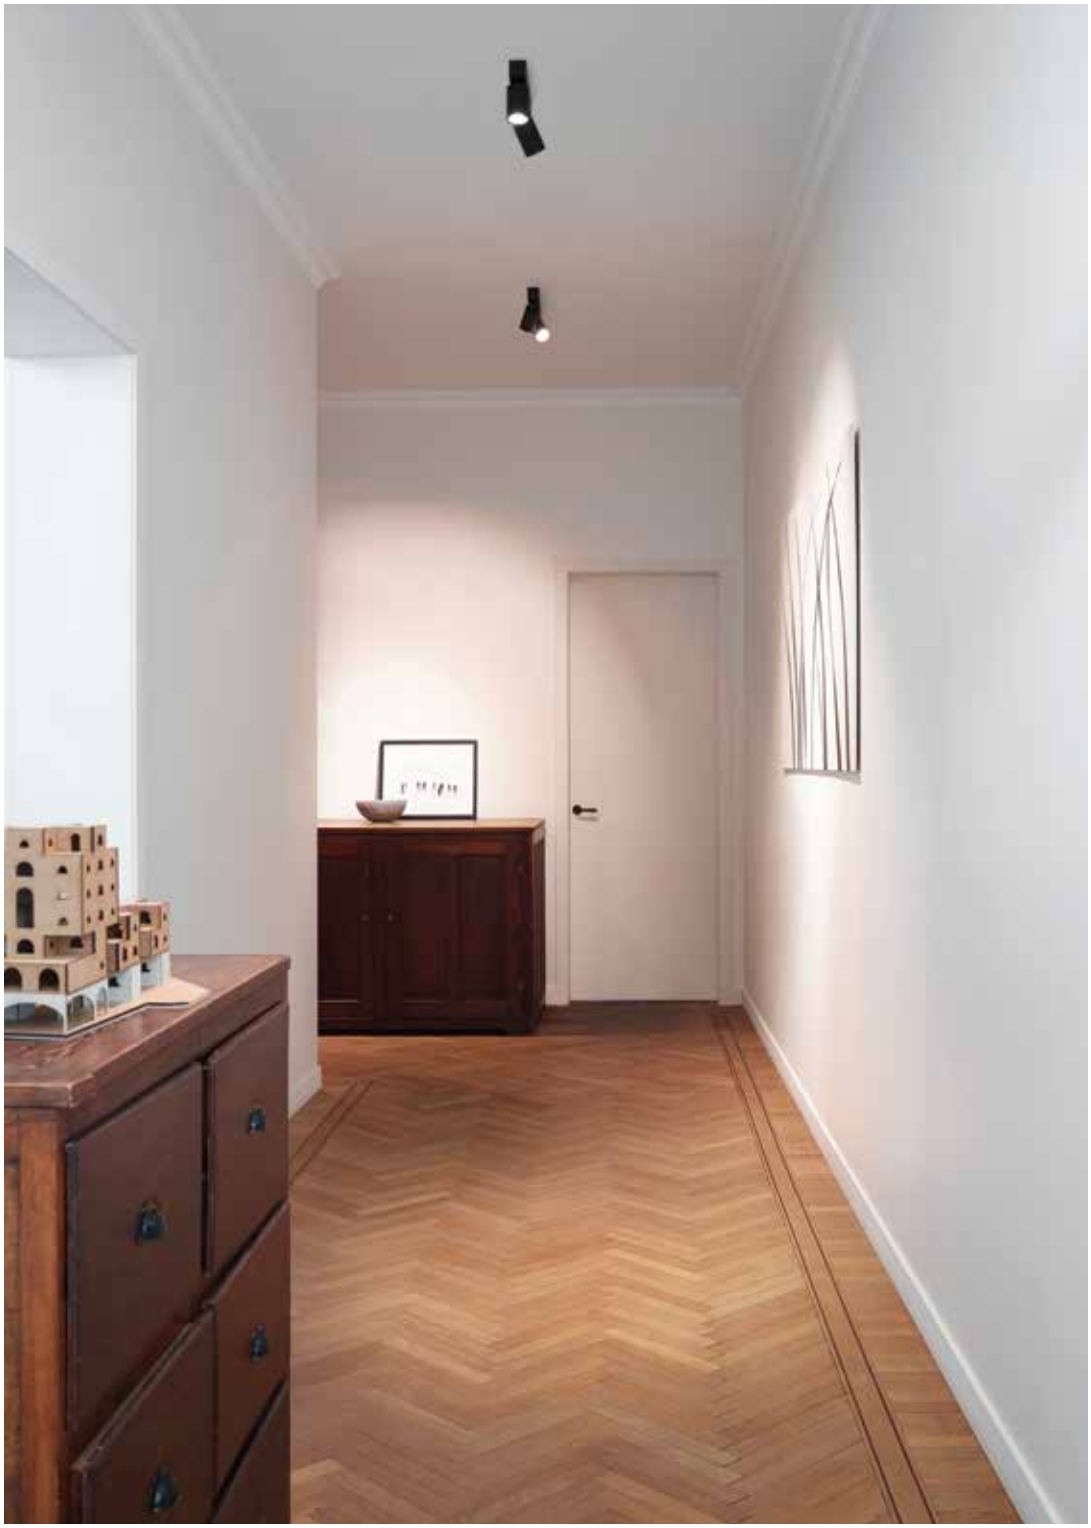


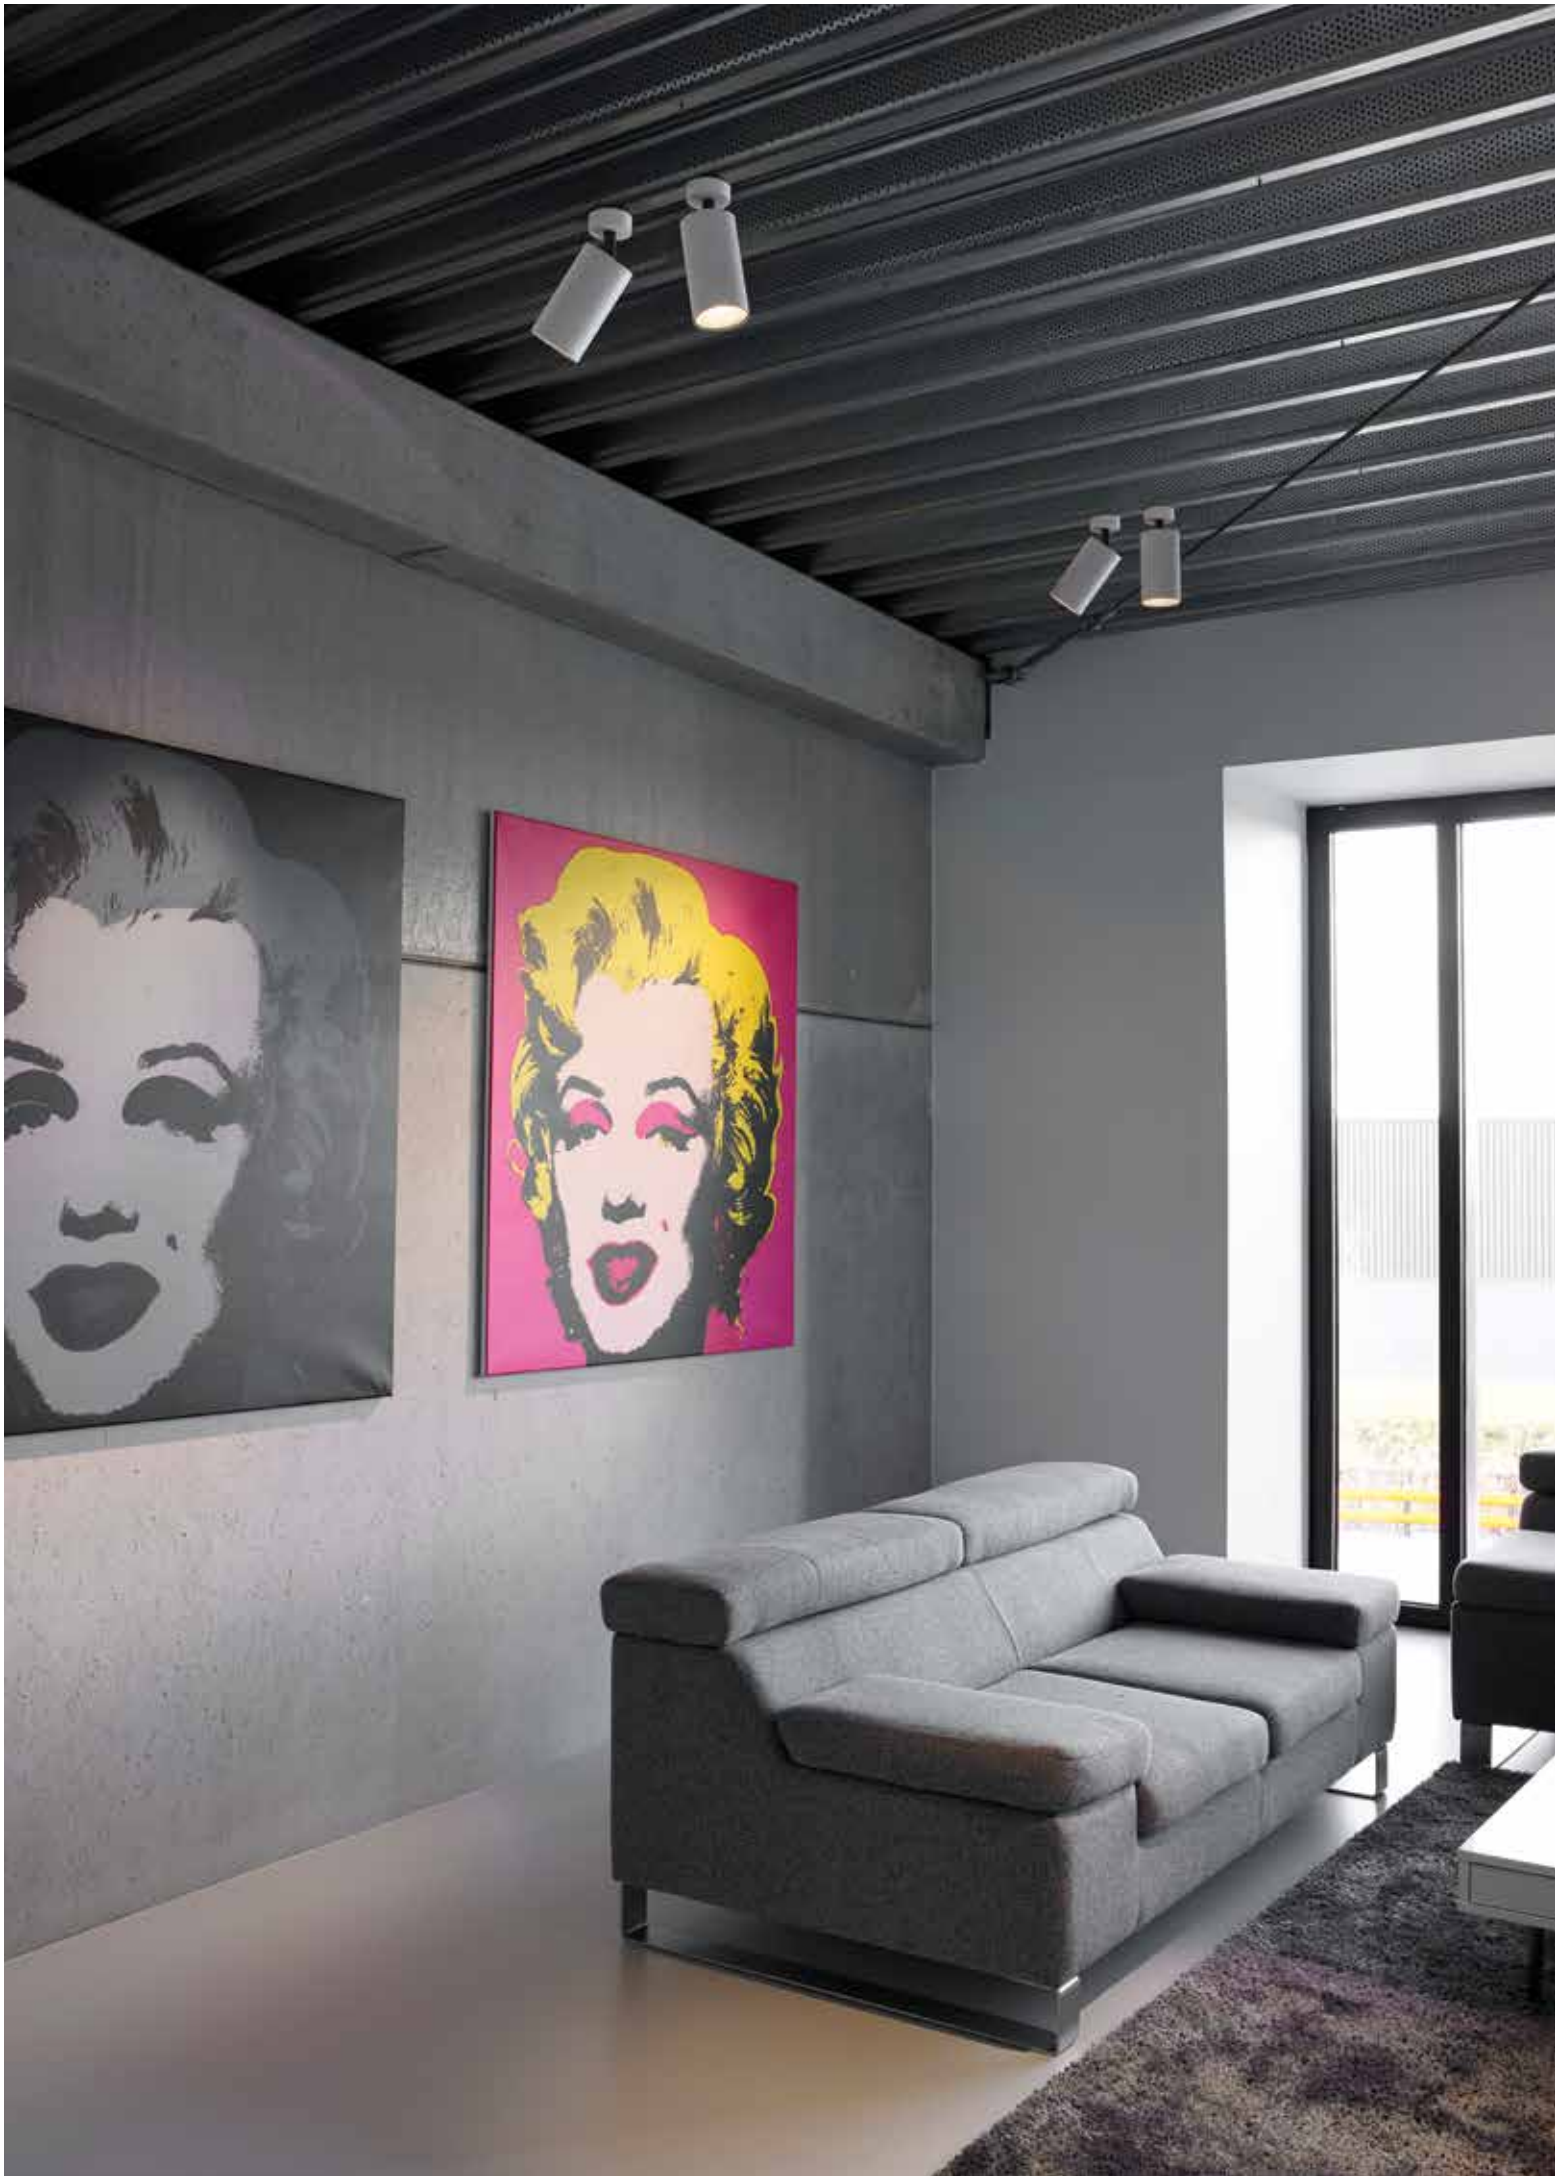

FULL INFO / PAG TEC

Requirements

MAXISPY TUBE ◇
414 04 00 ◇
◇ = B / MMAT / W



Options

INSTALLATION		
COVERSET R ◇		
204 00 90 ◇	Ø90	
204 00 100 ◇	Ø100	

◇ = ANO / B / W



FULL INFO / PAG TEC


Accessories

HONEYCOMB 78 ◇	Ø78
201 02 01 ◇	
◇ = B	



SOFTENING LENS 78	Ø78
201 02 04	



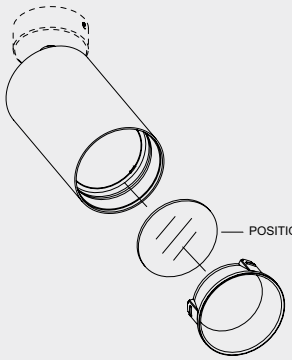




new

led

Maxispy On





1-10V DIM

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2592lm (25W)	2200lm (25W)
REFLECTOR FL-20°	**MAXISPY ON 83020 DIM1** ◇ **414 46 21 832 ED1** ◇ ◇ = B / W	**MAXISPY ON 93020 DIM1** ◇ **414 46 21 932 ED1** ◇ ◇ = B / W
REFLECTOR FL-35°	**MAXISPY ON 83035 DIM1** ◇ **414 46 21 833 ED1** ◇ ◇ = B / W	**MAXISPY ON 93035 DIM1** ◇ **414 46 21 933 ED1** ◇ ◇ = B / W
2700K	2399lm (25W)	1951lm (25W)
REFLECTOR FL-20°	**MAXISPY ON 82720 DIM1** ◇ **414 46 21 822 ED1** ◇ ◇ = B / W	**MAXISPY ON 92720 DIM1** ◇ **414 46 21 922 ED1** ◇ ◇ = B / W
REFLECTOR FL-35°	**MAXISPY ON 82735 DIM1** ◇ **414 46 21 823 ED1** ◇ ◇ = B / W	**MAXISPY ON 92735 DIM1** ◇ **414 46 21 923 ED1** ◇ ◇ = B / W

ADJUSTABLE 0°- 90° / 355°
INCL.1 x POWERLED WHITE 25W
INCL.LED POWER SUPPLY 700mA-DC
120-240V / 50-60Hz

1,3 IP20

REQUIREMENTS
MAXISPY TUBE

OPTIONS
COVERSET R 90-100

ACCESSORIES
HONEYCOMB 78
SOFTENING LENS 78

FULL INFO / PAG 132

Accessories

HONEYCOMB 87 ◇ Ø87
201 01 01 ◇
◇ = B



LINEAR SPREAD LENS 87 Ø87
201 01 02



SPREAD LENS 87 Ø87
201 01 03




SOFTENING LENS 87 Ø87
201 01 04



GLASS SBL 87 Ø87
201 01 05








BOOSTER HP + LINEAR SPREAD LENS 87



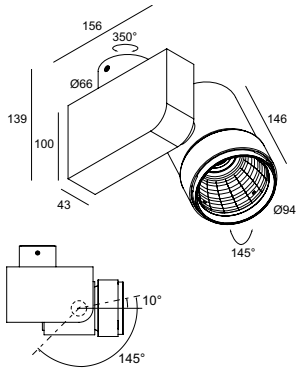

	CRI > 80
3000K	2000lm (17W)
REFLECTOR SP-20°	**BOOSTER HP 3020** ◇ **313 22 28122** ◇ ◇ = B / W
REFLECTOR FL-27°	
REFLECTOR WFL-40°	**BOOSTER HP 3040** ◇ **313 22 28132** ◇ ◇ = B / W
REFLECTOR WFL-50°	


ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 17W
INCL. LED POWER SUPPLY 700mA-DC
220-240V / 50-60Hz

IP20

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

Booster HP



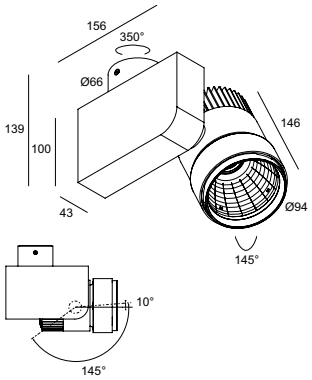

up to 90% efficiency

new

CRI > 80

3000lm (26W)

BOOSTER HP 3027 ◇
313 23 48122 ◇
◇ = B / W

BOOSTER HP 3050 ◇
313 23 48132 ◇
◇ = B / W

ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 26W
INCL. LED POWER SUPPLY 600mA-DC
220-240V / 50-60Hz

IP20

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

new DALI DIM

CRI > 80

4000lm (32W)

BOOSTER HP 4 3027 DIM5 ◇
313 24 832 ED5 ◇
◇ = B / W

BOOSTER HP 4 3050 DIM5 ◇
313 24 833 ED5 ◇
◇ = B / W

ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 32W
INCL. LED POWER SUPPLY 750mA-DC
DIMMING BY DALI
220-240V / 50-60Hz


IP20

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

ON REQUEST CRI>90

Booster HIC



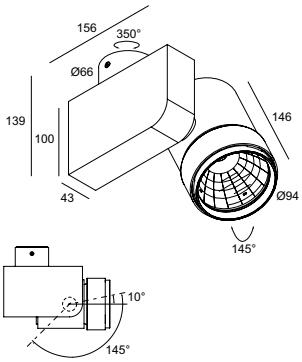

up to 90% efficiency

BOOSTER HIC-35 SP18 ◇
313 22 1935-18 ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-35 FL28 ◇
313 22 1935-28 ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-35 WFL52 ◇
313 22 1935-52 ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 35W

BOOSTER HIC-70 SP18 ◇
313 22 1970-18 ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-70 FL28 ◇
313 22 1970-28 ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-70 WFL52 ◇
313 22 1970-52 ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 70W

◇ = B / W
ADJUSTABLE 145° / 350°
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG

IP20


NATURAL HARMONY


URBAN ENERGY
MIX IS THE MAX




FULL INFO / PAG TEC


Options


INSTALLATION	C A B	
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41	

Super-Oh!





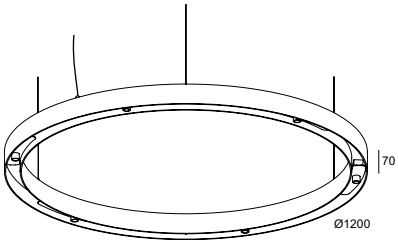

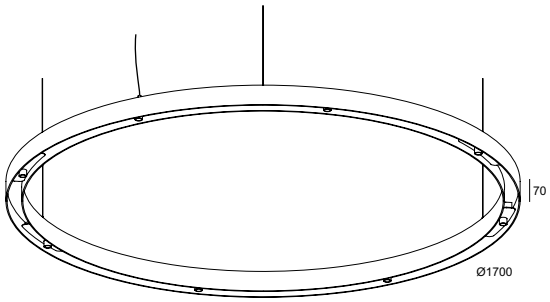

SUPER-OH! 70 83020 ◇
308 07 03 832 ◇
◇ = B
FIXED
INCL.3 x POWERLED WHITE 6W / 3000K ● / 475lm

SUPER-OH! 70 82720 ◇
308 07 03 822 ◇
◇ = B
FIXED
INCL.3 x POWERLED WHITE 6W / 2700K ● / 450lm

INCL.3 x LENS FL-20°
INCL.3 x LED POWER SUPPLY 500mA-DC
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 2 x 0,75mm²
220-240V / 0 I 50-60Hz
MAINS DIMMING (FE)

□ CE 5,2 IP20

OPTIONS
CABLE BASE R / S

SUPER-OH! 120 83020 ◇
308 12 06 832 ◇
◇ = B
FIXED
INCL.6 x POWERLED WHITE 6W / 3000K ● / 475lm

SUPER-OH! 120 82720 ◇
308 12 06 822 ◇
◇ = B
FIXED
INCL.6 x POWERLED WHITE 6W / 2700K ● / 450lm

INCL.6 x LENS FL-20°
INCL.6 x LED POWER SUPPLY 500mA-DC
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 2 x 0,75mm²
220-240V / 0 I 50-60Hz
MAINS DIMMING (FE)

□ CE 9,8 IP20

OPTIONS
CABLE BASE R / S

SUPER-OH! 170 83020 ◇
308 17 08 832 ◇
◇ = B
FIXED
INCL.8 x POWERLED WHITE 6W / 3000K ● / 475lm

SUPER-OH! 170 82720 ◇
308 17 08 822 ◇
◇ = B
FIXED
INCL.8 x POWERLED WHITE 6W / 2700K ● / 450lm

INCL.8 x LENS FL-20°
INCL.8 x LED POWER SUPPLY 500mA-DC
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 2 x 0,75mm²
220-240V / 0 I 50-60Hz
MAINS DIMMING (FE)

□ CE 14,4 IP20

OPTIONS
CABLE BASE R / S






FULL INFO / PAG TEC


Options


INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Super-Oh!





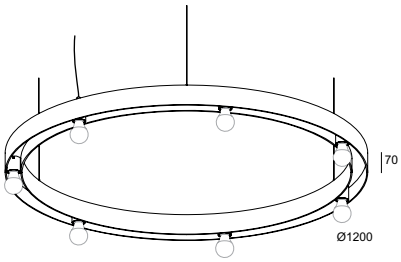

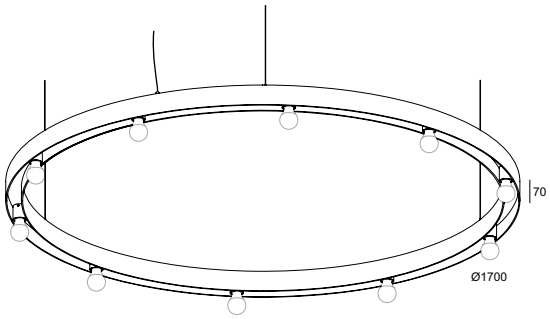

SUPER-OH! 70 ◇
308 07 05 00 ◇
◇ = B
FIXED
E27Ls / 100-240V / 50-60Hz
5 x A60 max.20W

INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0,75mm²

4,2 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
led LED SOLUTION - PAG TEC 4-5

SUPER-OH! 120 ◇
308 12 07 00 ◇
◇ = B
FIXED
E27Ls / 100-240V / 50-60Hz
7 x A60 max.20W

INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0,75mm²

8,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
led LED SOLUTION - PAG TEC 4-5

SUPER-OH! 170 ◇
308 17 10 00 ◇
◇ = B
FIXED
E27Ls / 100-240V / 50-60Hz
10 x A60 max.20W

INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE3 x 0,75mm²

12,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
led LED SOLUTION - PAG TEC 4-5









WWW.SAAI.CO


Requirements

INSTALLATION

PITCH 162 RECESSED KIT
274 88 014

184 x 65 max.25

0,5





PITCH 162




PITCH 162 RECESSED KIT





PITCH 162 RECESSED

Pitch







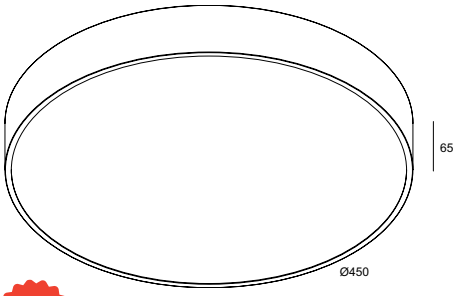

PITCH 162 ◇
274 85 1607 ◇
◇ = W
FIXED
INCL.1 x PC SBL
INCL.LED CLUSTER 6,5W / 3000K ● / 670lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,5 IP40

REQUIREMENT FOR RECESSED INSTALLATION
PITCH 162 RECESSED KIT
274 88 014


PITCH 260 ◇
274 85 2515 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K / 1580lm
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

CE 0,7 IP40

PITCH 450 ◇
274 85 4535 ◇
◇ = W
FIXED
INCL.1 x PC SBL
INCL.LED CLUSTER 34,6W / 3000K ● / 4200lm
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz

CE 3,0 IP40

SUPERNOVA
OVERVIEW

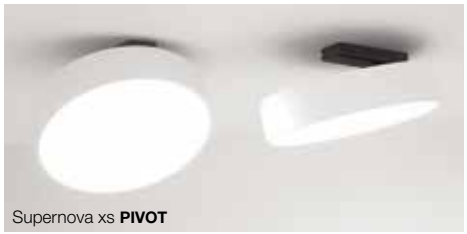
Supernova xs **PIVOT**


Supernova


Supernova **SR**


Supernova


Supernova **DOWN-UP**


SBL


PRISMATIC


Full


Line

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/27495120 or www.deltalight.com/supernova

SUPERNOVA XS PIVOT



Ø 260 - Ø 330

ADJUSTABLE 0-45°

led SBL: FULL

PAG INT 386

SUPERNOVA XS



Ø 260 - Ø 330

FIXED

led SBL: FULL

PAG INT 387

SUPERNOVA 45



Ø 450

FIXED

led SBL: FULL

PAG INT 387

SUPERNOVA



Ø 650 - Ø 950 - Ø 1250

FIXED

led SBL: FULL & LINE
PRISMA: LINE

T16

PAG INT 391

SUPERNOVA DOWN/UP



Ø 650 - Ø 950 - Ø 1250

FIXED

led SBL: LINE
PRISMA: LINE

T16

PAG INT 397

SUPERNOVA SR



620 x 620
1240 x 310
1240 x 1240

FIXED

T16

PAG INT 407

SUPERNOVA SR DOWN/UP



620 x 620
1240 x 310
1240 x 1240

FIXED

T16

PAG INT 409



On request the Supernova can be offered in any RAL colour, matching the specific look and feel of your interior design.





HANRATHARCHITECT

led

Supernova XS Pivot









FULL	1580lm	2600lm
	**SUPERNOVA XS PIVOT 260 ◇** **274 88 2515 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 15W / 3000K INCL.LED POWER SUPPLY 24V-DC 220-240V / 50-60Hz CE 1,2 IP40	**SUPERNOVA XS PIVOT 330 ◇** **274 88 3224 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 22W / 3000K INCL.LED POWER SUPPLY 1050 mA-DC 110-240V / 50-60Hz CE 1,4 IP40
new 1-10V DIM	**SUPERNOVA XS PIVOT 260 DIM1 ◇** **274 88 2515 ED1 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 15W / 3000K INCL.LED POWER SUPPLY 600mA-DC DIMMING BY 1-10V 110-240V / 50-60Hz CE 1,2 IP40	**SUPERNOVA XS PIVOT 330 DIM1 ◇** **274 88 3224 ED1 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 22W / 3000K INCL.LED POWER SUPPLY 1050mA-DC DIMMING BY 1-10V 220-240V / 50-60Hz CE 1,4 IP40
new DALI DIM	**SUPERNOVA XS PIVOT 260 DIM5 ◇** **274 88 2515 ED5 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 15W / 3000K INCL.LED POWER SUPPLY 600mA-DC DIMMING BY DALI 110-240V / 50-60Hz CE 1,2 IP40	**SUPERNOVA XS PIVOT 330 DIM5 ◇** **274 88 3224 ED5 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 22W / 3000K INCL.LED POWER SUPPLY 1050mA-DC DIMMING BY DALI 220-240V / 50-60Hz CE 1,4 IP40

Supernova XS







1580lm

SUPERNOVA XS 260 ◇
274 87 2515 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

0,8 IP40

SUPERNOVA XS 260 DIM1 ◇
274 87 2515 ED1 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 600mA-DC
DIMMING BY 1-10V
110-240V / 50-60Hz

0,8 IP40

SUPERNOVA XS 260 DIM5 ◇
274 87 2515 ED5 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 600mA-DC
DIMMING BY DALI
110-240V / 50-60Hz

0,8 IP40

2600lm

SUPERNOVA XS 330 ◇
274 87 3224 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 22W / 3000K
INCL.LED POWER SUPPLY 1050mA-DC
110-240V / 50-60Hz

1,0 IP40

SUPERNOVA XS 330 DIM1 ◇
274 87 3224 ED1 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 22W / 3000K
INCL.LED POWER SUPPLY 1050mA-DC
DIMMING BY 1-10V
220-240V / 50-60Hz


1,0 IP40

SUPERNOVA XS 330 DIM5 ◇
274 87 3224 ED5 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 22W / 3000K
INCL.LED POWER SUPPLY 1050mA-DC
DIMMING BY DALI
220-240V / 50-60Hz

1,0 IP40

Supernova 45





4400lm

SUPERNOVA 4583 ◇
274 95 45 83 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 34W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
110-240V / 50-60Hz

3,5 IP40

SUPERNOVA 4583 DIM1 ◇
274 95 45 83 ED1 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 34W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
DIMMING BY 1-10V
220-240V / 50-60Hz

3,5 IP40

SUPERNOVA 4583 DIM5 ◇
274 95 45 83 ED5 ◇
◇ = W
INCL.1 x PC SBL
INCL.LED CLUSTER 34W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
DIMMING BY DALI
220-240V / 50-60Hz

3,5 IP40

AWARD DESIGN PLUS light+building
reddot design award winner 2013
GOOD DESIGN award
interior innovation award 2014
Selection



ARCERO






FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



CONTROL GEAR

DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 20x SUPERNOVA 6528 EVG DIM1
max. 9x SUPERNOVA 9526 EVG DIM1
max. 4x SUPERNOVA 12528 EVG DIM1

FULL



1-10V DIM

new

LINE




1-10V DIM


DALI DIM


Supernova











6160lm	14140lm	28050lm
SUPERNOVA 6528 EVG DIM 1 ◇ **274 95 6528 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 46W / 3000K INCL.1 x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 8,7 IP20 0,1 OPTIONS SUSPENSION SET 18 3m ED1 CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90 DALI TO 1-10V CONVERTER	**SUPERNOVA 9528 EVG DIM 1** ◇ **274 95 9528 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 105W / 3000K INCL.2 x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 12,7 IP20 0,1 OPTIONS SUSPENSION SET 18 3m ED1 CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90 DALI TO 1-10V CONVERTER	**SUPERNOVA 12528 EVG DIM 1** ◇ **274 95 12528 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V INCL.LEDCLUSTER 208W / 3000K INCL.3 x LED POWER SUPPLY 350mA-DC DIM1 120-240V / 50-60Hz CE 16,6 IP20 0,1 OPTIONS SUSPENSION SET 18 3m ED1 CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90 DALI TO 1-10V CONVERTER
7840lm	19600lm	31360lm
SUPERNOVA LINE 6583 ◇ **274 95 06 83** ◇ ◇ = W INCL.PC SBL	**SUPERNOVA LINE 9583** ◇ **274 95 09 83** ◇ ◇ = W INCL.PC SBL	**SUPERNOVA LINE 12583** ◇ **274 95 12 83** ◇ ◇ = W INCL.PC SBL
SUPERNOVA LINE 6583 DIM1 ◇ **274 95 06 83 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE 9583 DIM1** ◇ **274 95 09 83 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE 12583 DIM1** ◇ **274 95 12 83 ED1** ◇ ◇ = W INCL.PC SBL DIMMING BY 1-10V
SUPERNOVA LINE 6583 DIM5 ◇ **274 95 06 83 ED5** ◇ ◇ = W INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE 9583 DIM5** ◇ **274 95 09 83 ED5** ◇ ◇ = W INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE 12583 DIM5** ◇ **274 95 12 83 ED5** ◇ ◇ = W INCL.PC SBL DIMMING BY DALI
INCL.LEDCLUSTER 59W / 3000K INCL.1 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 8,7 IP20 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5) CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90	INCL.LEDCLUSTER 147W / 3000K INCL.2 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 12,7 IP20 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5) CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90	INCL.LEDCLUSTER 235W / 3000K INCL.2 x LED POWER SUPPLY 2800mA-DC 220-240V / 0 I 50-60Hz CE 16,6 IP20 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5) CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90

GOOD DESIGN award




FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED1
328 18 43 ED1
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
INCL. 1 x CABLE 2 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W




COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




Supernova Prismatic









new

LINE	7840lm	19600lm
	**SUPERNOVA LINE 6583 PRISMATIC** ◇ **274 95 06 83 PR** ◇ ◇ = W INCL.PC PRISMATIC	**SUPERNOVA LINE 9583 PRISMATIC** ◇ **274 95 09 83 PR** ◇ ◇ = W INCL.PC PRISMATIC
1-10V DIM	**SUPERNOVA LINE 6583 PRISMATIC DIM1** ◇ **274 95 06 83 PR ED1** ◇ ◇ = W INCL.PC PRISMATIC DIMMING BY 1-10V	**SUPERNOVA LINE 9583 PRISMATIC DIM1** ◇ **274 95 09 83 PR ED1** ◇ ◇ = W INCL.PC PRISMATIC DIMMING BY 1-10V
DALI DIM	**SUPERNOVA LINE 6583 PRISMATIC DIM5** ◇ **274 95 06 83 PR ED5** ◇ ◇ = W INCL.PC PRISMATIC DIMMING BY DALI	**SUPERNOVA LINE 9583 PRISMATIC DIM5** ◇ **274 95 09 83 PR ED5** ◇ ◇ = W INCL.PC PRISMATIC DIMMING BY DALI
	INCL.LEDCLUSTER 59W / 3000K INCL.1 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 8,7 IP20 REQUIREMENTS SUPERNOVA 65 RECESSED KIT 274 94 0710 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)	INCL.LEDCLUSTER 147W / 3000K INCL.2 x LED POWER SUPPLY 1400mA-DC 220-240V / 0 I 50-60Hz CE 12,7 IP20 REQUIREMENTS SUPERNOVA 95 RECESSED KIT 274 94 1010 OPTIONS SUSPENSION SET 18 3m or SUSPENSION SET 18 3m ED1 (FOR DIM1 & DIM5)

GOOD DESIGN award



KEUKENS FIERENS

FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED2
328 18 43 ED2
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W





COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




Supernova









SUPERNOVA 65 ◇
274 95 60 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
10,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 ◇
274 95 90 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI EVG
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 ◇
274 95 120 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI EVG
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 65 EVG DIM 2 ◇
274 95 60 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W
10,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 EVG DIM 2 ◇
274 95 90 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 EVG DIM 2 ◇
274 95 120 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

GOOD DESIGN award

FULL INFO / PAG TEC

Options

INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

new


LINE




1-10V DIM


DALI DIM


Supernova Down-Up

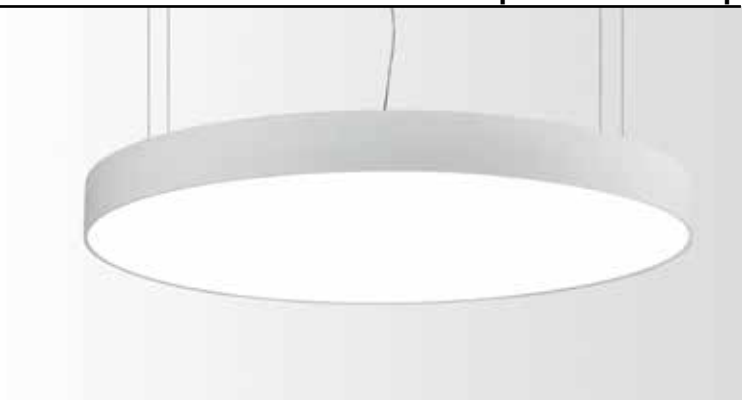









9800lm	23520lm	37240lm
SUPERNOVA LINE 6583 DOWN-UP ◇ **274 96 06 83 ◇** ◇ = W INCL.PC SBL	**SUPERNOVA LINE 9583 DOWN-UP ◇** **274 96 09 83 ◇** ◇ = W INCL.PC SBL	**SUPERNOVA LINE 12583 DOWN-UP ◇** **274 96 12 83 ◇** ◇ = W INCL.PC SBL
SUPERNOVA LINE 6583 DOWN-UP DIM1 ◇ **274 96 06 83 ED1 ◇** ◇ = W INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE 9583 DOWN-UP DIM1 ◇** **274 96 09 83 ED1 ◇** ◇ = W INCL.PC SBL DIMMING BY 1-10V	**SUPERNOVA LINE 12583 DOWN-UP DIM1 ◇** **274 96 12 83 ED1 ◇** ◇ = W INCL.PC SBL DIMMING BY 1-10V
SUPERNOVA LINE 6583 DOWN-UP DIM5 ◇ **274 96 06 83 ED5 ◇** ◇ = W INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE 9583 DOWN-UP DIM5 ◇** **274 96 09 83 ED5 ◇** ◇ = W INCL.PC SBL DIMMING BY DALI	**SUPERNOVA LINE 12583 DOWN-UP DIM5 ◇** **274 96 12 83 ED5 ◇** ◇ = W INCL.PC SBL DIMMING BY DALI
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m INCL. 1 x CABLE 5 x 0,75mm² INCL. 2 x CABLE 5 x 0,75mm² (1-10V DIM) INCL. 1 x CABLE 3 x 0,75mm² + 1 x CABLE 2 x 0,75mm² (DALI DIM) CABLING 2 CIRCUITS INCL.LEDCLUSTER UP 15W / 3000K INCL.LEDCLUSTER DOWN 60W / 3000K INCL.LED POWER SUPPLY 220-240V / 0 I 50-60Hz CE 8,7 IP20 OPTIONS CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90	INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m INCL. 1 x CABLE 5 x 0,75mm² INCL. 2 x CABLE 5 x 0,75mm² (1-10V DIM) INCL. 1 x CABLE 3 x 0,75mm² + 1 x CABLE 2 x 0,75mm² (DALI DIM) CABLING 2 CIRCUITS INCL.LEDCLUSTER UP 30W / 3000K INCL.LEDCLUSTER DOWN 150W / 3000K INCL.LED POWER SUPPLY 220-240V / 0 I 50-60Hz CE 12,7 IP20 OPTIONS CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90	INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m INCL. 1 x CABLE 5 x 0,75mm² INCL. 2 x CABLE 5 x 0,75mm² (1-10V DIM) INCL. 1 x CABLE 3 x 0,75mm² + 1 x CABLE 2 x 0,75mm² (DALI DIM) CABLING 2 CIRCUITS INCL.LEDCLUSTER UP 45W / 3000K INCL.LEDCLUSTER DOWN 240W / 3000K INCL.LED POWER SUPPLY 220-240V / 0 I 50-60Hz CE 16,6 IP20 OPTIONS CABLE BASE R / S COVERSET R 62-90-100 / S 62-80-90

GOOD DESIGN award




CAAN ARCHITECTEN

FULL INFO / PAG TEC


Options


INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Supernova Down-Up Prismatic

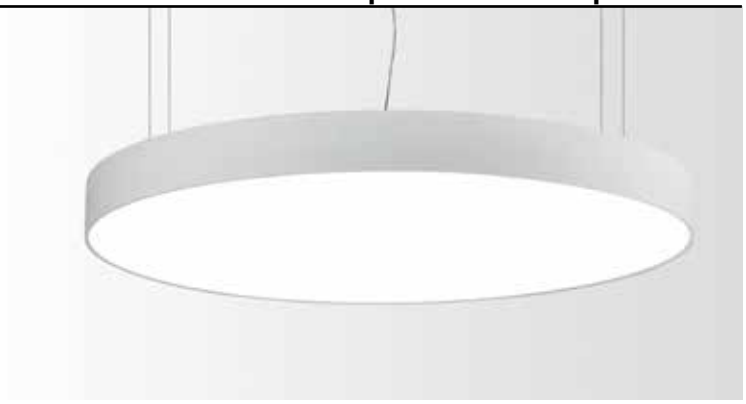







new

LINE	7840lm	19600lm
	**SUPERNOVA LINE 6583 PRISMATIC DOWN-UP ◇** **274 96 06 83 PR ◇** ◇ = W INCL.PC PRISMATIC	**SUPERNOVA LINE 9583 PRISMATIC DOWN-UP ◇** **274 96 09 83 PR ◇** ◇ = W INCL.PC PRISMATIC
1-10V DIM	**SUPERNOVA LINE 6583 PRISMATIC DOWN-UP DIM1 ◇** **274 96 06 83 PR ED1 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY 1-10V	**SUPERNOVA LINE 9583 PRISMATIC DOWN-UP DIM1 ◇** **274 96 09 83 PR ED1 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY 1-10V
DALI DIM	**SUPERNOVA LINE 6583 PRISMATIC DOWN-UP DIM5 ◇** **274 96 06 83 PR ED5 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY DALI	**SUPERNOVA LINE 9583 PRISMATIC DOWN-UP DIM5 ◇** **274 96 09 83 PR ED5 ◇** ◇ = W INCL.PC PRISMATIC DIMMING BY DALI
	INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m INCL. 1 x CABLE 5 x 0,75mm² INCL. 2 x CABLE 5 x 0,75mm² (1-10V DIM) INCL. 1 x CABLE 3 x 0,75mm² + 1 x CABLE 2 x 0,75mm² (DALI DIM) CABLING 2 CIRCUITS INCL.LEDCLUSTER UP 15W / 3000K INCL.LEDCLUSTER DOWN 60W / 3000K INCL.LED POWER SUPPLY 220-240V / 0 I 50-60Hz CE 8,7 IP20 OPTIONS CABLE BASE R / S COVERSET R 62-90-100 / S 62-90-90	INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m INCL. 1 x CABLE 5 x 0,75mm² INCL. 2 x CABLE 5 x 0,75mm² (1-10V DIM) INCL. 1 x CABLE 3 x 0,75mm² + 1 x CABLE 2 x 0,75mm² (DALI DIM) CABLING 2 CIRCUITS INCL.LEDCLUSTER UP 30W / 3000K INCL.LEDCLUSTER DOWN 150W / 3000K INCL.LED POWER SUPPLY 220-240V / 0 I 50-60Hz CE 12,7 IP20 OPTIONS CABLE BASE R / S COVERSET R 62-90-100 / S 62-90-90

GOOD DESIGN award


UNITED CLOTHING OF BELGIUM


FULL INFO / PAG TEC


Options


INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Supernova Down-Up









SUPERNOVA 65 DOWN-UP ◇
274 96 60 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI EVG
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG
2 x TC-L 24W
10,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 DOWN-UP ◇
274 96 90 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI EVG
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 DOWN-UP ◇
274 96 120 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI EVG
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 65 DOWN-UP EVG DIM 2 ◇
274 96 60 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 3~MULTI EVG DIM
3 x T16 14/24W
2G11 / 220-240V / 50-60Hz / 1 x 2~EVG DIM
2 x TC-L 24W
10,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 95 DOWN-UP EVG DIM 2 ◇
274 96 90 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 4 x 2~MULTI EVG DIM
4 x T16 14/24W
4 x T16 21/39W
14,5 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA 125 DOWN-UP EVG DIM 2 ◇
274 96 120 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 5 x 2~MULTI EVG DIM
4 x T16 21/39W
4 x T16 28/54W
2 x T16 14/24W
19 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

GOOD DESIGN award



ARCHION





INTERIEURBURO VANDECANDELAERE







OTHER CRITERIA NEW YORK

FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 18 3m
328 18 43
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²



SUSPENSION SET 18 3m ED2
328 18 43 ED2
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W





COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




Supernova SR







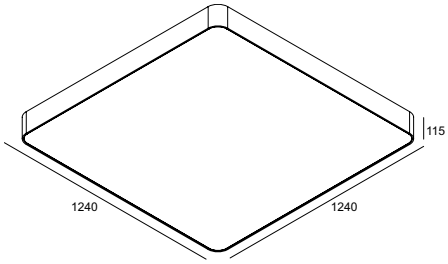

SUPERNOVA SR 424 ◇
274 92 0606 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG
4 x T16 14/24W
CE 6,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 ◇
274 92 0312 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 ◇
274 92 1212 ◇
◇ = W
INCL.PC SBL
G5 / 220-240V / 0 I 50-60Hz / 3 x 2~MULTI-EVG
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 424 EVG DIM 2 ◇
274 92 0606 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG DIM
4 x T16 14/24W
CE 6,0 IP20 0,1


OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 EVG DIM 2 ◇
274 92 0312 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 EVG DIM 2 ◇
274 92 1212 ED2 ◇
◇ = W
INCL.PC SBL
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 3 x 2~MULTI-EVG DIM
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
SUSPENSION SET 18 3m ED2
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

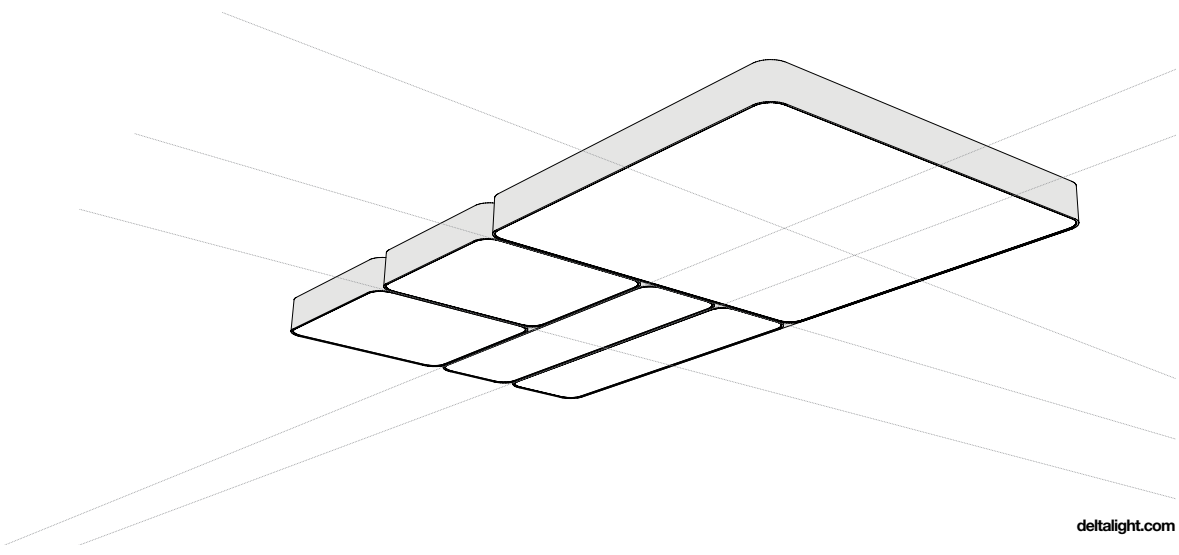



KANNIBAAL / PIÈCEMONTÉE


FULL INFO / PAG TEC


Options


INSTALLATION	C A B	
CABLE BASE R ◇	Ø57 x 41	
203 99 55 ◇		
◇ = ANO / W / B		
CABLE BASE S ◇	57 x 57 x 41	
203 99 56 ◇		
◇ = ANO / W / B		
COVERSET R ◇		
204 00 62 ◇	Ø62	
204 00 90 ◇	Ø90	
204 00 100 ◇	Ø100	
◇ = ANO / B / W		
COVERSET S ◇		
204 62 62 ◇	62 x 62	
204 80 80 ◇	80 x 80	
204 90 90 ◇	90 x 90	
◇ = ANO / B / W		

Supernova SR Down-Up







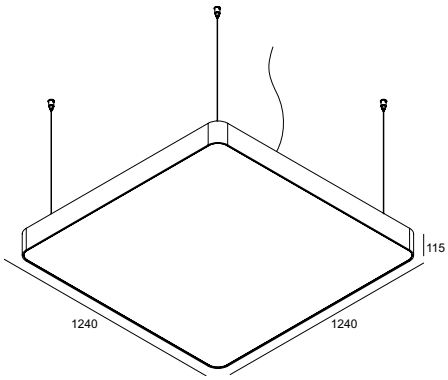

SUPERNOVA SR 424 DOWN-UP ◇
274 93 0606 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG
4 x T16 14/24W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 DOWN-UP ◇
274 93 0312 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 DOWN-UP ◇
274 93 1212 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm²
G5 / 220-240V / 0 I 50-60Hz / 3 x 2~MULTI-EVG
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 424 DOWN-UP EVG DIM 2 ◇
274 93 0606 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 2 x 2~MULTI-EVG DIM
4 x T16 14/24W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 254 DOWN-UP EVG DIM 2 ◇
274 93 0312 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W
CE 6,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

SUPERNOVA SR 654 DOWN-UP EVG DIM 2 ◇
274 93 1212 ED2 ◇
◇ = W
INCL.PC SBL
INCL. 4 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 3 x 2~MULTI-EVG DIM
6 x T16 28/54W
CE 22,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



GOVAERT & VANHOUTTE





FULL INFO / PAG TEC

Options

JACK SYSTEM

JACKPOINT◇ Ø41 x 9 / 38 — 16 x 60
203 10 01◇
◇ = A / B / W

JACKPOINT TRIMLESS Ø62 x 80 — 60 x 80
328 10 04

SETPOINT◇ Ø85 x 43 — 105 x 75
203 10 27◇ max.22
◇ = PRIM

CARREEPOINT◇ 50 x 50 x 5 / 38 — 16 x 60
203 10 02◇
◇ = A / W

DELTAPOINT SINGLE◇ Ø82 x 3 / 45 — 68 x 50
203 20 01◇ max.35
◇ = A / W

FLATPOINT◇ Ø45 x 5 / 41 — 16 x 60
203 10 06◇
◇ = ALU

DAXPOINT◇ Ø65 x 6 / 35 — 58 x 45
203 10 03◇ max.12
◇ = A / B / W

SAX 1◇ Ø50 / Ø19 x 52
203 10 15◇
◇ = A / W

M10 SYSTEM SPOTNIC

SPOTNIC M10 TRIMLESS Ø62 x 80 — 60 x 80
328 10 05

SPOTNIC CLIP + ROSAS◇ -
203 05 041◇
◇ = W

20 / Ø65

SPOTNIC S1 CLIP◇ 58 x 45
203 05 061◇ max.12
◇ = W

19 / Ø65

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER


TRANSFO 50W 86 x 31 x 20
200 46 06

TRANSFO 100W 107 x 35 x 21
200 46 10

led

Spotnic LED M10





12 max.10

SPOTNIC LED 3033 M10 ◇
M10 89 28122 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350mA-DC


0,4 IP20

OPTIONS
M10 SYSTEM SPOTNIC
LED POWER SUPPLY 350mA-DC

CRI>80 680lm (7W)
ON REQUEST 2700K

Spotnic JAC






SPOTNIC 50 JAC ◇
JAC 89 00 ◇
◇ = W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.35W
CE 0,4 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

Spotnic LED


led





SPOTNIC 1 3033 ◇
250 16 28122 ◇
◇ = W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

CE 0,7 IP20




SPOTNIC 2 3033 ◇
250 16 28222 ◇
◇ = W
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

CE 0,9 IP20

CRI>80 680lm (7W)
ON REQUEST 2700K


Spotnic T50





SPOTNIC 1 T50 ◇
250 16 10 ◇
◇ = W
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.35W


CE 0,7 IP20 0,5



SPOTNIC 2 T50 ◇
250 16 20 ◇
◇ = W
GU5.3 / 220-240V / 50-60Hz / TE
2 x QR-C51 max.35W

CE 0,9 IP20 0,5



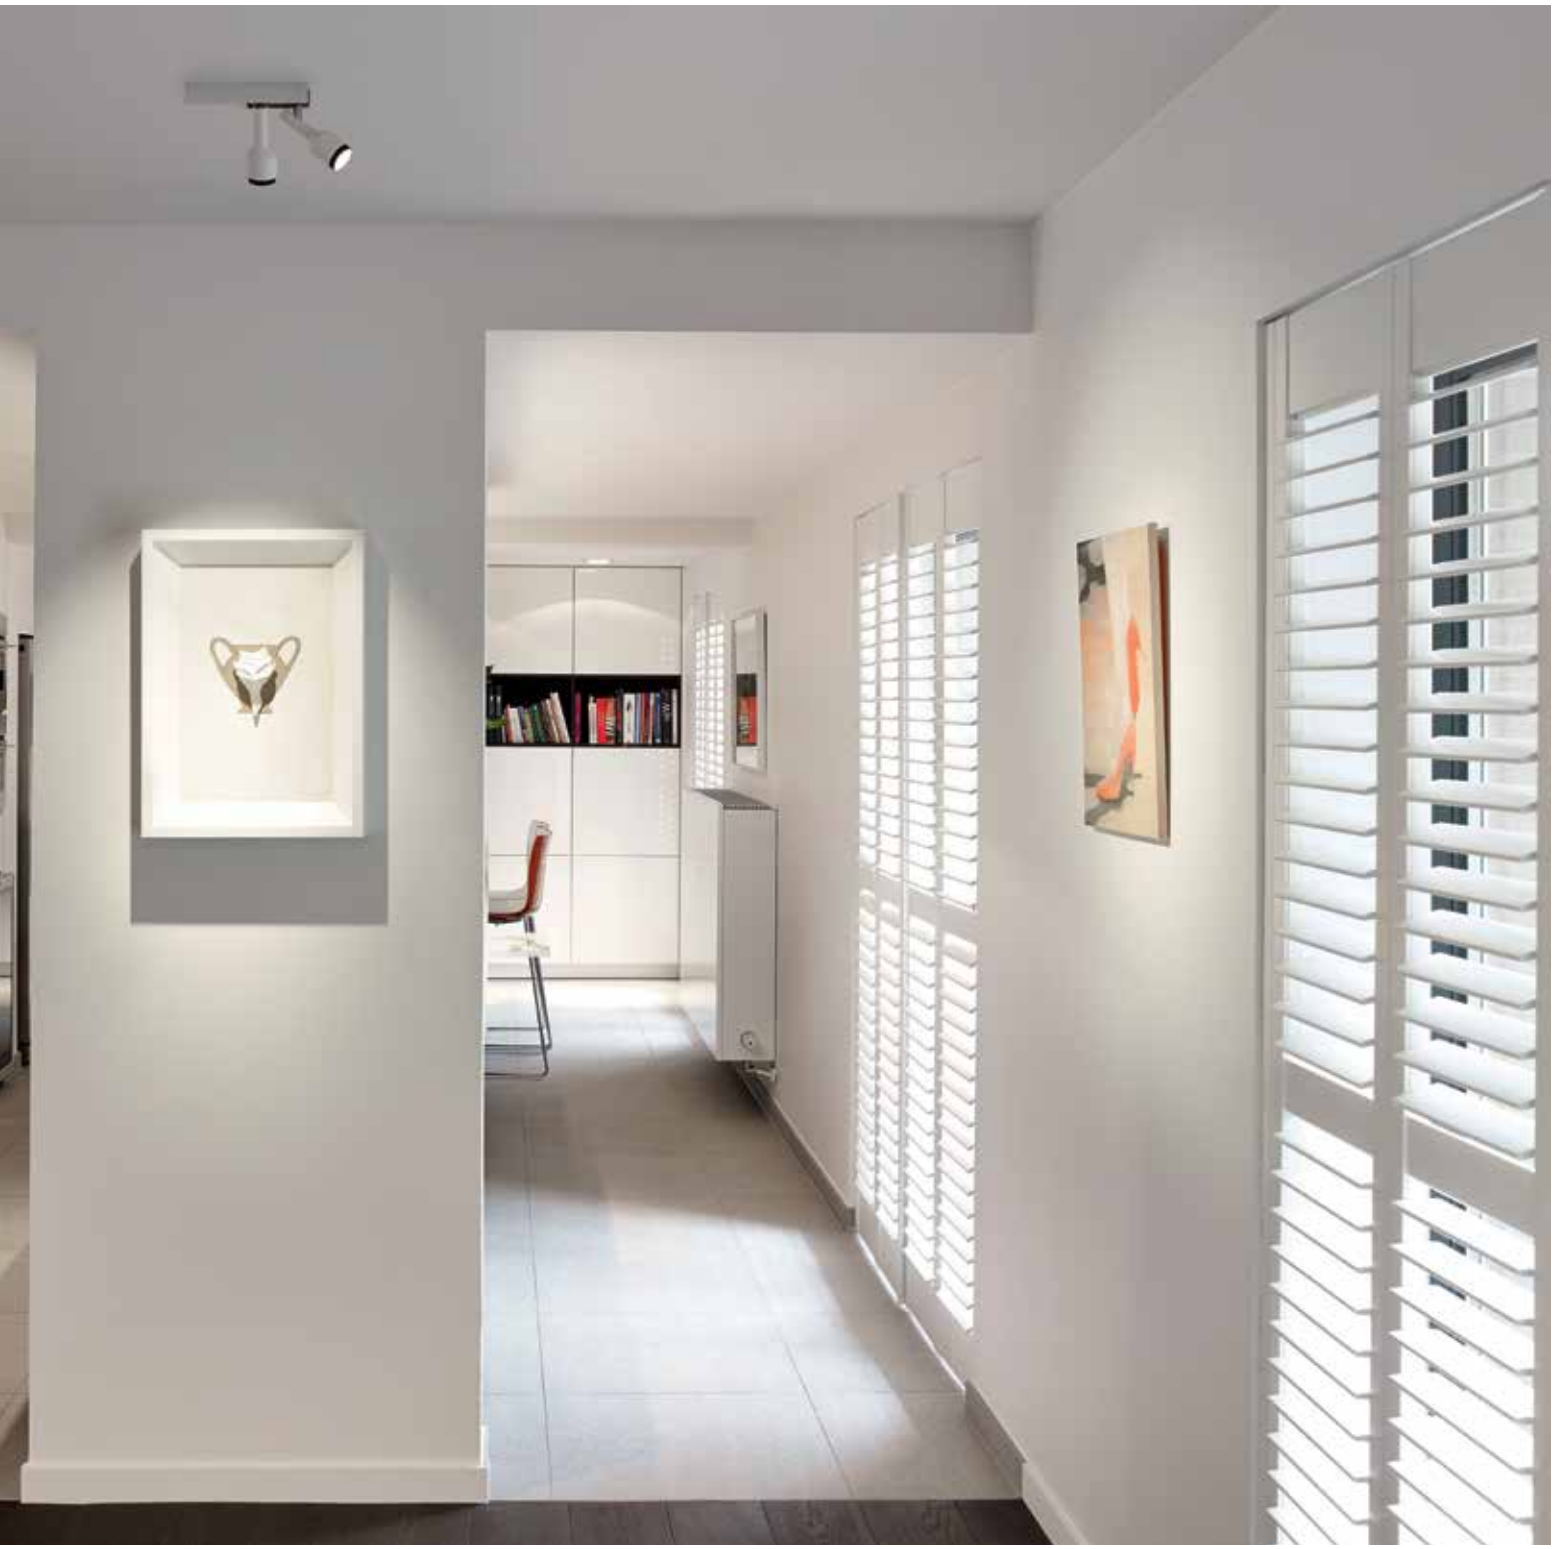



Spot JAC


SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC*	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC






SUNSET 1 A + 1 x CREDO 70 A



SUNSET 1 ◇
250 11 10 ◇
◇ = A / W
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W


CE 0,6 IP20

Sunset

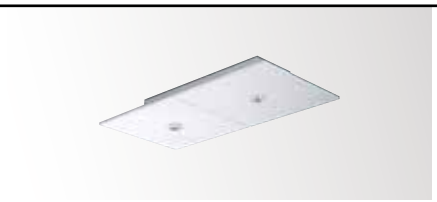



SUNSET 2 A + 2 x CREDO 70 A




SUNSET 2 ◇
250 11 20 ◇
◇ = A / W
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

□ CE 1,0 IP20





SUNSET 3 A + 3 x SPOTNIC W




SUNSET 3 ◇
250 11 30 ◇
◇ = A / W
EXCL.3 x SPOT JAC
220-240V / 50-60Hz / TE
3 x max.50W

□ CE 1,7 IP20





SUNSET 4 A + 4 x CREDO 111 A



SUNSET 4 ◇
250 11 40 ◇
◇ = A / W
EXCL.4 x SPOT JAC
220-240V / 50-60Hz / TE
4 x max.50W

□ CE 2,2 IP20



FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	

FULL INFO / PAG TEC


Accessories


CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
RING 66 ◇ **201 32 50** ◇ ◇ = A / W	Ø74	
RING 109 ◇ **201 28 01** ◇ ◇ = A / B / W	Ø116	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23	
CONE 66 ◇ **201 32 52** ◇ ◇ = B	Ø66 / Ø45 / H38	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 109 **201 18 00**	Ø109	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 109 **201 48 01**	Ø109	
LENS 111 **201 47 11**	Ø100	
RASTER 66 ◇ **201 32 51** ◇ ◇ = B	Ø66	
RASTER 109 ◇ **201 28 02** ◇ ◇ = B	Ø109	

Spatio









SPATIO 50 JAC ◇
JAC 81 00 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
0,3 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
RING 66 + RASTER 66
RING 66 + CONE 66
CONE 50
CLIP 50 + DICROIC FILTER 50

SPATIO 111 JAC ◇
JAC 83 00 ◇
◇ = A / B / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
0,4 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
RING 109 + FRONTGLASS 109
RING 109 + LENS 109
RING 109 + RASTER 109
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



FULL INFO / PAG TEC

Options

INSTALLATION	
COVERSET R ◇ **204 00 90** ◇ **204 00 100** ◇ ◇ = ANO / W	 Ø90 Ø100

FULL INFO / PAG TEC

Accessories

CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
RING 66 ◇ **201 32 50** ◇ ◇ = A / W	Ø74
RING 109 ◇ **201 28 01** ◇ ◇ = A / B / W	Ø116
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CONE 66 ◇ **201 32 52** ◇ ◇ = B	Ø66 / Ø45 / H38
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 109 **201 18 00**	Ø109
FRONTGLASS 111 **201 17 00**	Ø100
LENS 109 **201 48 01**	Ø109
LENS 111 **201 47 11**	Ø100
RASTER 66 ◇ **201 32 51** ◇ ◇ = B	Ø66
RASTER 109 ◇ **201 28 02** ◇ ◇ = B	Ø109

4000K 🟡

3000K 🟡

REFLECTOR FL-33°

REFLECTOR WFL-50°


2700K 🟡

REFLECTOR FL-33°

REFLECTOR WFL-50°

Spatio Reo





CRI > 80	CRI > 90
ON REQUEST	
680lm (7W)	566lm (7W)
SPATIO REO 3033 ◇ **311 13 8122** ◇ ◇ = A / W	**SPATIO REO 3033-9** ◇ **311 13 89122** ◇ ◇ = A / W
SPATIO REO 3050 ◇ **311 13 8132** ◇ ◇ = A / W	**SPATIO REO 3050-9** ◇ **311 13 89132** ◇ ◇ = A / W
618lm (7W)	525lm (7W)
SPATIO REO 2733 ◇ **311 13 8123** ◇ ◇ = A / W	**SPATIO REO 2733-9** ◇ **311 13 89123** ◇ ◇ = A / W
SPATIO REO 2750 ◇ **311 13 8133** ◇ ◇ = A / W	**SPATIO REO 2750-9** ◇ **311 13 89133** ◇ ◇ = A / W


INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

◇ CE 0,7 IP20

OPTIONS
COVERSET R 90-100

Spatio T50






SPATIO 50 T50 ◇
311 10 105 ◇
◇ = A / W
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W

◇ CE 0,5 IP20 0,5

OPTIONS
COVERSET R 90-100

ACCESSORIES
RING 66 + RASTER 66
RING 66 + CONE 66
CONE 50
CLIP 50 + DICROIC FILTER 50





SPATIO 111 T50 ◇
311 10 111 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W

◇ CE 0,6 IP20 1,0

OPTIONS
COVERSET R 90-100

ACCESSORIES
RING 109 + FRONTGLASS 109
RING 109 + LENS 109
RING 109 + RASTER 109
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



SPATIO 50 T50 A
+ RING 66 A + CONE 66 B



SPATIO 111 T50 A
+ RING 109 A + RASTER 109 B

FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
CONTROL GEAR		
LED POWER SUPPLY **ALL INFO ON FOLD-OUT COVER**		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	

FULL INFO / PAG TEC


Accessories

CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	

led

Credo Reo





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**CREDO REO 3033 JAC** ◇ **JAC 62 28122** ◇ ◇ = A / W	**CREDO REO 3033-9 JAC** ◇ **JAC 62 29122** ◇ ◇ = A / W
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**CREDO REO 2733 JAC** ◇ **JAC 62 28123** ◇ ◇ = A / W	**CREDO REO 2733-9 JAC** ◇ **JAC 62 29123** ◇ ◇ = A / W

INCL.1 x POWERLED WHITE [I] 7W
EXCL. 1 x JACK SYSTEM
EXCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

III CE 0,4 IP20


OPTIONS
JACK SYSTEM
LED POWER SUPPLY 350mA-DC / DIM

Credo










CREDO 50 JAC ◇
JAC 61 00 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-C51 max.50W
0,3 IP20 0,5


OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50



CREDO 70 JAC ◇
JAC 62 00 ◇
◇ = A / W
BA15d / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP70 max.50W
0,3 IP20 1,0

OPTIONS
JACK SYSTEM
TRANFO



CREDO 111 JAC ◇
JAC 63 00 ◇
◇ = A / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
0,4 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO



FULL INFO / PAG TEC

Options

JACK SYSTEM		
JACKPOINT ◇ **203 10 01** ◇ ◇ = A / B / W	Ø41 x 9 / 38	16 x 60
JACKPOINT TRIMLESS **328 10 04**	Ø62 x 80	60 x 80
SETPOINT ◇ **203 10 27** ◇ ◇ = PRIM	Ø85 x 43	105 x 75 max.22
CARREEPOINT ◇ **203 10 02** ◇ ◇ = A / W	50 x 50 x 5 / 38	16 x 60
DELTAPOINT SINGLE ◇ **203 20 01** ◇ ◇ = A / W	Ø82 x 3 / 45	68 x 50 max.35
FLATPOINT ◇ **203 10 06** ◇ ◇ = ALU	Ø45 x 5 / 41	16 x 60
DAXPOINT ◇ **203 10 03** ◇ ◇ = A / B / W	Ø65 x 6 / 35	58 x 45 max.12
SAX 1 ◇ **203 10 15** ◇ ◇ = A / W	Ø50 / Ø19 x 52	
M10 SYSTEM		
DELTA CLIP + ROSAS ◇ **203 05 04** ◇ ◇ = A / B / W	-	Ø65 20 350°
DAX CLIP ◇ **203 05 06** ◇ ◇ = A / B / W	58 x 45 max.12	19 Ø65 350°
DELTA FIX ◇ **203 05 10** ◇ ◇ = A / B / W	Ø18	Ø42 350°
CONTROL GEAR		
LED TRANSFO **12V / 1-70W** **300 89 12 71**	117 x 34 x 21	
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	


FULL INFO / PAG TEC

Accessories

CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 111 **201 47 11**	Ø100	

Phantom II





PHANTOM II JAC ◇
JAC 04 01 ◇
JAC 04 15 ◇
JAC 04 30 ◇
◇ = A / W
GX5.3 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-CBC35 max.35W
1 x QR-CB51 max.50W
CE 0,3 IP20 0,5

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50


PHANTOM II M10 ◇
M10 04 01 ◇
M10 04 15 ◇
M10 04 30 ◇
◇ = A / W
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC35 max.35W
1 x QR-CB51 max.50W
CE 0,3 IP20 0,5

OPTIONS
M10 SYSTEM
TRANSFO

ACCESSORIES
CLIP 50 + DICROIC FILTER 50

Rand 111





RAND 111 JAC ◇
JAC 73 00 ◇
◇ = A / B / W
G53 / 12V / EXCL.TRANSFO
EXCL.1 x JACK SYSTEM
1 x QR-LP111 max.100W
CE 0,4 IP20 1,0

OPTIONS
JACK SYSTEM
TRANSFO

ACCESSORIES
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111





RUSLAN VASYAKIN

Rand Reo









	CRI > 80	CRI > 90	CRI > 80	CRI > 90
4000K				
	ON REQUEST		ON REQUEST	
3000K	680lm (7W)	566lm (7W)	2x 680lm (7W)	2x 566lm (7W)
REFLECTOR FL-33°	**RAND 1 REO 3033** ◇ **285 52 8122** ◇ ◇ = A / W	**RAND 1 REO 3033-9** ◇ **285 52 89122** ◇ ◇ = A / W	**RAND 2 REO 3033** ◇ **285 52 8222** ◇ ◇ = A / W	**RAND 2 REO 3033-9** ◇ **285 52 89222** ◇ ◇ = A / W
REFLECTOR WFL-50°	**RAND 1 REO 3050** ◇ **285 52 8132** ◇ ◇ = A / W	**RAND 1 REO 3050-9** ◇ **285 52 89132** ◇ ◇ = A / W	**RAND 2 REO 3050** ◇ **285 52 8232** ◇ ◇ = A / W	**RAND 2 REO 3050-9** ◇ **285 52 89232** ◇ ◇ = A / W
2700K	618lm (7W)	525lm (7W)	2x 618lm (7W)	2x 525lm (7W)
REFLECTOR FL-33°	**RAND 1 REO 2733** ◇ **285 52 8123** ◇ ◇ = A / W	**RAND 1 REO 2733-9** ◇ **285 52 89123** ◇ ◇ = A / W	**RAND 2 REO 2733** ◇ **285 52 8223** ◇ ◇ = A / W	**RAND 2 REO 2733-9** ◇ **285 52 89223** ◇ ◇ = A / W
REFLECTOR WFL-50°	**RAND 1 REO 2750** ◇ **285 52 8133** ◇ ◇ = A / W	**RAND 1 REO 2750-9** ◇ **285 52 89133** ◇ ◇ = A / W	**RAND 2 REO 2750** ◇ **285 52 8233** ◇ ◇ = A / W	**RAND 2 REO 2750-9** ◇ **285 52 89233** ◇ ◇ = A / W
	INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 0,8 IP20 1,0		INCL.2 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 220-240V / 50-60Hz 1,5 IP20 1,0	



RAND 2 REO 3033 W





Rand LED














RAND 111 LED DIM8 ◇
285 50 124 ED8 ◇
◇ = A / B / W
INCL.1 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE

◇ CE 0,6 IP20

RAND 211 LED DIM8 ◇
285 50 224 ED8 ◇
◇ = A / B / W
INCL.2 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE

◇ CE 1,0 IP20

RAND 311 LED DIM8 ◇
285 50 324 ED8 ◇
◇ = A / B / W
INCL.3 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE

◇ CE 1,6 IP20

ON REQUEST 45°


FULL INFO / PAG TEC


Accessories

	C A B	
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 111 **201 47 11**	Ø100	









RAND 111 T50 ◇
285 51 11 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
0,6 IP20 1,0


ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

RAND 211 T50 ◇
285 52 21 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
1,0 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

Rand T50






RAND 311 T50 ◇
285 53 31 ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
CE 1,6 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111




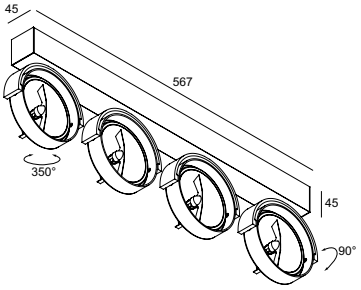

RAND 411 T50 ◇
285 54 41 ◇
◇ = A / W
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
CE 2,0 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



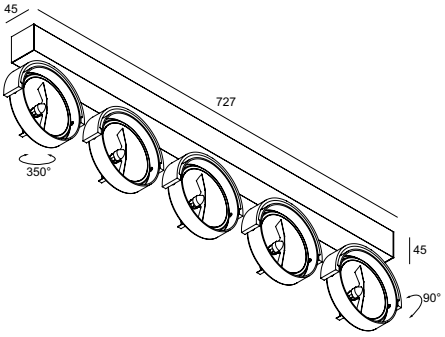

RAND 511 T50 ◇
285 55 51 ◇
◇ = A / W
G53 / 220-240V / 50-60Hz / TE
5 x QR-LP111 max.50W
CE 2,6 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111




AABE




FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 2 1,6m
328 15 21
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²



SUSPENSION SET 4 1,6m
328 15 41
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W





Outfit U












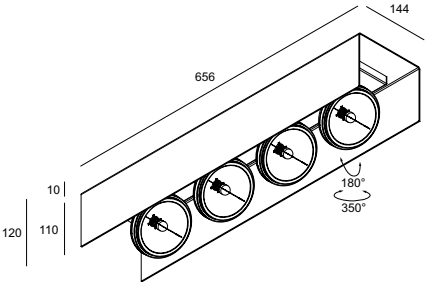

new led

OUTFIT U 211 LED ◇
345 022 822 ◇
◇ = W
ADJUSTABLE 0°-180° / 350°
INCL.2 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE

2,8 IP20

OPTIONS
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

OUTFIT U 211 T50 ◇
345 02 21 ◇
◇ = W
ADJUSTABLE 0°-180° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

2,9 IP20 850° 1,0

OPTIONS
SUSPENSION SET 2 1,6m
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

OUTFIT U 411 T50 ◇
345 02 41 ◇
◇ = W
ADJUSTABLE 0°-180° / 350°
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W

5,4 IP20 850° 1,0

OPTIONS
SUSPENSION SET 2 1,6m
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ON REQUEST LED LAMP 45°



OUTFIT U 211 T50 + SUSPENSION SET 2 1,6m



VERDICKT & VERDICKT

FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 2 1,6m
328 15 21
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²



SUSPENSION SET 4 1,6m
328 15 41
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W




COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



Outfit L





new


led

OUTFIT L 211 LED ◇
345 012 822 ◇
◇ = W
ADJUSTABLE 0°-180° / 350°
INCL.2 x LED 111 LAMP 24° 12V-DC / 15,5W / 2800K ● / 550lm
MAINS DIMMING (FE)
G53 / 220-240V / 50-60Hz / TE

CE 2,5 IP20

OPTIONS
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90






OUTFIT L 211 T50 ◇
345 01 21 ◇
◇ = W
ADJUSTABLE 0°-180° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 2,3 IP20 850° 1,0

OPTIONS
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



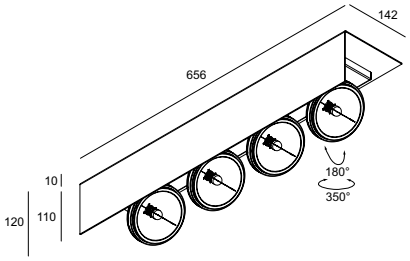

OUTFIT L 411 T50 ◇
345 01 41 ◇
◇ = W
ADJUSTABLE 0°-180° / 350°
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W

CE 4,2 IP20 850° 1,0

OPTIONS
SUSPENSION SET 4 1,6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

ON REQUEST LED LAMP 45°



OUTFIT U 211 LED - ON WALL


Muziek

FULL INFO / PAG TEC

Options

INSTALLATION




COVERSET R ◇

204 00 90 ◇	Ø90
204 00 100 ◇	Ø100

◇ = ANO / W



SUSPENSION + CONNECTION TRIMLESS O.F.A.
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²




play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

new

led

Flac





FLAC 83015 ◇
286 73 831 ◇
◇ = W
INCL. LENS DOWN SP-15°

FLAC 83030 ◇
286 73 832 ◇
◇ = W
INCL. LENS DOWN FL-30°

INCL.1 x POWERLED DOWN WHITE 4,1W / 20° / 3000K / 380lm
INCL.LED CLUSTER UP 14,7W / 3000K / 1960lm
INCL LED POWER SUPPLY 350mA-DC
INCL.1 x CABLE 2 x 0.75mm²
INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m
100-240V / 50-60Hz
MAINS DIMMING (FE)

CE 3,7 IP20

OPTIONS
SUSPENSION + CONNECTION TRIMLESS
COVERSET R 62-90-100 / S 62-80-90





Requirements

INSTALLATION

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



4000K

3000K


REFLECTOR FL-33°

2700K


REFLECTOR FL-33°

Sfinks



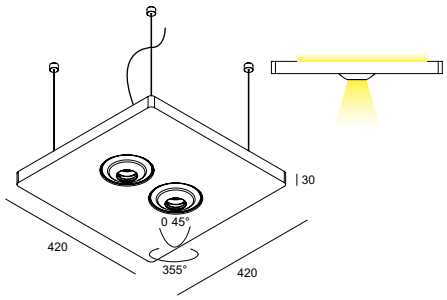



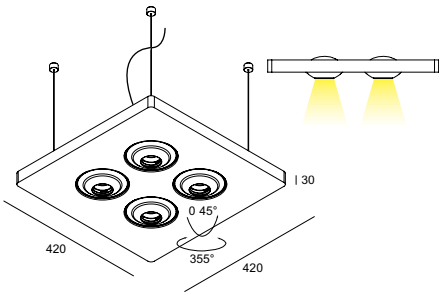

DIM8

CRI > 80	CRI > 90
ON REQUEST	
2 x 703lm (6,2W)	2 x 550lm (6,2W)
SFINKS 2 83033 DOWN-UP ◇ **280 51 82832 ◇** ◇ = W	**SFINKS 2 93033 DOWN-UP ◇** **280 51 82932 ◇** ◇ = W
2 x 665lm (6,2W)	2 x 519lm (6,2W)
SFINKS 2 82733 DOWN-UP ◇ **280 51 82822 ◇** ◇ = W	**SFINKS 2 92733 DOWN-UP ◇** **280 51 82922 ◇** ◇ = W

ADJUSTABLE 0°- 45° / 355°
INCL.2 x POWERLED WHITE 6,2W DOWN
INCL.2 x LED ARRAY WHITE 7,5W / 3000K UP
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 3 x 0.75mm²
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 4,7 IP20

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

CRI > 80	CRI > 90
ON REQUEST	
4 x 703lm (6,2W)	4 x 550lm (6,2W)
SFINKS 4 83033 DIM8 ◇ **280 50 84832 ED8 ◇** ◇ = W	**SFINKS 4 93033 DIM8 ◇** **280 50 84932 ED8 ◇** ◇ = W
4 x 665lm (6,2W)	4 x 519lm (6,2W)
SFINKS 4 82733 DIM8 ◇ **280 50 84822 ED8 ◇** ◇ = W	**SFINKS 4 92733 DIM8 ◇** **280 50 84922 ED8 ◇** ◇ = W

ADJUSTABLE 0°- 45° / 355°
INCL.4 x POWERLED WHITE 6,2W
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
INCL.LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 5,2 IP20

REQUIREMENT
CABLE BASE R / S



FULL INFO / PAG TEC

Options

INSTALLATION		
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41	

FULL INFO / PAG TEC

Accessories


CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26	
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22	
FRONTGLASS 111 **201 17 00**	Ø100	
LENS 111 **201 47 11**	Ø100	


Grand Prix RC














GRAND PRIX RC 211 T50 ◇
280 30 211 ◇
◇ = ALU
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
1,6 IP20 850° 1,0

OPTIONS
CABLE BASE R / S

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

GRAND PRIX RC 411 T50 ◇
280 30 411 ◇
◇ = ALU
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
2,5 IP20 850° 1,0

OPTIONS
CABLE BASE R / S

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

GRAND PRIX SC 411 T50 ◇
280 31 411 ◇
◇ = ALU
INCL.4 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
2,3 IP20 850° 1,0

OPTIONS
CABLE BASE R / S

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



THE OFF/ WHITE COMPANY


Requirements

INSTALLATION

BOWL GLASS CLEAR
286 67 01

BOWL GLASS AMBER
286 67 02

BOWL GLASS OPAL WHITE
286 67 03



0,7



GIBBO + BOWL GLASS OPAL WHITE

new led

Gibbo





	CRI > 80
4000K	
	ON REQUEST
3000K	703lm (6,2W)
	GIBBO 830 ◇ **286 67 8183** ◇ ◇ = B / W
2700K	665lm (6,2W)
	GIBBO 827 ◇ **286 67 8182** ◇ ◇ = B / W

INCL.1 x POWERLED WHITE [H] 6,2W
EXCL.GLASS
INCL.1 x CABLE 2 x 0.75mm²
INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m
INCL.LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 0 I 50-60Hz

1,3 IP20

REQUIREMENT
BOWL GLASS CLEAR
286 67 01
or
BOWL GLASS AMBER
286 67 02
or
BOWL GLASS OPAL WHITE
286 67 03


WÜNDER


FULL INFO / PAG 130

Options

INSTALLATION



SUSPENSION + CONNECTION TRIMLESS O.F.A.
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



play.delta ight.com/suspensiontrimlessconcrete
play.delta ight.com/suspensiontrimlessplasterboard



SUSPENSION + CONNECTION TRIMLESS

new

led

Gaboo C





GABOO C ◇
286 64 12 ◇
◇ = B / W
INCL.1 x LED CLUSTER UP 6,3W / 3000K ● / 725lm
INCL.1 x LED CLUSTER DOWN 7,3W / 3000K ● / 845lm
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
INCL.1 x CABLE 2 x 0.75mm²
INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m
100-240V / 50-60Hz

CE 1,3 IP20

OPTIONS
SUSPENSION + CONNECTION TRIMLESS




BENNETTS ASSOCIATES

new

led

McDelta






McDELTA ◇
286 691 28122 ◇
◇ = W
INCL.1 x BIPOLAR CABLE 2 x 0.5mm² 1.6m
INCL.1 x POWERLED WHITE 7W / 3000K ● / 680lm
INCL.REFLECTOR FL-33°
INCL.POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
220-240V / 0 I 50-60Hz

CE 1,0 IP20

led

Nyx





NYX ◇
286 68 28102 B ◇
◇ = B
INCL.PC SBL
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x BIPOLAR CABLE 2 x 0.5mm²
INCL.1 x POWERLED WHITE 7W / 3000K ● / 680lm
INCL.POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 1,3 IP20

INNOVATIONSPREIS ARCHITEKTUR + TECHNIK





FULL INFO / PAG TEC

Options

INSTALLATION




COVERSET R ◇

204 00 90 ◇	Ø90
204 00 100 ◇	Ø100

◇ = ANO / W




SUSPENSION + CONNECTION TRIMLESS O.F.A.
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

Husk






HUSK ◇
286 65 27 ◇
◇ = B / W
INCL.PC SBL
INCL.1 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
E27Ls / 100-240V / 50-60Hz

 1 x TC-TSE max.15W

 1 x TCA-SE max.15W



OPTIONS
COVERSET R 90-100
SUSPENSION + CONNECTION TRIMLESS
led LED SOLUTION - PAG TEC 4-5



SUSPENSION + CONNECTION TRIMLESS



ARCHIBIR





FULL INFO / PAG TEC

Options

INSTALLATION



COVERSET R ◇

204 00 90 ◇ Ø90

204 00 100 ◇ Ø100




◇ = ANO / W

SUSPENSION + CONNECTION TRIMLESS O.F.A.

328 10 02

INCL.1 x AUTOMATIC ADJUSTMENT

INCL.1 x CONNECTOR 3 x 2.5mm²




play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard



SUSPENSION + CONNECTION TRIMLESS

Metronome



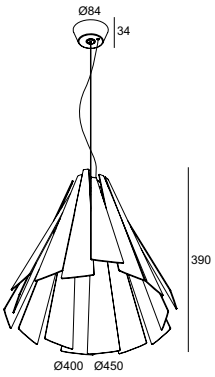

METRONOME ◇

286 70 27 ◇

◇ = B / W

INCL.1 x CABLE SUSPENSION 1.6m

INCL.1 x CABLE 2 x 0.75mm²

E27Ls / 100-240V / 50-60Hz

1 x TCA-SE max.23W

1 x A60 max.60W

CE 2,1 IP20 0,1

OPTIONS


COVERSET R 90-100

SUSPENSION + CONNECTION TRIMLESS

led LED SOLUTION - PAG TEC 4-5

Metronome H



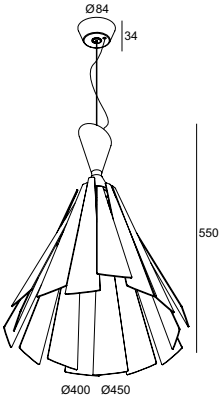

METRONOME H ◇

286 70 28 ◇

◇ = B / W

INCL.1 x CABLE SUSPENSION 1.6m

INCL.1 x CABLE 2 x 0.75mm²

E27Ls / 100-240V / 50-60Hz

1 x TCA-SE max.23W

1 x A60 max.60W

CE 2,3 IP20 0,1

OPTIONS

COVERSET R 90-100

SUSPENSION + CONNECTION TRIMLESS

led LED SOLUTION - PAG TEC 4-5

play.deltalight.com/metronome

DESIGN BY **DELTA LIGHT®** & **TIM VAN STEENBERGEN**

reddot design award winner 2012

interior innovation award 2012 Winner






CHOCOLATE
ACADEMY™
centre
CALLEBAUT




FULL INFO / PAG TEC

Options

INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Metronome L



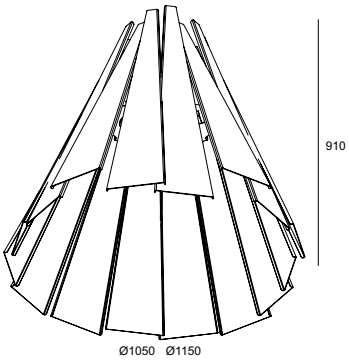

METRONOME L ◇
286 71 427 ◇
◇ = W
INCL.1 x CABLE 3 x 0.75mm² 3m
INCL.SUSPENSION CHAIN 3m
E27Ls / 100-240V / 50-60Hz
4 x TC-TSE max.23W
4 x TCA-SE max.23W
4 x A60 max.60W
CE 35,0 IP20 0,1


OPTIONS
COVERSET R 90-100
CABLE BASE R / S
led LED SOLUTION - PAG TEC 4-5

play.deltalight.com/metronome

DESIGN BY **DELTA LIGHT®** & **TIM VAN STEENBERGEN**


reddot design award winner 2012

interior innovation award 2012 Winner

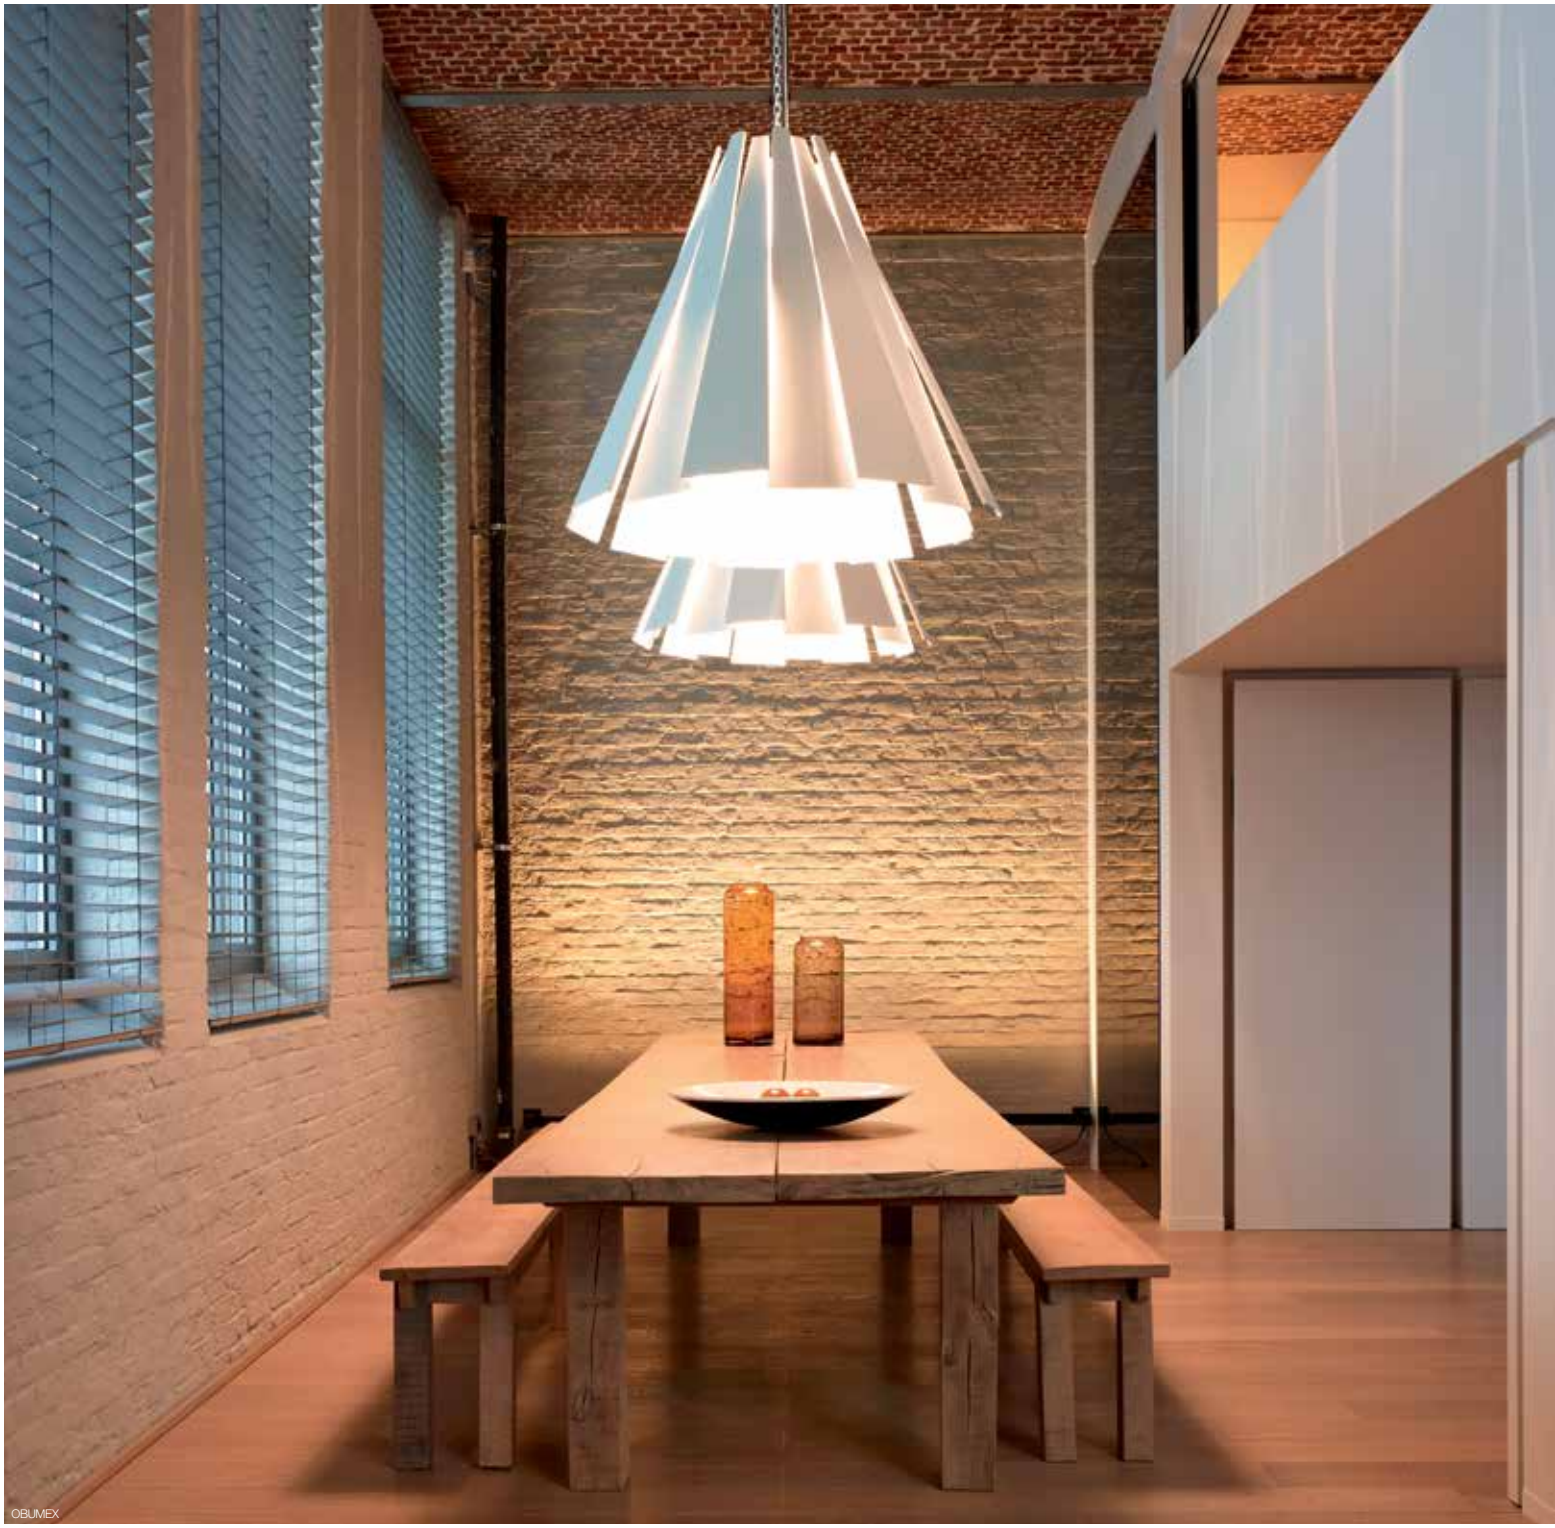
OBUMEX



NICHOLAS HARE ARCHITECTS

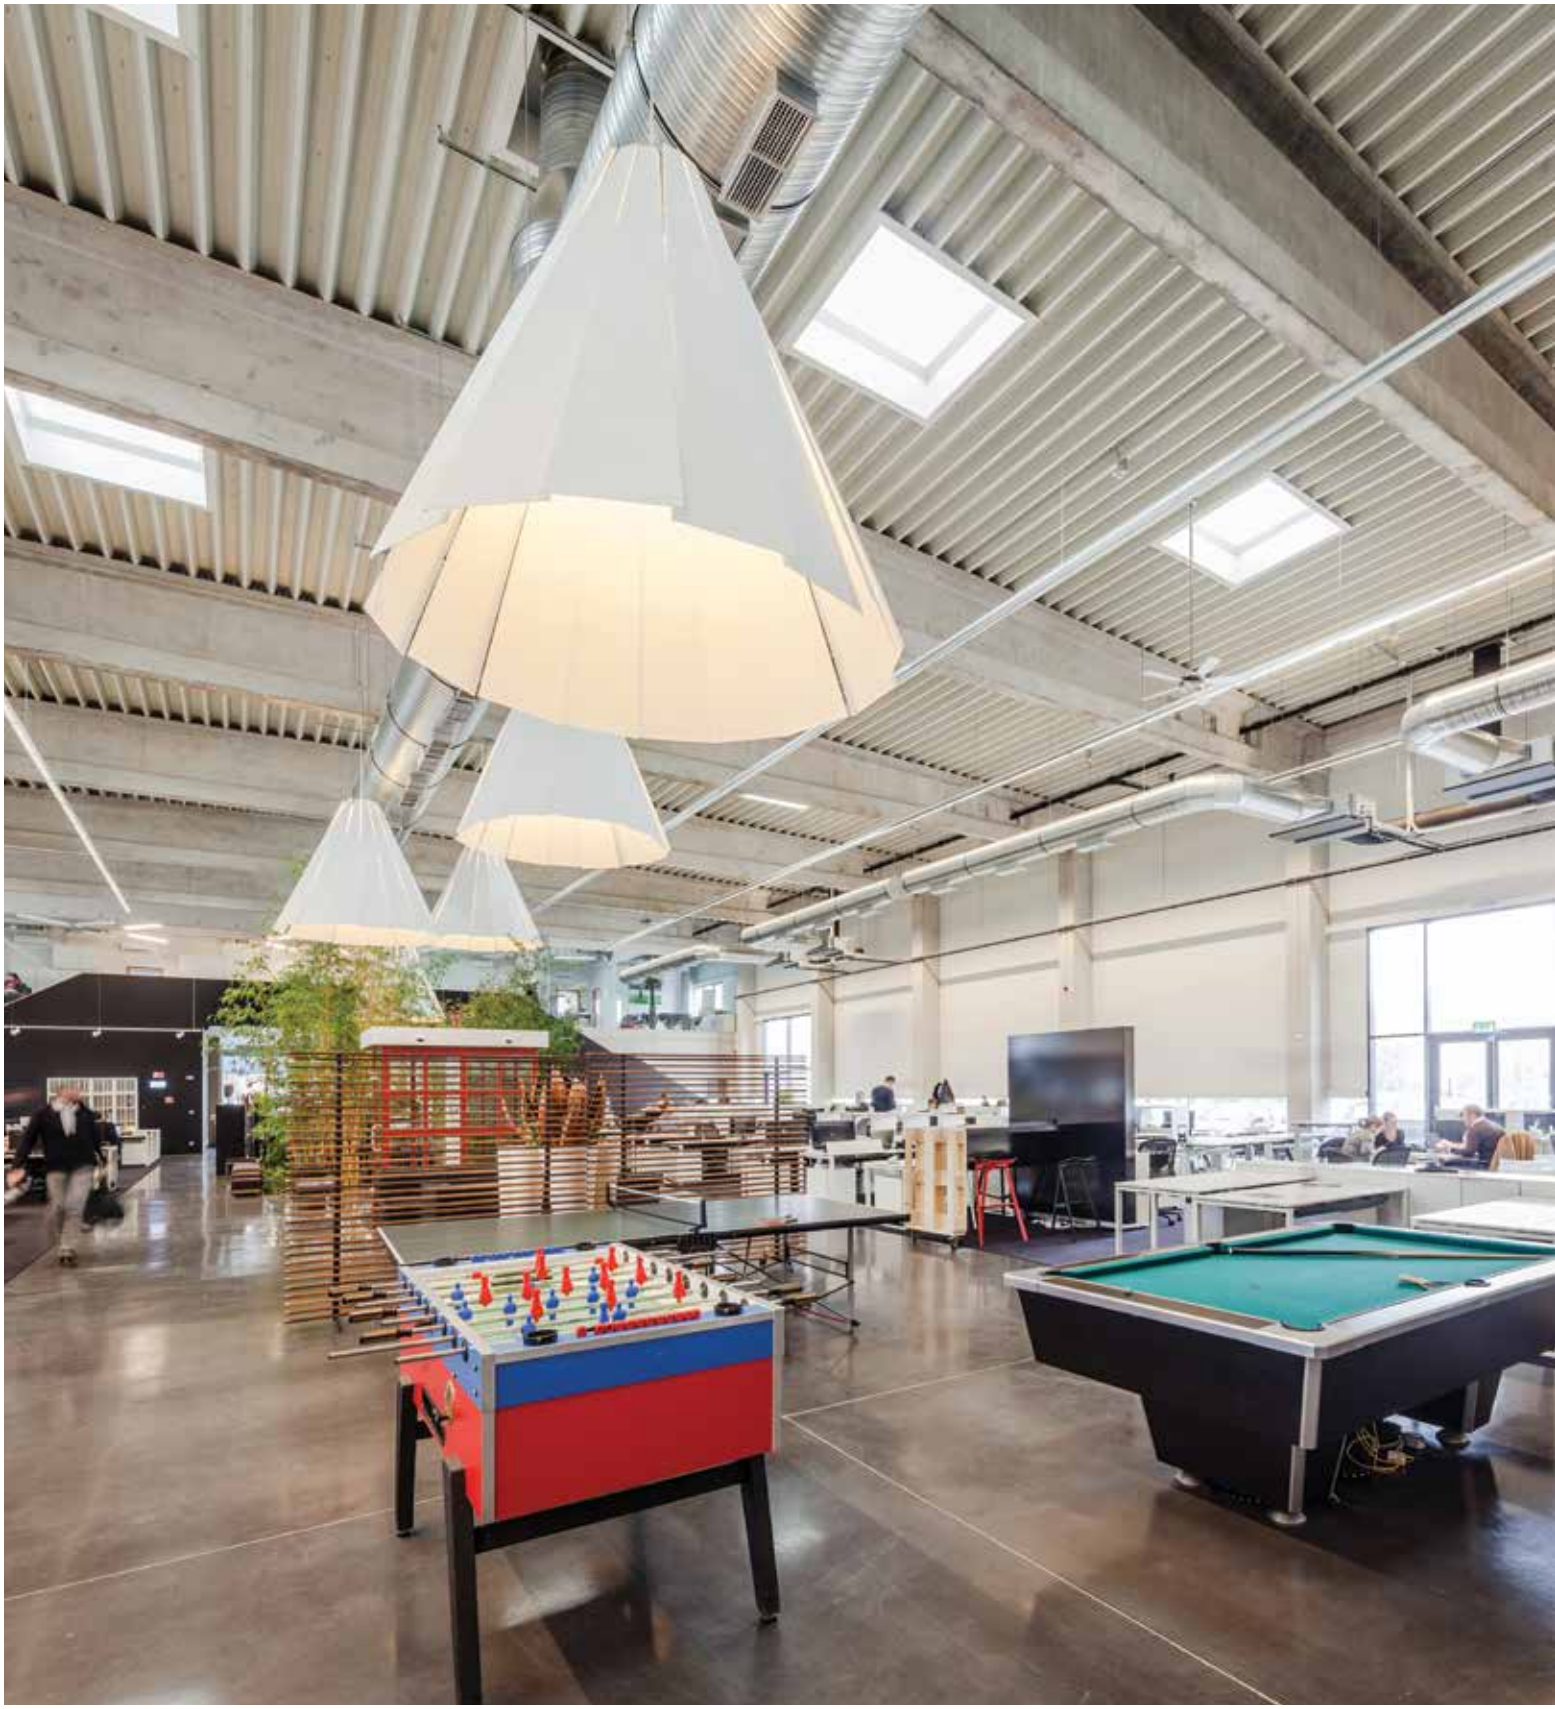



FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION CHAIN 3M
286 71 03

SUSPENSION CHAIN 6M
286 71 06

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B


CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B

COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W

COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W

Metronome XXL



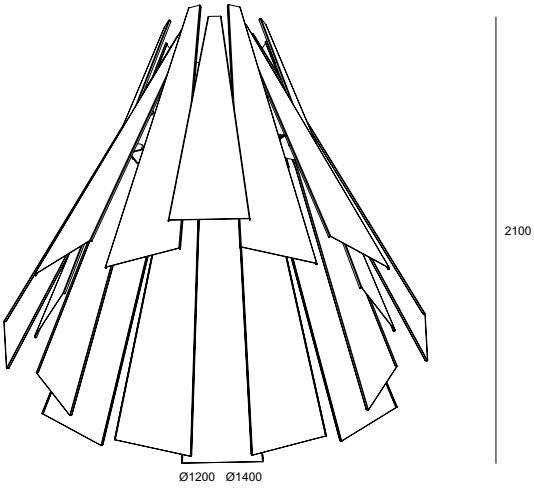

METRONOME XXL ◇
286 71 727 ◇
◇ = W
INCL.1 x CABLE 3 x 0.75mm² / 6m
E27Ls / 100-240V / 50-60Hz
7 x TC-TSE max.23W
7 x TCA-SE max.23W
7 x A60 max.60W
80,0 IP20 0,1

OPTIONS
SUSPENSION CHAIN
COVERSET R 90-100
CABLE BASE R / S
led LED SOLUTION - PAG TEC 4-5

play.deltalight.com/metronome

DESIGN BY **DELTA LIGHT®** & **TIM VAN STEENBERGEN**

reddot design award winner 2012


interior innovation award 2012 Winner







90 DEGREES

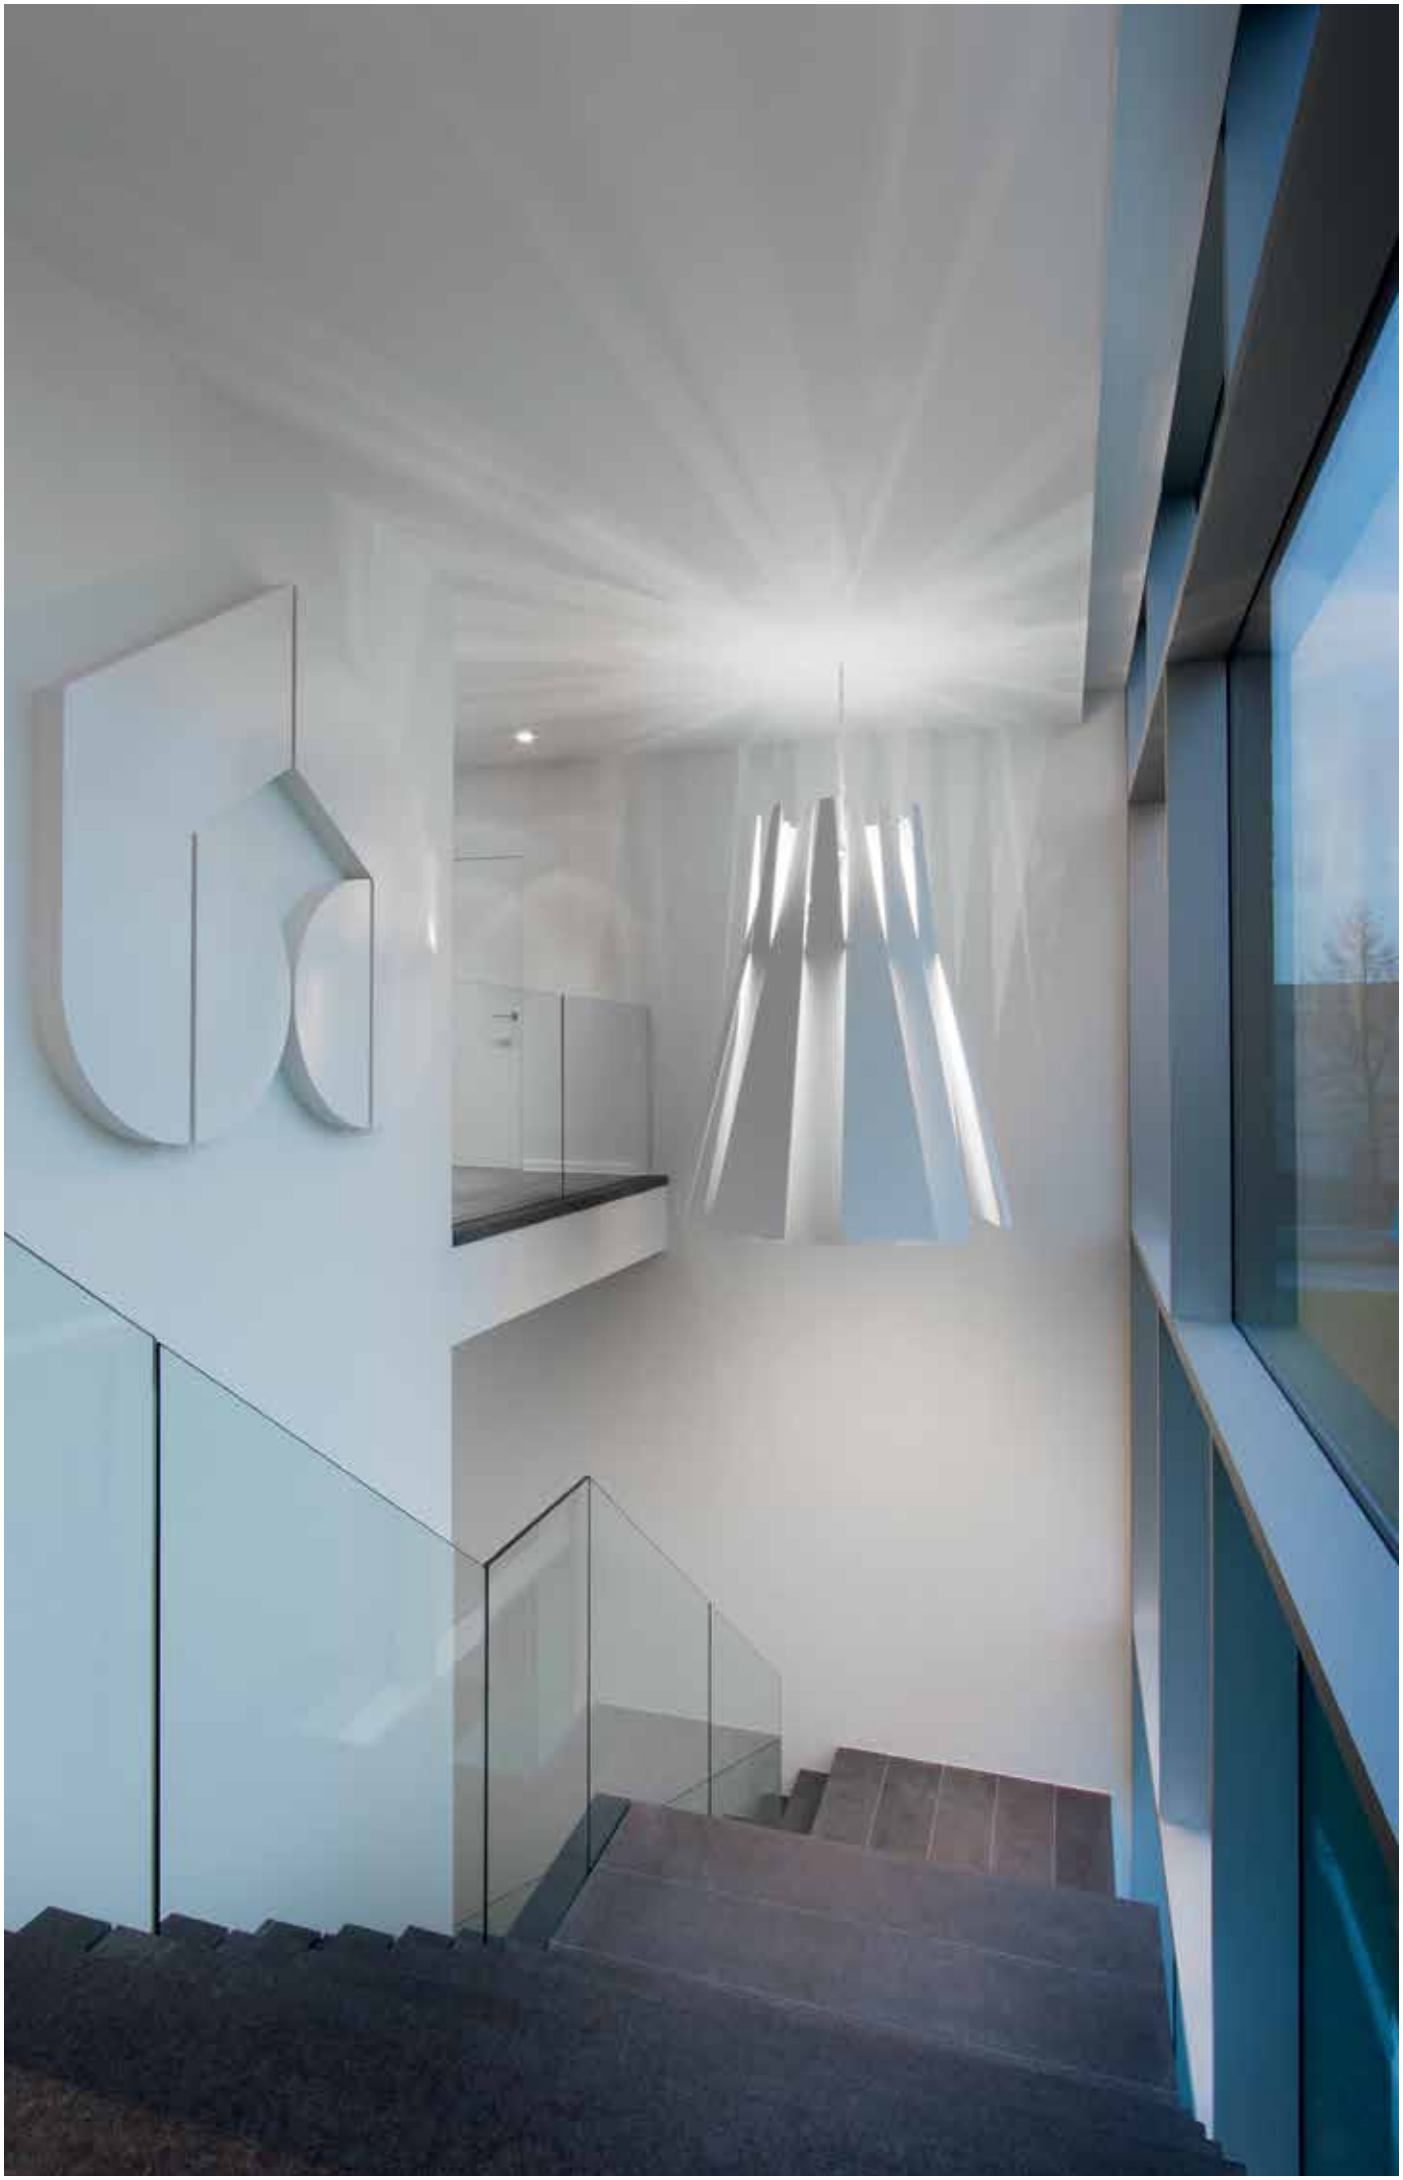

FULL INFO / PAG TEC


Options


INSTALLATION	
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Jeti









JETI S
271 61 21
INCL.3 x CABLE SUSPENSION 1.6m
INCL.1 x CABLE 2 x 0.75mm²
E27Ls / 100-240V / 50-60Hz
1 x A60 max.60W
1 x TC-TSE max.23W
1 x TCA-SE max.20W

1,5 IP40 0,1

OPTIONS
COVERSET R 62-90-100 / S 62-80-90


JETI PLANO H 260 C
271 54 260
INCL.4 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
2GX13 / 220-240V / 50-60Hz / 2 x 1~EVG
2 x T16-R 60W

7,4 IP20 0,1


OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Jeti














JETI PLANO L 110
271 521 83
INCL.LED CLUSTER 10,5W / CRI>80 / 3000K / 1180lm
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

1,0 IP43

JETI L 115
271 511 83
INCL.LED CLUSTER 15W / CRI>80 / 3000K / 1960lm
INCL.LED POWER SUPPLY 350mA-DC
110-240V / 50-60Hz

0,8 IP20

JETI L PLANO L 415 DIM1
271 522 83 ED1
INCL.LED CLUSTER 60W / CRI>80 / 3000K / 7840lm
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 0 I 50-60Hz


5,4 IP20

JETI PLANO L 218
271 52 218
G24q-2 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 18W

0,9 IP43 0,1

JETI L 124
271 51 124
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16-S 24W

0,8 IP20 0,1



JETI PLANO L 160
271 52 160
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 60W


5,4 IP20 0,1

JETI PLANO L 424
271 52 424
G5 / 220-240V / 0 I 50-60Hz / 1 x 4~EVG
4 x T16 24W

5,9 IP20 0,1





nthaal

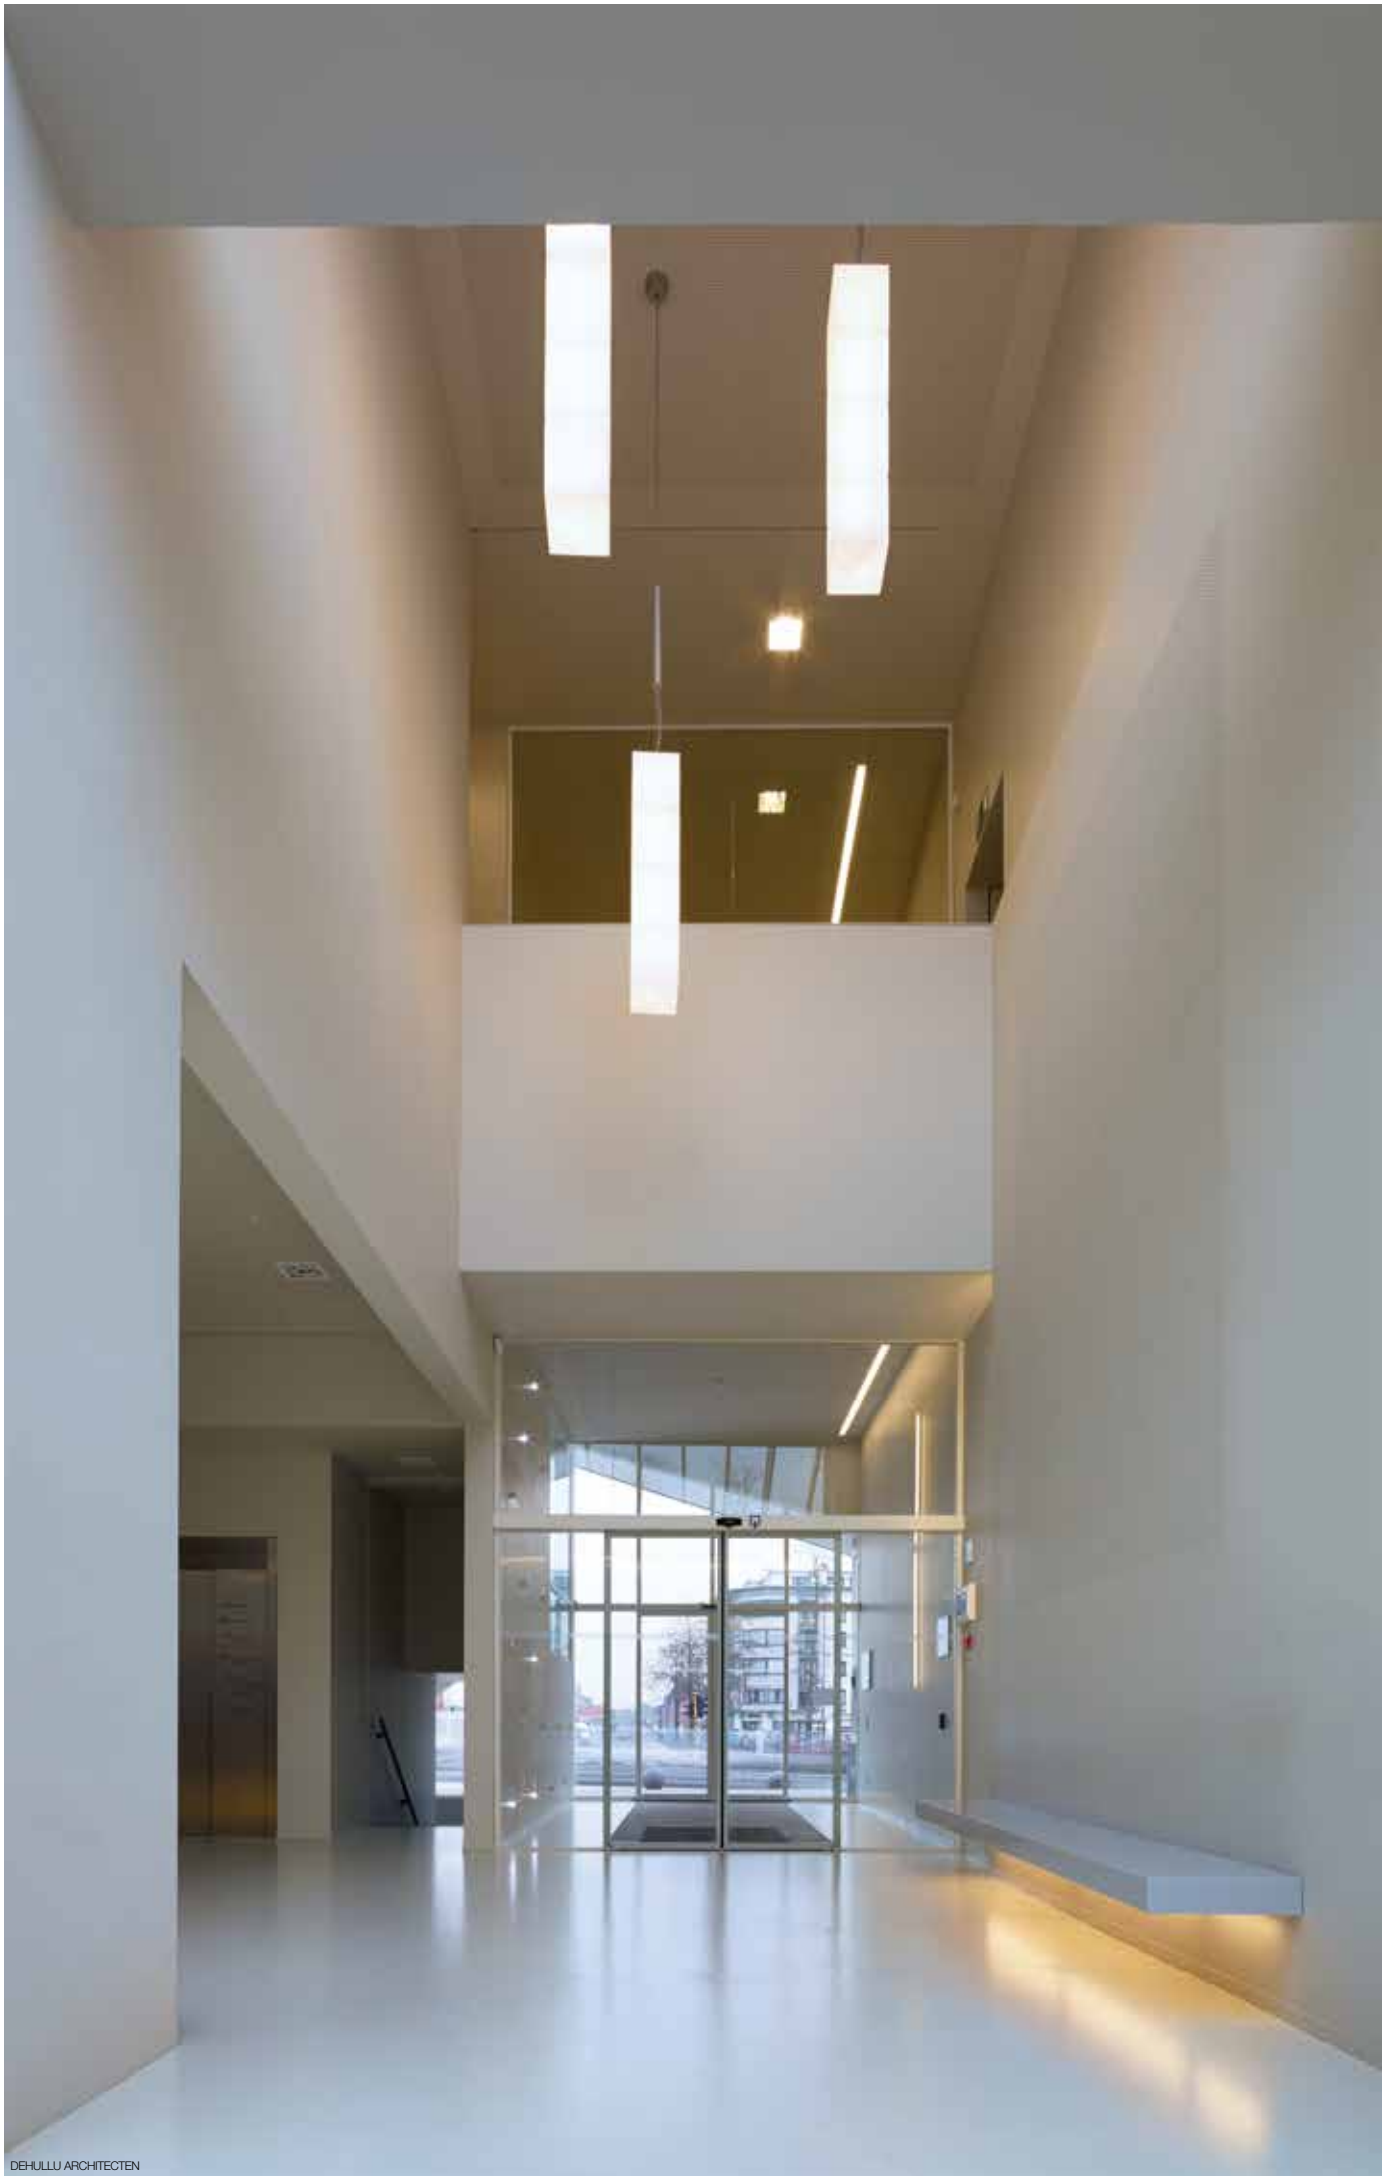

DEHULLU ARCHITECTEN

Jeti Luster



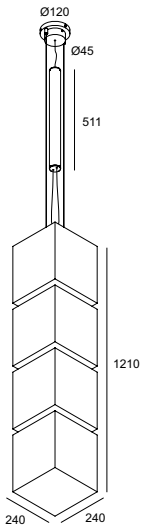

JETI LUSTER
271 64 21
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
CE 6,5 IP20 0,1

JETI LUSTER EVG DIM 2
271 64 21 ED2
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG DIM
2 x T16 54W
CE 6,5 IP20 0,1




FULL INFO / PAG TEC


Options

INSTALLATION	
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	

Be Cool®

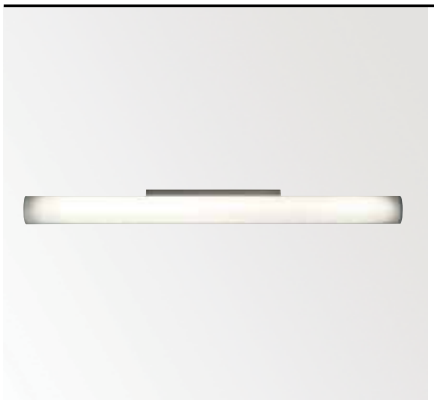



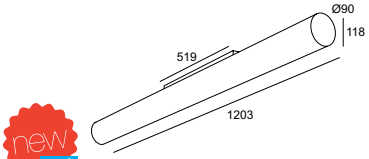


new led

BE COOL® 130 ◇
274 251 83 ◇
◇ = ALU
INCL.LED CLUSTER 30W / CRI>80 / 3000K / 3920lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 0 I 50-60Hz

CE 2,5 IP40

BE COOL® 154 ◇
274 25 154 ◇
◇ = ALU
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 54W

CE 2,5 IP40 0,1

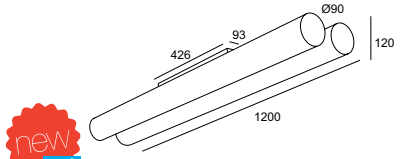


new led

BE COOL® 230 ◇
274 252 83 ◇
◇ = A
INCL.2 x LED CLUSTER 30W / CRI>80 / 3000K / 2 x 3920lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 0 I 50-60Hz

CE 5,0 IP40

BE COOL® 254 ◇
274 25 254 ◇
◇ = A
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W

CE 5,0 IP40 0,1

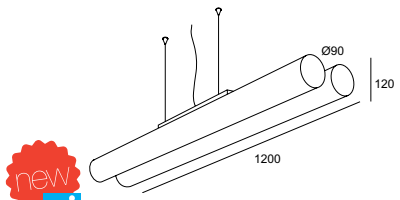

new led

BE COOL® C 230 ◇
274 262 83 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
INCL.2 x LED CLUSTER 30W / CRI>80 / 3000K / 2 x 3920lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 0 I 50-60Hz

CE 5,0 IP40

BE COOL® C 254 ◇
274 26 254 ◇
◇ = A
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W

CE 5,6 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



FULL INFO / PAG TEC

Options

INSTALLATION

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B

CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B

COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W

COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W

CONTROL GEAR


LED RGB KIT 150
300 90 215

RGB TOUCH CONTROLLER DMX
300 90 330

RGB REMOTE CONTROL
300 90 310
MAX.1 x NEBEL RGB RC M
+
MAX.5 x NEBEL RGB RC S

Nebel RGB





NEBEL RGB
286 61 33
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
INCL.LEDSTRIP RGB 72W
EXCL.LED RGB KIT

3,0 IP40

OPTIONS
LED RGB KIT
RGB TOUCH CONTROLLER DMX
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

NEBEL RGB RC M
286 61 33 RC M
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
INCL.LEDSTRIP RGB 72W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER MASTER
220-240V / 50-60Hz

3,0 IP40


NEBEL RGB RC S
286 61 33 RC S
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
INCL.LEDSTRIP RGB 72W
INCL.LED POWER SUPPLY 24V-DC
INCL.RGB RECEIVER SLAVE
220-240V / 50-60Hz

3,0 IP40

OPTIONS
RGB REMOTE CONTROL
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Nebel





NEBEL
286 61 254
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI EVG
2 x T16-S 28/54W


2,8 IP40 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

NEBEL EVG DIM 2
286 61 254 ED2
INCL.2 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY DALI / SWITCH
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI EVG DIM
2 x T16-S 28/54W

2,8 IP40 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

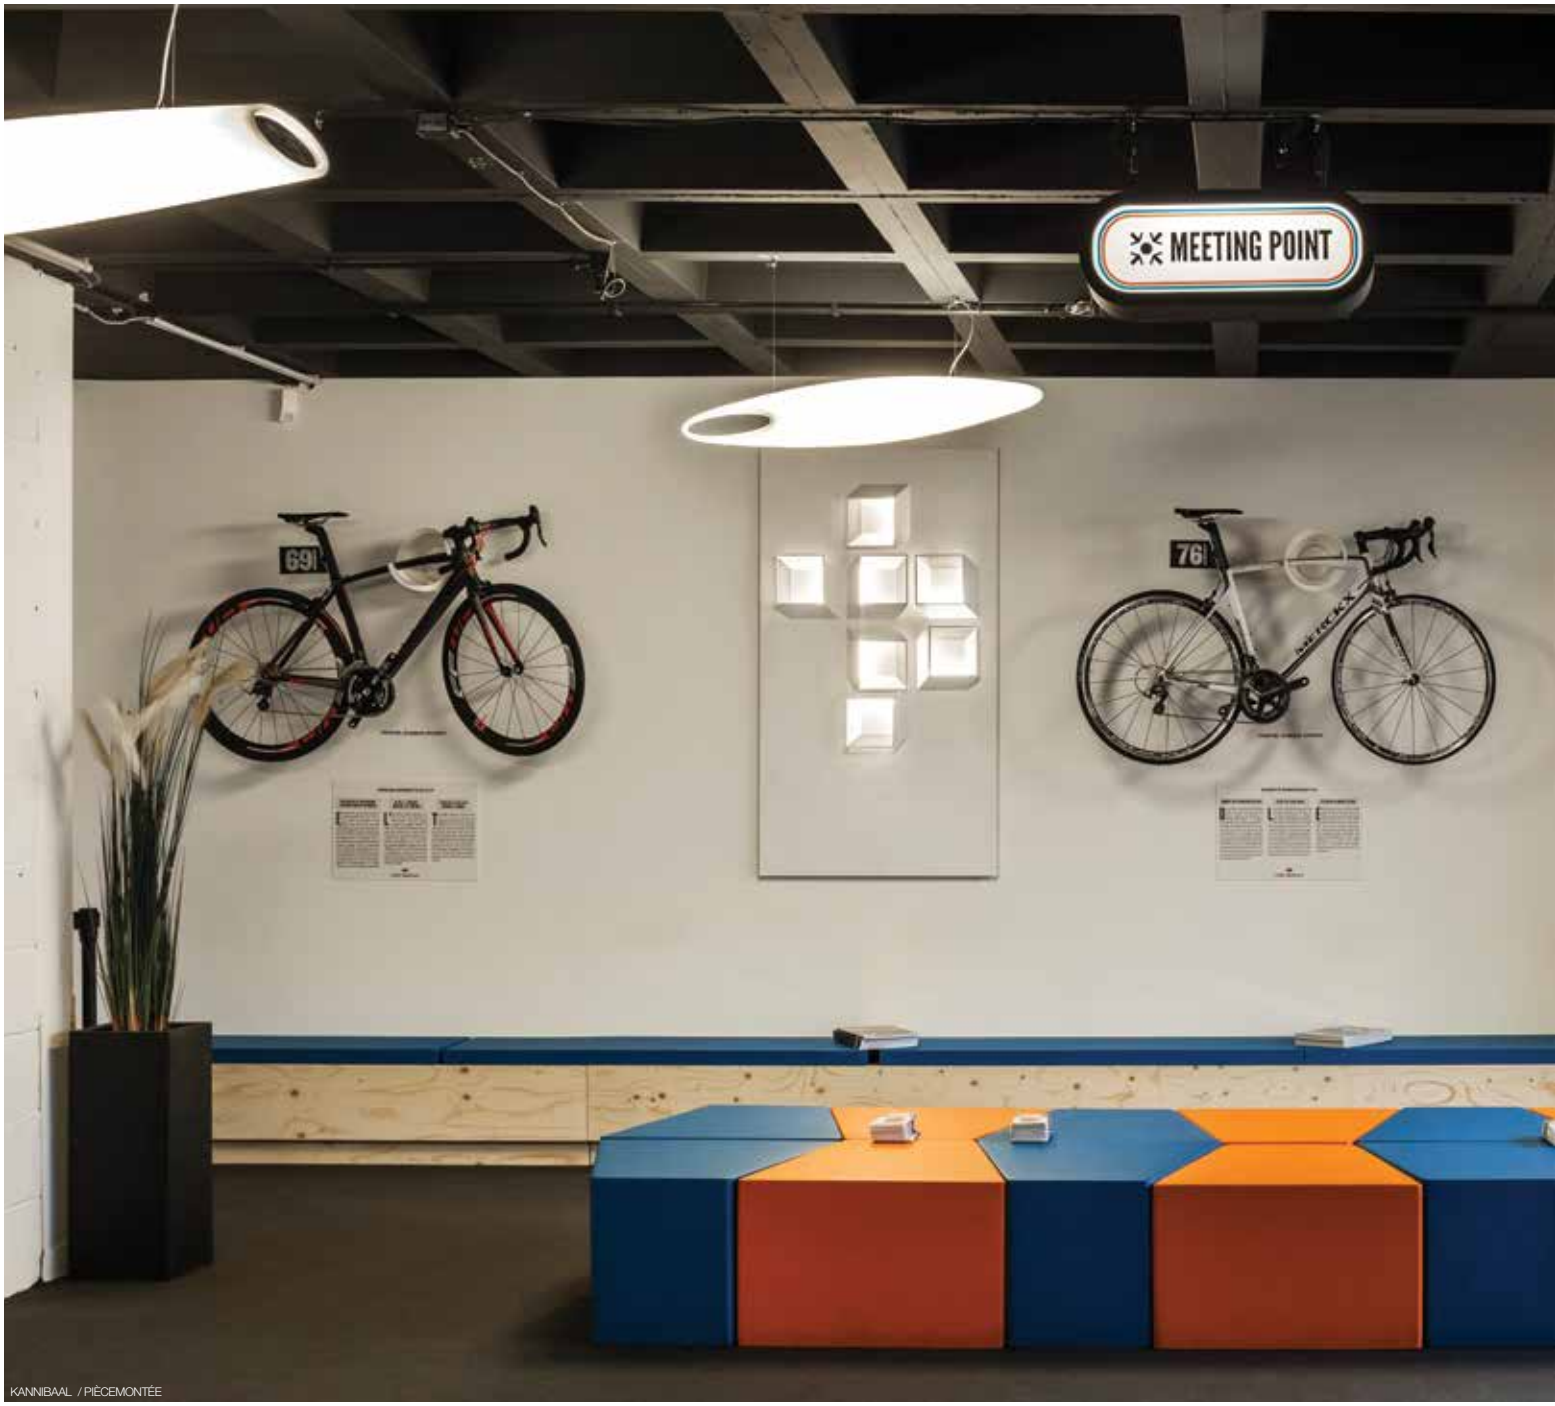

KANNIBAAL / PIÈCEMONTÉE





SCHÖN ARCHITECTS / KROKI STUDIO



ART1ST DESIGN STUDIO

FULL INFO / PAG TEC

Options

CONTROL GEAR


LED RGB KIT 150
300 90 215

LED RGB KIT 60
300 90 206

RGB TOUCH CONTROLLER DMX
300 90 330

Cumulus RGB C






CUMULUS RGB C ◇
286 51 300 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
INCL.LEDSTRIP RGB 44W
EXCL.LED RGB KIT

CE 9,2 IP40

OPTIONS
LED RGB KIT
RGB TOUCH CONTROLLER DMX

Cumulus C






CUMULUS 255 C
286 51 255 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 3 x 0.75mm²
2GX13 / 220-240V / 50-60Hz / 2 x 1~EVG
2 x T16-R 55W

CE 8,0 IP40 0,1

CUMULUS 255 C EVG DIM 6
286 51 255 ED6 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
DIMMING BY SWITCH DIM
2GX13 / 220-240V / 50-60Hz / 2 x 1~EVG DIM
2 x T16-R 55W

CE 8,0 IP40 0,1



CUMULUS 155-111 C ◇
286 51 155 11 ◇
◇ = A
INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0.75mm²
CABLING 2 CIRCUITS
ADJUSTABLE 0°- 30°
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 55W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 35W

CE 10,2 IP20 1,0



FULL INFO / PAG TEC

Options

INSTALLATION

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W



COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




CONTROL GEAR

DALI TO 1-10V CONVERTOR 189 x 30 x 29
385 611 ED5
max. 9x SUPERDOME 9528 EVG DIM1

new

Superdome



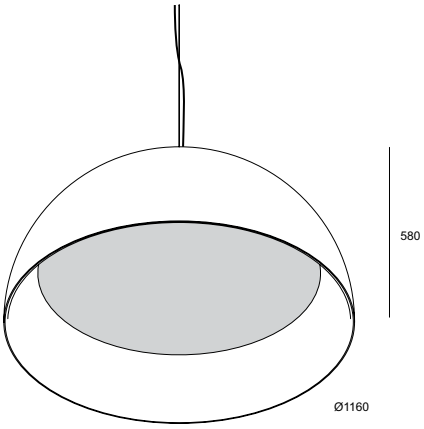

led

SUPERDOME 9528 EVG DIM1 ◇
321 95 9528 ED1 ◇
◇ = B-W / W-W
INCL.PC SBL
INCL. 1 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 5 x 0,75mm² 3m
INCL.LEDCLUSTER 114W / 3000K / 14140lm
INCL.2 x LED POWER SUPPLY 350mA-DC
DIMMING BY 1-10V
120-240V / 50-60Hz

CE 23,0 IP20

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
DALI TO 1-10V CONVERTER

SUPERDOME ◇
321 95 327 ◇
◇ = B-W / W-W
INCL.PC SBL
INCL. 1 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 3 x 0,75mm² 3m
E27Ls / 100-240V / 50-60Hz
3 x TC-TSE max.23W
3 x TCA-SE max.23W

CE 21,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
DALI TO 1-10V CONVERTER


PRAGUE
FERTILITY
CENTRE

FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 21 2x0.75 1.6m
328 21 212
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²

SUSPENSION SET 21 3x0.75 1.6m
328 21 213
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²


SUSPENSION SET 21 EVG DIM1
328 21 213 ED1
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
INCL.1 x CABLE 2 x 0.75mm²

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B

CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B

COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W


COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W

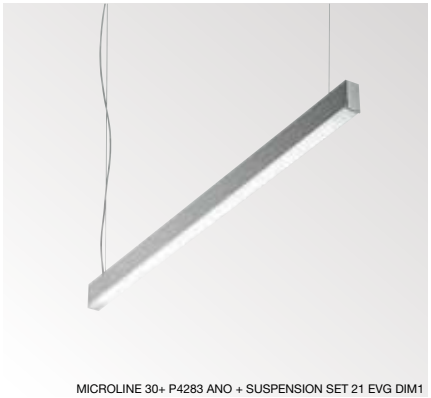

MICROLINE 30+ P4283 ANO + SUSPENSION SET 21 EVG DIM1

Microline 30+ P4283







MICROLINE 30+ P4283 DIM1 ◇
346 021 42 ED1 ◇
◇ = ANO / W
DOWN
INCL.1 x PC SBL
INCL.LED CLUSTER 30W / 3000K / 3920lm
INCL.1 x LED POWERSUPPLY 700mA-DC
DIMMING BY 1-10V CONTROL
220-240V / 0 I 50-60Hz

1,9 IP20

OPTIONS
SUSPENSION SET 21 EVG DIM1
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Microline 30+ P

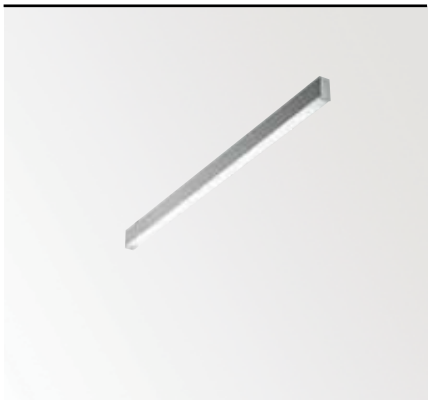

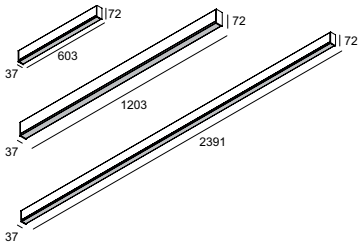

MICROLINE 30+ P1124 ◇
346 021 124 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 14/24W

1,6 IP20 0,1

OPTIONS
SUSPENSION SET 21 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

MICROLINE 30+ P1154 ◇
346 021 154 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W

2,2 IP20 0,1

OPTIONS
SUSPENSION SET 21 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

MICROLINE 30+ P2154 ◇
346 021 254 ◇
◇ = ANO / W
DOWN
INCL.1 x MIC30+ PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16-S 28/54W

4,5 IP20 0,1

OPTIONS
SUSPENSION SET 21 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90



FULL INFO / PAG TEC

Options

INSTALLATION

SUSPENSION SET 22 1.6m
328 22 22
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²



CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B



COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W




COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W




Accessories

HDL - HE REFLECTOR T16 SEAMLESS DOWN
378 52 154

B-Liner 65 P630

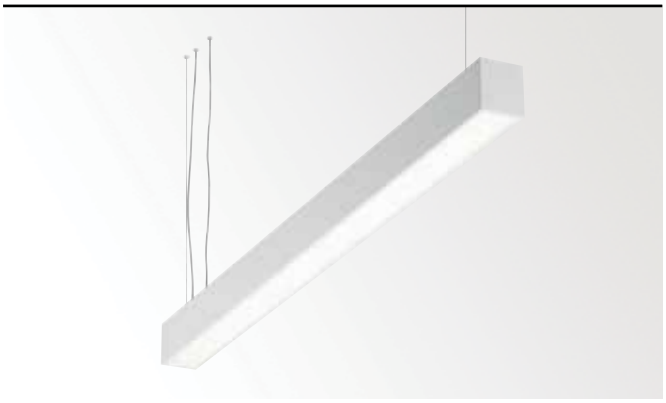



B-LINER 65 P630 ◇
384 01 62 ED1 ◇
◇ = ANO / W


DOWN-UP
INCL.2 x PC SBL
INCL.LED CLUSTER DOWN 32W / 3000K / 3920lm
INCL.LED CLUSTER UP 16W / 3000K / 1960lm
INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 5 x 0.75mm² + 2 x 0.75mm²
CABLING 2 CIRCUITS
INCL.2 x LED POWERSUPPLY
DIMMING BY 1-10V CONTROL (DOWN ONLY)
110-240V / 0 I 50-60Hz

CE 2,5 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Headliner 75 P1154





HEADLINER 75 P1154 ◇
377 01 154 ◇
◇ = ANO / W

DOWN
INCL.1 x HDL75 PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W

CE 2,7 IP20 0,1

OPTIONS
SUSPENSION SET 22 3x0.75 1.6m
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90


ACCESSORIES
HDL - HE REFLECTOR T16 SEAMLESS DOWN






B-LINER 65 P630 / HEADLINER 75 P412 LED CLUSTER

Efficiency Headliner 75 P1154

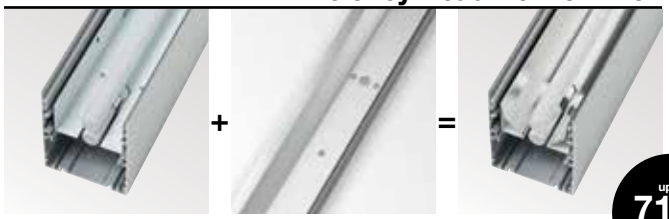


HEADLINER 75P 1154 + HEADLINER HE REFLECTOR T16 SEAMLESS DOWN = HEADLINER 75P 1154 + HE REFLECTOR

up to 71% efficiency



HEADLINER



HIGH EFFICIENCY

The Headliner

is a no-nonsense made-to-measure profile solution, with excellent efficiency and light output results.

The white lacquered reflector of the standard Headliner is optimized to produce perfect lighting conditions, achieving a light output of 53%.
+
HE Reflector
Specially designed reflector in sheet metal plate provides superior reflection abilities. Resulting in increase of efficiency of 34%, guaranteeing reduced energy consumption.
=
Exceptional output results are achieved by adding the HE Reflector to the standard Headliner module, resulting in 71% efficiency.



CBC / ALFREDO SARAVIA T.

FULL INFO / PAG TEC

Options

INSTALLATION	C A B
CABLE BASE R ◇	Ø57 x 41
203 99 55 ◇	
◇ = ANO / W / B	
CABLE BASE S ◇	57 x 57 x 41
203 99 56 ◇	
◇ = ANO / W / B	
COVERSET R ◇	
204 00 62 ◇	Ø62
204 00 90 ◇	Ø90
204 00 100 ◇	Ø100
◇ = ANO / B / W	
COVERSET S ◇	
204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90
◇ = ANO / B / W	


FULL INFO / PAG TEC

Accessories

NoBody 200 54 PC CLEAR UP
331 52 54

NoBody 200 P







NoBody 200 P1254 ◇
331 02 88 ◇
◇ = ANO
DOWN-UP
INCL.1 x NB200 54 PC OPAL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W

6,1 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90
ACCESSORIES
NoBody 200 54 PC CLEAR UP

NoBody 300 P

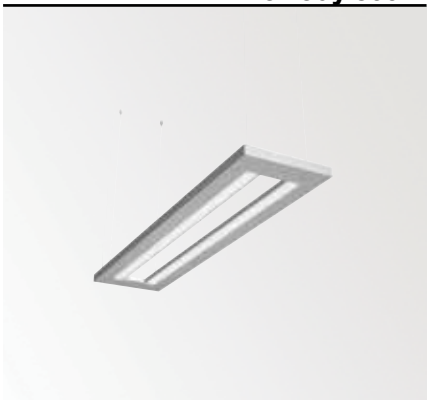



NoBody 300 P1254 ◇
268 02 88 ◇
◇ = ANO
DOWN-UP
INCL.2 x NB300 54 PC SBL
INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W

8,0 IP20 0,1

OPTIONS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90


90 DEGREES

FULL INFO / PAG TEC


Options

INSTALLATION

SUSPENSION SET 17 2x0.75 1.6m
328 17 212
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 2 x 0.75mm²


SUSPENSION SET 17 3x0.75 1.6m
328 17 213
INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1.6m
INCL.1 x CABLE 3 x 0.75mm²

SUSPENSION TRIMLESS
328 10 01
INCL.1 x AUTOMATIC ADJUSTMENT




play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

SUSPENSION + CONNECTION TRIMLESS
328 10 02
INCL.1 x AUTOMATIC ADJUSTMENT
INCL.1 x CONNECTOR 3 x 2.5mm²



play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

CONNECTION TRIMLESS
328 10 03
INCL.1 x CABLE 3 x 0.75mm²



play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

CABLE BASE R ◇ Ø57 x 41
203 99 55 ◇
◇ = ANO / W / B



CABLE BASE S ◇ 57 x 57 x 41
203 99 56 ◇
◇ = ANO / W / B




COVERSET R ◇
204 00 62 ◇ Ø62
204 00 90 ◇ Ø90
204 00 100 ◇ Ø100
◇ = ANO / B / W




COVERSET S ◇
204 62 62 ◇ 62 x 62
204 80 80 ◇ 80 x 80
204 90 90 ◇ 90 x 90
◇ = ANO / B / W



Endless

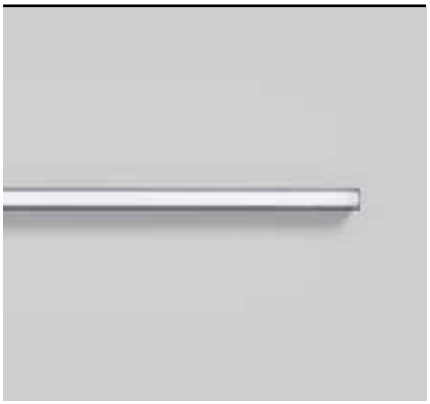



ENDLESS 124 ◇
355 01 124 ◇
◇ = A / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16-S 24W
CE 0,8 IP20 0,1


ENDLESS 154 ◇
355 01 154 ◇
◇ = A /W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W
CE 1,4 IP20 0,1


ENDLESS 124 W


ENDLESS 154 A

Endless 30 LED






ENDLESS 30 LED WW ◇
369 01 342 ◇
◇ = B / W
INCL.12 x POWERLED WHITE 1,1W / 3000K
INCL.12 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 2,8 IP20 650°

OPTIONS
SUSPENSION SET 328 17 212
SUSPENSION TRIMLESS
SUSPENSION + CONNECTION TRIMLESS
CONNECTION TRIMLESS
CABLE BASE R / S

Endless 30



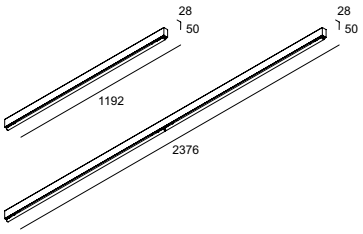


ENDLESS 30 P1154 ◇
369 01 154 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W

◇ CE 1,8 IP20 0,1

OPTIONS
SUSPENSION SET 328 17 213
SUSPENSION TRIMLESS
SUSPENSION + CONNECTION TRIMLESS
CONNECTION TRIMLESS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90

Endless 30+



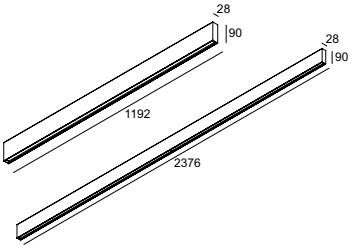

ENDLESS 30+ P1154 ◇
374 01 154 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W

◇ CE 1,8 IP20 0,1

ENDLESS 30+ P2154 ◇
374 01 254 ◇
◇ = B / W
DIRECT FIXATION
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16-S 28/54W

◇ CE 3,4 IP20 0,1

OPTIONS
SUSPENSION SET 328 17 213
SUSPENSION TRIMLESS
SUSPENSION + CONNECTION TRIMLESS
CONNECTION TRIMLESS
CABLE BASE R / S
COVERSET R 62-90-100 / S 62-80-90


ENDLESS 30 LED WW W


ENDLESS 30+
+ SUSPENSION + CONNECTION TRIMLESS


ENDLESS 30+
+ SUSPENSION TRIMLESS
+ CONNECTION TRIMLESS







KEUKENS FIERENS




Lay Out






LAY OUT 124 ◇
338 01 124 ◇
◇ = ANO
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16 14/24W

CE 0,8 IP20 0,1



LAY OUT 154 ◇
338 01 154 ◇
◇ = ANO
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16 28/54W

CE 1,4 IP20 0,1

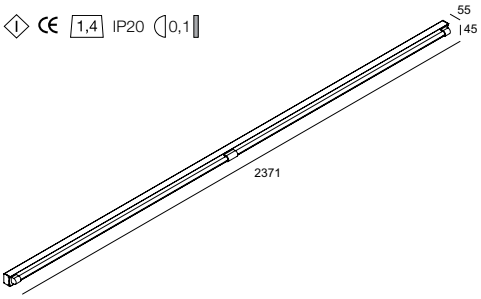

LAY OUT 254 ◇
338 01 254 ◇
◇ = ANO
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W

CE 2,6 IP20 0,1








INTERIOR
WALL RECESSED

Wall recessed luminaires are often applied to provide direction and guarantee safety, but the Delta Light® range has much more to offer. In addition to functional or directional lighting, the collection enables you to create playful light effects and original compositions. You can combine several fixtures to produce an attractive and artistic setting. Or you can opt for a discrete, but entertaining light emphasis.

www.deltalight.com/IWR

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/3040512 or www.deltalight.com/inlet



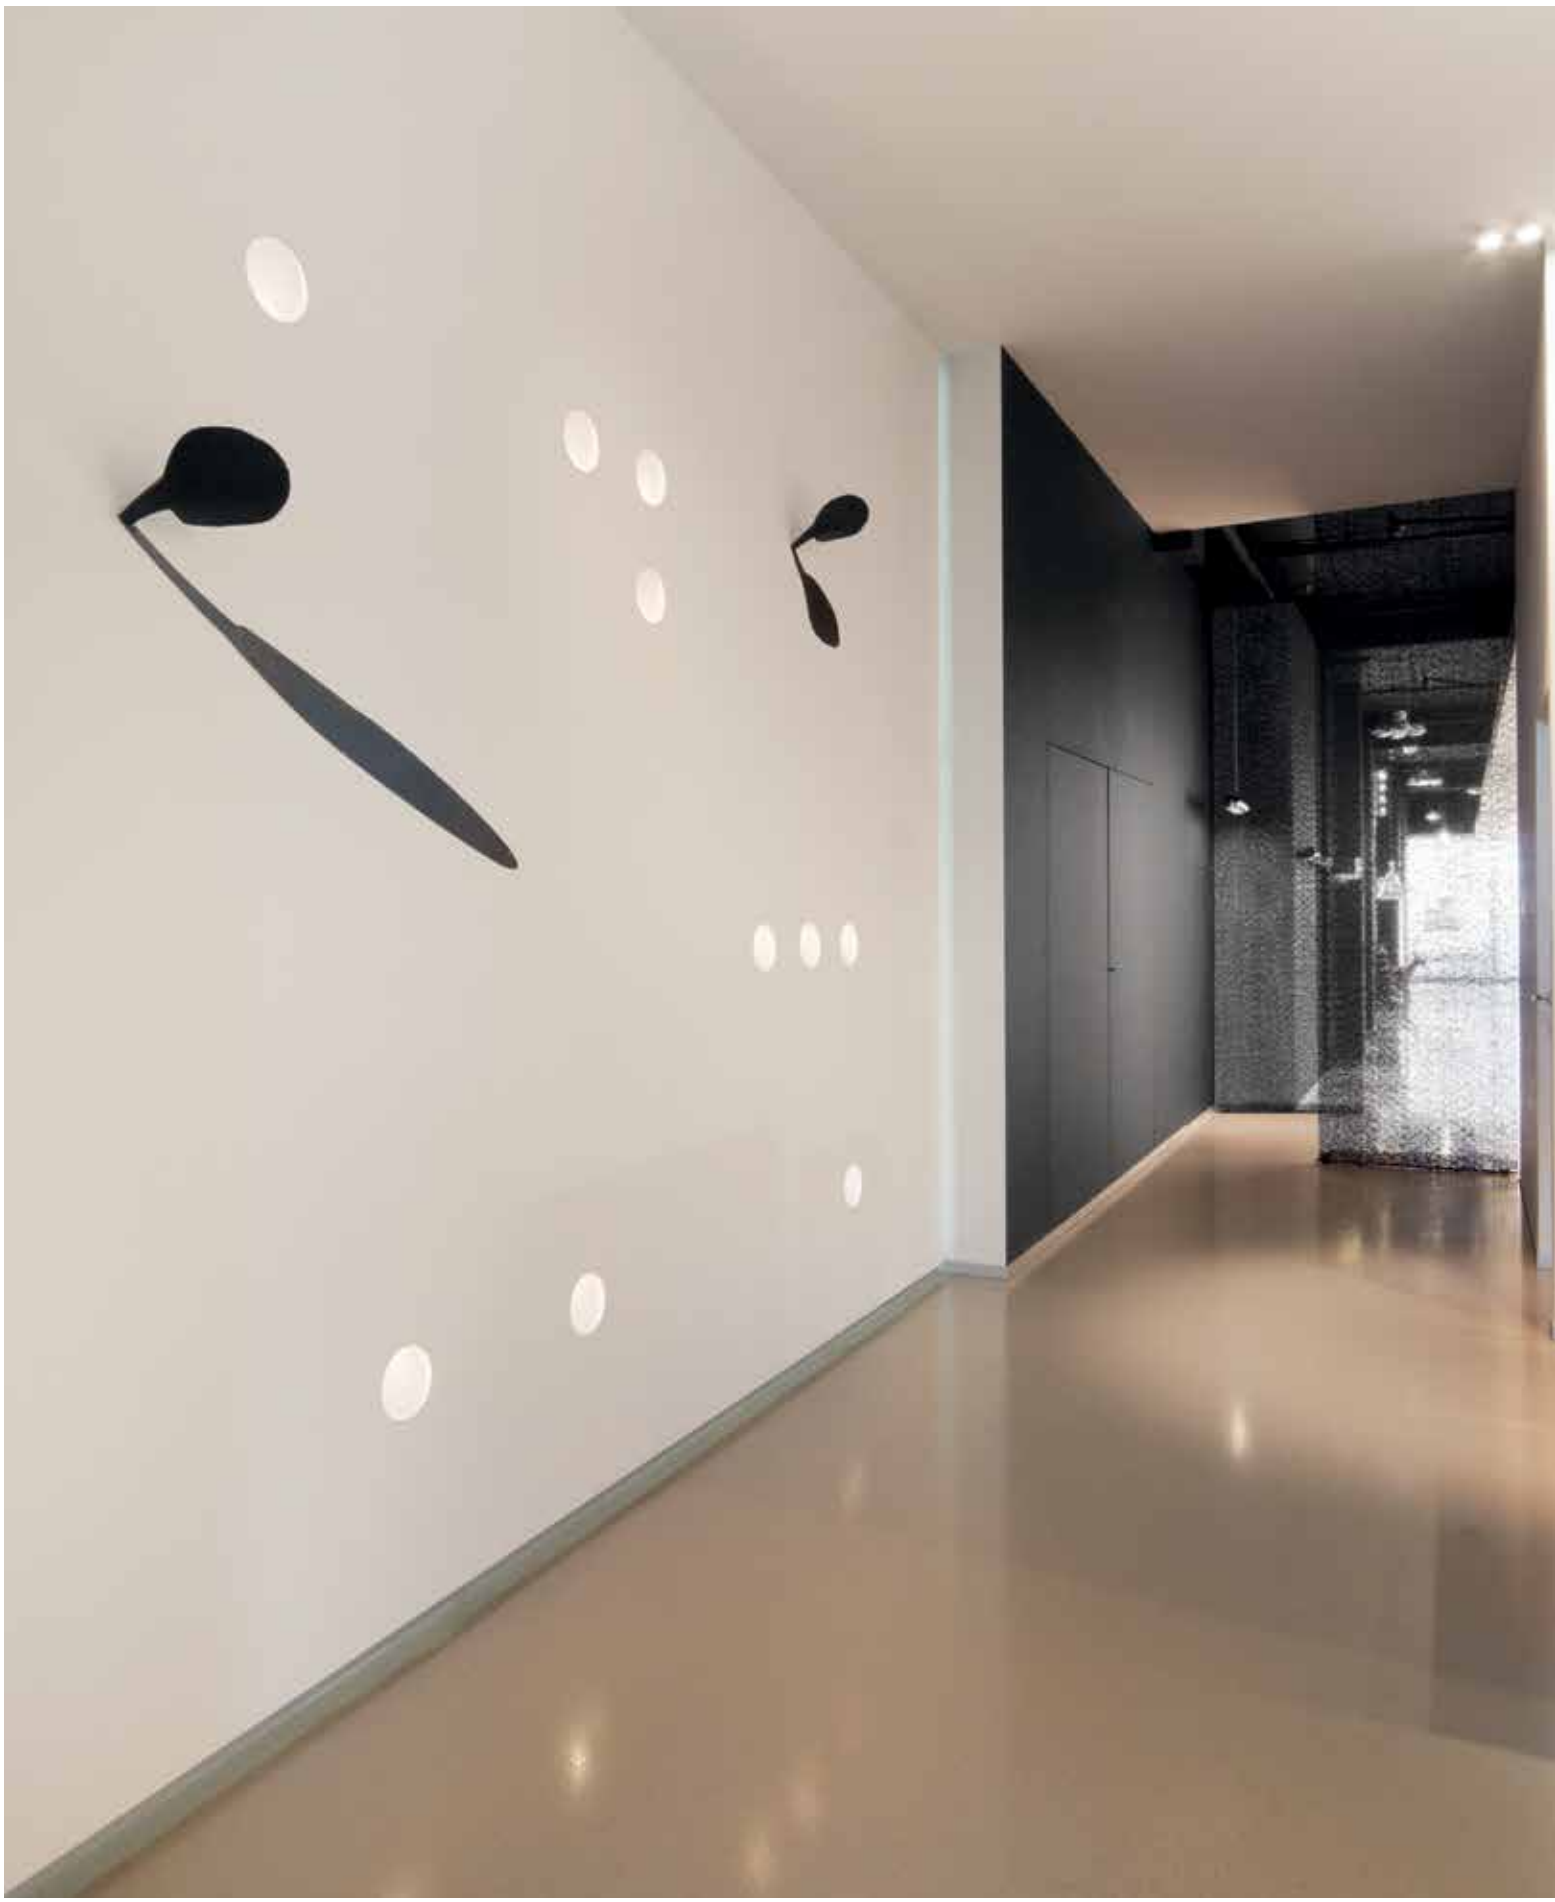

INDEX
INTERIOR WALL RECESSED



HELI
INT 500



LEDS C S
INT 507



LOGIC MINI W R
INT 502



INLET
INT 509



LOGIC MINI W S
INT 502



FEMTOLINE
INT 511



LOGIC W L
INT 503



SKELP
INT 513



LOGIC W S
INT 503



VICE VERSA
INT 515



LEDS C R
INT 507

FEMTOLINE	INT 511
HELI 1 LED	INT 500
INLET S	INT 509
LEDS C®	INT 507
LOGIC MINI W R	INT 502
LOGIC MINI W S	INT 502
LOGIC W L	INT 503
LOGIC W S	INT 503
SKELP	INT 513
VICE VERSA F LED	INT 515

FULL INFO / PAG TEC

Options

INSTALLATION	C A B	
PLASTERKIT 115 **202 31 99**	150 x 150	75 x 75
PLASTERKIT 186 **207 01 186**	190 x 150	75 x 75
CONCRETE BOX 115 **202 31 98**	150 x 150 x 80	155 x 155
CONCRETE BOX 186 **270 11 186**	145 x 105 x 70	105 x 110
MOUNTING KIT 75 **202 00 75**	117 x 117 x 22	Ø121


CONTROL GEAR	C A B	
LED POWER SUPPLY **ALL INFO ON FOLD-OUT COVER**		
TRANSFO 50W **200 46 06**	86 x 31 x 20	
TRANSFO 100W **200 46 10**	107 x 35 x 21	




led

Heli 1 LED







75 x 75 x 60

HELI 1 LED NW ◇
202 04 34 ◇
◇ = A / W
INCL.1 x LEDCLUSTER WHITE [A] 1,1W / 4000K

HELI 1 LED WW ◇
202 04 32 ◇
◇ = A / W
INCL.1 x LEDCLUSTER WHITE [A] 1,1W / 3000K
INCL.1 x HELI 1 PC SBL

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,2 IP40

OPTIONS
PLASTERKIT 186
CONCRETE BOX 186
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM

75 x 75 x 85

HELI 1 SCREEN LED NW ◇
202 04 14 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

HELI 1 SCREEN LED WW ◇
202 04 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,2 IP20


OPTIONS
PLASTERKIT 186
CONCRETE BOX 186
MOUNTING KIT 75
LED POWER SUPPLY 350mA-DC / DIM




Heli 1









64 x 71 x 85

HELI 1 WHITE ◇
202 31 00 ◇
◇ = ANO
INCL.1 x HELI 1 GLASS SBL
G4 / 12V / EXCL.TRANSFO
1 x QT9 max.20W

IP20 0,1

OPTIONS
PLASTERKIT 115
CONCRETE BOX 115
TRANSFO

64 x 71 x 85

HELI 1 SCREEN ◇
202 31 10 ◇
◇ = ANO
INCL.1 x HELI 1 GLASS
G4 / 12V / EXCL.TRANSFO
1 x QT9 max.20W

IP20 0,1


OPTIONS
PLASTERKIT 115
CONCRETE BOX 115
TRANSFO

FULL INFO / PAG TEC


Requirements

INSTALLATION


CONCRETE BOX 191
270 11 191
315 x 80



CONCRETE BOX 192
270 11 192
135 x 125



CONCRETE PACK LOGIC W L
304 32 96
315 x 80



CONCRETE PACK LOGIC W S
304 33 96
135 x 125



FULL INFO / PAG TEC

Options


INSTALLATION	A B C	
CONCRETE BOX 188 **270 11 188**	Ø60 x 65	Ø67 x 70

CONTROL GEAR	A B C
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	146 x 55 x 19

new

Logic Mini W R






Ø 55 x 50
LOGIC MINI W R ◇
304 30 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 0,6W / 3000K / 40lm
EXCL.LED POWER SUPPLY 24V-DC


IP54

OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC

new

Logic Mini W S

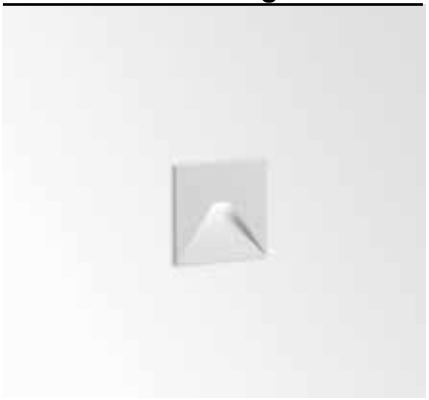



Ø 55 x 50
LOGIC MINI W S ◇
304 31 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 0,6W / 3000K / 40lm
EXCL.LED POWER SUPPLY 24V-DC


IP54


OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC

Logic W L





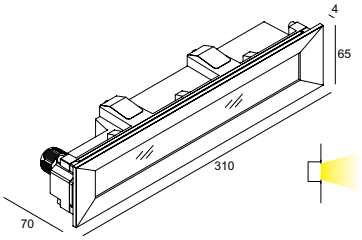

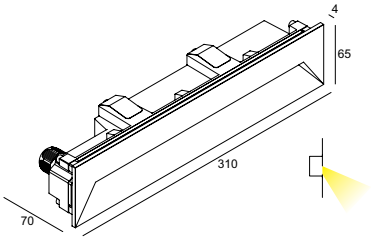

BOX 110-135
LOGIC W L F ◇
304 32 02 83 ◇
◇ = A / N / W
INCL.1 x GLASS SBL
INCL.1 x LED CLUSTER 9,5W / 3000K / 1270lm
INCL.LED POWER SUPPLY 350mA-DC
INCL. 1 x PG11
110-240V / 50-60Hz

IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L


BOX 110-135
LOGIC W L ◇
304 32 01 83 ◇
◇ = A / N / W
INCL.1 x GLASS SBL
INCL.1 x LED CLUSTER 9,5W / 3000K / 1270lm
INCL.LED POWER SUPPLY 350mA-DC
INCL. 1 x PG11
110-240V / 50-60Hz

IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

Logic W S






BOX 115-140
LOGIC W S ◇
304 33 01 83 ◇
◇ = A / N / W
INCL.1 x PC SBL
INCL.1 x POWERLED 6,2W / 3000K / 703lm
INCL.LED POWER SUPPLY 350mA-DC
INCL. 1 x PG11
110-240V / 50-60Hz

IP65

REQUIREMENTS
CONCRETE BOX 192
or
CONCRETE PACK LOGIC W S

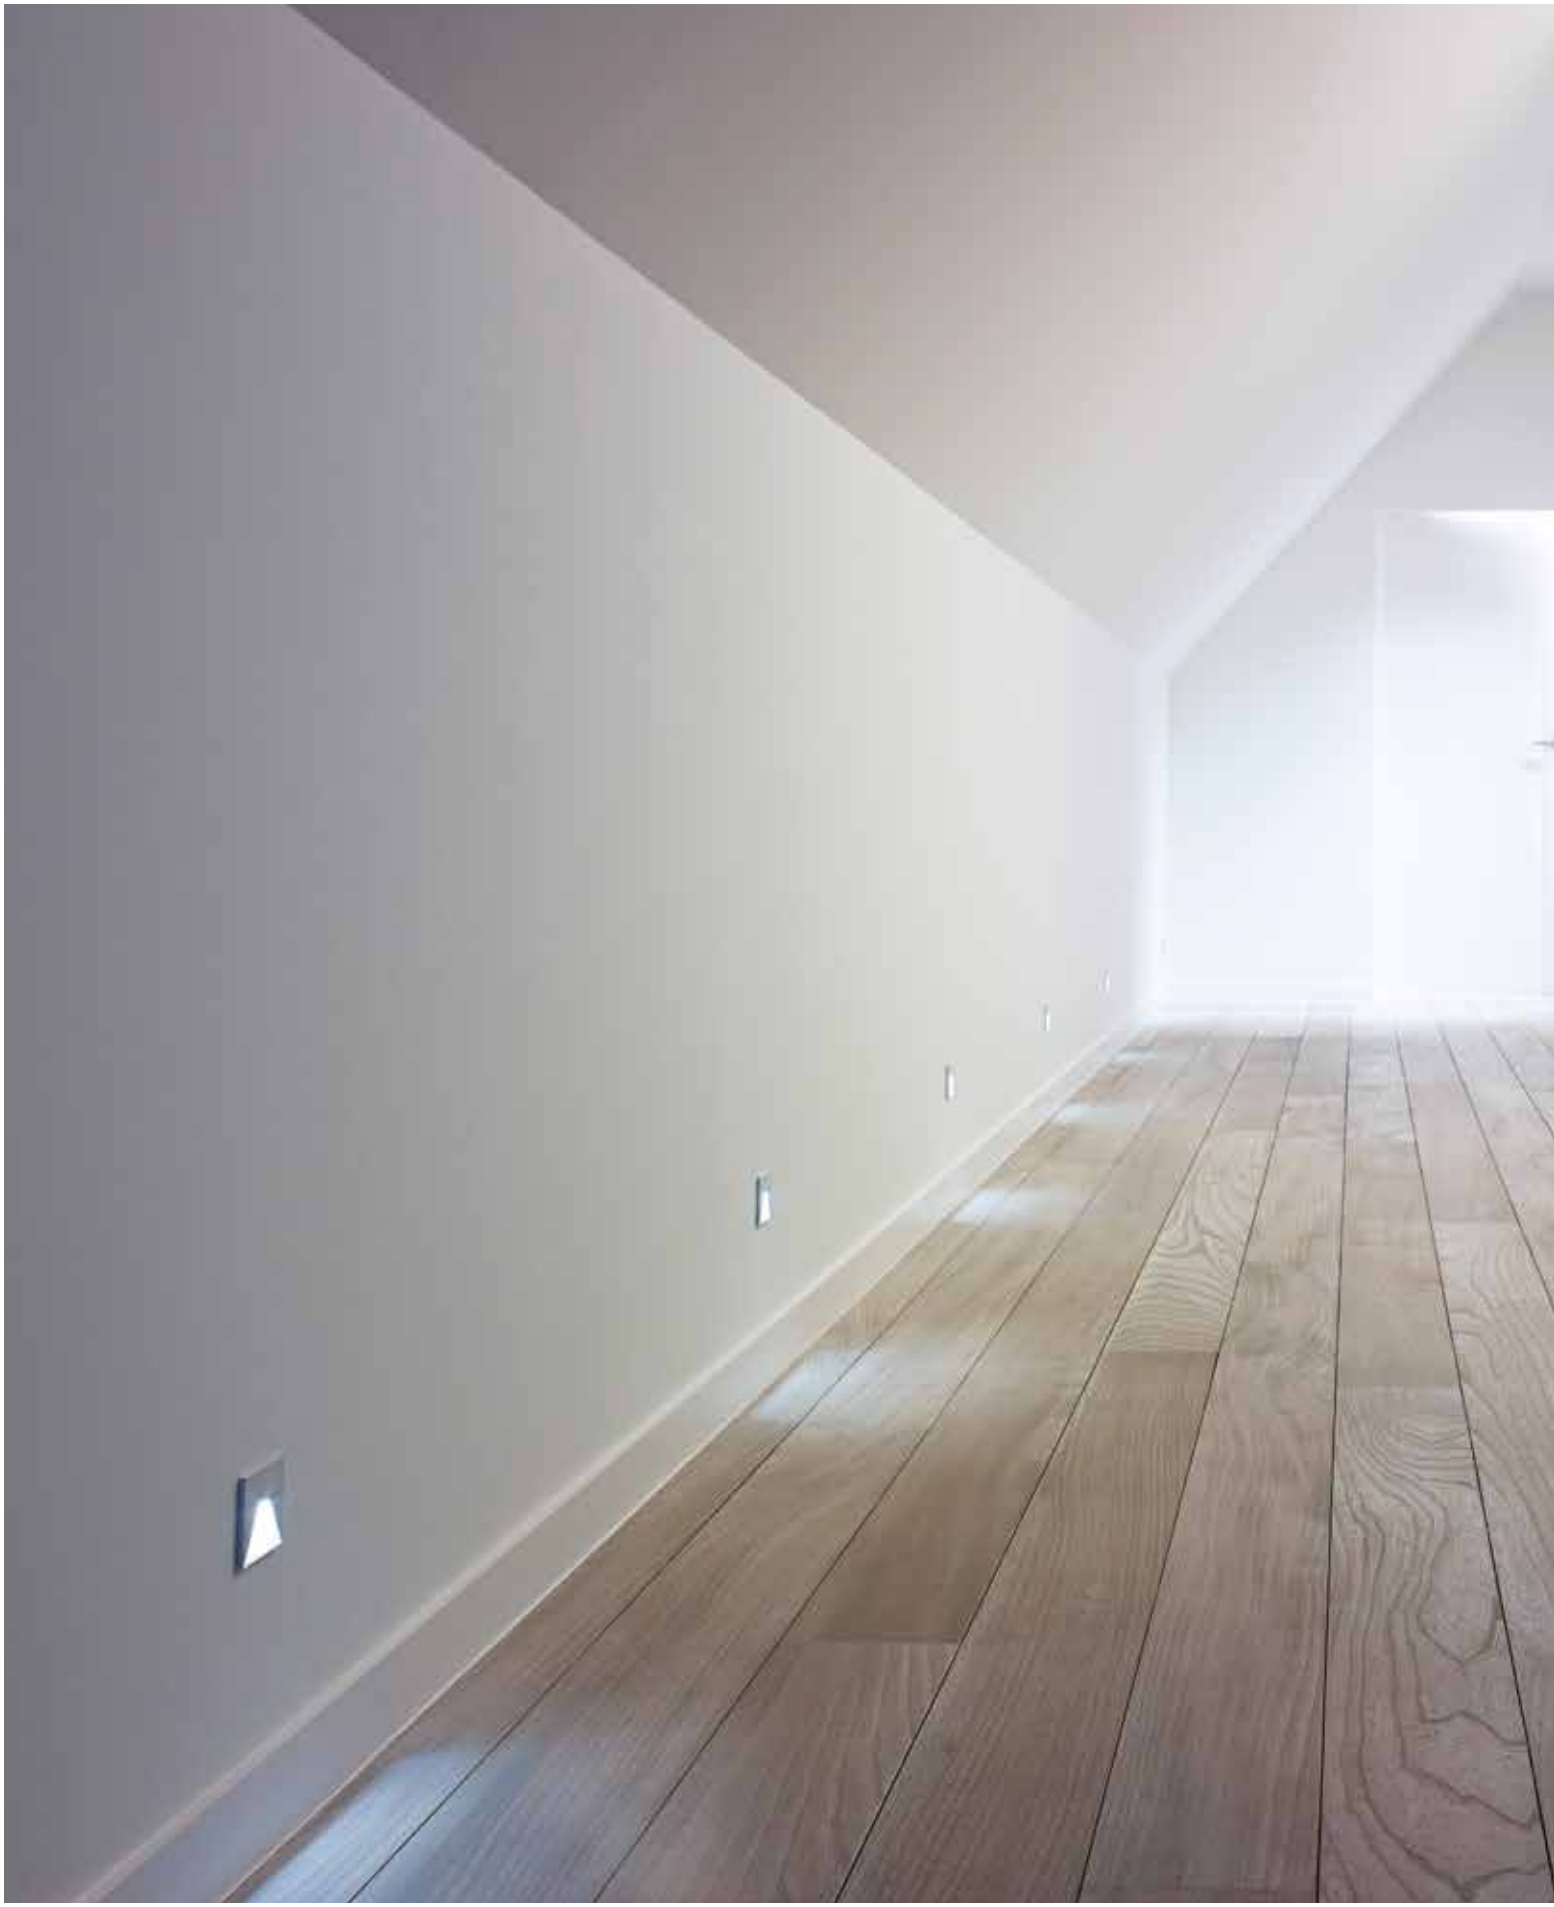





FULL INFO / PAG TEC

Options


INSTALLATION		
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

Leds C®





41 x 38

LEDS C R ST NW ◇
302 20 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K


LEDS C R ST WW ◇
302 20 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,1 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM





41 x 38

LEDS C® R NW ◇
302 20 10 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K


LEDS C® R WW ◇
302 20 12 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K


LEDS C® R BLUE ◇
302 20 11 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE [A] 1,1W

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,1 IP54

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM

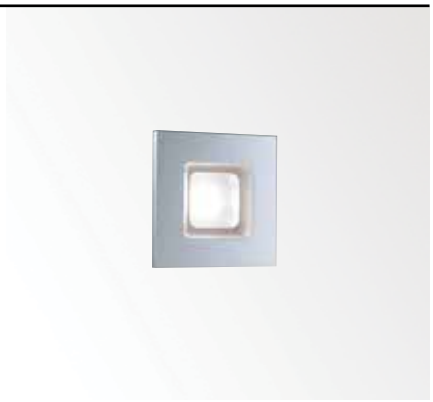



38 x 38 x 38

LEDS C® S NW ◇
302 20 44 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS C® S WW ◇
302 20 42 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

LEDS C® S BLUE ◇
302 20 41 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE [A] 1,1W

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,1 IP54

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM


1976 2 | WLADIMIRO PANIZZA 3 | MICHEL LAURENT
1975 2 | FRANCESCO MOSER 3 | GUY SIBILLE
1972 2 | GIANNI MOTTA 3 | MARINO BASSO

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
PLASTERKIT 145 **304 05 99**	140 x 235	110 x 180
CONCRETE BOX 145 **304 05 98**	150 x 210 x 75	155 x 215


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Inlet S





22 x 170 x 45 min.12

INLET S NW ◇
304 05 14 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

INLET S WW ◇
304 05 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K


INLET S HW ◇
304 05 13 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 2700K

INLET S BLUE ◇
304 05 11 BL ◇
◇ = A
INCL.1 x POWERLED BLUE 1,1W

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,2 IP20

OPTIONS
PLASTERKIT 145
CONCRETE BOX 145
LED POWER SUPPLY 350mA-DC / DIM

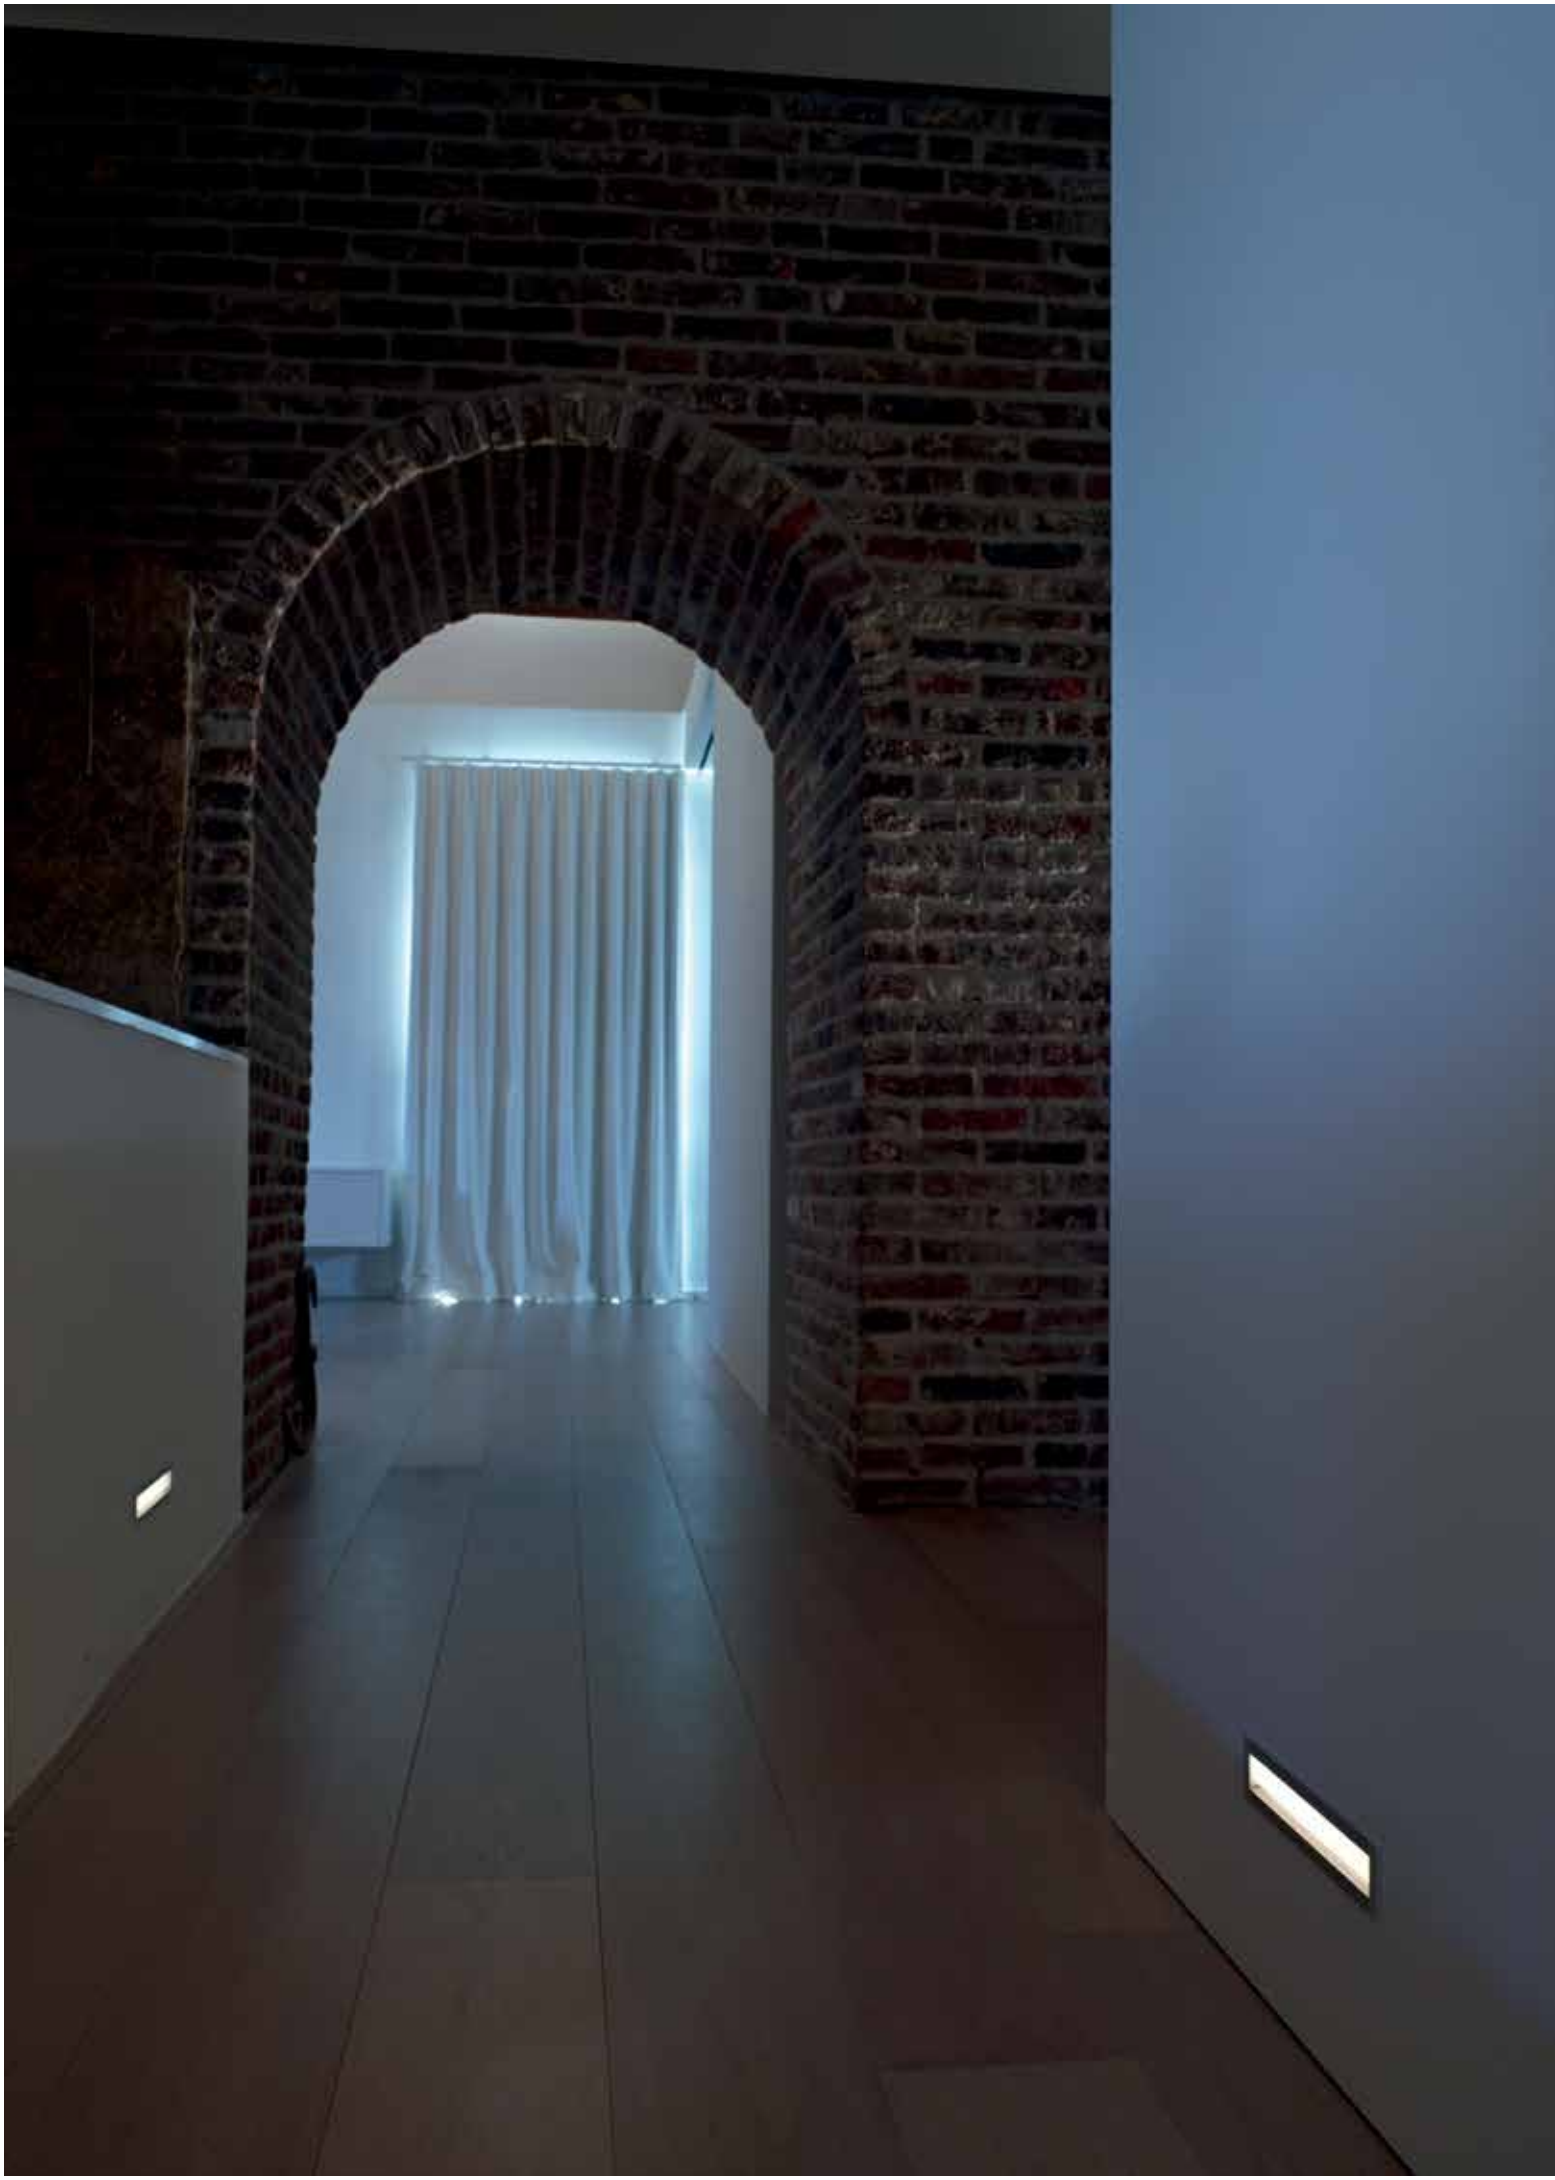


FULL INFO / PAG TEC

Options

INSTALLATION		
PLASTERKIT 184 **207 01 184**	304 x 85	222 x 54
CONCRETE BOX 184 **270 11 184**	270 x 91 x 65	273 x 94
CONTROL GEAR		
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	146 x 55 x 19	
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	242 x 46 x 36	
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	211 x 43 x 28	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	260 x 60 x 49	

Femtoline





219 x 38 x 65

FEMTOLINE 145 NW ◇
376 01 244 ◇
◇ = ANO
INCL.1 x LEDSTRIP WHITE 4000K / 1,5W

FEMTOLINE 145 WW ◇
376 01 242 ◇
◇ = ANO
INCL.1 x LEDSTRIP WHITE 3000K / 1,5W

INCL.1 x PC SBL
EXCL.LED POWER SUPPLY 24V-DC

0,4 IP22

OPTIONS
PLASTERKIT 184
CONCRETE BOX 184
LED POWER SUPPLY 24V-DC




FULL INFO / PAG TEC

Requirements

MOUNTING KIT SKELP TRIMLESS
202 15 61 972

152 x 100 max.25

0,4



FULL INFO / PAG TEC

Options


INSTALLATION	A~B C	
PLASTERKIT 181 **207 01 181**	250 x 250	170 x 170


led

Skelp





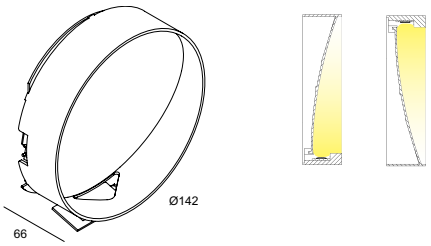

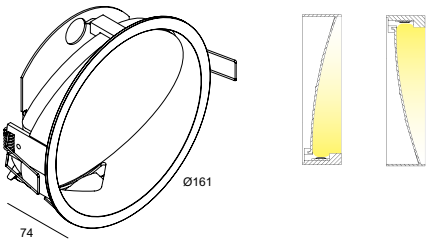

ØKIT x 100

SKELP TRIMLESS LED WW ◇
320 01 12 ◇
◇ = W
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

□ CE 0,4 IP20

REQUIREMENTS
MOUNTING KIT SKELP TRIMLESS

152 x 100

SKELP LED WW ◇
320 02 12 ◇
◇ = B-MMAT / W-W
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

□ CE 0,4 IP20

OPTIONS
PLASTERKIT 181

CRI>80 703lm (6,2W)



SKELP LED B-MMAT



FULL INFO / PAG TEC


Options

INSTALLATION	C A B	
PLASTERKIT 180 **207 01 180**	190 x 355	155 x 325
CONCRETE BOX 180 **270 11 180**	266 x 355 x 101	185 x 350

led

Vice Versa F LED





131 x 170 x 95 max.20

VICE VERSA F LED ◇
276 07 12 ◇
◇ = A-ANO / B-MMAT
INCL.1 x POWERLED WHITE 3,5W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 1,7 IP20

OPTIONS
PLASTERKIT 180
CONCRETE BOX 180



VICE VERSA F LED B-MMAT

INTERIOR
WALL SURFACE

The indoor wall mounted luminaires are designed to direct the light up and/or down. These wall mounted downlights can perform many different functions, ranging from a diffuse illumination of the ceiling to an eyecatching composition or functional corridor lighting. Several wall luminaires in the collection combine led with a lens, resulting in tightly delineated light patterns, providing an expressive touch to your project.

www.deltalight.com/IWS



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2787112L or www.deltalight.com/forty-5



INDEX
INTERIOR WALL SURFACE


B-SIDE
INT 521



FIFTY-5
INT 535


SKELP ON
INT 543



SONTUR L
INT 551


CAMUS 10
INT 565


I-BEAM
INT 575


B-FLEX
INT 521



FIFTY-0
INT 535


ULTRA
INT 545


VISA
INT 553


TIGA
INT 567


I-LINER
INT 575


TOPIX
INT 523



POGO
INT 537



NEC + ULTRA
INT 547



GALA S
INT 556


BOXY WL+
INT 569


MICROLINE 30+ WALL
INT 577


LOOK IN
INT 527



GABOO
INT 539




MONTUR S
INT 548


GALA
INT 556


ORBIT
INT 571


T-LINER
INT 579


PUK
INT 529



TWEETER FIX W
INT 541



MONTUR M
INT 549


VISION
INT 561


YUPI
INT 571


T FLOR 2
INT 579


FORTY-5
INT 531


VIKTOR
INT 543



MONTUR L
INT 551


VINCE
INT 565


BACKSPACE LED
INT 573


JETI
INT 581



BE COOL
INT 583

BACKSPACE	INT 573
BE COOL®	INT 583
B-FLEX	INT 521
BOXY WL+	INT 569
B-SIDE	INT 521
CAMUS 10	INT 565
FIFTY-0	INT 535
FIFTY-5	INT 535
FORTY-5	INT 531
GABOO W	INT 539
GALA	INT 556
GALA S LED	INT 556
I-BEAM	INT 575
I-LINER	INT 575
JETI	INT 581
LOOK IN	INT 527
MICROLINE 30+ WALL	INT 577
MONTUR L	INT 551
MONTUR M	INT 549
MONTUR S	INT 548
NEC+ULTRA	INT 547
ORBIT	INT 571
POGO	INT 537
PUK	INT 529
SKELP ON	INT 543
SONTUR L	INT 551
T FLOR 2	INT 579
TIGA	INT 567
T-LINER	INT 579
TOPIX	INT 523
TWEETER FIX	INT 541
ULTRA	INT 545
VIKTOR	INT 543
VINCE	INT 565
VISA	INT 553
VISION	INT 561
YUPI	INT 571




BURO II & ARCHI+I

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER




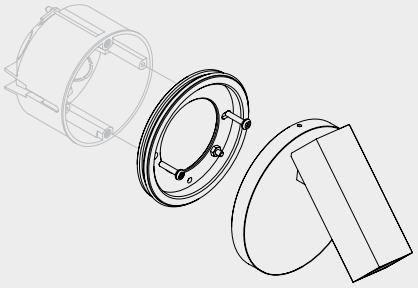

INSTALLATION BOX Ø65 x 45

B-Side





B-SIDE LED NW ◇
304 16 04 ◇
◇ = ALU
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 4000K

B-SIDE LED WW ◇
304 16 02 ◇
◇ = ALU
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K


INCL.1 x LENS 10°
EXCL.LED POWER SUPPLY 350-700mA-DC

III CE 0,3 IP20

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM

B-Flex






B-FLEX V2 NW ◇
303 23 14 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 2,3W / 4000K

B-FLEX V2 WW ◇
303 23 12 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 2,3W / 3000K

INCL.1 x LENS 25°
INCL.LED POWER SUPPLY 700mA-DC
INCL.1 x SWITCH ON/OFF + DIMMING
110-240V / 50-60Hz

CE 0,4 IP20





B-FLEX H2 NW ◇
303 13 14 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 2,3W / 4000K

B-FLEX H2 WW ◇
303 13 12 ◇
◇ = ALU
INCL.1 x POWERLED WHITE 2,3W / 3000K

INCL.1 x LENS 25°
INCL.LED POWER SUPPLY 700mA-DC
INCL.1 x SWITCH ON/OFF + DIMMING
110-240V / 50-60Hz

CE 0,4 IP20



FULL INFO / PAG TEC

Options

INSTALLATION		
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Topix





41 x 38

TOPIX NW ◇
304 17 04 ◇
◇ = A / W
INCL.2 x POWERLED WHITE [A] 1,1W / 4000K


TOPIX WW ◇
304 17 02 ◇
◇ = A / W
INCL.2 x POWERLED WHITE [A] 1,1W / 3000K


EXCL.LED POWER SUPPLY 350mA-DC

0,1 IP20

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM

reddot design award
winner 2009

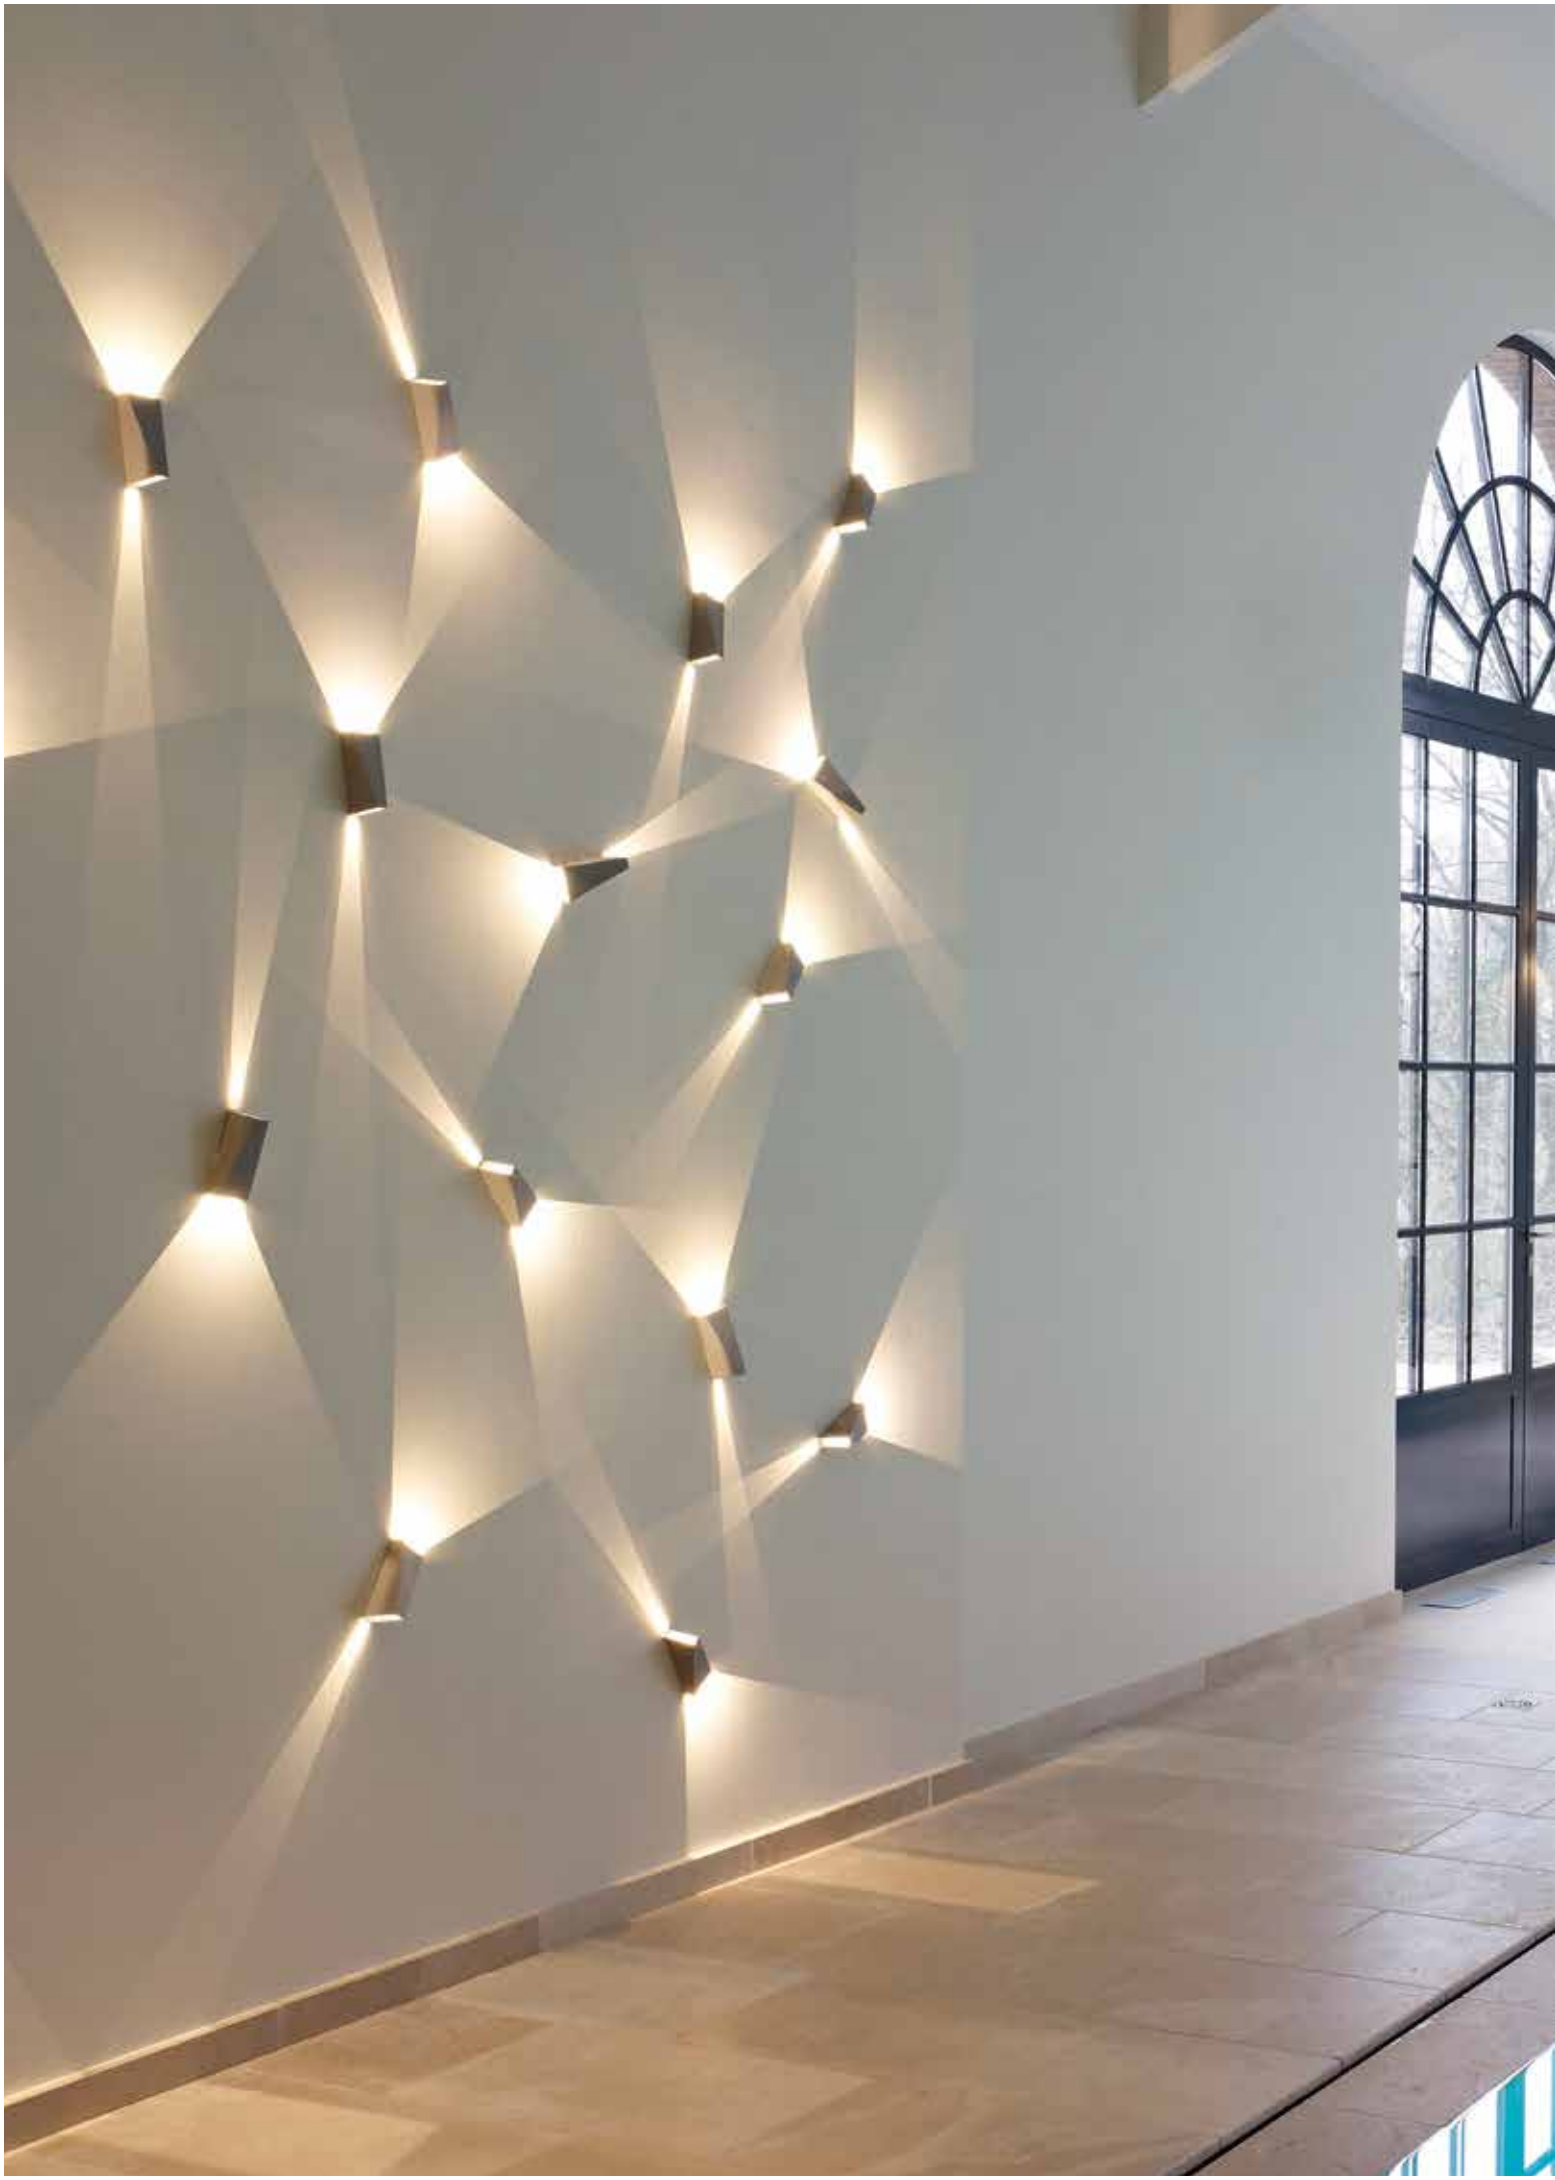

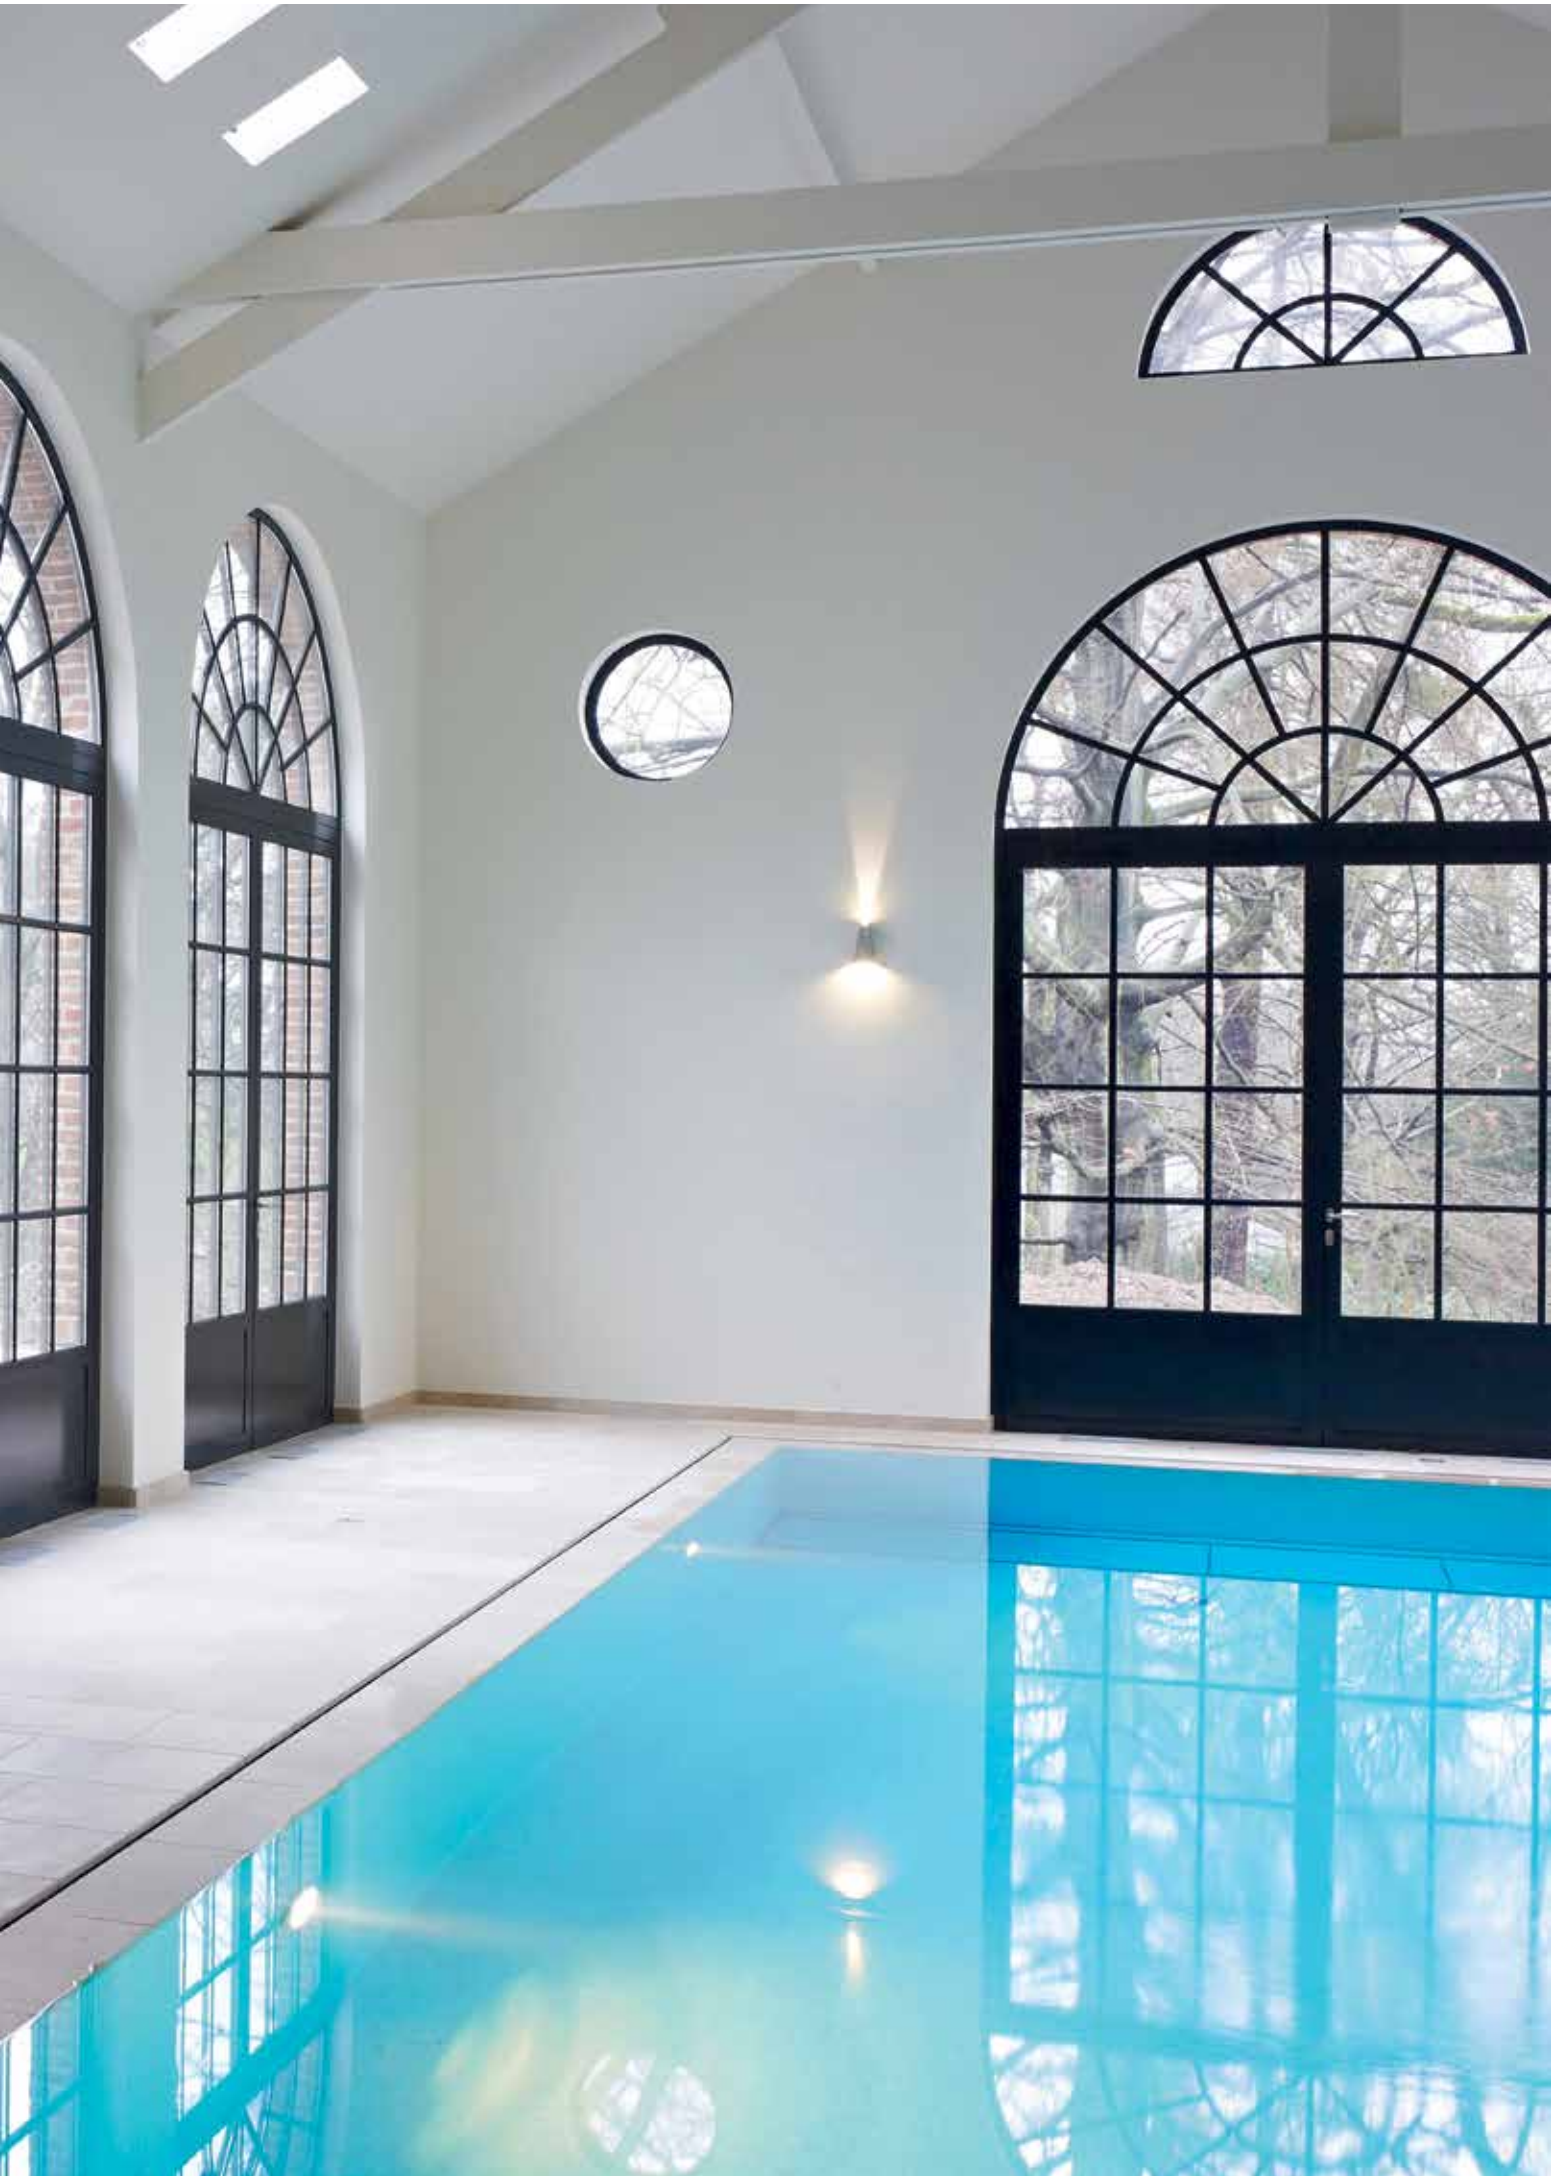



FULL INFO / PAG TEC

Options

INSTALLATION		
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Look In





41 x 38

LOOK IN NW ◇
304 13 04 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LOOK IN WW ◇
304 13 02 ◇
◇ = A / W
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

CE 0,1 IP20

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM

DESIGNPREIS 2009
NOMINEE


Christian Dior

FULL INFO / PAG TEC


Options


CONTROL GEAR

LED POWER SUPPLY 14V-DC / 12W
300 90 90

100 x 48 x 28

Puk

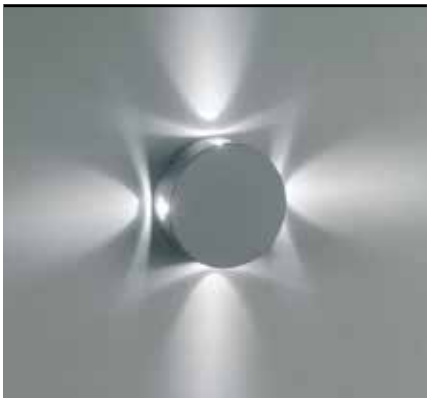



PUK 4 NW ◇
301 00 44 ◇
◇ = A
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 4000K

PUK 4 WW ◇
301 00 05 ◇
◇ = A
INCL.4 x LED WHITE Ø5mm / 14V-DC / 0,5W / 2800K


PUK 4 BLUE ◇
301 00 04 BL ◇
◇ = A
INCL.4 x LED BLUE Ø5mm / 14V-DC / 0,5W


EXCL.LED POWER SUPPLY 14V-DC / 0,8A

0,1 IP20

OPTIONS
LED POWER SUPPLY 14V-DC / 0,8A



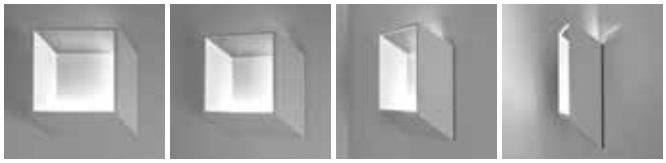

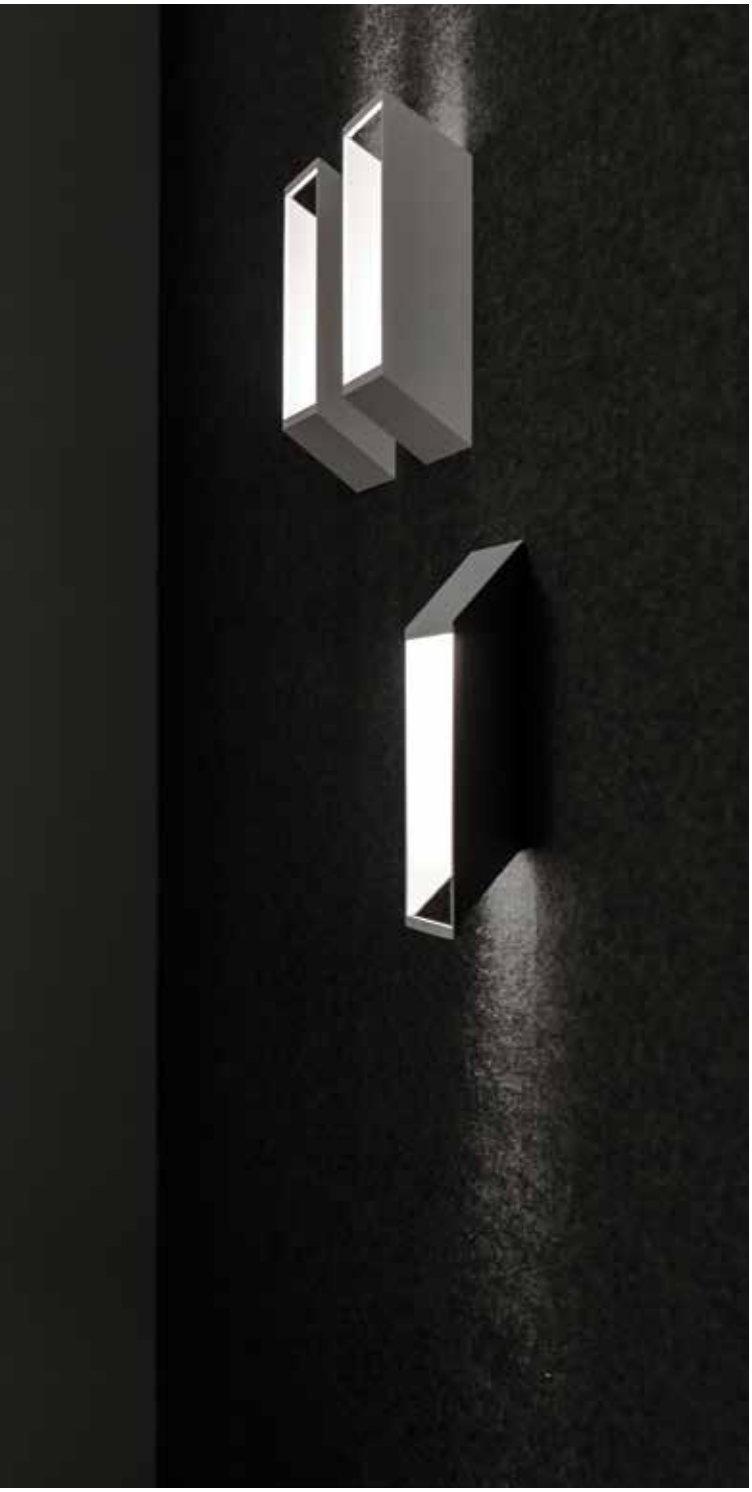


new

led


Forty-5





FORTY-5 WW L ◇
278 71 12 L ◇
◇ = W
INCL.1 x LED CLUSTER 3,15W / 3000K / 420lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 2,7 IP20




FORTY-5 WW R ◇
278 71 12 R ◇
◇ = W
INCL.1 x LED CLUSTER 3,15W / 3000K / 420lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 2,7 IP20

reddot design award winner 2015

GOOD DESIGN award

interior innovation award 2015 Winner

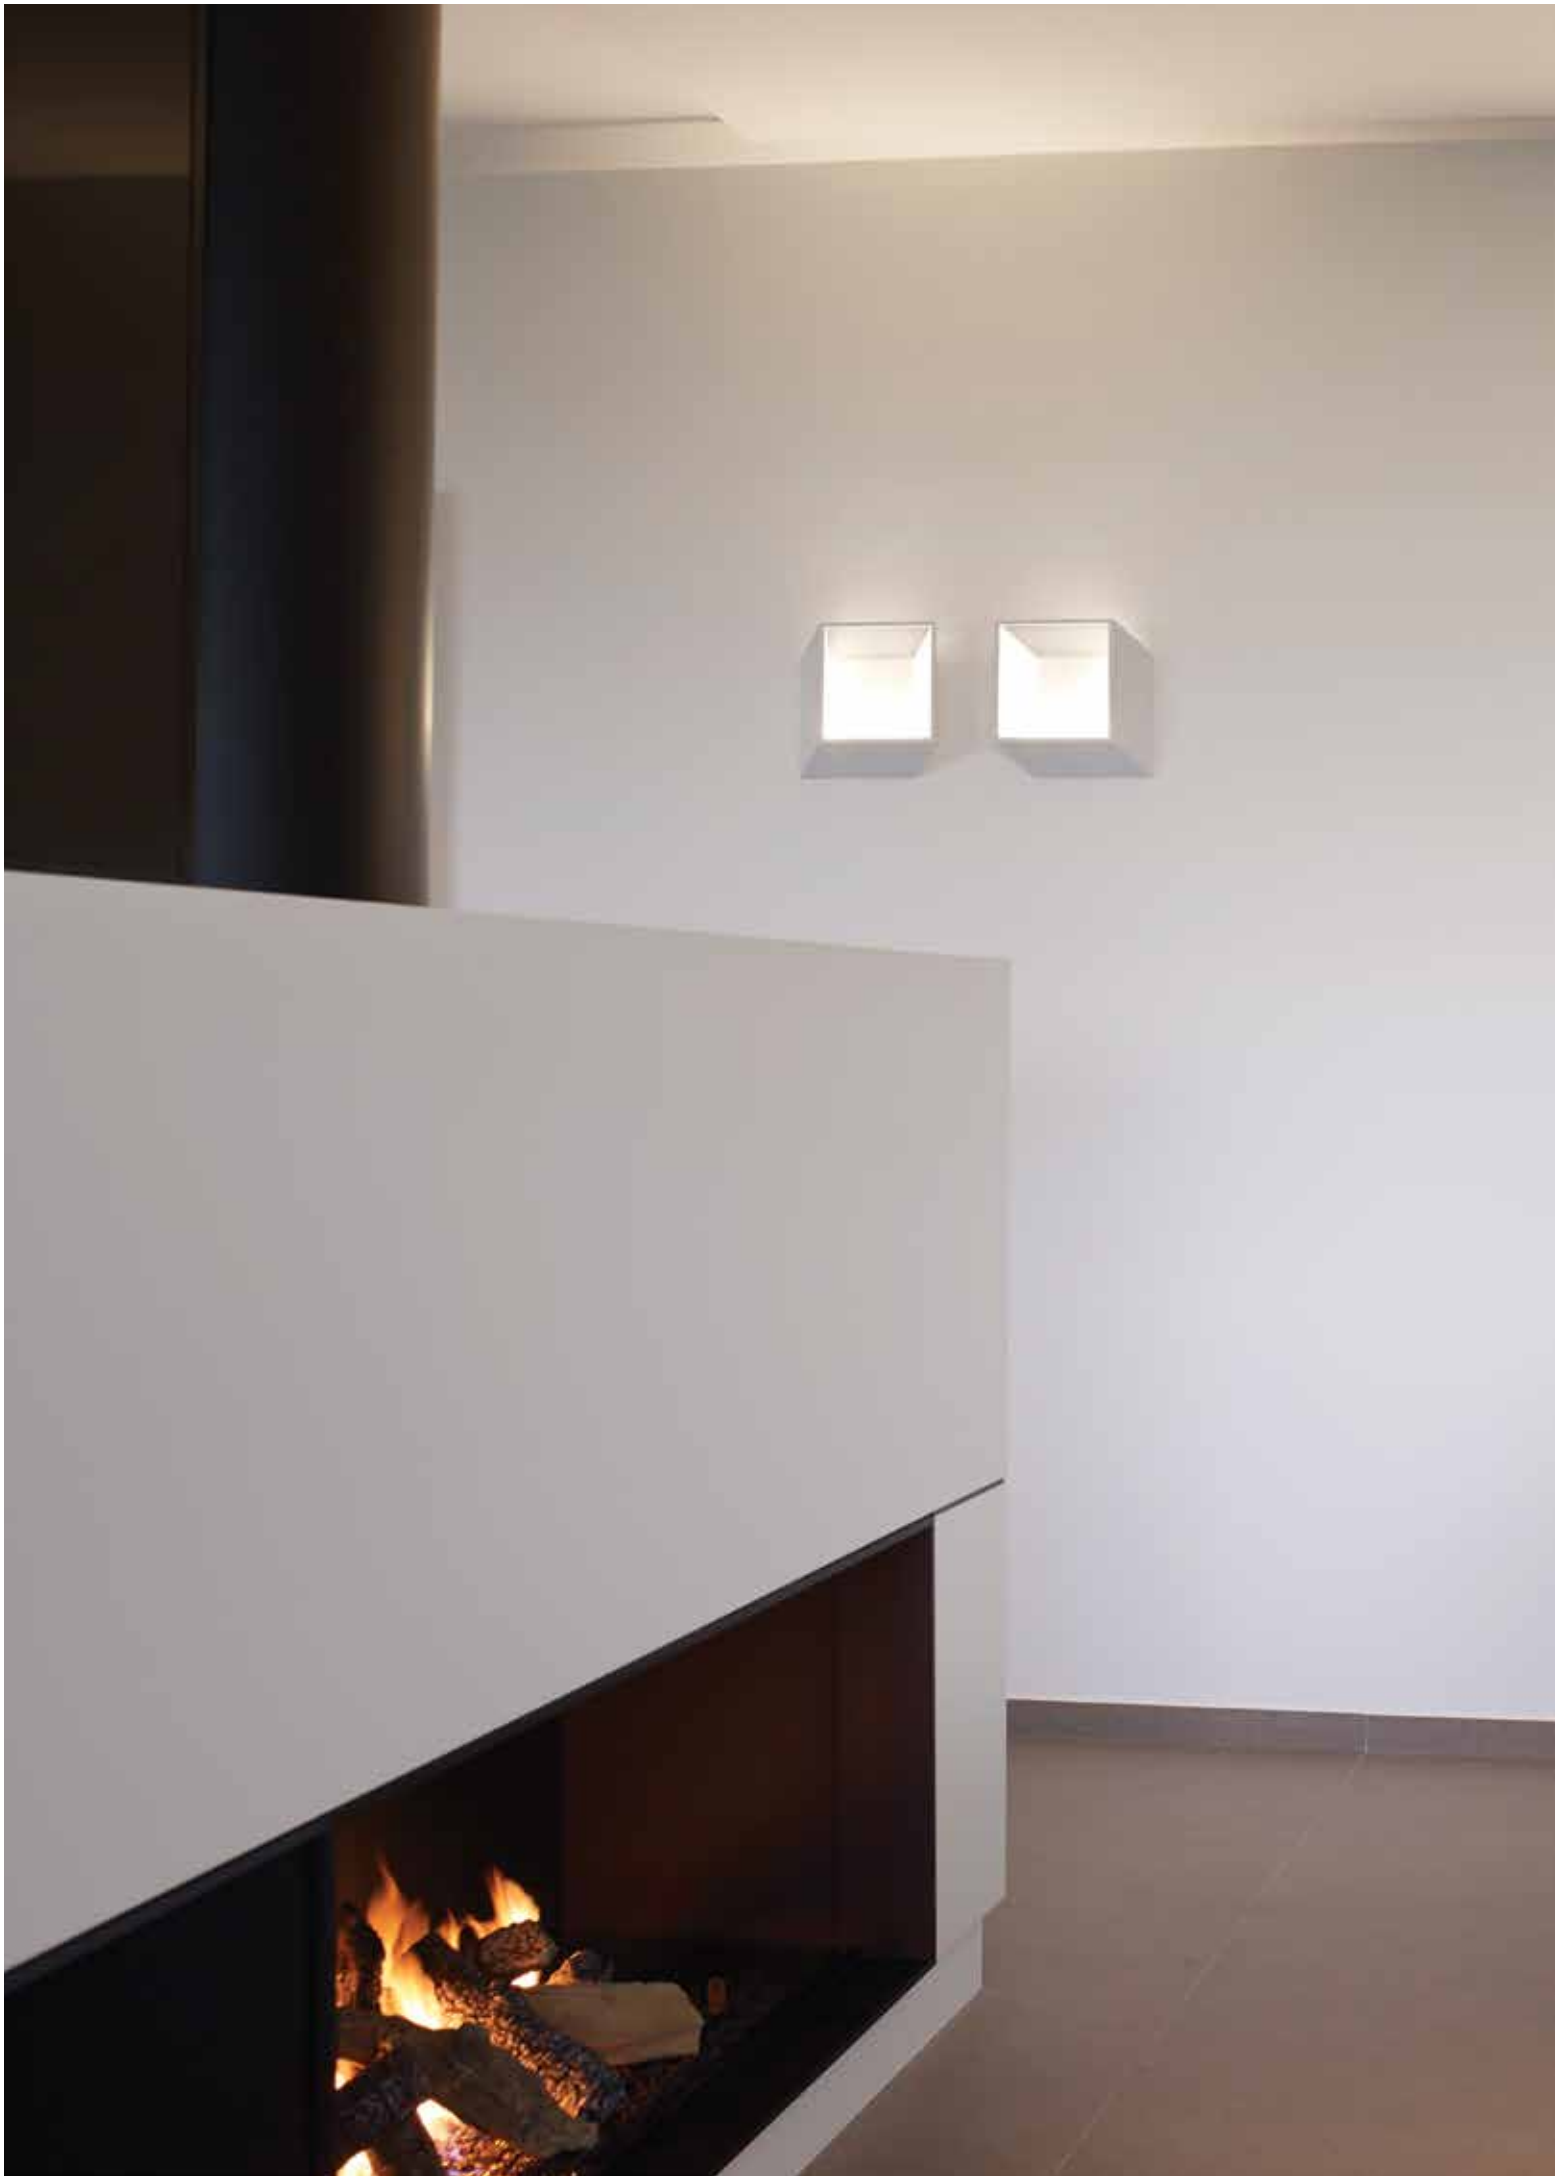







EGIDE MEERTENS

new

led

Fifty-5

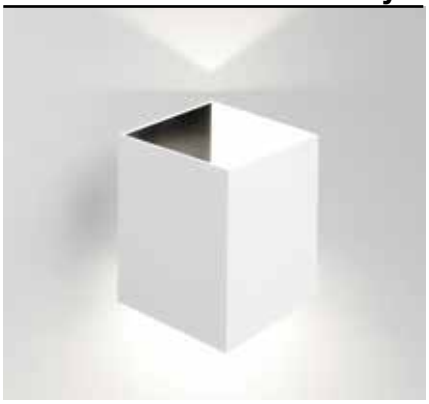


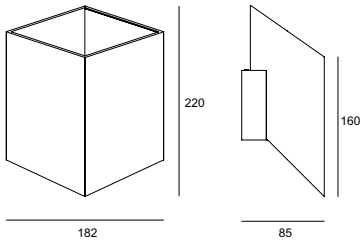


new


led

Fifty-0

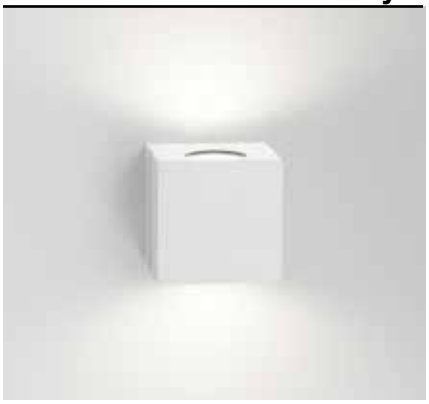




	CRI > 80	CRI > 80
4000K		
	ON REQUEST	ON REQUEST
3000K	2 x 703lm (6,2W)	2 x 703lm (6,2W)
	FIFTY-5 830 ◇ **278 73 8283** ◇ ◇ = B-W / W-W	**FIFTY-0 830** ◇ **278 74 8283** ◇ ◇ = W
2700K	2 x 665lm (6,2W)	2 x 665lm (6,2W)
	FIFTY-5 827 ◇ **278 73 8282** ◇ ◇ = B-W / W-W	**FIFTY-0 827** ◇ **278 74 8282** ◇ ◇ = W
	INCL.1 x COLOUR B (FOR FIFTY-5 W-W) INCL.1 x COLOUR MMAT (FOR FIFTY-5 B-W / W-W) INCL.1 x COLOUR W (FOR FIFTY-5 B-W) INCL.2 x SOFTENING LENS INCL.LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 1,0 IP20	INCL.2 x SOFTENING LENS INCL.LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz □ CE 0,7 IP20

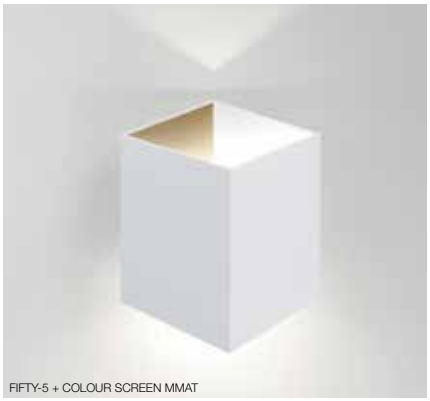

FIFTY-5 + COLOUR SCREEN MMAT

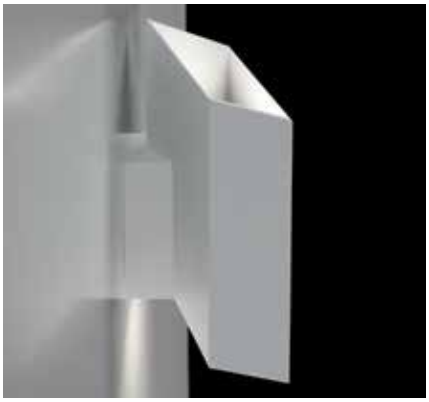




new

led

Pogo





POGO ◇
278 72 22 ◇
◇ = W

INCL.1 x LED CLUSTER UP 5,25W / 3000K ● / 700lm
INCL.1 x LED CLUSTER DOWN 5,25W / 3000K ● / 700lm
INCL.2 x PC
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

□ CE 0,7 IP40




new

led

Gaboo W





GABOO W ◇
286 64 22 ◇
◇ = W
INCL.1 x LED CLUSTER UP 6,3W / 3000K ● / 725lm
INCL.1 x LED CLUSTER DOWN 6,3W / 3000K ● / 725lm
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

□ CE 0,9 IP20




VA ET VIENT

Requirements

INSTALLATION

BOWL GLASS CLEAR
286 67 01

BOWL GLASS AMBER
286 67 02




BOWL GLASS OPAL WHITE
286 67 03

0,7

Tweeter Fix W BL





TWEETER FIX W BL 830 ◇
278 75 8183 ◇
◇ = B / W
INCL.1 x POWERLED WHITE 9,3W / 3000K ● / 945lm

TWEETER FIX W BL 827 ◇
278 75 8182 ◇
◇ = B / W
INCL.1 x POWERLED WHITE 9,3W / 2700K ● / 893lm


FIXED
INCL.LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
EXCL.BOWL GLASS
220-240V / 50-60Hz

CE 1,5 IP20

REQUIREMENT
BOWL GLASS CLEAR
286 67 01
or
BOWL GLASS AMBER
286 67 02
or
BOWL GLASS OPAL WHITE
286 67 03

Tweeter Fix W FRL





TWEETER FIX W FRL 830 ◇
278 76 8183 ◇
◇ = W
INCL.1 x POWERLED WHITE 9,3W / 3000K ● / 945lm

TWEETER FIX W FRL 827 ◇
278 76 8182 ◇
◇ = W
INCL.1 x POWERLED WHITE 9,3W / 2700K ● / 893lm


FIXED
INCL.1 x FRESNELL LENS 35°
INCL.LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
220-240V / 50-60Hz

CE 1,5 IP20



Viktor



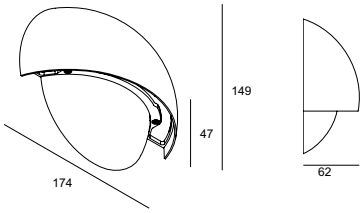


VIKTOR ◇
223 80 12 ◇
◇ = A / N / W
INCL.LED CLUSTER 8,4W / 3000K ● / 580lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

IP65

Skelp On





SKELP ON LED WW ◇
320 03 12 ◇
◇ = W
INCL.1 x POWERLED WHITE 6,2W / 3000K ● / 703lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP20








NADIA CORNELISSEN / ACES OF SPACE

Ultra X LED



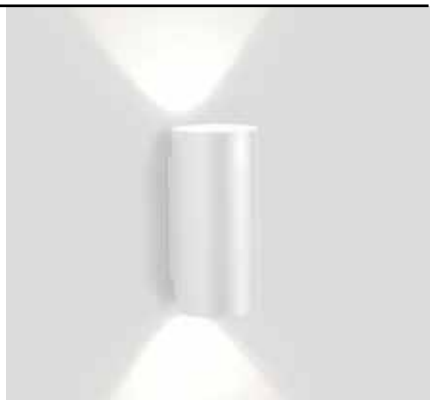






ULTRA X LED WW ◇
279 61 18102 ◇
◇ = A / N / W
INCL.1 x POWERLED WHITE 6,2W / 3000K ● / 703lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,6 IP55

ULTRA X DOWN-UP LED WW ◇
279 61 18202 ◇
◇ = A / N / W
INCL.2 x POWERLED WHITE 6,2W / 3000K ● / 703lm
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,9 IP55



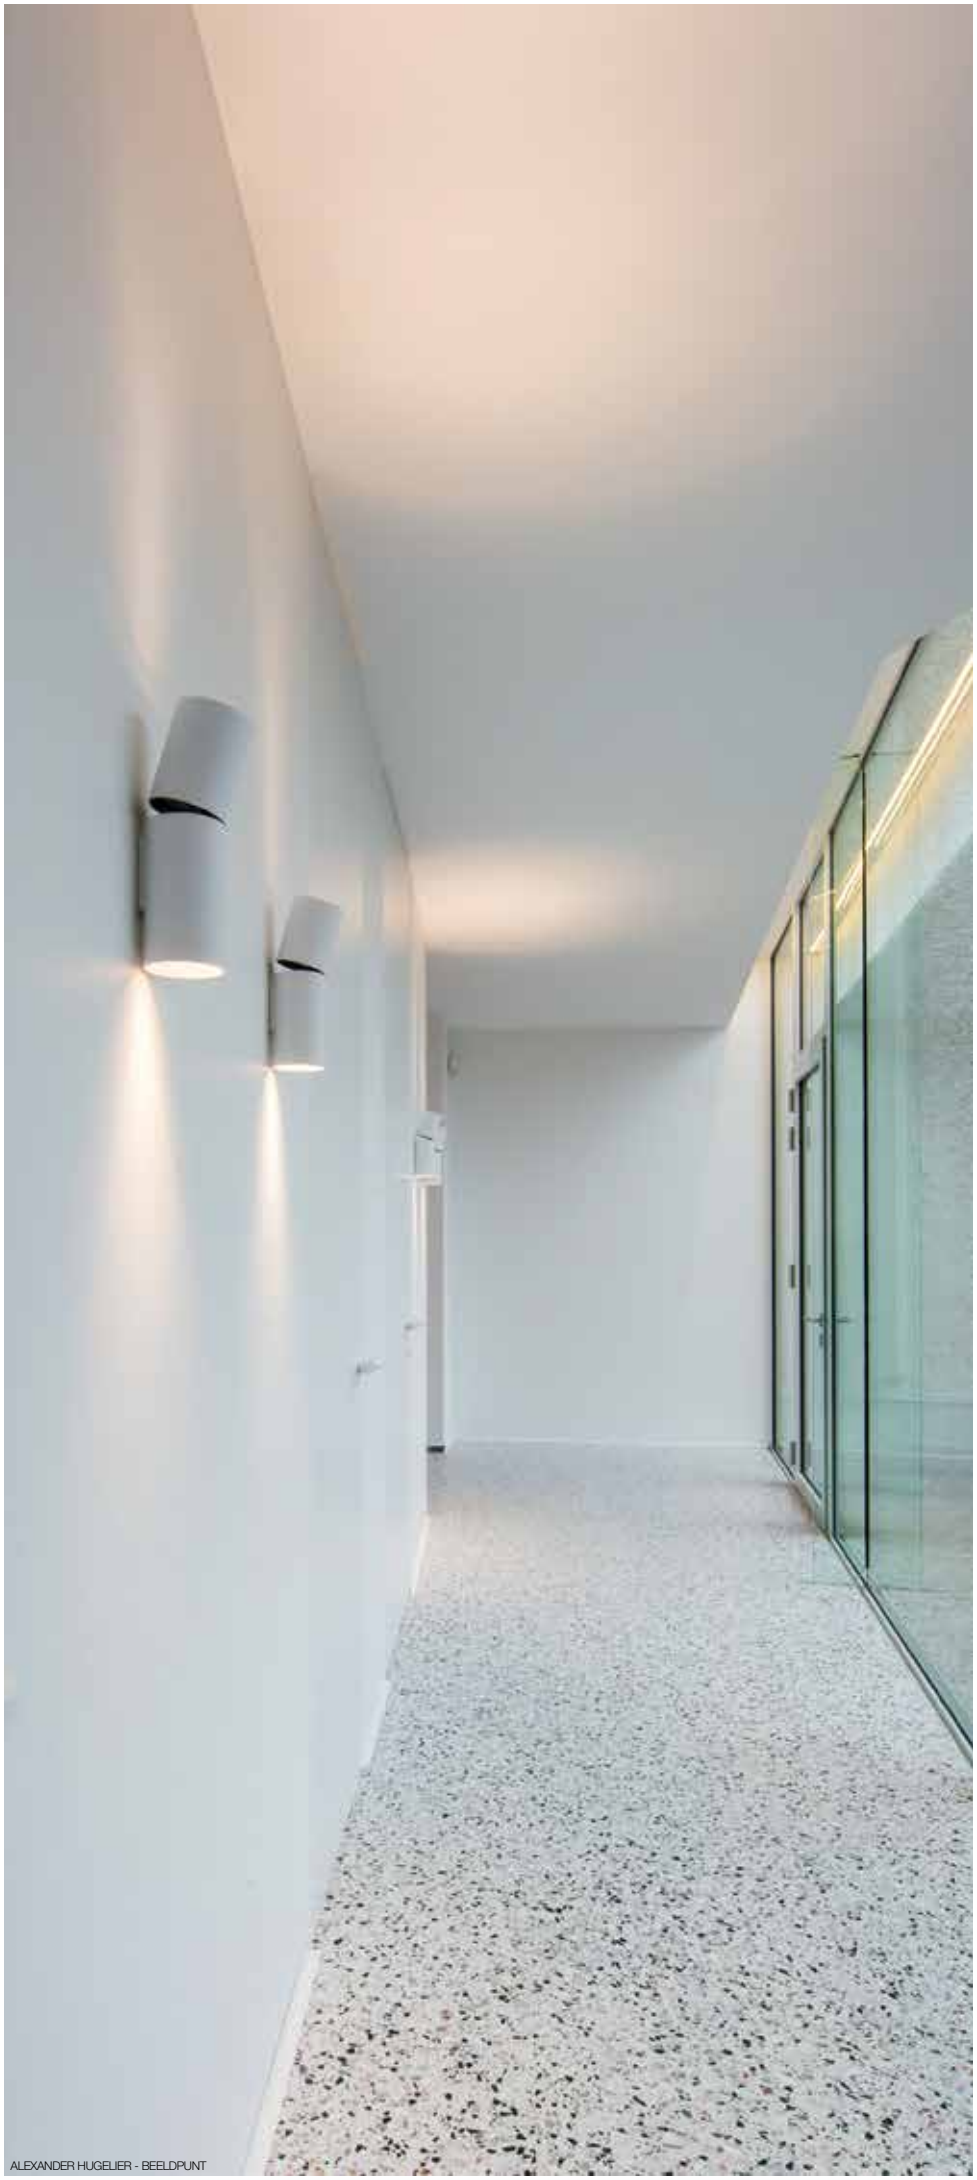


ALEXANDER HUGELIER - BEELDPUNT


FULL INFO / PAG TEC

Accessories

	C A B	
CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12	
GLASS SBL 50 **201 30 05**	Ø50	

Ultra W

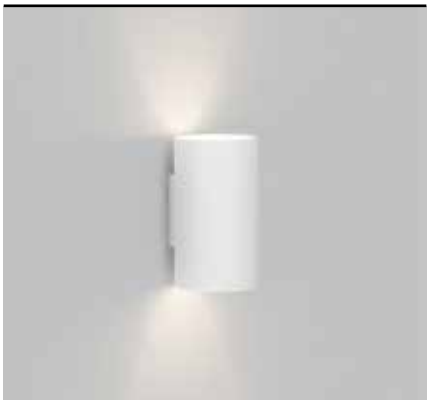





ULTRA W ◇
279 81 40 ◇
◇ = W
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

0,4 IP20 0,1

Ultra TW

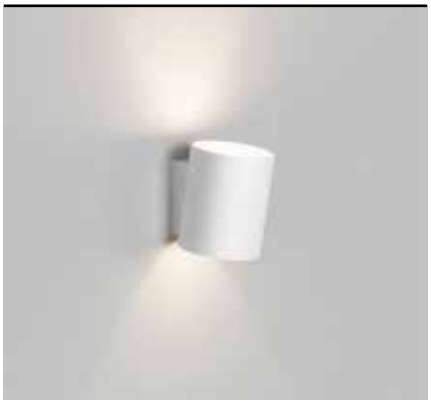




ULTRA TW HP ◇
279 51 40 ◇
◇ = W
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

0,3 IP20 0,1

Nec+Ultra





NEC+ULTRA 250 Hi ◇
279 52 62 ◇
◇ = W
GU10 / 100-240V / 50-60Hz
2 x QPAR51 max.50W

1,0 IP20 0,5

ACCESSORIES
CLIP 50 + GLASS SBL 50
led LED SOLUTION - PAG TEC 4-5

GOOD DESIGN award


ULTRA TW


ULTRA TW + CLIP 50 + GLASS SBL 50







MONTUR M O E27 W

Montur S









MONTUR S LED ◇
232 112 83 ◇
◇ = A / B / W
INCL.1 x GLASS OPAL
INCL1 x LED CLUSTER 7W / 3000K / 505lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP65


MONTUR S O E27 ◇
232 111 00 ◇
◇ = B / W
E27Ls / 220-240V / 50-60Hz
1 x A60 max.40W

IP20

OPTIONS
led LED SOLUTION - PAG TEC 4-5

Montur M






led

MONTUR M LED ◇
232 212 83 ◇
◇ = A / B / W
INCL.1 x GLASS OPAL
INCL1 x LED CLUSTER 6,3W / 3000K / 840lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 2,6 IP65






MONTUR M E27 ◇
232 213 00 ◇
◇ = A / B / W
INCL.1 x GLASS CLEAR
E27Ls / 220-240V / 50-60Hz
1 x A60 max.40W

CE 2,5 IP65

OPTIONS
led LED SOLUTION - PAG TEC 4-5






MONTUR M O E27 ◇
232 211 00 ◇
◇ = B / W
E27Ls / 220-240V / 50-60Hz
1 x A60 max.40W

CE 1,3 IP20

OPTIONS
led LED SOLUTION - PAG TEC 4-5

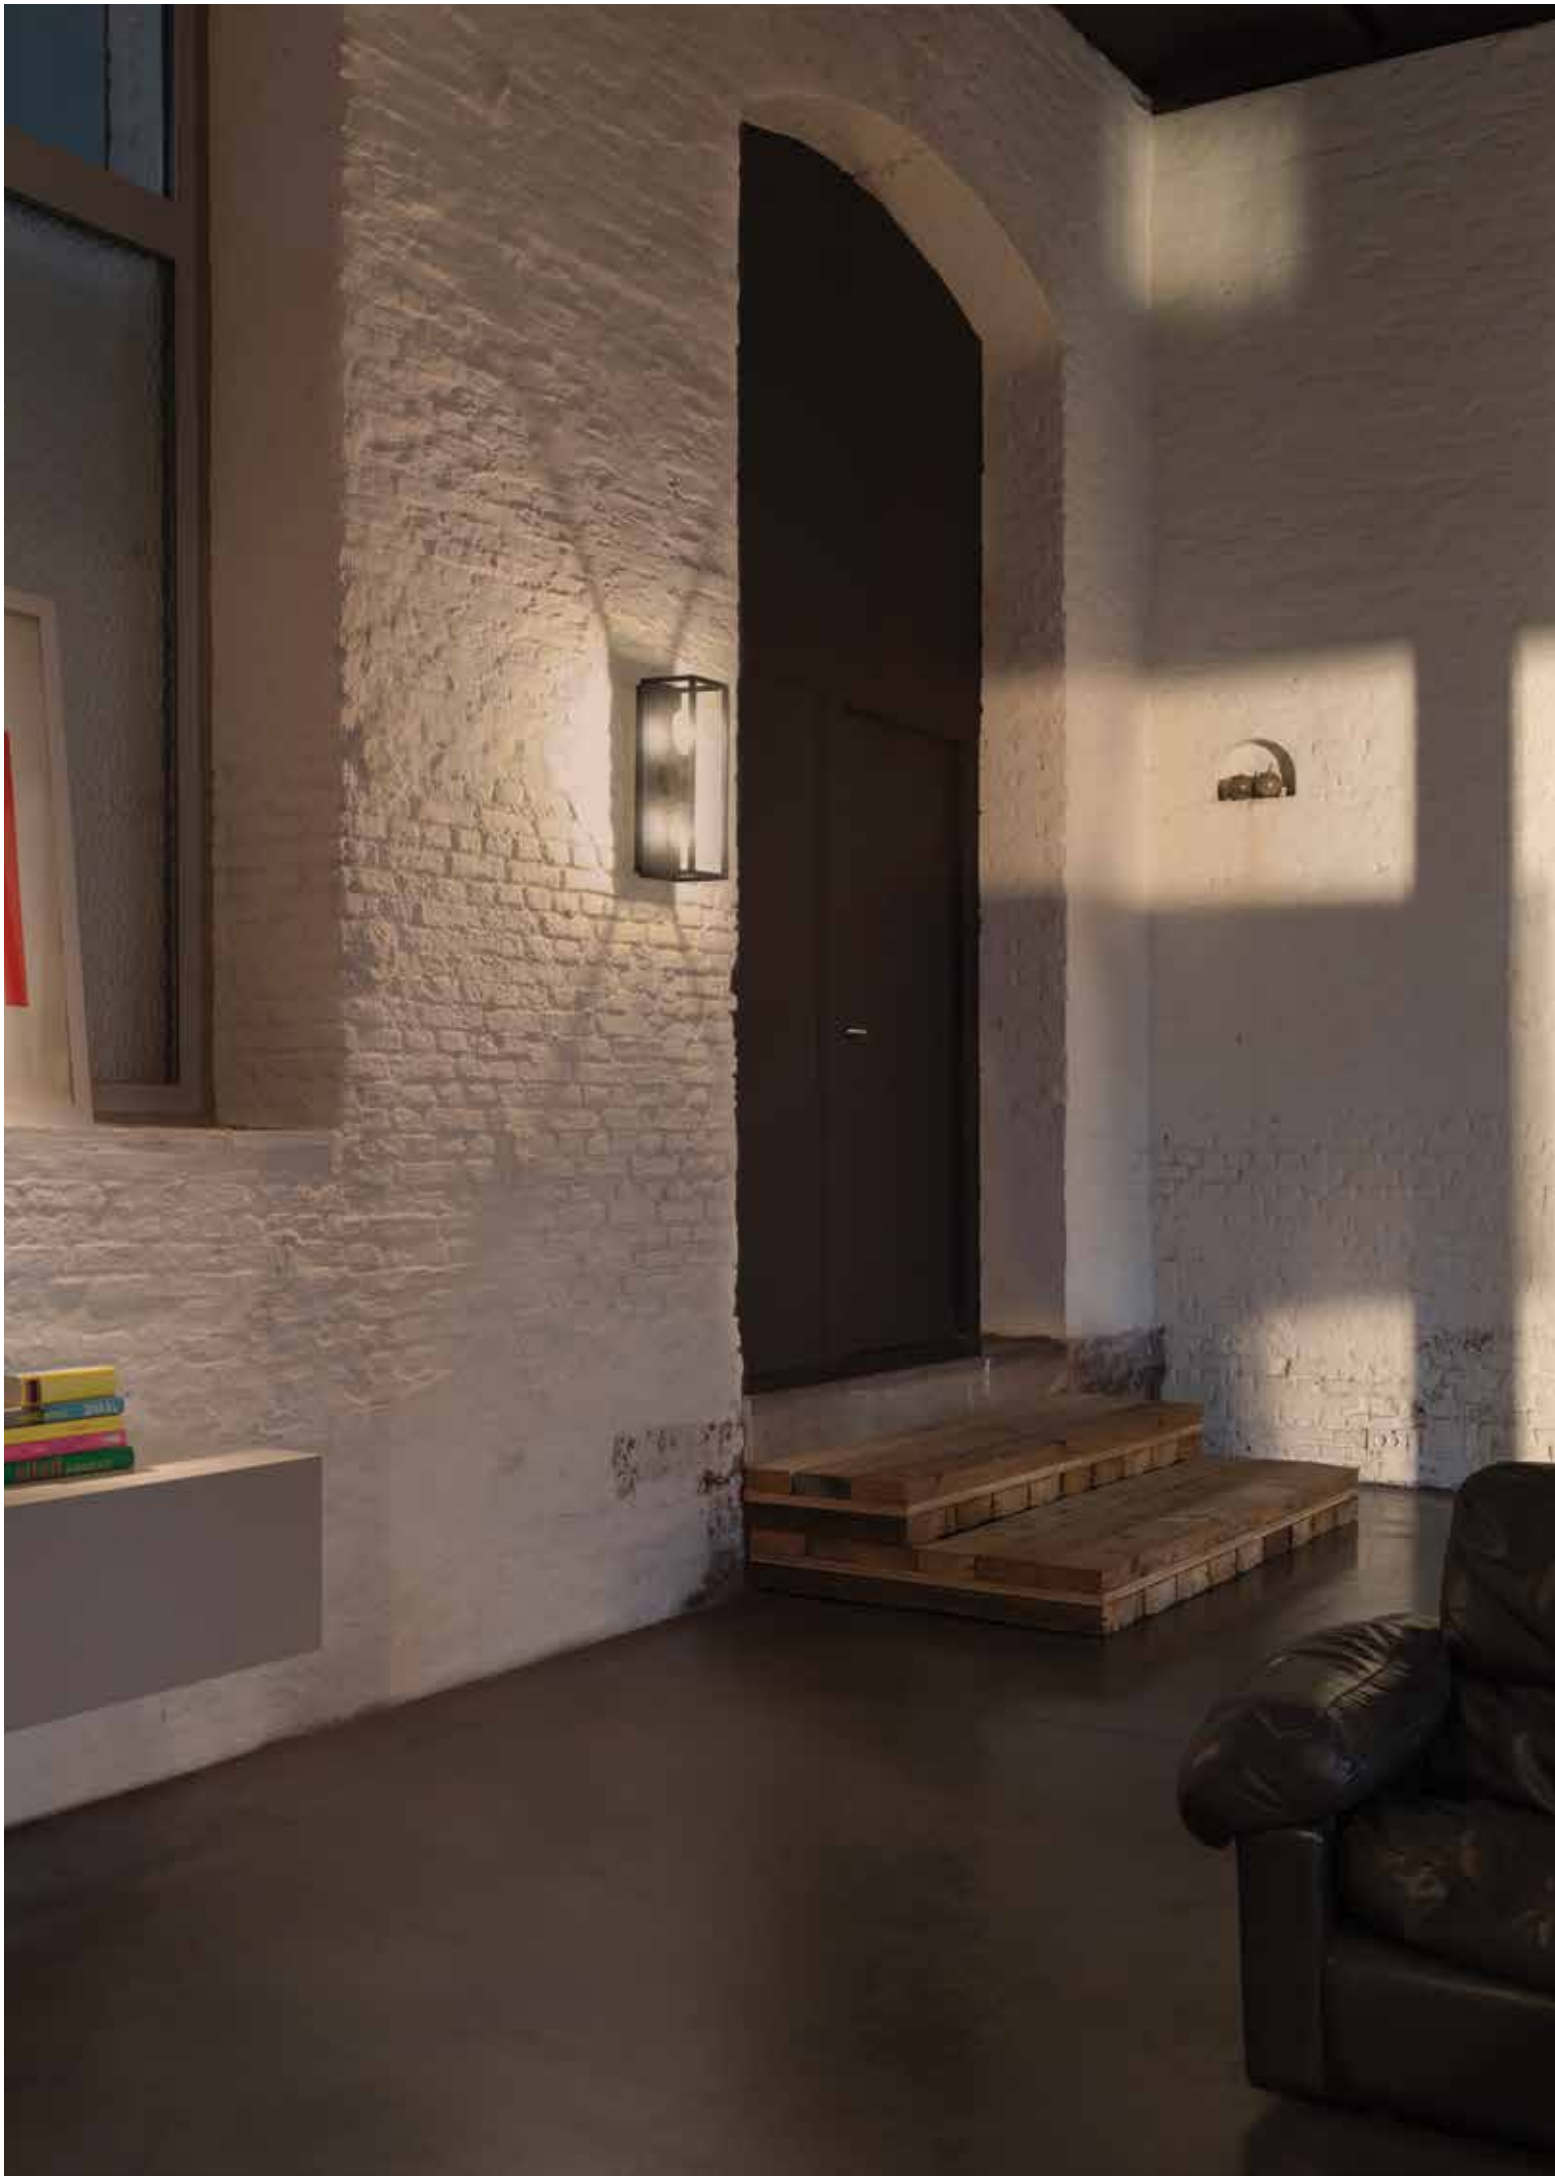



new

Montur L





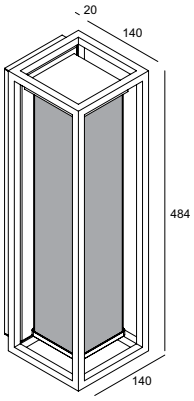

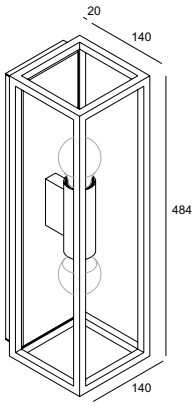

led

MONTUR L PC LED ◇
232 318 83 ◇
◇ = A / B
INCL.1 x PC SBL
INCL1 x LED CLUSTER 14,7W / 3000K ● / 1960lm
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 0 I 50-60Hz

CE 2,6 IP54


MONTUR L O E27 ◇
232 321 00 ◇
◇ = B / W
2 x E27Ls / 220-240V / 50-60Hz
2 x A60 max.40W

CE 1,8 IP20

OPTIONS
led LED SOLUTION - PAG TEC 4-5

Sontur L



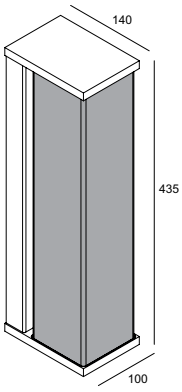


SONTUR L PC LED ◇
232 008 83 ◇
◇ = A / B / W
INCL.1 x PC SBL
INCL1 x LED CLUSTER 14,7W / 3000K ● / 1960lm
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 0 I 50-60Hz


CE 1,5 IP54



FINGERS
FOODSHOTS
SUGGESTION
VINTAGE CHICKEN €9.00
WINE BY GLASS
WHITE
JULES BAR
JULES BAR

Visa

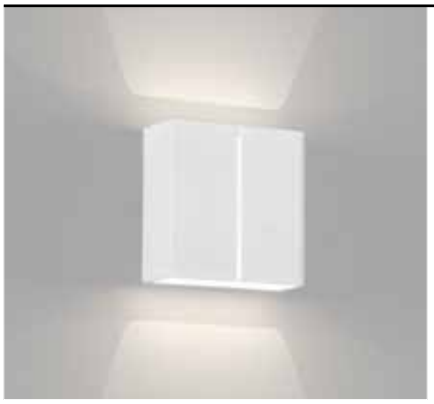








led

VISA LED WW ◇
275 07 24 ◇
◇ = W
INCL.4 x POWERLED WHITE 1,1W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

0,9 IP55

VISA ◇
275 07 42 ◇
◇ = W
G9 / 100-240V / 50-60Hz
2 x QT14 max.60W

1,3 IP20 0,1

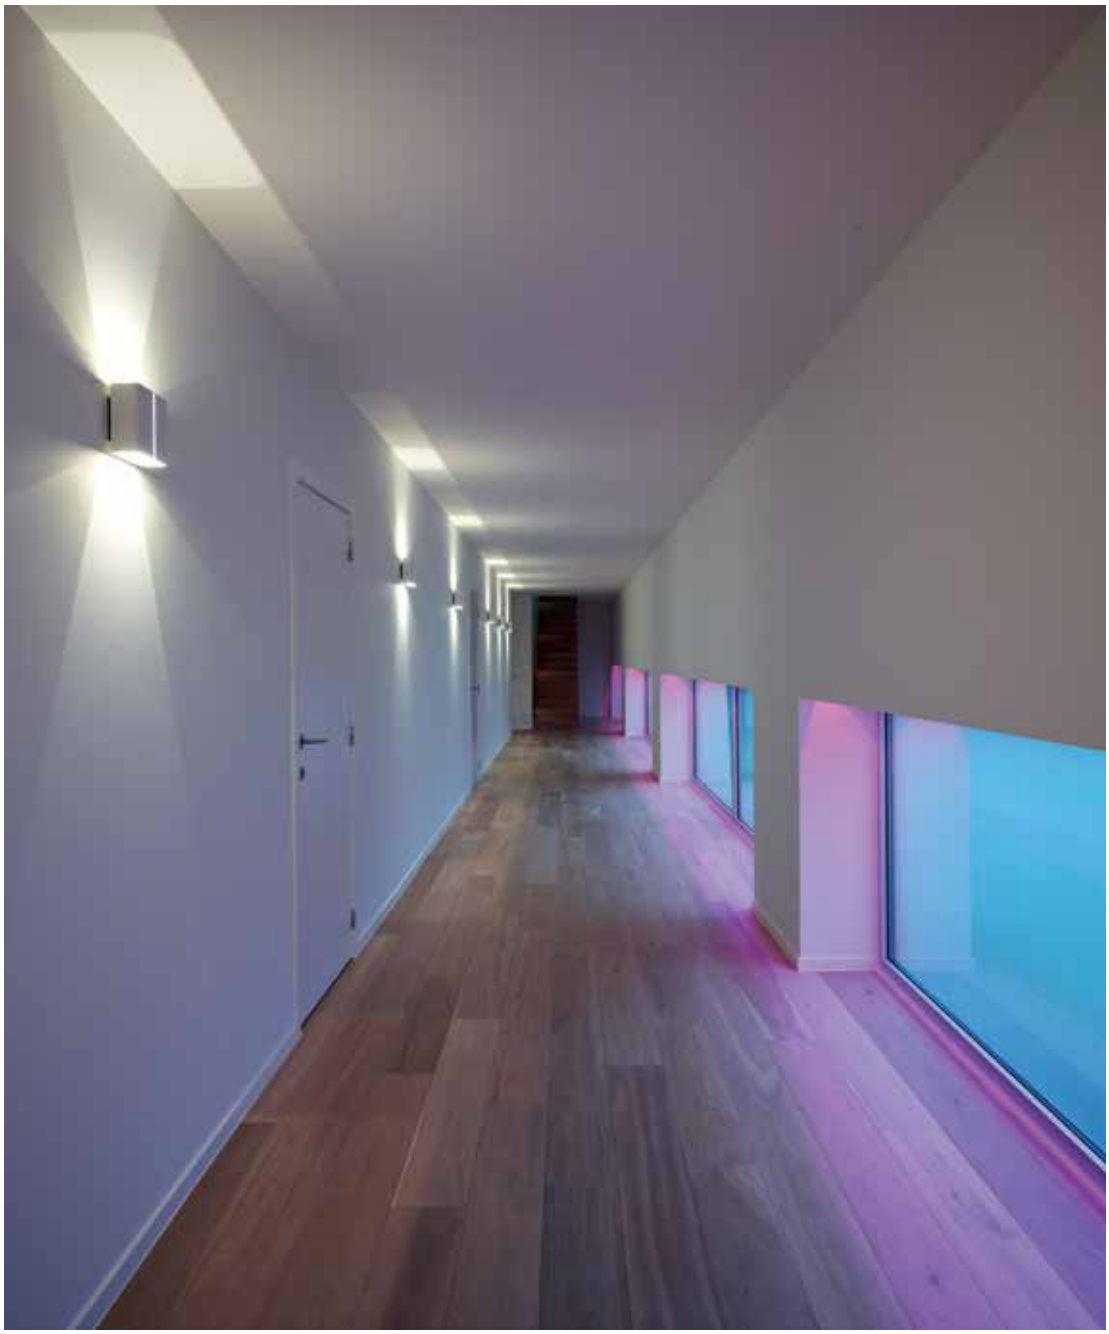









Gala S LED

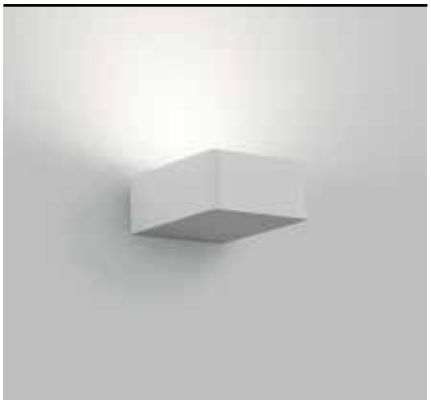





GALA S LED ◇
275 11 8183 ◇
◇ = A / W
INCL.1 x SOFTENING GLASS
INCL.1 x POWERLED WHITE 6,2W / 3000K ● / 703lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,7 IP20

Gala L OK LED

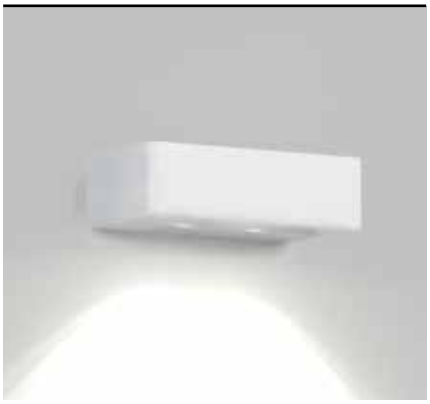

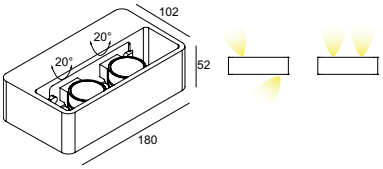


GALA L OK LED WW ◇
275 04 18202 ◇
◇ = A / N / W
ADJUSTABLE 20°
INCL.2 x POWERLED WHITE 4,2W / 3000K ● / 472lm
INCL.2 x LENS
INCL.LED POWER SUPPLY 240 mA-DC
100-240V / 50-60Hz

CE 1,0 IP55

Gala L LED







GALA L LED WW ◇
275 04 52 ◇
◇ = A / N / W
INCL.LED CLUSTER 6,3W / 3000K / 840lm
INCL.LED POWER SUPPLY 350 mA-DC
100-240V / 50-60Hz

0,8 IP65

Gala LED

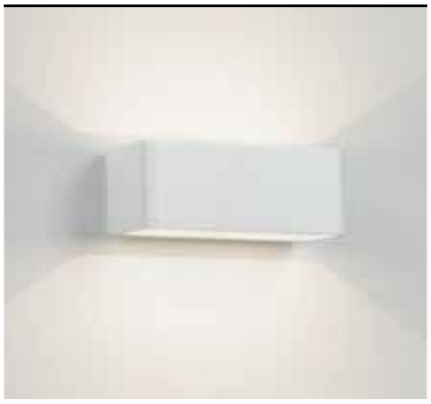




GALA LED WW ◇
275 04 24 ◇
◇ = W
INCL.4 x POWERLED WHITE 1,1W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

0,6 IP20


Gala





GALA ◇
275 04 01 ◇
◇ = ALU / W
R7s / 100-240V / 50-60Hz
1 x QT-DE12s max.150W

0,5 IP20 0,5

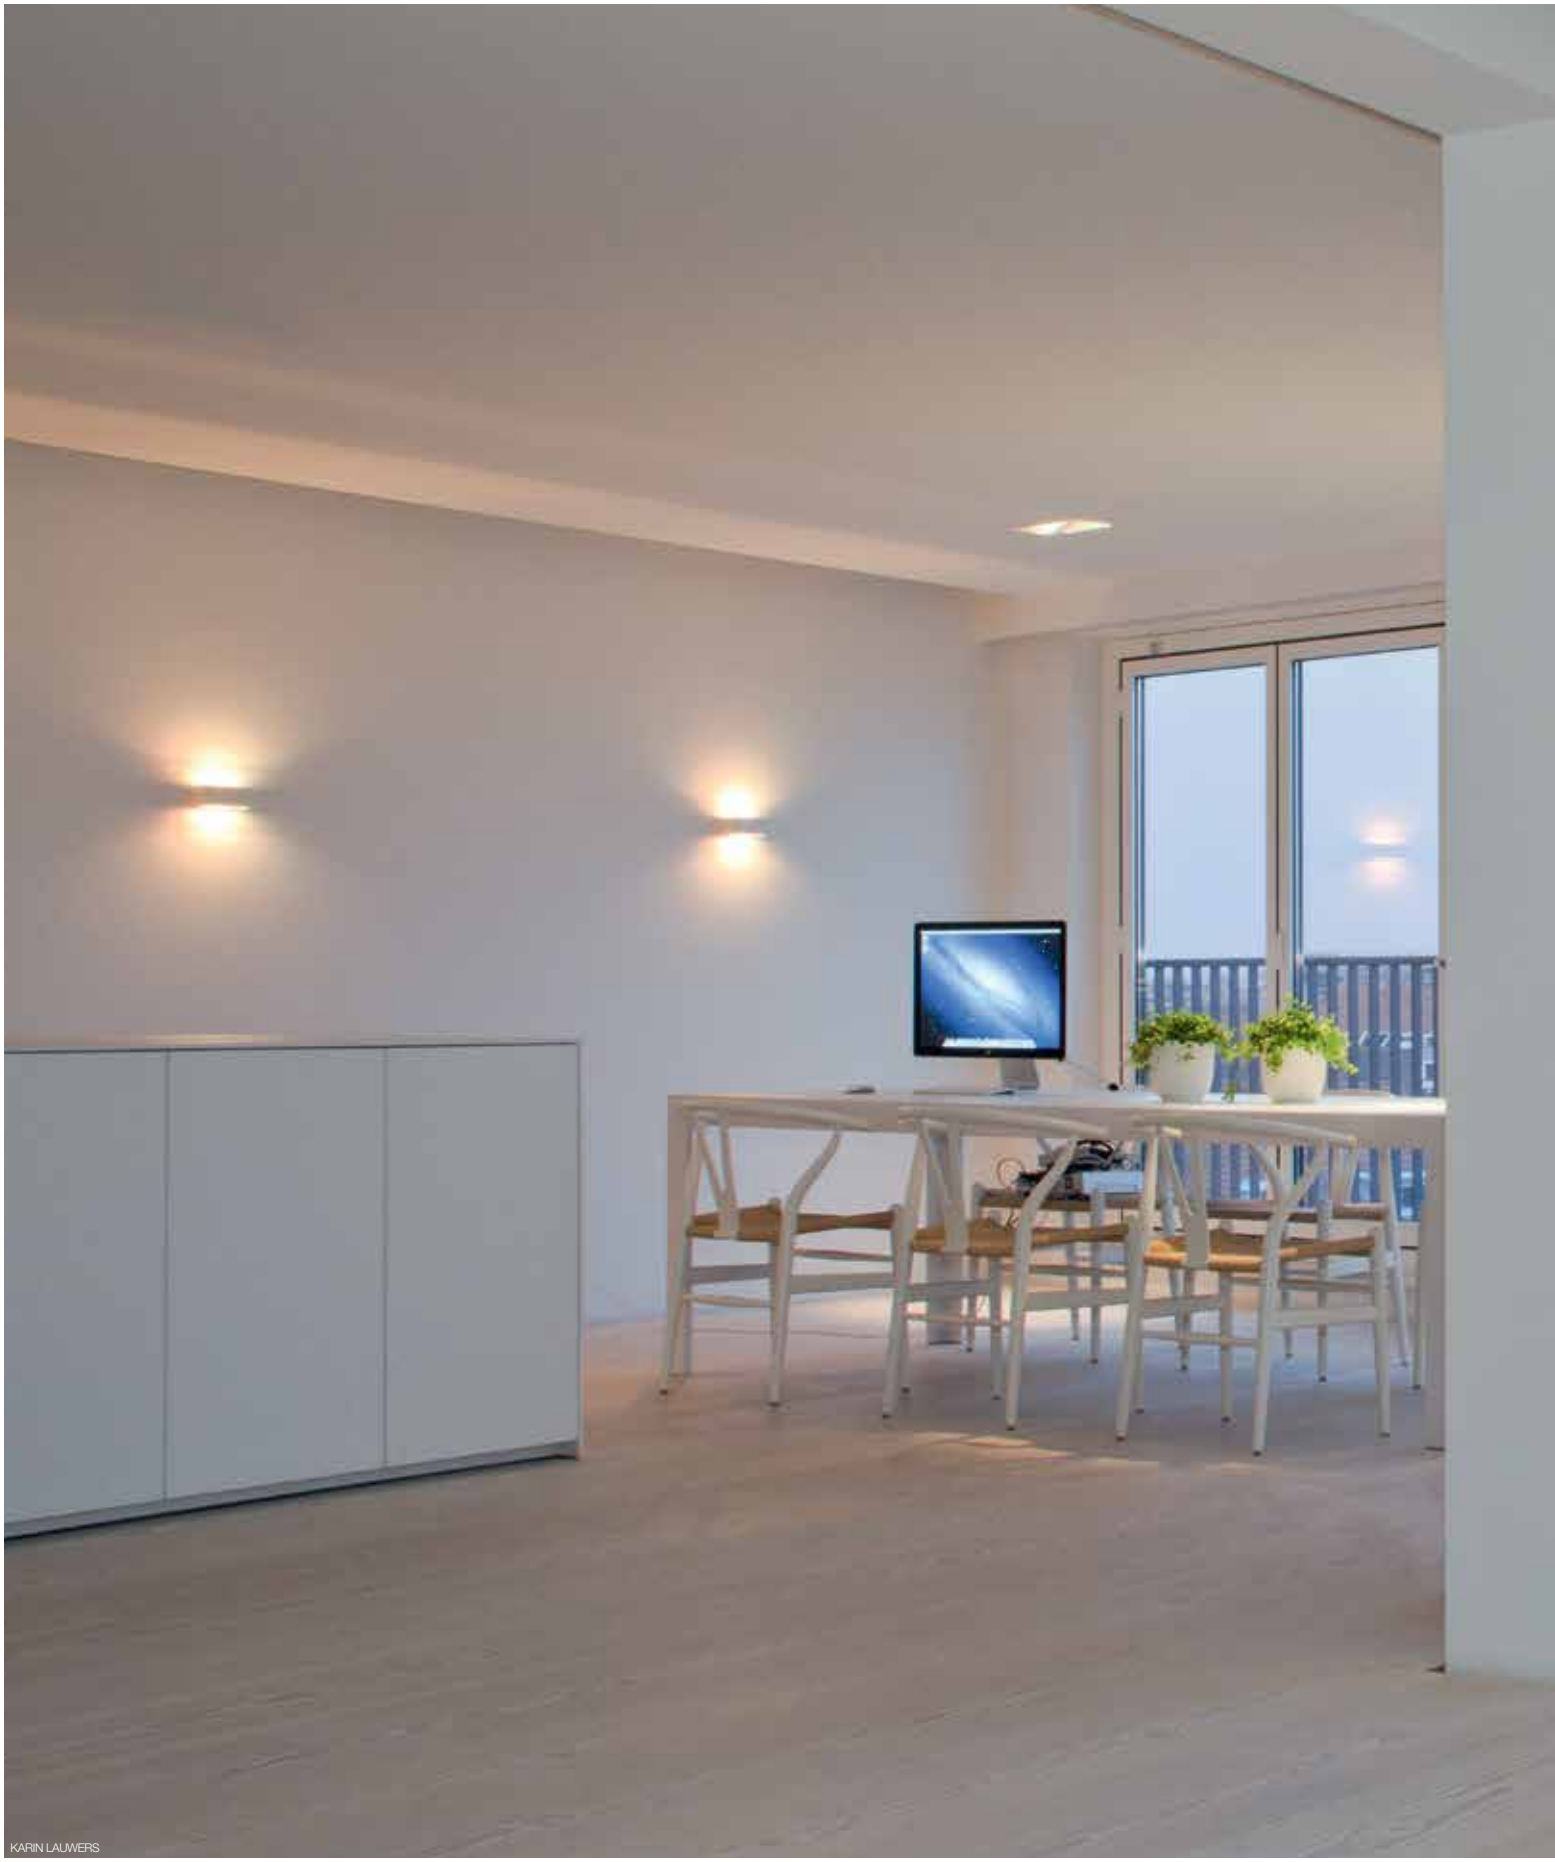

KARIN LAUWERS






FULL INFO / PAG TEC

Accessories

DICROIC FILTER 100 **201 38 11** ● max. 40W	Ø100	



VISION S RGB W

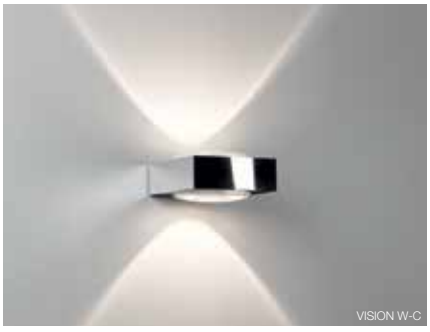



VISION W-C





VISION W + DICROIC FILTER 100 BLUE

Vision S

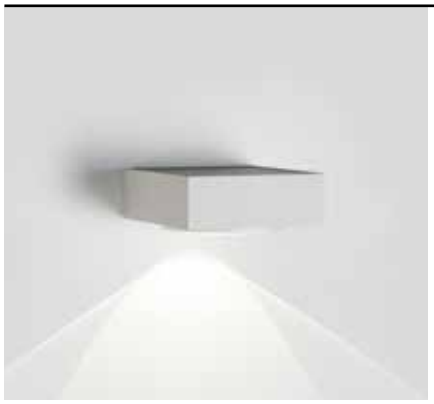

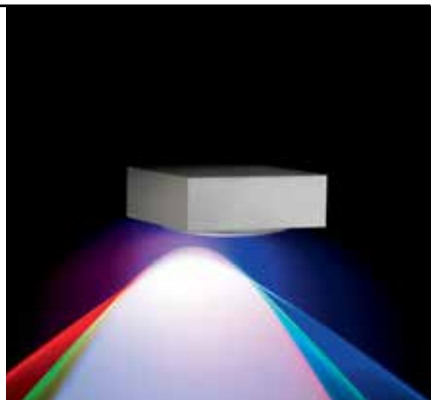






VISION S LED WW ◇
278 24 22 ◇
◇ = W / W-C
INCL.1 x LENS
INCL.2 x POWERLED WHITE 1,6W / 3000K
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz


0,8 IP20

VISION S RGB ◇
278 24 33 ◇
◇ = W / W-C
INCL.1 x LENS
INCL.3 x POWERLED 1,6W / R - G - B
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

0,8 IP20

Vision

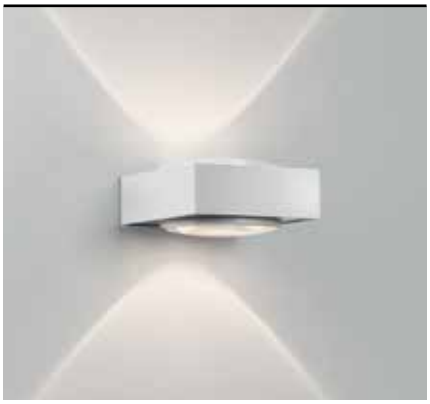



VISION ◇
278 25 40 ◇
◇ = W / W-C
INCL.2 x LENS
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W

0,9 IP20 0,5

ACCESSORIES
DICROIC FILTER 100 BLUE

GOOD DESIGN award



MOOD INTERIEUR






ABC PROJECTS - ANJA VERROEYE






led

Vince

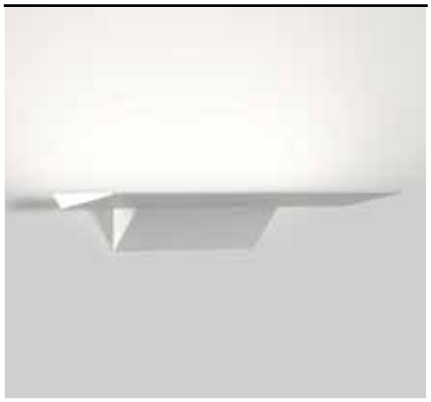

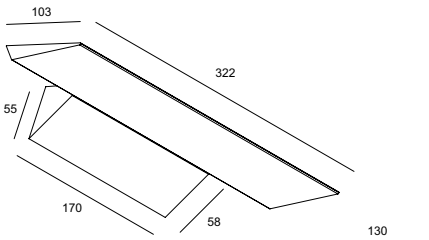



VINCE ◇
275 10 12 ◇
◇ = W
INCL.LED CLUSTER 8,5W / 3000K ● / 705lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 1,1 IP20 0,1

led

Camus 10

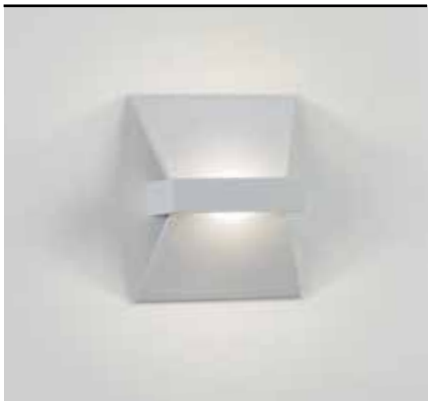



CAMUS 10 LED ◇
275 08 4102 ◇
◇ = W
INCL.1 x POWERLED WHITE 6,2W / 3000K ● / 703lm
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


CE 1,0 IP20


GREEN GOOD DESIGN award






Tiga LED BS

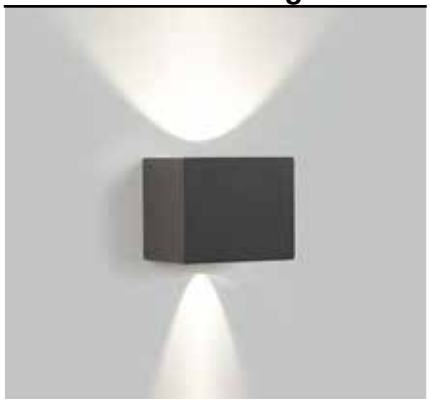





	CRI > 80
4000K	
	ON REQUEST
3000K	680lm (7W)
	TIGA LED BS 3024 ◇ **223 752 8102** ◇ ◇ = A / G / W
2700K	618lm (7W)
	TIGA LED BS 2724 ◇ **223 752 8103** ◇ ◇ = A / G / W
	INCL.1 x POWERLED WHITE 7W / 3000K INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz IP65

Tiga LED

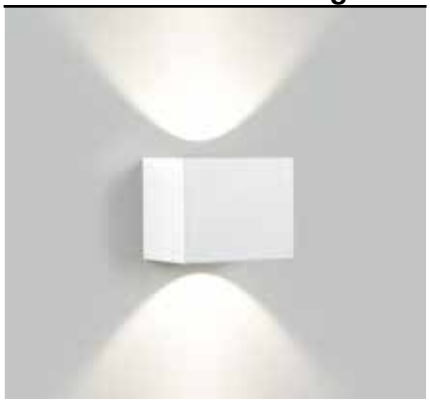





CRI > 80
ON REQUEST
680lm (7W)
TIGA LED 3024 ◇ **223 751 8102** ◇ ◇ = A / G / W
618lm (7W)
TIGA LED 2724 ◇ **223 751 8103** ◇ ◇ = A / G / W
INCL.1 x POWERLED WHITE 7W / 3000K INCL.DIMMABLE LED POWER SUPPLY 350mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz IP65

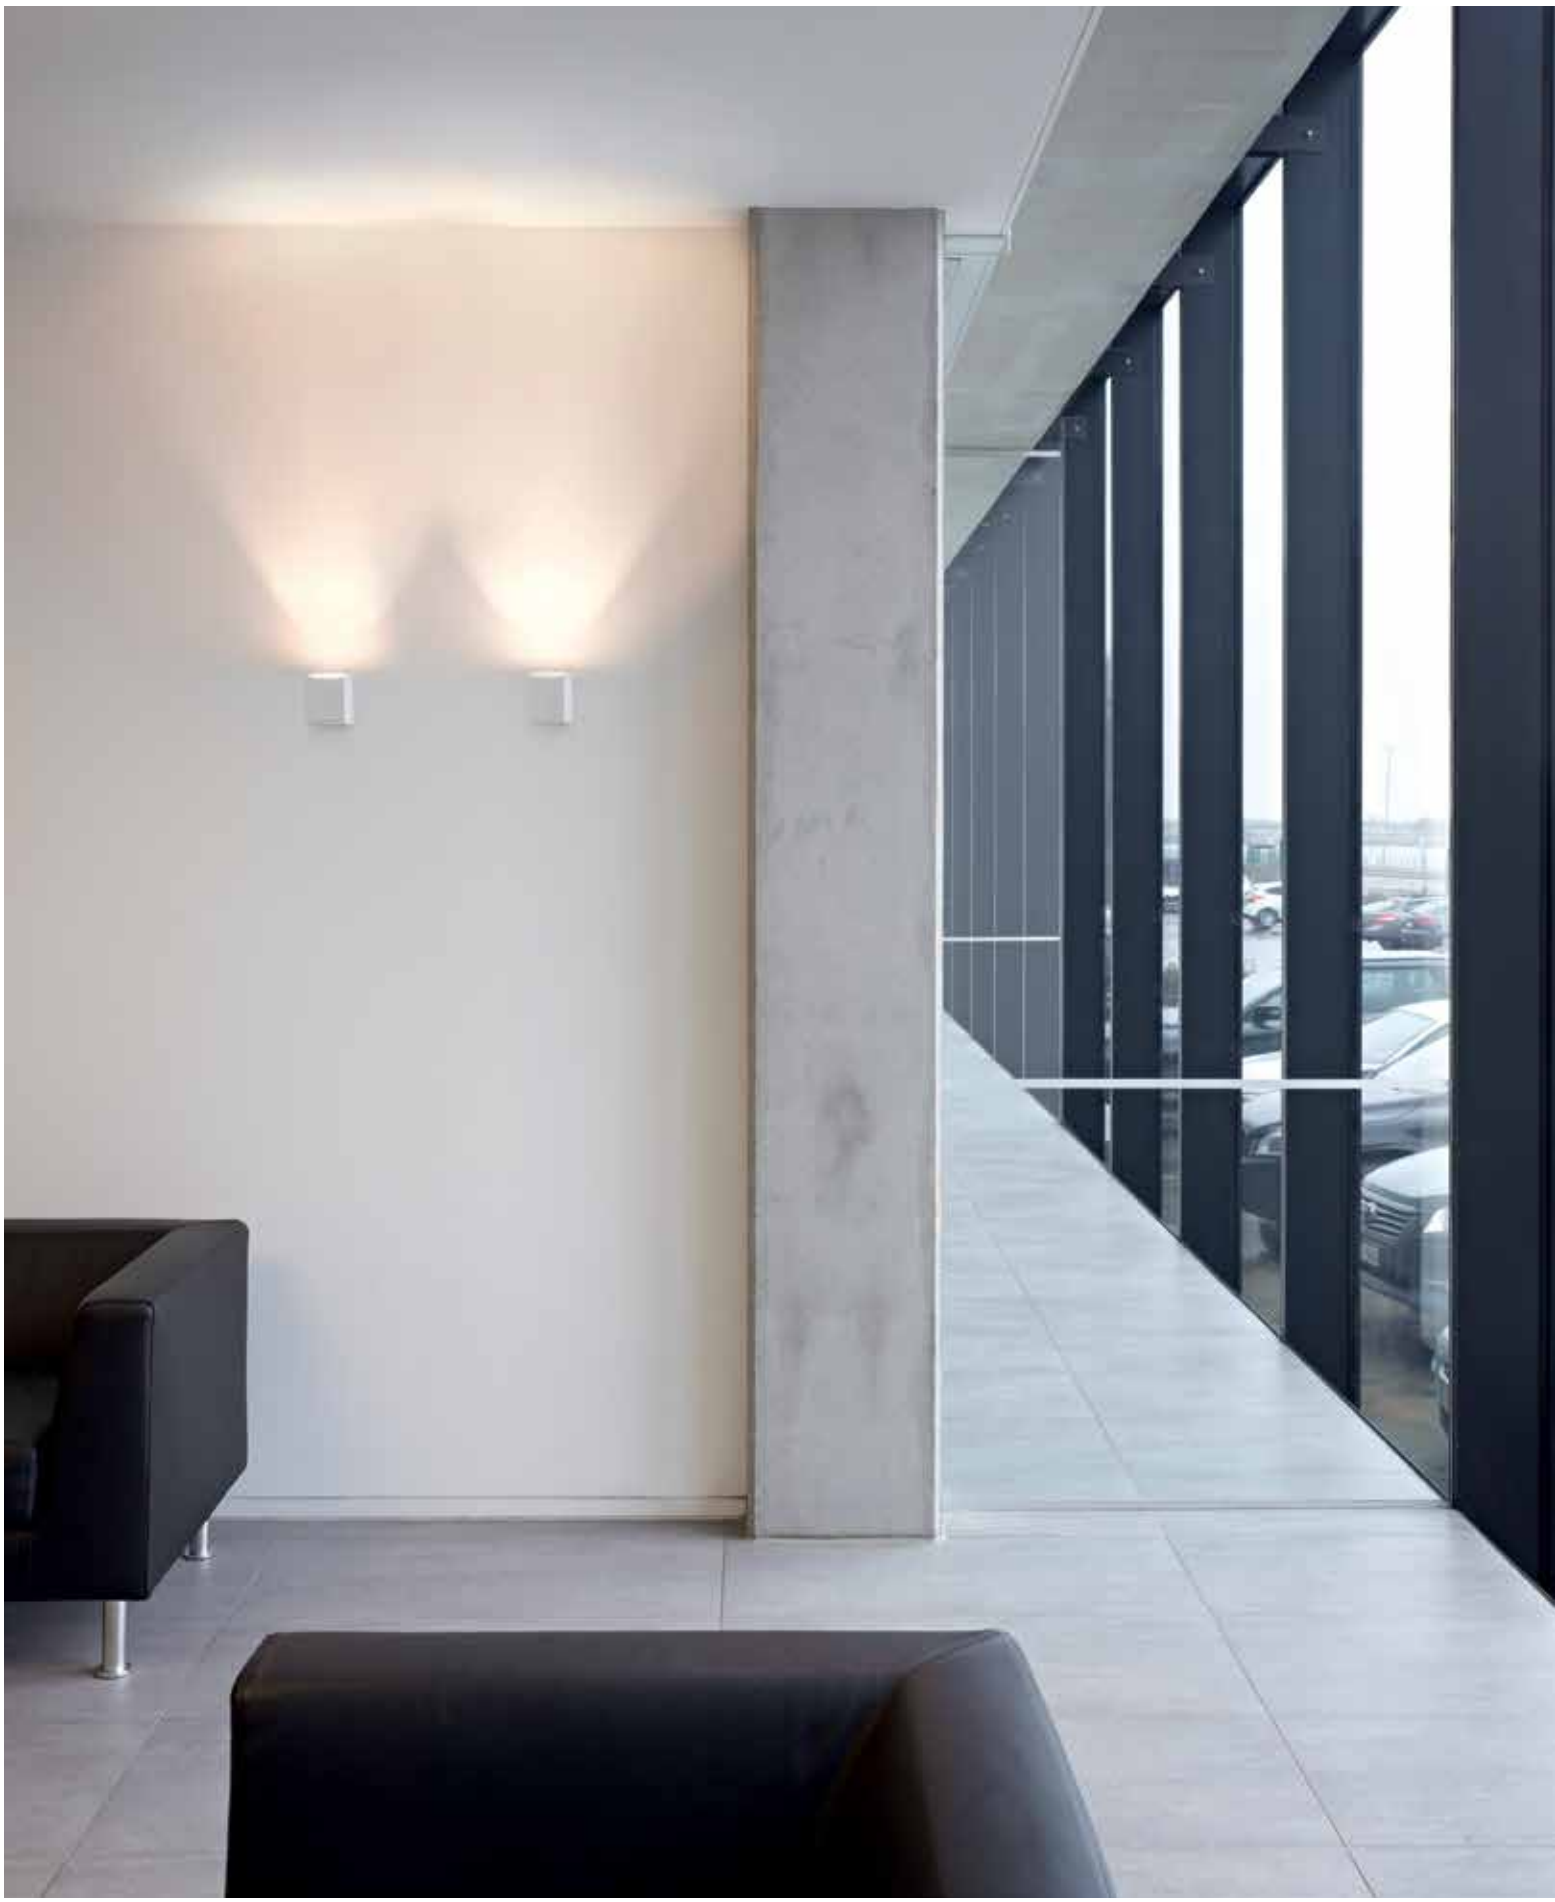

Boxy WL+

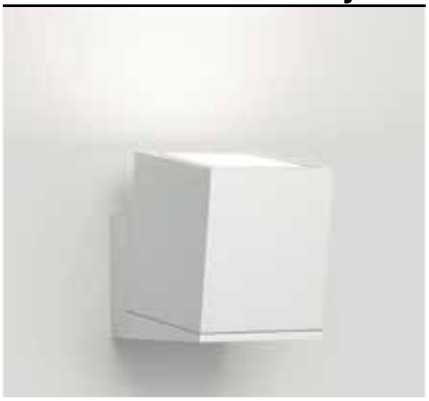



	CRI > 80
4000K	
	ON REQUEST
3000K	680lm (7W)
REFLECTOR FL-33°	**BOXY WL+ LED 3033** ◇ **251 69 8122** ◇ ◇ = W-W
2700K	618lm (7W)
REFLECTOR FL-33°	**BOXY WL+ LED 2733** ◇ **251 69 8123** ◇ ◇ = W-W

INCL.1 x POWERLED WHITE 7W
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

0,9 IP20 IP53






AABE

FULL INFO / PAG TEC

Options

INSTALLATION

COVERSET S ◇


204 62 62 ◇	62 x 62
204 80 80 ◇	80 x 80
204 90 90 ◇	90 x 90


◇ = ANO / B / W

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

Orbit

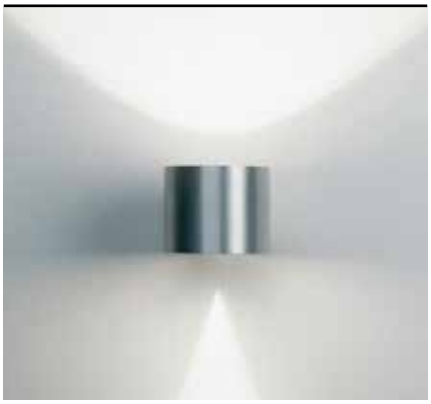





ORBIT ◇
271 11 40 ◇
◇ = ALU
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W
IP20 1,0

OPTIONS
COVERSET S 80-90

AWARD
DESIGN PLUS
light+building

Yupi

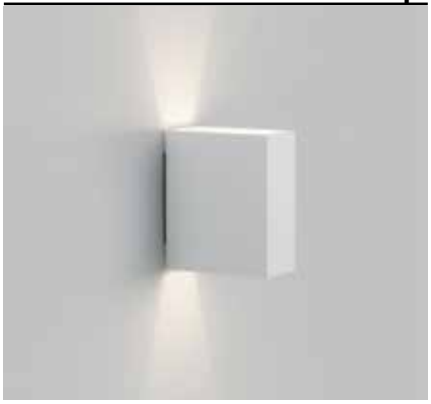



YUPI ◇
279 92 40 ◇
◇ = A / W
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W
IP20 0,1

YUPI X LED WW ◇
279 91 22 ◇
◇ = A
INCL.2 x POWERLED WHITE [A] 1,1-1,6W / 3000K
EXCL.LED POWER SUPPLY 350-500mA-DC
IP65


OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM






Backspace LED





BACKSPACE 38 LED ◇
274 81 12 ◇
◇ = W / B
INCL.1 x LEDCLUSTER 7,5W / 3000K / 980lm
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240 / 50-60Hz

CE 1,1 IP20 0,1




BACKSPACE 66 LED ◇
274 81 22 ◇
◇ = W / B
INCL.1 x LEDCLUSTER 15W / 3000K / 1960lm
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240 / 50-60Hz

CE 1,7 IP20 0,1


Backspace





BACKSPACE 26 EVG ◇
274 80 26 E ◇
◇ = ANO
INCL.1 x BACKSPACE 26 PC SBL
G24q-3 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-DEL 26W

CE 1,1 IP20 0,1




BACKSPACE 36 EVG ◇
274 80 36 E ◇
◇ = ANO
INCL.1 x BACKSPACE 36 PC SBL
2G11 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-L 36W

CE 1,7 IP20 0,1



i-Beam






i-BEAM 124 ◇
274 55 24 ◇
◇ = C / W
INCL.1 x PC SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 24W

0,9 IP44 0,1

i-Liner



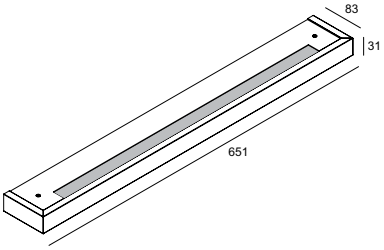


i-LINER 124 ◇
276 64 24 ◇
◇ = ALU-W / W-W / C-W
INCL. 1 x PC TUBE SBL
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 24W

1,4 IP44 0,1




Microline 30+ Wall





MICROLINE 30+ WALL 124 ◇
347 02 124 ◇
◇ = ANO / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 14/24W
1,8 IP20 0,1

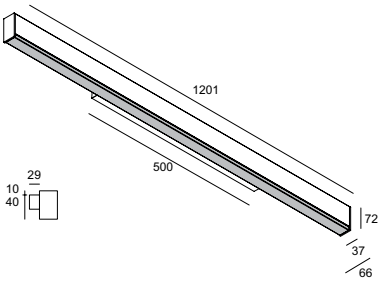


MICROLINE 30+ WALL 154 ◇
347 02 154 ◇
◇ = ANO / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~MULTI-EVG
1 x T16-S 28/54W
2,6 IP20 0,1



T-Liner



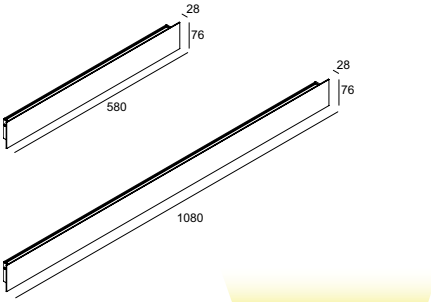

T-LINER 50 82 WW ◇
270 60 11 83 ◇
◇ = W
INCL.1 x LED CLUSTER 7,35W / 3000K ● / 980lm
INCL.1 x LED POWERSUPPLY
100-240V / 50-60Hz


CE 0,8 IP20

T-LINER 100 83 WW ◇
270 60 12 83 ◇
◇ = W
INCL.1 x LED CLUSTER 14,7W / 3000K ● / 1960lm
INCL.1 x LED POWERSUPPLY
100-240V / 50-60Hz

CE 1,5 IP20

T-Liner down-up



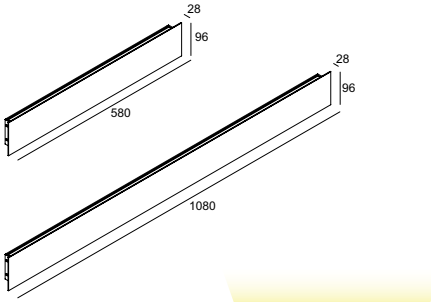


T-LINER 50 83 DOWN-UP WW ◇
270 61 21 83 ◇
◇ = W
INCL.2 x LED CLUSTER 7,35W / 3000K ● / 980lm
INCL.1 x LED POWERSUPPLY
100-240V / 50-60Hz


CE 1,0 IP20

T-LINER 100 83 DOWN-UP WW ◇
270 61 22 83 ◇
◇ = W
INCL.2 x LED CLUSTER 14,7W / 3000K ● / 1960lm
INCL.2 x LED POWERSUPPLY
100-240V / 50-60Hz

CE 1,9 IP20

T Flor 2

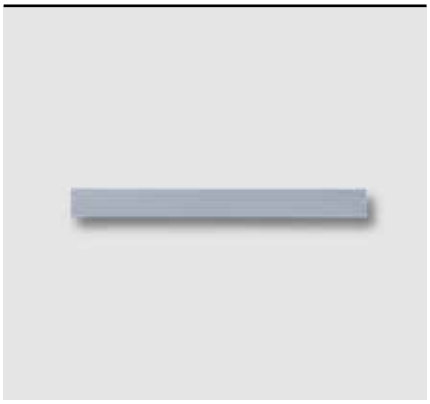

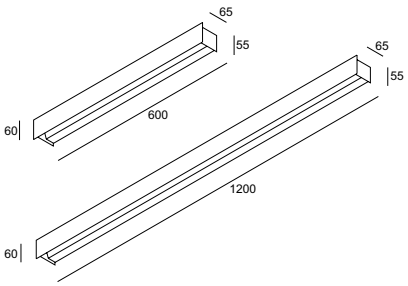

T FLOR 2 - 224 ◇
270 50 24 ◇
◇ = ANO / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 14/24W

CE 1,1 IP20 0,1

T FLOR 2 - 224 EVG DIM 6 ◇
270 50 24 ED6 ◇
◇ = ANO / W
INCL.1 x SWITCH ON/OFF + DIMMING
DIMMING BY SWITCH DIM
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 14/24W

CE 1,1 IP20 0,1

T FLOR 2 - 254 ◇
270 50 54 ◇
◇ = ANO / W
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG
2 x T16 28/54W


CE 2,0 IP20 0,1


T FLOR 2 - 254 EVG DIM 6 ◇
270 50 54 ED6 ◇
◇ = ANO / W
INCL.1 x SWITCH ON/OFF + DIMMING
DIMMING BY SWITCH DIM
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~MULTI-EVG DIM
2 x T16 28/54W

CE 2,0 IP20 0,1





Jeti

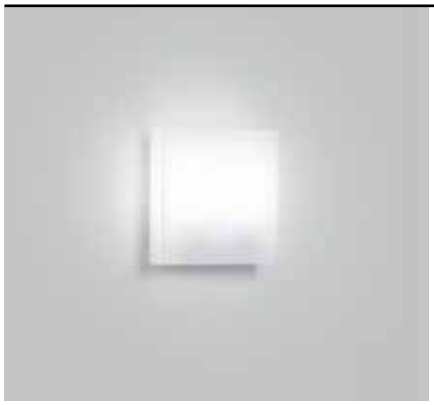


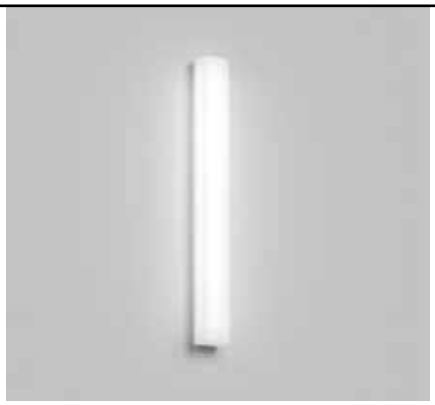









JETI PLANO L 110
271 521 83
INCL.LED CLUSTER 10,5W / CRI>80 / 3000K / 1180lm
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 1,0 IP43

JETI PLANO L 218
271 52 218
G24q-2 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x TC-DEL 18W

CE 0,9 IP43 0,1

JETI L 115
271 511 83
INCL.LED CLUSTER 15W / CRI>80 / 3000K / 1960lm
INCL.LED POWER SUPPLY 350mA-DC
110-240V / 50-60Hz


CE 0,8 IP20

JETI L 124
271 51 124
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16-S 24W

CE 0,8 IP20 0,1

JETI L PLANO L 415 DIM1
271 522 83 ED1
INCL.LED CLUSTER 60W / CRI>80 / 3000K / 7840lm
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 0 I 50-60Hz

CE 5,4 IP20



JETI PLANO L 160
271 52 160
2GX13 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16-R 60W

CE 5,4 IP20 0,1

JETI PLANO L 424
271 52 424
G5 / 220-240V / 0 I 50-60Hz / 1 x 4~EVG
4 x T16 24W

CE 5,9 IP20 0,1





Be Cool®










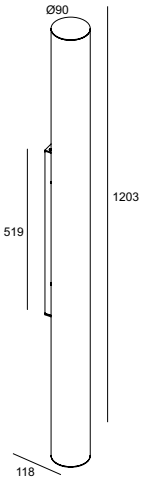

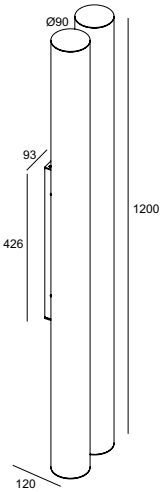

BE COOL® 155 ◇
274 25 55 ◇
◇ = ALU
2G11 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-L 55W
CE 1,7 IP40 0,1

BE COOL® 130 ◇
274 251 83 ◇
◇ = ALU
INCL.LED CLUSTER 30W / CRI>80 / 3000K / 3920lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 0 I 50-60Hz
CE 2,5 IP40

BE COOL® 230 ◇
274 252 83 ◇
◇ = A
INCL.2 x LED CLUSTER 30W / CRI>80 / 3000K / 2 x 3920lm
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 0 I 50-60Hz
CE 5,0 IP40

BE COOL® 154 ◇
274 25 154 ◇
◇ = ALU
G5 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x T16 54W
CE 2,5 IP40 0,1


BE COOL® 254 ◇
274 25 254 ◇
◇ = A
G5 / 220-240V / 0 I 50-60Hz / 1 x 2~EVG
2 x T16 54W
CE 5,0 IP40 0,1

INTERIOR
STAND ALONE

Delta Light's collection of stand alone luminaires allow you to add the finishing touch to your interior design, upgrade your office environment or cater for a purely functional need. They can be placed easily anywhere in the room, providing direct or indirect lighting, while adding additional style and elegance thanks to their unique design and choice of material.

www.deltalight.com/IFS

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/274843224 or www.deltalight.com/supernova-f

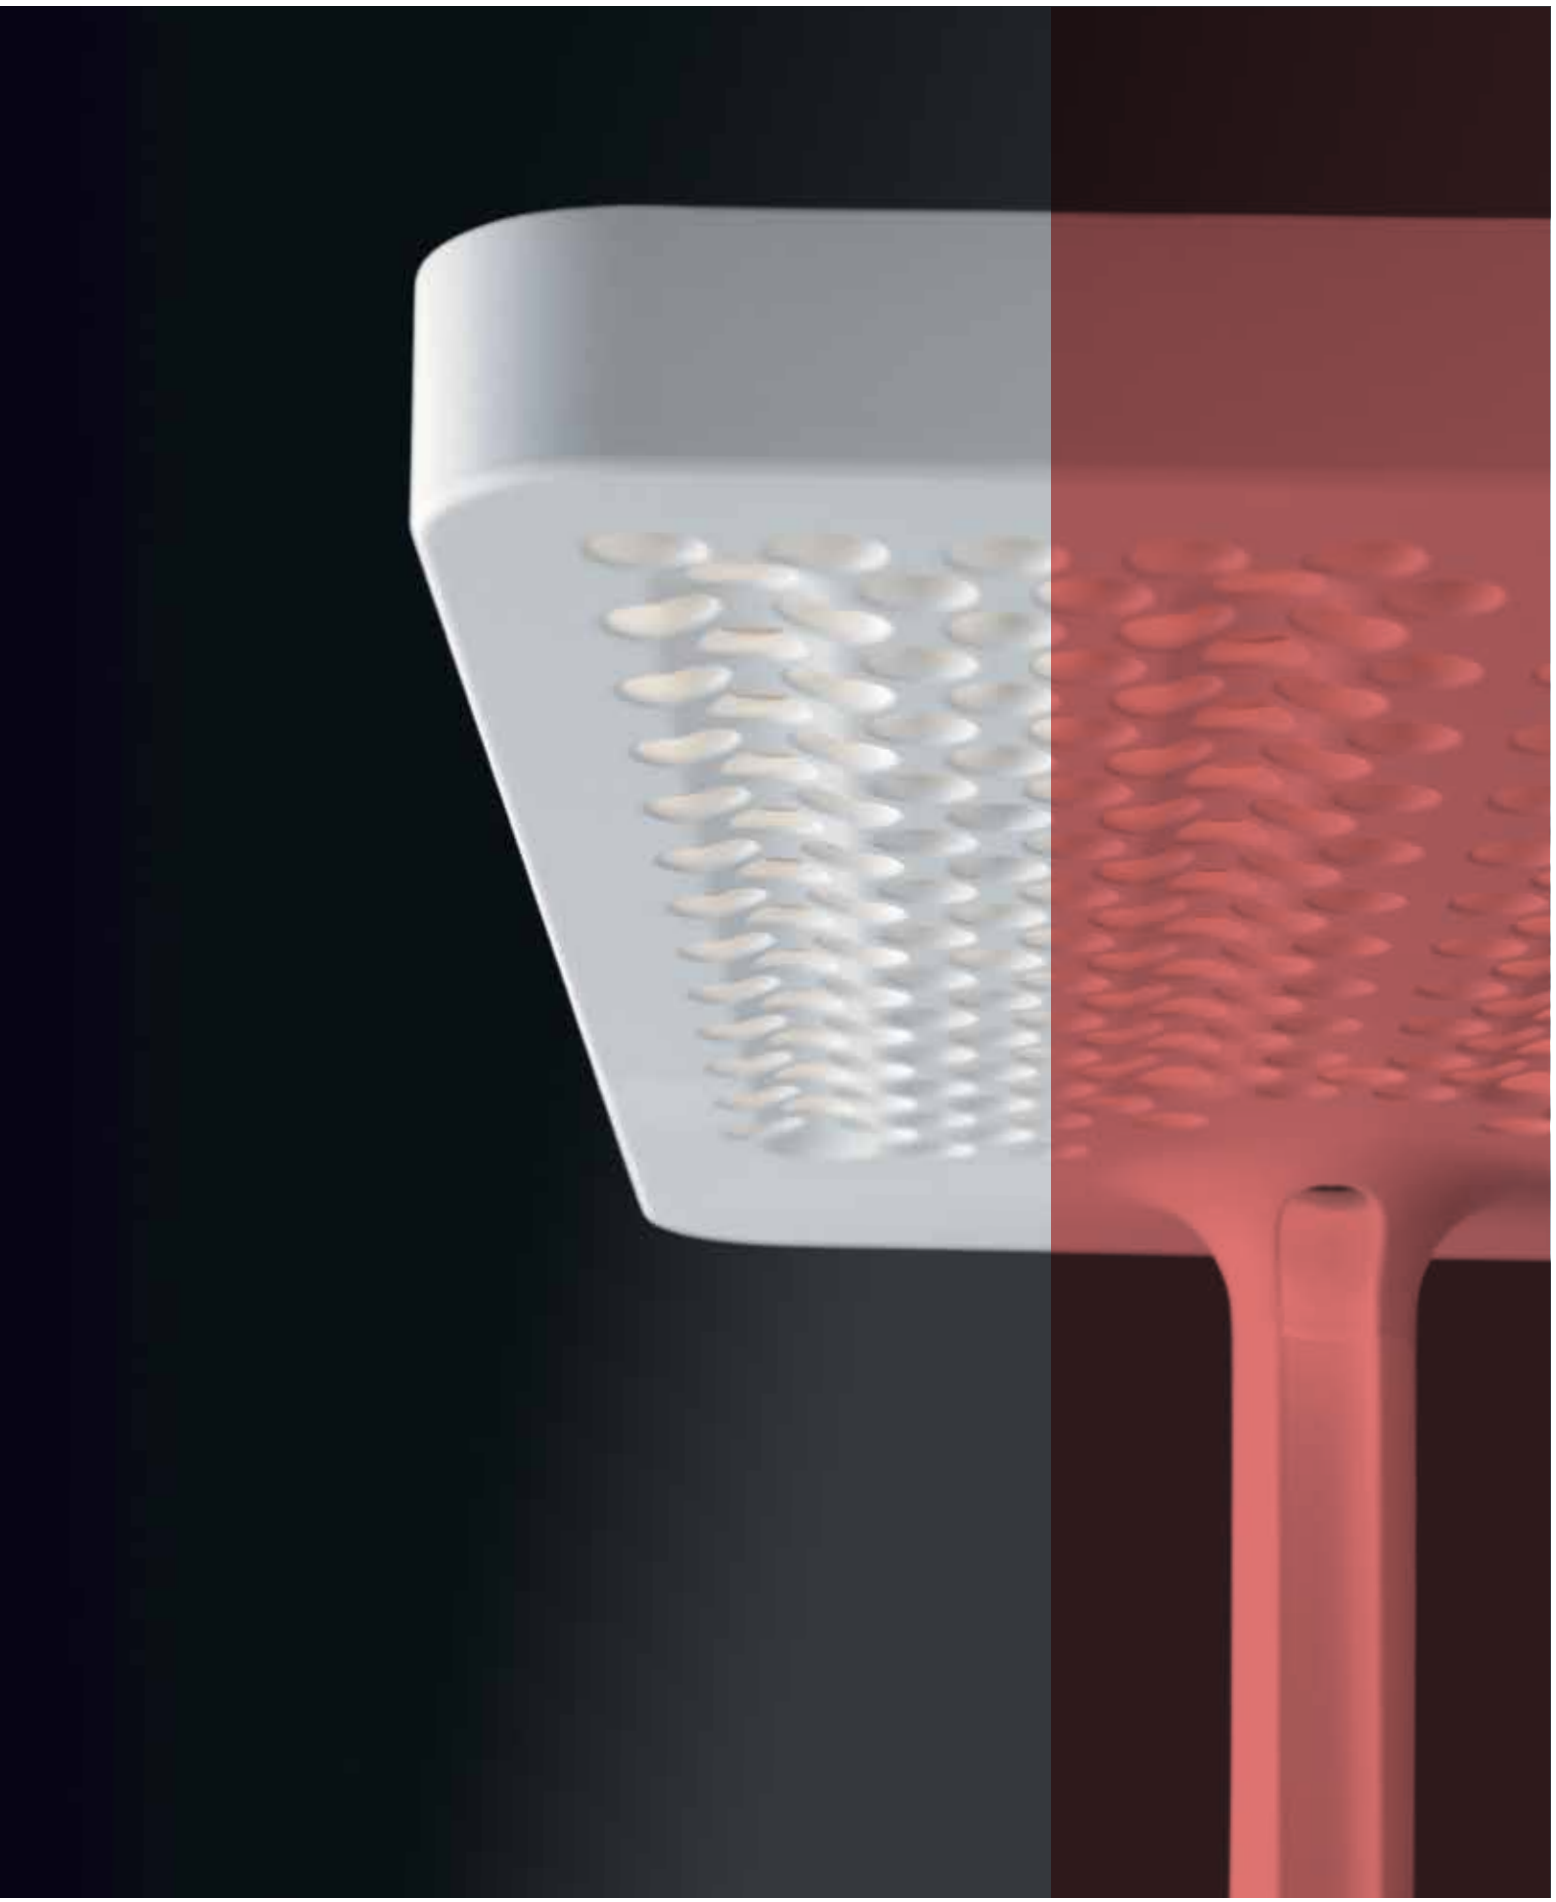



INDEX
INTERIOR STAND ALONE



SUPERNOVA F
INT 589



OFFICER
INT 591


OFFICER	INT 591
SUPERNOVA F	INT 589





Supernova F



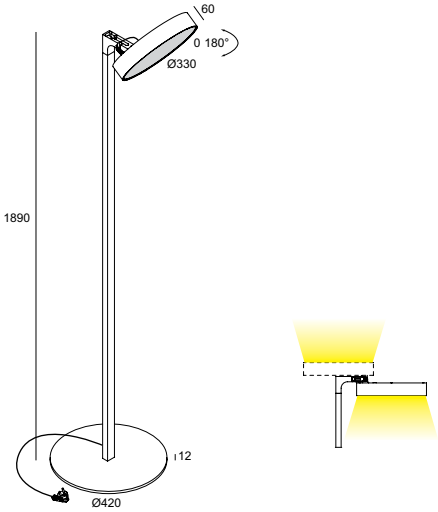


SUPERNOVA F
274 84 3224
INCL.1 x PC SBL
INCL.1 x CABLE 3 x 0,75 mm² 2m
INCL.1 x SWITCH ON/OFF + DIMMING 1-100%
INCL.LED CLUSTER 22W / 3000K / 2600lm
INCL.DIMMABLE LED POWER SUPPLY 1050 mA-DC
220-240V / 50-60Hz

CE 9,5 IP20





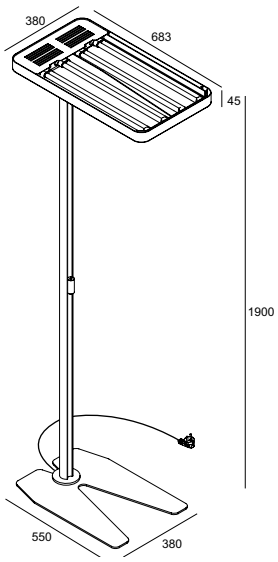

OFFICER ◇
205 05 455 E ◇
◇ = W
INCL.1 x SWITCH ON/OFF
INCL.1 x SWITCH FOR 50/100% LIGHT
INCL.1 x CABLE 3 x 0.75mm² 2m
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG
4 x TC-L 55W
15,0 IP20 0,1

OFFICER ED ◇
205 05 455 ED ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x CABLE 3 x 0.75mm² 2m
DIMMING BY SWITCH DIM
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
15,0 IP20 0,1

OFFICER EDL ◇
205 06 455 EDL ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x SWITCH FOR LED
INCL.1 x CABLE 3 x 0.75mm² 2m
DIMMING BY SWITCH DIM
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
INCL.1 x POWERLED WHITE 1W / 4000K
INCL.LED POWER SUPPLY 350mA-DC
15,0 IP20 0,1


1 x POWERLED WHITE 1W / 4000K


1 x SWITCH ON/OFF
1 x SWITCH FOR 50/100% LIGHT


1 x SWITCH ON/OFF + DIMMING 3-100%


1 x SWITCH ON/OFF + DIMMING 3-100%

Officer

OFFICER S ◇
205 05 455 S ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x CABLE 3 x 0.75mm² 2m
DAYLIGHT CONTROL
PRESENCE DETECTION
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
IP20 0,1

OFFICER SL ◇
205 06 455 SL ◇
◇ = W
INCL.1 x SWITCH ON/OFF + DIMMING 3-100%
INCL.1 x SWITCH FOR LED
INCL.1 x CABLE 3 x 0.75mm² 2m
DAYLIGHT CONTROL
PRESENCE DETECTION
2G11 / 220-240V / 50-60Hz / 2 x 2~EVG DIM
4 x TC-L 55W
INCL.1 x POWERLED WHITE 1W / 4000K
INCL.LED POWER SUPPLY 350mA-DC
IP20 0,1


DAYLIGHT CONTROL - PRESENCE DETECTION


DAYLIGHT CONTROL - PRESENCE DETECTION


1 x POWERLED WHITE 1W / 4000K


1 x SWITCH ON/OFF + DIMMING 3-100%


1 x SWITCH ON/OFF + DIMMING 3-100%



interior innovation award 2011
Winner





INTERIOR
TRACK LIGHTING

Track lighting forms the basis for variable and flexible lighting design, easy to adapt to the changing use and set-up of a space. Delta Light further upgrades these benefits by offering track ligthting luminaires with unrivaled flexibility in movement, supreme light performance and efficiency results, and award-winning designs.
A comprehensive choice in light source and accessories offers solutions for musea, hospitality to residential, retail or public spaces.

www.deltalight.com/IT



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/3132348132AD or www.deltalight.com/booster-ad





EGIDE MEERTENS

INDEX
TRACK LIGHTING



BOXY R AD
INT 605



YOU-TURN ON AD
INT 618



MIDISPY ON ADL
INT 607



YOU-TURN ON AD
INT 623



SPY ON ADL
INT 609



BOOSTER AD
INT 639



SPY ON AD
INT 611



SUPERNOVA XS PIVOT AD
INT 645



MAXISPY ON AD
INT 613



MOHOW
INT 647



PHAR AD
INT 617




SPATIO AD
INT 649

BOOSTER AD	INT 639
BOXY R AD	INT 605
MAXISPY ON AD	INT 613
MIDISPY ON ADL	INT 607
MOHOW	INT 647
PHAR AD	INT 617
SPATIO AD	INT 649
SPY ON AD	INT 611
SPY ON ADL	INT 609
SUPERNOVA XS PIVOT AD	INT 645
YOU-TURN ON AD	INT 618

Composition


1 TRACK 3F
2 ENDCAP / SUPPLY / CORNERS
3 FIXATION
4 CURRENT SUPPLY
5 ACCESSORIES
6 OPTIONS

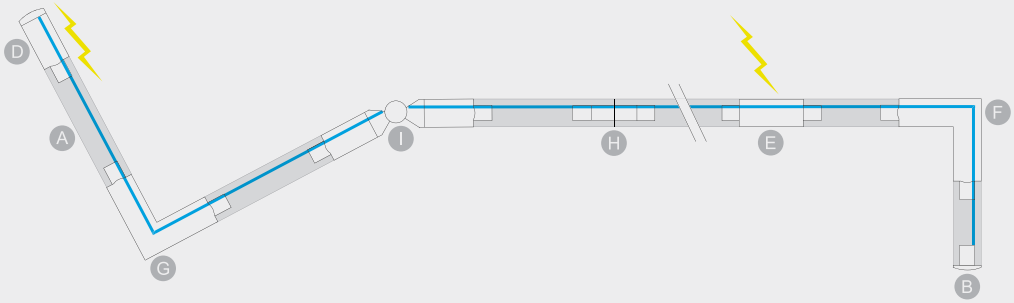


BOTTOM VIEW

1 Track

A






TRACK 1m ◇
200 01 410 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
0,8

TRACK 2m ◇
200 01 420 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
1,6

TRACK 3m ◇
200 01 430 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
2,4


2 Endcap / Supply / Corners

B




TRACK END CAP ◇
200 01 41 ◇
◇ = A / B / W
0,1

C




TRACK END SUPPLY 11 ◇
200 01 11 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

D




TRACK END SUPPLY 12 ◇
200 01 12 ◇
◇ = A / B / W
220-240V / 50-60Hz
IP20
0,1

E




TRACK MIDDLE SUPPLY ◇
200 01 14 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

F




TRACK CORNER 90° OUT ◇
200 01 35 ◇
◇ = A / B / W
0,1 IP20

G




TRACK CORNER 90° IN ◇
200 01 34 ◇
◇ = A / B / W
0,1 IP20


H



TRACK CORNER 180° ◇
200 01 21 ◇
◇ = A / B / W
0,1 IP20

I






TRACK CORNER 60°-300° ◇
200 01 24 ◇
◇ = A / B / W
0,1 IP20


BOTTOM VIEW


TRACK 3F
REQUIREMENT

3 Fixation




TRACK DIRECT FIXATION ◇
200 01 02 ◇
◇ = ANO
0,1






TRACK SUSPENSION 3,0
200 01 13
L 3,0m
0,1




4 Current Supply


TRACK CURRENT SUPPLY 5 x 0,75mm² 3,0m
200 99 53
L 3,0m / 5 x 0,75mm²
0,3
OPTIONS
CABLE BASE R/S



5 Accessories

TRACK BENDING TOOL
200 00 01
0,1



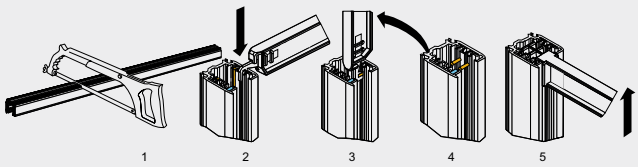


6 Options FULL INFO / PAG TEC

INSTALLATION		
CABLE BASE R ◇ **203 99 55 ◇** ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56 ◇** ◇ = ANO / W / B	57 x 57 x 41	
COVERSET R ◇ **204 00 62 ◇** **204 00 90 ◇** **204 00 100 ◇** ◇ = ANO / B / W	 Ø62 Ø90 Ø100	
COVERSET S ◇ **204 62 62 ◇** **204 80 80 ◇** **204 90 90 ◇** ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90	

Composition

1 TRACK 3F DIM
2 ENDCAP / SUPPLY / CORNERS
3 FIXATION
4 CURRENT SUPPLY
5 OPTIONS

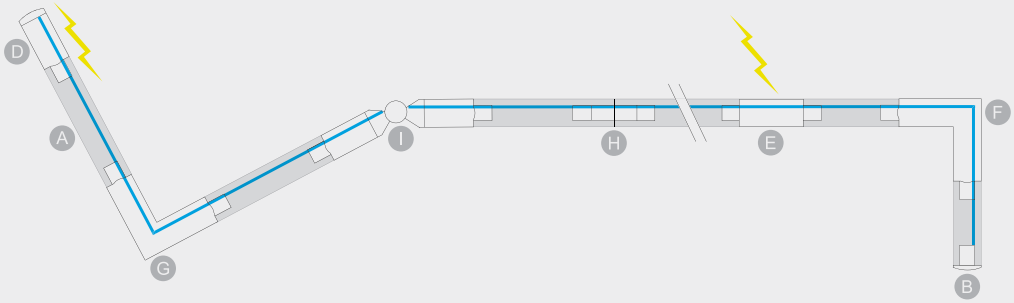


BOTTOM VIEW

1 Track Dim

A






TRACK DIM 1m ◇
200 11 410 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
0,8

TRACK DIM 2m ◇
200 11 420 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
1,6

TRACK DIM 3m ◇
200 11 430 ◇
◇ = ANO / B / W
110-240V / 50-60Hz / 3F
IP20
2,4


2 Endcap / Supply / Corners

B



TRACK DIM END CAP ◇
200 11 41 ◇
◇ = A / B / W
0,1

C




TRACK DIM END SUPPLY 11 ◇
200 11 11 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

D




TRACK DIM END SUPPLY 12 ◇
200 11 12 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

E




TRACK DIM MIDDLE SUPPLY ◇
200 11 14 ◇
◇ = A / B / W
220-240V / 50-60Hz
0,1 IP20

F




TRACK DIM CORNER 90° OUT ◇
200 11 35 ◇
◇ = A / B / W
0,1 IP20

G




TRACK DIM CORNER 90° IN ◇
200 11 34 ◇
◇ = A / B / W
0,1 IP20

H



TRACK DIM CORNER 180° ◇
200 11 21 ◇
◇ = A / B / W
0,1 IP20

I

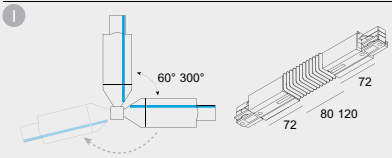



BOTTOM VIEW

TRACK DIM CORNER 60°-300° ◇
200 11 24 ◇
◇ = A / B / W
0,1 IP20


DIMMABLE TRACK 3F DIM
REQUIREMENT


3 Fixation





TRACK DIM DIRECT FIXATION ◇
200 11 02 ◇
◇ = ANO
0,1






TRACK DIM SUSPENSION 3,0
200 11 13
L 3,0m
0,1

4 Current Supply

TRACK CURRENT SUPPLY 5 x 0,75mm² 3,0m
200 99 53
L 3,0m / 5 x 0,75mm²
0,3
OPTIONS
CABLE BASE R/S



5 Options FULL INFO / PAG TEC


INSTALLATION	C A B	
CABLE BASE R ◇ **203 99 55 ◇** ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56 ◇** ◇ = ANO / W / B	57 x 57 x 41	
COVERSET R ◇ **204 00 62 ◇** **204 00 90 ◇** **204 00 100 ◇** ◇ = ANO / B / W	 Ø62 Ø90 Ø100	
COVERSET S ◇ **204 62 62 ◇** **204 80 80 ◇** **204 90 90 ◇** ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90	

Composition

1 TRACK 2F

2 ENDCAP / SUPPLY


3 OPTIONS

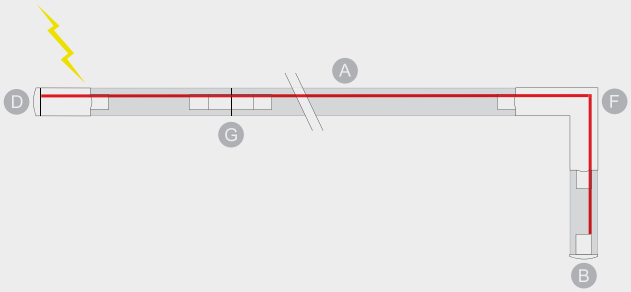

BOTTOM VIEW

1 Track

A




TRACK 2F 2m ◇
200 21 420 ◇
◇ = ANO / B / W
48V DC / 25A / 2F
IP20
1,0

TRACK 2F 3m ◇
200 21 430 ◇
◇ = ANO / B / W
48V DC / 25A / 2F
IP20
1,2


2 Endcap / Supply / Corners

B




TRACK 2F END CAP ◇
200 21 41 ◇
◇ = A / B / W
0,1

C




TRACK 2F END SUPPLY 11 ◇
200 21 11 ◇
◇ = A / B / W
48V DC / 2F
0,1 IP20

D




TRACK 2F END SUPPLY 12 ◇
200 21 12 ◇
◇ = A / B / W
220-240V / 50-60Hz
IP20
0,1

E*

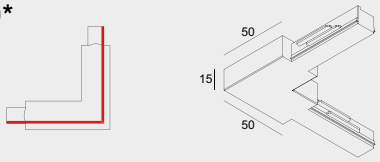


TRACK 2F CORNER 90° OUT ◇
200 21 35 ◇
◇ = A / B / W
0,1 IP20

F*

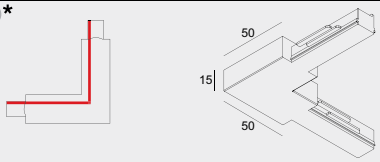

TRACK 2F CORNER 180° ◇
200 21 34 ◇
◇ = A / B / W
0,1 IP20

G*



TRACK 2F CORNER 180° ◇
200 21 21 ◇
◇ = A / B / W
0,1 IP20



BOTTOM VIEW

*AVAILABLE END 2015

TRACK 2F
REQUIREMENT

3 Option

LED Power Supply 48V

Type		
	LED POWER SUPPLY 48V / 100W	**LED POWER SUPPLY 48V / 240W**
	300 89 48 100	**300 89 48 240**
	⧈ CE 0,4 IP20	⧈ CE 1,0 IP20
DIMensions (L x W x H)	55 x 90 x 100	63 x 125 x 114
Input	100-240V / 50-60Hz	100-240V / 50-60Hz
Output	**48V-DC /100W**	**48V-DC /240W**
λ	> 0,93	> 0,93
DIM	-	-



KANNIBAAL / PIÈCEMONTÉE

FULL INFO / PAG TEC

Accessories

BOXY HONEYCOMB ◇ Ø45 / H5
251 70 03 01 ◇
◇ = B / W



BOXY SOFTENING LENS ◇ Ø45 / H5
251 70 03 04 ◇
◇ = B / W



BOXY GLASS SBL ◇ Ø45 / H5
251 70 03 05 ◇
◇ = B / W






BOXY R AD B-B + BOXY HONEYCOMB

new

led

Boxy R AD





DIM8

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	945lm (9,3W)	739lm (9,3W)
REFLECTOR FL-33°	**BOXY R 83033 DIM8 AD** ◇ **251 74 81832 ED8 AD** ◇ ◇ = B-B / B-MMAT / W-B / W-W	**BOXY R 93033 DIM8 AD** ◇ **251 74 81932 ED8 AD** ◇ ◇ = B-B / B-MMAT / W-B / W-W
2700K	893lm (9,3W)	698lm (9,3W)
REFLECTOR FL-33°	**BOXY R 82733 DIM8 AD** ◇ **251 74 81822 ED8 AD** ◇ ◇ = B-B / B-MMAT / W-B / W-W	**BOXY R 92733 DIM8 AD** ◇ **251 74 81922 ED8 AD** ◇ ◇ = B-B / B-MMAT / W-B / W-W

ADJUSTABLE 0-90° / 360°
INCL.1 x POWERLED WHITE 9,3W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 0,8 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)


ACCESSORIES
BOXY HONEYCOMB
BOXY SOFTENING LENS
BOXY GLASS SBL




FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W












Midispy On ADL






	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	475lm (6W)	780lm (9W)	585lm (9W)
LENS FL-20°	**MIDISPY ON 83020 ADL ◇** **414 262 832 ADL ◇** ◇ = B / W		
REFLECTOR WFL-40°		**MIDISPY ON 83040 ADL ◇** **414 261 833 ADL ◇** ◇ = B / W	**MIDISPY ON 93040 ADL ◇** **414 261 933 ADL ◇** ◇ = B / W
2700K	450lm (6W)	726lm (9W)	548lm (9W)
LENS FL-20°	**MIDISPY ON 82720 ADL ◇** **414 262 822 ADL ◇** ◇ = B / W		
REFLECTOR WFL-40°		**MIDISPY ON 82740 ADL ◇** **414 261 823 ADL ◇** ◇ = B / W	**MIDISPY ON 92740 ADL ◇** **414 261 923 ADL ◇** ◇ = B / W
	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 6W EXCL.LED POWER SUPPLY 48V-DC 0,6 IP20 REQUIREMENTS MIDISPY TUBE TRACK 2F (ALL INFO INT 602-603) LED POWER SUPPLY 48V-DC	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 9W EXCL.LED POWER SUPPLY 48V-DC 0,6 IP20 REQUIREMENTS MIDISPY TUBE TRACK 2F (ALL INFO INT 602-603) LED POWER SUPPLY 48V-DC	

FULL INFO / PAG TEC

Requirements


SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ **413 03 01** ◇ ◇ = B	Ø50	
LINEAR SPREAD LENS 50 **413 03 02**	Ø50	
SPREAD LENS 50 **413 03 03**	Ø50	
SOFTENING LENS 50 **413 03 04**	Ø50	
GLASS SBL 50 **413 03 05**	Ø50	

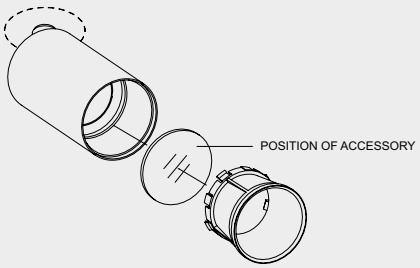


SPY TUBE W



SPY TUBE B


SPY TUBE MMAT

new led

Spy On HP ADL





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**SPY ON HP 83033 ADL** ◇ **414 361 21 831 ADL** ◇ ◇ = B / W	**SPY ON HP 93033 ADL** ◇ **414 361 21 931 ADL** ◇ ◇ = B / W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**SPY ON HP 82733 ADL** ◇ **414 361 21 821 ADL** ◇ ◇ = B / W	**SPY ON HP 92733 ADL** ◇ **414 361 21 921 ADL** ◇ ◇ = B / W

ADJUSTABLE 0-90° / 355°
INCL.1 x POWERLED WHITE 18W
EXCL.LED POWER SUPPLY 48V


IP20

REQUIREMENTS
SPY TUBE
TRACK 2F (ALL INFO INT 602-603)
LED POWER SUPPLY 48V-DC

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

Spy On ADL






	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	475lm (6W)	945lm (9,3W)	739lm (9,3W)
LENS SP-15°	**SPY ON 83015 ADL** ◇ **414 362 831 ADL** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPY ON 83018 ADL** ◇ **414 361 81831 ADL** ◇ ◇ = B / W	**SPY ON 93018 ADL** ◇ **414 361 81931 ADL** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPY ON 83033 ADL** ◇ **414 361 81832 ADL** ◇ ◇ = B / W	**SPY ON 93033 ADL** ◇ **414 361 81932 ADL** ◇ ◇ = B / W
2700K	450lm (6W)	893lm (9,3W)	698lm (9,3W)
LENS SP-15°	**SPY ON 82715 ADL** ◇ **414 362 821 ADL** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPY ON 82718 ADL** ◇ **414 361 81821 ADL** ◇ ◇ = B / W	**SPY ON 92718 ADL** ◇ **414 361 81921 ADL** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPY ON 82733 ADL** ◇ **414 361 81822 ADL** ◇ ◇ = B / W	**SPY ON 92733 ADL** ◇ **414 361 81922 ADL** ◇ ◇ = B / W
	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 6W EXCL.LED POWER SUPPLY 48V 0,6 IP20 REQUIREMENTS SPY TUBE TRACK 2F (ALL INFO INT 602-603) LED POWER SUPPLY 48V-DC ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 9,3W EXCL.LED POWER SUPPLY 48V 0,7 IP20 REQUIREMENTS SPY TUBE TRACK 2F (ALL INFO INT 602-603) LED POWER SUPPLY 48V-DC ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	

FULL INFO / PAG TEC

Requirements

SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



FULL INFO / PAG TEC

Accessories

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03




SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05






SPY TUBE W


SPY TUBE B



SPY TUBE MMAT

new

led

Spy On HP AD





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**SPY ON HP 83033 AD** ◇ **414 361 21 831 AD** ◇ ◇ = B / W	**SPY ON HP 93033 AD** ◇ **414 361 21 931 AD** ◇ ◇ = B / W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**SPY ON HP 82733 AD** ◇ **414 361 21 821 AD** ◇ ◇ = B / W	**SPY ON HP 92733 AD** ◇ **414 361 21 921 AD** ◇ ◇ = B / W

ADJUSTABLE 0-90° / 355°
INCL.1 x POWERLED WHITE 18W
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz

IP20

REQUIREMENTS
SPY TUBE
TRACK 3F (ALL INFO INT 598-599)


ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

new

led

Spy On AD





t


	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	475lm (6W)	945lm (9,3W)	739lm (9,3W)
LENS SP-15°	**SPY ON 83015 AD** ◇ **414 362 831 AD** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPY ON 83018 AD** ◇ **414 361 81831 AD** ◇ ◇ = B / W	**SPY ON 93018 AD** ◇ **414 361 81931 AD** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPY ON 83033 AD** ◇ **414 361 81832 AD** ◇ ◇ = B / W	**SPY ON 93033 AD** ◇ **414 361 81932 AD** ◇ ◇ = B / W
2700K	450lm (6W)	893lm (9,3W)	698lm (9,3W)
LENS SP-15°	**SPY ON 82715 AD** ◇ **414 362 821 AD** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPY ON 82718 AD** ◇ **414 361 81821 AD** ◇ ◇ = B / W	**SPY ON 92718 AD** ◇ **414 361 81921 AD** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPY ON 82733 AD** ◇ **414 361 81822 AD** ◇ ◇ = B / W	**SPY ON 92733 AD** ◇ **414 361 81922 AD** ◇ ◇ = B / W
	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 500mA-DC 110-240V / 50-60Hz CE 0,7 IP20 REQUIREMENTS SPY TUBE TRACK 3F (ALL INFO INT 598-599) ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 9,3W INCL.LED POWER SUPPLY 500mA-DC 110-240V / 50-60Hz CE 0,7 IP20 REQUIREMENTS SPY TUBE TRACK 3F (ALL INFO INT 598-599) ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	



FULL INFO / PAG TEC

Requirements


MAXISPY TUBE ◇
414 04 00 ◇
◇ = B / MMAT / W



FULL INFO / PAG TEC

Accessories

HONEYCOMB 78◇ **201 02 01◇** ◇ = B	Ø78
SOFTENING LENS 78 **201 02 04**	Ø78

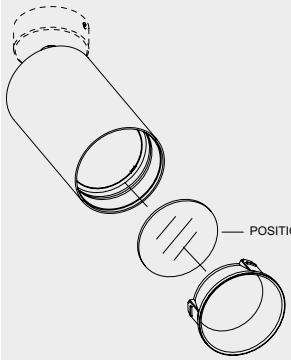



4000K

3000K

REFLECTOR FL-20°

REFLECTOR FL-35°

2700K

REFLECTOR FL-20°


REFLECTOR FL-35°

new

led

Maxispy On HP AD





1-10V DIM

CRI > 80	CRI > 90	CRI > 80	CRI > 90
ON REQUEST		ON REQUEST	
2592lm (25W)	2200lm (25W)	2592lm (25W)	2200lm (25W)
MAXISPY ON HP 83020 AD ◇ **414 46 21 832 AD ◇** ◇ = B / W	**MAXISPY ON HP 93020 AD ◇** **414 46 21 932 AD ◇** ◇ = B / W	**MAXISPY ON HP 83020 AD DIM1 ◇** **414 46 21 832 AD ED1 ◇** ◇ = B / W	**MAXISPY ON HP 93020 AD DIM1 ◇** **414 46 21 932 AD ED1 ◇** ◇ = B / W
MAXISPY ON HP 83035 AD ◇ **414 46 21 833 AD ◇** ◇ = B / W	**MAXISPY ON HP 93035 AD ◇** **414 46 21 933 AD ◇** ◇ = B / W	**MAXISPY ON HP 83035 AD DIM1 ◇** **414 46 21 833 AD ED1 ◇** ◇ = B / W	**MAXISPY ON HP 93035 AD DIM1 ◇** **414 46 21 933 AD ED1 ◇** ◇ = B / W
2399lm (25W)	1951lm (25W)	2399lm (25W)	1951lm (25W)
MAXISPY ON HP 82720 AD ◇ **414 46 21 822 AD ◇** ◇ = B / W	**MAXISPY ON HP 92720 AD ◇** **414 46 21 922 AD ◇** ◇ = B / W	**MAXISPY ON HP 82720 AD DIM1 ◇** **414 46 21 822 AD ED1 ◇** ◇ = B / W	**MAXISPY ON HP 92720 AD DIM1 ◇** **414 46 21 922 AD ED1 ◇** ◇ = B / W
MAXISPY ON HP 82735 AD ◇ **414 46 21 823 AD ◇** ◇ = B / W	**MAXISPY ON HP 92735 AD ◇** **414 46 21 923 AD ◇** ◇ = B / W	**MAXISPY ON HP 82735 AD DIM1 ◇** **414 46 21 823 AD ED1 ◇** ◇ = B / W	**MAXISPY ON HP 92735 AD DIM1 ◇** **414 46 21 923 AD ED1 ◇** ◇ = B / W
ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 25W INCL.LED POWER SUPPLY 700mA-DC 120-240V / 50-60Hz CE 1,3 IP20 REQUIREMENTS MAXISPY TUBE TRACK 3F (ALL INFO INT 598-599) ACCESSORIES HONEYCOMB 78 SOFTENING LENS 78		ADJUSTABLE 0-90° / 355° INCL.1 x POWERLED WHITE 25W INCL.LED POWER SUPPLY 700mA-DC 120-240V / 50-60Hz CE 1,3 IP20 REQUIREMENTS MAXISPY TUBE TRACK 3F DIM (ALL INFO INT 600-601) ACCESSORIES HONEYCOMB 78 SOFTENING LENS 78	



KANNIBAAL / PIÈCEMONTÉE








new

led

Phar AD



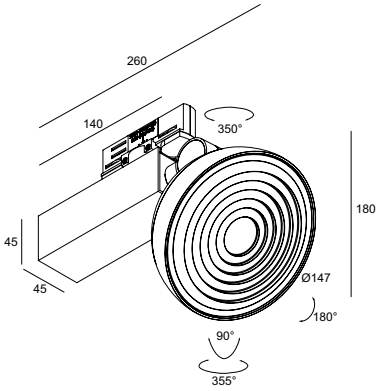

	CRI > 80
4000K	
	ON REQUEST
3000K	1930lm (18W)
	PHAR 830 AD ◇ **206 32 21 83 AD** ◇ ◇ = B
2700K	1787lm (18W)
	PHAR 827 AD ◇ **206 32 21 82 AD** ◇ ◇ = B

ADJUSTABLE
INCL.1 x POWERLED WHITE 18W
INCL.1 x FRESNELL LENS 35°
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz

IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

t

FULL INFO / PAG TEC

Accessories


OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	



YOU-TURN OPTO + OPTO CLIP + SOFTENING LENS 78

You-Turn On AD






YOU-TURN ON 111 T50 AD ◇
313 02 12 AD ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
G53 / 220-240V / 50-60Hz / TE
MAINS DIMMING (FE)
1 x QR-LP111 max.50W
1,1 IP20 1,0

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

You-Turn On Reo AD





	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	958lm (10W)	803lm (10W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 3033 AD ◇** **313 020 12122 AD ◇** ◇ = W-B	**YOU-TURN ON REO 3033-9 AD ◇** **313 020 129122 AD ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 3050 AD ◇** **313 020 12132 AD ◇** ◇ = W-B	**YOU-TURN ON REO 3050-9 AD ◇** **313 020 129132 AD ◇** ◇ = W-B
REFLECTOR WFL-55°		
2700K	876lm (10W)	742lm (10W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 2733 AD ◇** **313 020 12123 AD ◇** ◇ = W-B	**YOU-TURN ON REO 2733-9 AD ◇** **313 020 129123 AD ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 2750 AD ◇** **313 020 12133 AD ◇** ◇ = W-B	**YOU-TURN ON REO 2750-9 AD ◇** **313 020 129133 AD ◇** ◇ = W-B
REFLECTOR WFL-55°		


ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 10W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

1,1 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

You-Turn On Opto AD





	CRI > 80	CRI > 90
ON REQUEST		
958lm (10W)	803lm (10W)	
YOU-TURN ON OPTO 3015 AD ◇ **313 021 12112 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 3015-9 AD ◇** **313 021 129112 AD ◇** ◇ = B-B / W-B	
YOU-TURN ON OPTO 3033 AD ◇ **313 021 12122 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 3033-9 AD ◇** **313 021 129122 AD ◇** ◇ = B-B / W-B	
YOU-TURN ON OPTO 3055 AD ◇ **313 021 12132 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 3055-9 AD ◇** **313 021 129132 AD ◇** ◇ = B-B / W-B	
876lm (10W)	742lm (10W)	
YOU-TURN ON OPTO 2715 AD ◇ **313 021 12113 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 2715-9 AD ◇** **313 021 129113 AD ◇** ◇ = B-B / W-B	
YOU-TURN ON OPTO 2733 AD ◇ **313 021 12123 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 2733-9 AD ◇** **313 021 129123 AD ◇** ◇ = B-B / W-B	
YOU-TURN ON OPTO 2755 AD ◇ **313 021 12133 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 2755-9 AD ◇** **313 021 129133 AD ◇** ◇ = B-B / W-B	

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 10W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

1,2 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

play.deltalight.com/youturn

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012 · GOOD DESIGN award · iF · Delta'11 Awards Silver Delta



ANARCHITECT





FULL INFO / PAG TEC

Accessories


	C A B	
OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	



YOU-TURN OPTO + OPTO CLIP + HONEYCOMB 78

You-Turn On Reo 20 AD





25W
1900-2600lm

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K ●		
	ON REQUEST	
3000K ●	2592lm (25W)	2200lm (25W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 20 83033 AD ◇** **313 020 21 832 AD ◇** ◇ = W-B	**YOU-TURN ON REO 20 93033 AD ◇** **313 020 21 932 AD ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 20 83050 AD ◇** **313 020 21 833 AD ◇** ◇ = W-B	**YOU-TURN ON REO 20 93050 AD ◇** **313 020 21 933 AD ◇** ◇ = W-B
REFLECTOR WFL-55°		
2700K ●	2399lm (25W)	1951lm (25W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 20 82733 AD ◇** **313 020 21 822 AD ◇** ◇ = W-B	**YOU-TURN ON REO 20 92733 AD ◇** **313 020 21 922 AD ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 20 82750 AD ◇** **313 020 21 823 AD ◇** ◇ = W-B	**YOU-TURN ON REO 20 92750AD ◇** **313 020 21 923 AD ◇** ◇ = W-B
REFLECTOR WFL-55°		


ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 25W
INCL.DIMMABLE LED POWER SUPPLY 700mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

◇ CE 1,6 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

You-Turn On Opto 20 AD





CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2592lm (25W)	2200lm (25W)
YOU-TURN ON OPTO 20 83015 AD ◇ **313 021 21 831 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 20 93015AD ◇** **313 021 21 931 AD ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 20 83033 AD ◇ **313 021 21 832 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 20 93033 AD ◇** **313 021 21 932 AD ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 20 83055 AD ◇ **313 021 21 833 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 20 93055 AD ◇** **313 021 21 933 AD ◇** ◇ = B-B / W-B
2399lm (25W)	1951lm (25W)
YOU-TURN ON OPTO 20 82715 AD ◇ **313 021 21 821 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 20 92715 AD ◇** **313 021 21 921 AD ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 20 82733 AD ◇ **313 021 21 822 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 20 92733 AD ◇** **313 021 21 922 AD ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 20 82755 AD ◇ **313 021 21 823 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 20 92755 AD ◇** **313 021 21 923 AD ◇** ◇ = B-B / W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 25W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 700mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

◇ CE 1,7 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

play.deltalight.com/youturn

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012 · GOOD DESIGN award · iF · Delta'11 Awards Silver Delta



FULL INFO / PAG TEC

Accessories


	C A B	
OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	



YOU-TURN OPTO + OPTO CLIP + HONEYCOMB 78


You-Turn On Reo 30 AD





You-Turn On Opto 30 AD





31,5W
2250-3000lm

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
4000K		
	ON REQUEST	
3000K	2981lm (31,5W)	2530lm (31,5W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 30 83033 AD ◇** **313 030 21 832 AD ◇** ◇ = W-B	**YOU-TURN ON REO 30 93033 AD ◇** **313 030 21 932 AD ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 30 83050 AD ◇** **313 030 21 833 AD ◇** ◇ = W-B	**YOU-TURN ON REO 30 93050 AD ◇** **313 030 21 933 AD ◇** ◇ = W-B
REFLECTOR WFL-55°		
2700K	2759lm (31,5W)	2244lm (31,5W)
REFLECTOR SP-15°		
REFLECTOR FL-33°	**YOU-TURN ON REO 30 82733 AD ◇** **313 030 21 822 AD ◇** ◇ = W-B	**YOU-TURN ON REO 30 92733 AD ◇** **313 030 21 922 AD ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN ON REO 30 82750 AD ◇** **313 030 21 823 AD ◇** ◇ = W-B	**YOU-TURN ON REO 30 92750AD ◇** **313 030 21 923 AD ◇** ◇ = W-B
REFLECTOR WFL-55°		

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
110-240V / 50-60Hz

◇ CE 1,6 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)
	ON REQUEST	
	2981lm (31,5W)	2530lm (31,5W)
	YOU-TURN ON OPTO 30 83015 AD ◇ **313 031 21 831 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93015AD ◇** **313 031 21 931 AD ◇** ◇ = B-B / W-B
	YOU-TURN ON OPTO 30 83033 AD ◇ **313 031 21 832 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93033 AD ◇** **313 031 21 932 AD ◇** ◇ = B-B / W-B
	YOU-TURN ON OPTO 30 83055 AD ◇ **313 031 21 833 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93055 AD ◇** **313 031 21 933 AD ◇** ◇ = B-B / W-B
	2759lm (31,5W)	2244lm (31,5W)
	YOU-TURN ON OPTO 30 82715 AD ◇ **313 031 21 821 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92715 AD ◇** **313 031 21 921 AD ◇** ◇ = B-B / W-B
	YOU-TURN ON OPTO 30 82733 AD ◇ **313 031 21 822 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92733 AD ◇** **313 031 21 922 AD ◇** ◇ = B-B / W-B
	YOU-TURN ON OPTO 30 82755 AD ◇ **313 031 21 823 AD ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92755 AD ◇** **313 031 21 923 AD ◇** ◇ = B-B / W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
110-240V / 50-60Hz

◇ CE 1,7 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012 · GOOD DESIGN award · iF Delta'11 Awards Silver Delta



31,5W
2250-3000lm

4000K

3000K

REFLECTOR FL-33°

REFLECTOR WFL-50°

2700K

REFLECTOR FL-33°


REFLECTOR WFL-50°

new

led

You-Turn On Reo 30 AD DIM





I-10V DIM

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2981lm (31,5W)	2530lm (31,5W)
YOU-TURN ON REO 30 83033 AD DIM1 ◇ **313 030 21 832 AD ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93033 AD DIM1 ◇** **313 030 21 932 AD ED1 ◇** ◇ = W-B
YOU-TURN ON REO 30 83050 AD DIM1 ◇ **313 030 21 833 AD ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93050 AD DIM1 ◇** **313 030 21 933 AD ED1 ◇** ◇ = W-B
2759lm (31,5W)	2244lm (31,5W)
YOU-TURN ON REO 30 82733 AD DIM1 ◇ **313 030 21 822 AD ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92733 AD DIM1 ◇** **313 030 21 922 AD ED1 ◇** ◇ = W-B
YOU-TURN ON REO 30 82750 AD DIM1 ◇ **313 030 21 823 AD ED1 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92750 AD DIM1 ◇** **313 030 21 923 AD ED1 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY 1-10V
110-240V / 50-60Hz

CE 1,6 IP20

REQUIREMENTS
TRACK 3F DIM (ALL INFO INT 600-601)

DALI DIM

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2981lm (31,5W)	2530lm (31,5W)
YOU-TURN ON REO 30 83033 AD DIM5 ◇ **313 030 21 832 AD ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93033 AD DIM5 ◇** **313 030 21 932 AD ED5 ◇** ◇ = W-B
YOU-TURN ON REO 30 83050 AD DIM5 ◇ **313 030 21 833 AD ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 93050 AD DIM5 ◇** **313 030 21 933 AD ED5 ◇** ◇ = W-B
2759lm (31,5W)	2244lm (31,5W)
YOU-TURN ON REO 30 82733 AD DIM5 ◇ **313 030 21 822 AD ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92733 AD DIM5 ◇** **313 030 21 922 AD ED5 ◇** ◇ = W-B
YOU-TURN ON REO 30 82750 AD DIM5 ◇ **313 030 21 823 AD ED5 ◇** ◇ = W-B	**YOU-TURN ON REO 30 92750 AD DIM5 ◇** **313 030 21 923 AD ED5 ◇** ◇ = W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY DALI
110-240V / 50-60Hz

CE 1,6 IP20

REQUIREMENTS
TRACK 3F DIM (ALL INFO INT 600-601)

reddot design award winner 2012

GOOD DESIGN award

Delta'11 Awards Silver Delta



FULL INFO / PAG TEC

Accessories

OPTO CLIP◇ **201 02 00**◇ ◇=B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇=B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	



YOU-TURN OPTO + OPTO CLIP + SOFTEN NG LENS 78

31,5W
2250-3000lm

4000K

3000K

REFLECTOR SP-15°

REFLECTOR FL-33°

REFLECTOR WFL-55°

2700K

REFLECTOR SP-15°


REFLECTOR FL-33°

REFLECTOR WFL-55°

new

You-Turn On Opto 30 AD DIM





t

I-10V DIM

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2981lm (31,5W)	2530lm (31,5W)
YOU-TURN ON OPTO 30 83015 AD DIM1 ◇ **313 031 21 831 AD ED1 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93015 AD DIM1 ◇** **313 031 21 931 AD ED1 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 83033 AD DIM1 ◇ **313 031 21 832 AD ED1 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93033 AD DIM1 ◇** **313 031 21 932 AD ED1 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 83055 AD DIM1 ◇ **313 031 21 833 AD ED1 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93055 AD DIM1 ◇** **313 031 21 933 AD ED1 ◇** ◇ = B-B / W-B
2759lm (31,5W)	2244lm (31,5W)
YOU-TURN ON OPTO 30 82715 AD DIM1 ◇ **313 031 21 821 AD ED1 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92715 AD DIM1 ◇** **313 031 21 921 AD ED1 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 82733 AD DIM1 ◇ **313 031 21 822 AD ED1 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92733 AD DIM1 ◇** **313 031 21 922 AD ED1 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 82755 AD DIM1 ◇ **313 031 21 823 AD ED1 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92755 AD DIM1 ◇** **313 031 21 923 AD ED1 ◇** ◇ = B-B / W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY 1-10V
110-240V / 50-60Hz

CE 1,7 IP20

REQUIREMENTS
TRACK 3F DIM (ALL INFO INT 600-601)

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

DALI DIM

CRI > 80	**CRI > 90** (> 97 ON REQUEST)
ON REQUEST	
2981lm (31,5W)	2530lm (31,5W)
YOU-TURN ON OPTO 30 83015 AD DIM5 ◇ **313 031 21 831 AD ED5 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93015 AD DIM5 ◇** **313 031 21 931 AD ED5 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 83033 AD DIM5 ◇ **313 031 21 832 AD ED5 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93033 AD DIM5 ◇** **313 031 21 932 AD ED5 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 83055 AD DIM5 ◇ **313 031 21 833 AD ED5 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 93055 AD DIM5 ◇** **313 031 21 933 AD ED5 ◇** ◇ = B-B / W-B
2759lm (31,5W)	2244lm (31,5W)
YOU-TURN ON OPTO 30 82715 AD DIM5 ◇ **313 031 21 821 AD ED5 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92715 AD DIM5 ◇** **313 031 21 921 AD ED5 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 82733 AD DIM5 ◇ **313 031 21 822 AD ED5 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92733 AD DIM5 ◇** **313 031 21 922 AD ED5 ◇** ◇ = B-B / W-B
YOU-TURN ON OPTO 30 82755 AD DIM5 ◇ **313 031 21 823 AD ED5 ◇** ◇ = B-B / W-B	**YOU-TURN ON OPTO 30 92755 AD DIM5 ◇** **313 031 21 923 AD ED5 ◇** ◇ = B-B / W-B

ADJUSTABLE 0°- 90° / 350°
INCL.1 x POWERLED WHITE 31,5W
INCL.1 x EFT FILTER*
INCL.DIMMABLE LED POWER SUPPLY 850mA-DC
DIMMING BY DALI
110-240V / 50-60Hz

CE 1,7 IP20

REQUIREMENTS
TRACK 3F DIM (ALL INFO INT 600-601)

ACCESSORIES
OPTO CLIP + HONEYCOMB 78
OPTO CLIP + SOFTENING LENS 78

*EFT / EQUALISING FILTER TECHNOLOGY

reddot design award winner 2012
GOOD DESIGN award
Delta'11 Awards Silver Delta





You-Turn On AD





up to 93% efficiency





YOU-TURN ON H111-35 AD ◇
313 02 1935 AD ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W
IP20 1,0

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

YOU-TURN ON HIT-35 AD SP15 ◇
313 02 133 AD SP15 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-35 AD FL24 ◇
313 02 133 AD FL24 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-35 AD WFL43 ◇
313 02 133 AD WFL43 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
IP20 1,0

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

YOU-TURN ON H111-70 AD ◇
313 02 1970 AD ◇
◇ = B-B / W-B
ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W
IP20 1,0

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

YOU-TURN ON HIT-70 AD SP15 ◇
313 02 137 AD SP15 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN ON HIT-70 AD FL24 ◇
313 02 137 AD FL24 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN ON HIT-70 AD WFL43 ◇
313 02 137 AD WFL43 ◇
◇ = B-B / W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
INCL.1 x 3F MULTI ADAPTOR
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
IP20 1,0

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

reddot design award winner 2012






INTERIEURBURO VANDECANDELAERE







ANARCHITECT

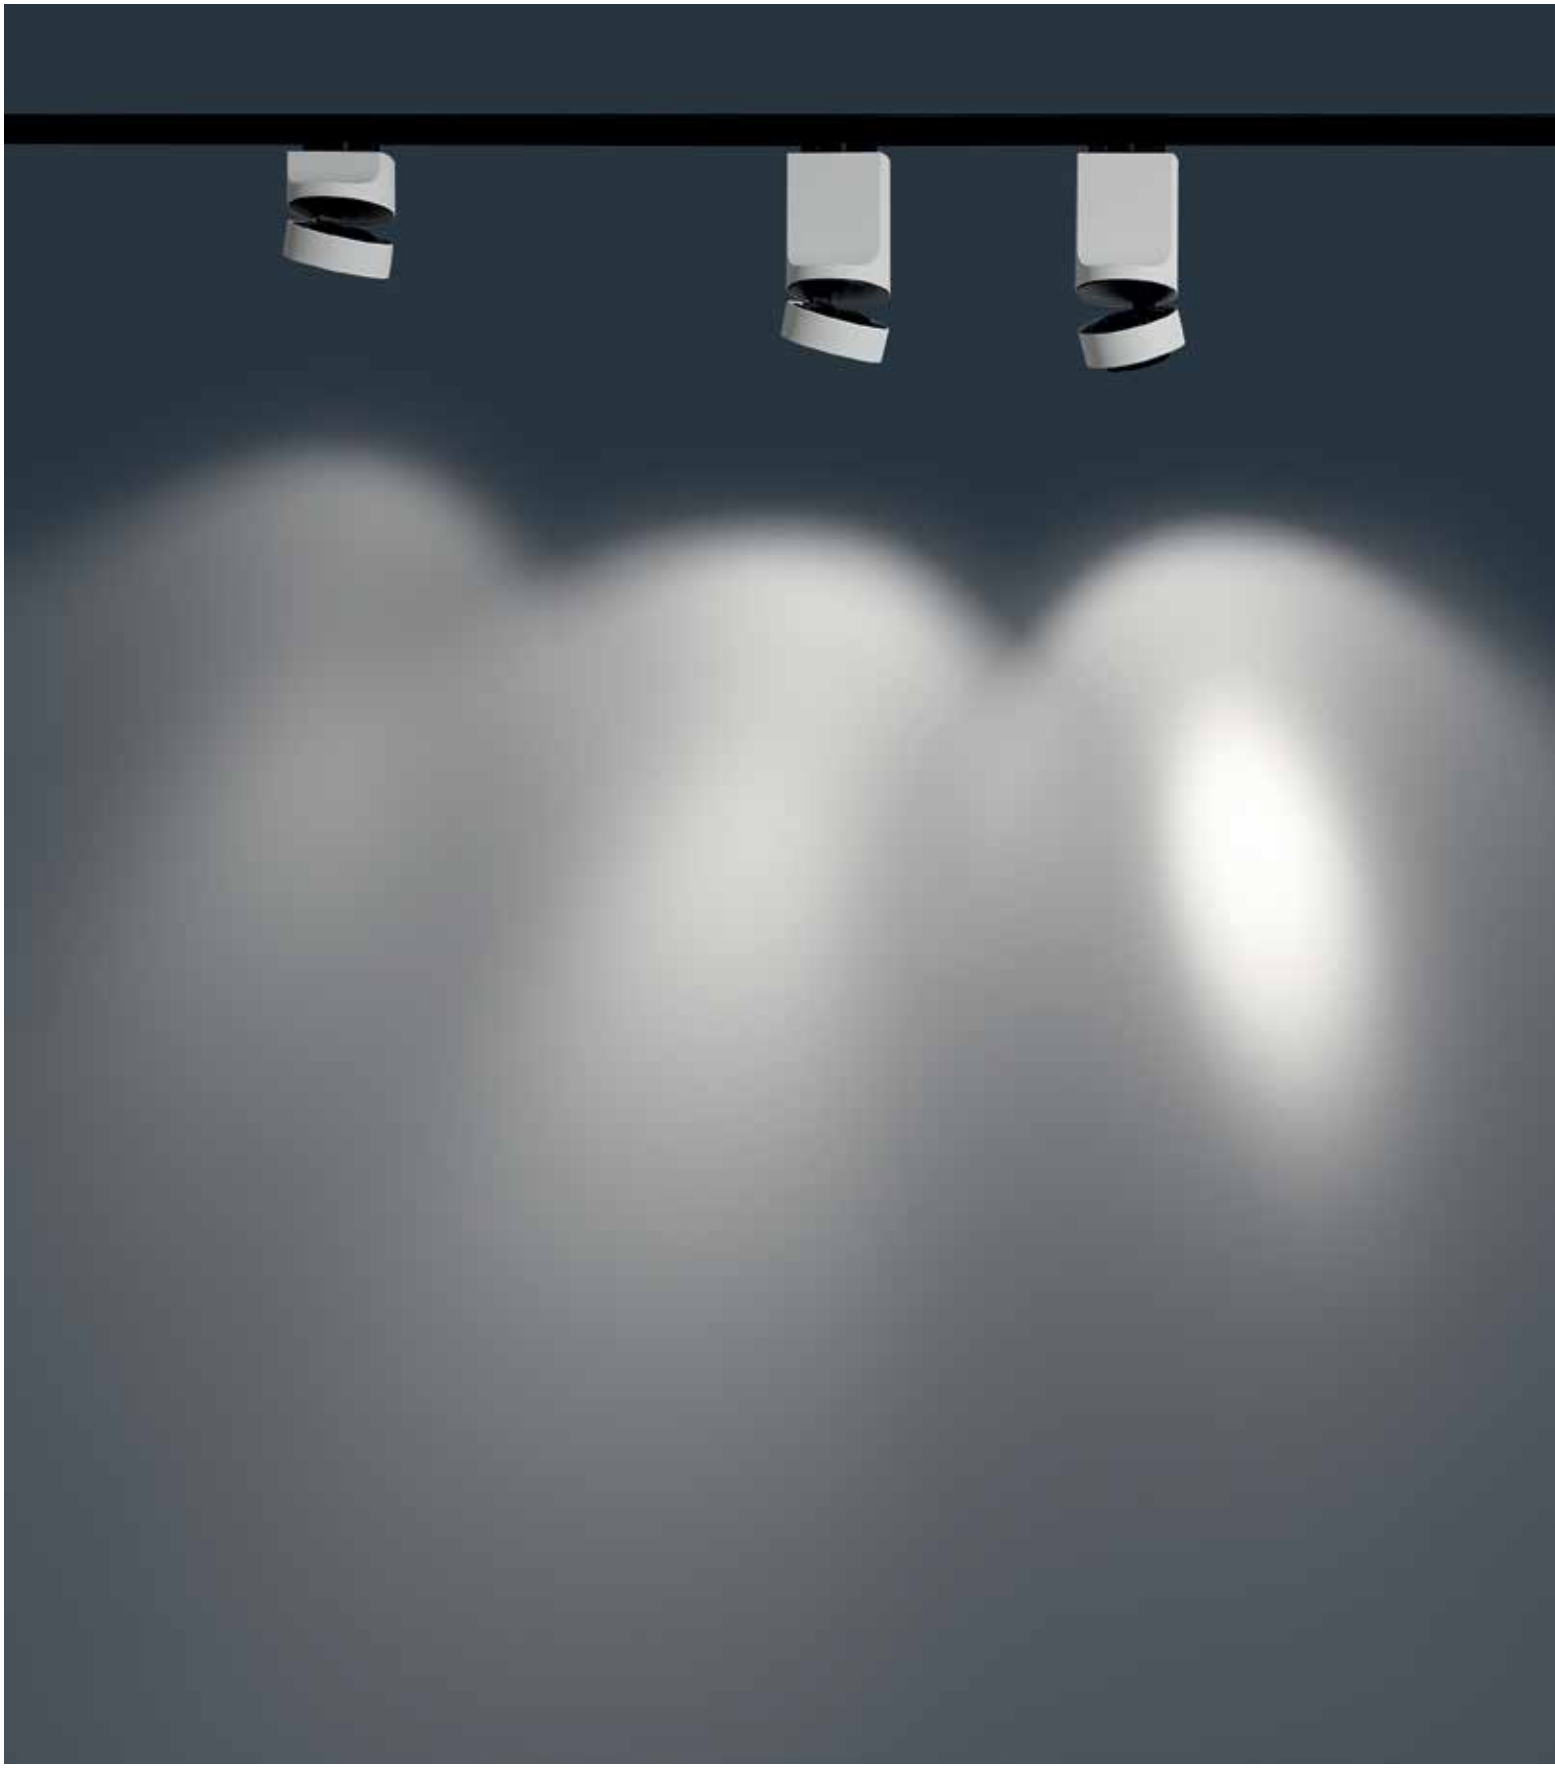

YOU-TURN ON REO 3033 AD
Carefully selected high performance leds matching 35-50 Watt halogen lamps, consuming less than 12 Watt, and delivering a powerful, warm light. Conical shape for improved lighting aesthetics. A perfect balance between lighting quality and energy efficiency.

YOU-TURN ON REO 303033 AD
Compact high flux LED solution that delivers uniform high quality illumination, without pixilation or multiple shadow effect. Dimmable 2981 lumen LED spot.

YOU-TURN ON OPTO 303033 AD
Led specific optic improves performance and efficiency with 15%. Combining the Equalising Filter Technology with specially designed cooling system provides optimal optic performance and extended durability, with 2981 lumen dimmable LED.



YOU-TURN ON 111 AD
Classic halogen solution with all its typic characteristics, for accent or general lighting.

YOU-TURN ON H111 AD
Efficient anti-glare spot with wide choice in light beam.
Ideal for use in retail.


YOU-TURN ON HIT AD
Specially designed segmented reflector in sheet metal plate provides superior reflection abilities. Up to 93% efficiency thanks to use of advanced reflector material, guaranteeing reduced energy consumption. Available in spot 15°, flood 24° and wide flood 43° it can be applied for accent lighting and/or general lighting.


up to **93%** efficiency

FULL INFO / PAG 132

Accessories

HONEYCOMB 87 ◇ **201 01 01** ◇ ◇ = B	Ø87
LINEAR SPREAD LENS 87 **201 01 02**	Ø87
SPREAD LENS 87 **201 01 03**	Ø87
SOFTENING LENS 87 **201 01 04**	Ø87
GLASS SBL 87 **201 01 05**	Ø87



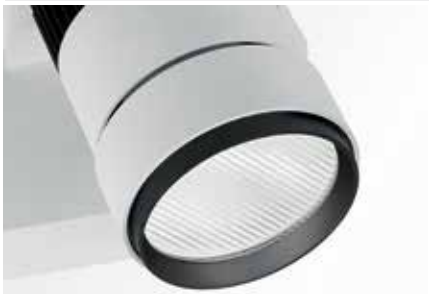


BOOSTER HP AD + LINEAR SPREAD LENS 87




led



up to 90% efficiency





	CRI > 80
3000K	2000lm (17W)
REFLECTOR SP-20°	**BOOSTER HP 3020 AD** ◇ **313 22 28122 AD** ◇ ◇ = B / W
REFLECTOR FL-27°	
REFLECTOR WFL-40°	**BOOSTER HP 3040 AD** ◇ **313 22 28132 AD** ◇ ◇ = B / W
REFLECTOR WFL-50°	

ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 17W
INCL. LED POWER SUPPLY 700mA-DC
220-240V / 50-60Hz

CE 1,6 IP20


REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

Booster HP AD



up to 90% efficiency

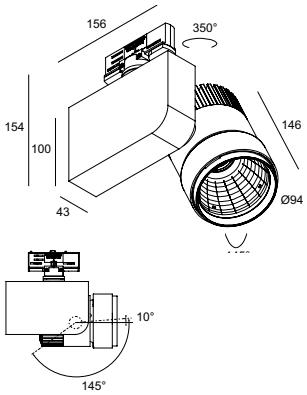

t

CRI > 80

3000lm (26W)

BOOSTER HP 3027 AD ◇
313 23 48122 AD ◇
◇ = B / W

BOOSTER HP 3050 AD ◇
313 23 48132 AD ◇
◇ = B / W

ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 26W
INCL. LED POWER SUPPLY 600mA-DC
220-240V / 50-60Hz

CE 2,1 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

new DALI DIM

3000lm (26W)

BOOSTER HP 3027 AD DIM5 ◇
313 23 48122 AD ED5 ◇
◇ = B / W

BOOSTER HP 3050 AD DIM5 ◇
313 23 48132 AD ED5 ◇
◇ = B / W

ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 26W
INCL. LED POWER SUPPLY 600mA-DC
DIMMING BY DALI
220-240V / 50-60Hz

CE 2,1 IP20

REQUIREMENTS
TRACK 3F DIM (ALL INFO INT 600-601)

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

CRI > 80

new

4000lm (32W)

BOOSTER HP 4 3027 AD ◇
313 24 832 AD ◇
◇ = B / W

BOOSTER HP 4 3050 AD ◇
313 24 833 AD ◇
◇ = B / W

ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 32W
INCL. LED POWER SUPPLY 750mA-DC
220-240V / 50-60Hz

CE 2,1 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

CRI > 80

new DALI DIM

4000lm (32W)

BOOSTER HP 4 3027 AD DIM5 ◇
313 24 832 AD ED5 ◇
◇ = B / W

BOOSTER HP 4 3050 AD DIM5 ◇
313 24 833 AD ED5 ◇
◇ = B / W


ADJUSTABLE 145° / 350°
INCL.1 x POWERLED WHITE 32W
INCL. LED POWER SUPPLY 750mA-DC
DIMMING BY DALI
220-240V / 50-60Hz

CE 2,1 IP20

REQUIREMENTS
TRACK 3F DIM (ALL INFO INT 600-601)

ACCESSORIES
HONEYCOMB 87
LINEAR SPREAD LENS 87
SPREAD LENS 87
SOFTENING LENS 87
GLASS SBL 87

ON REQUEST CRI>90

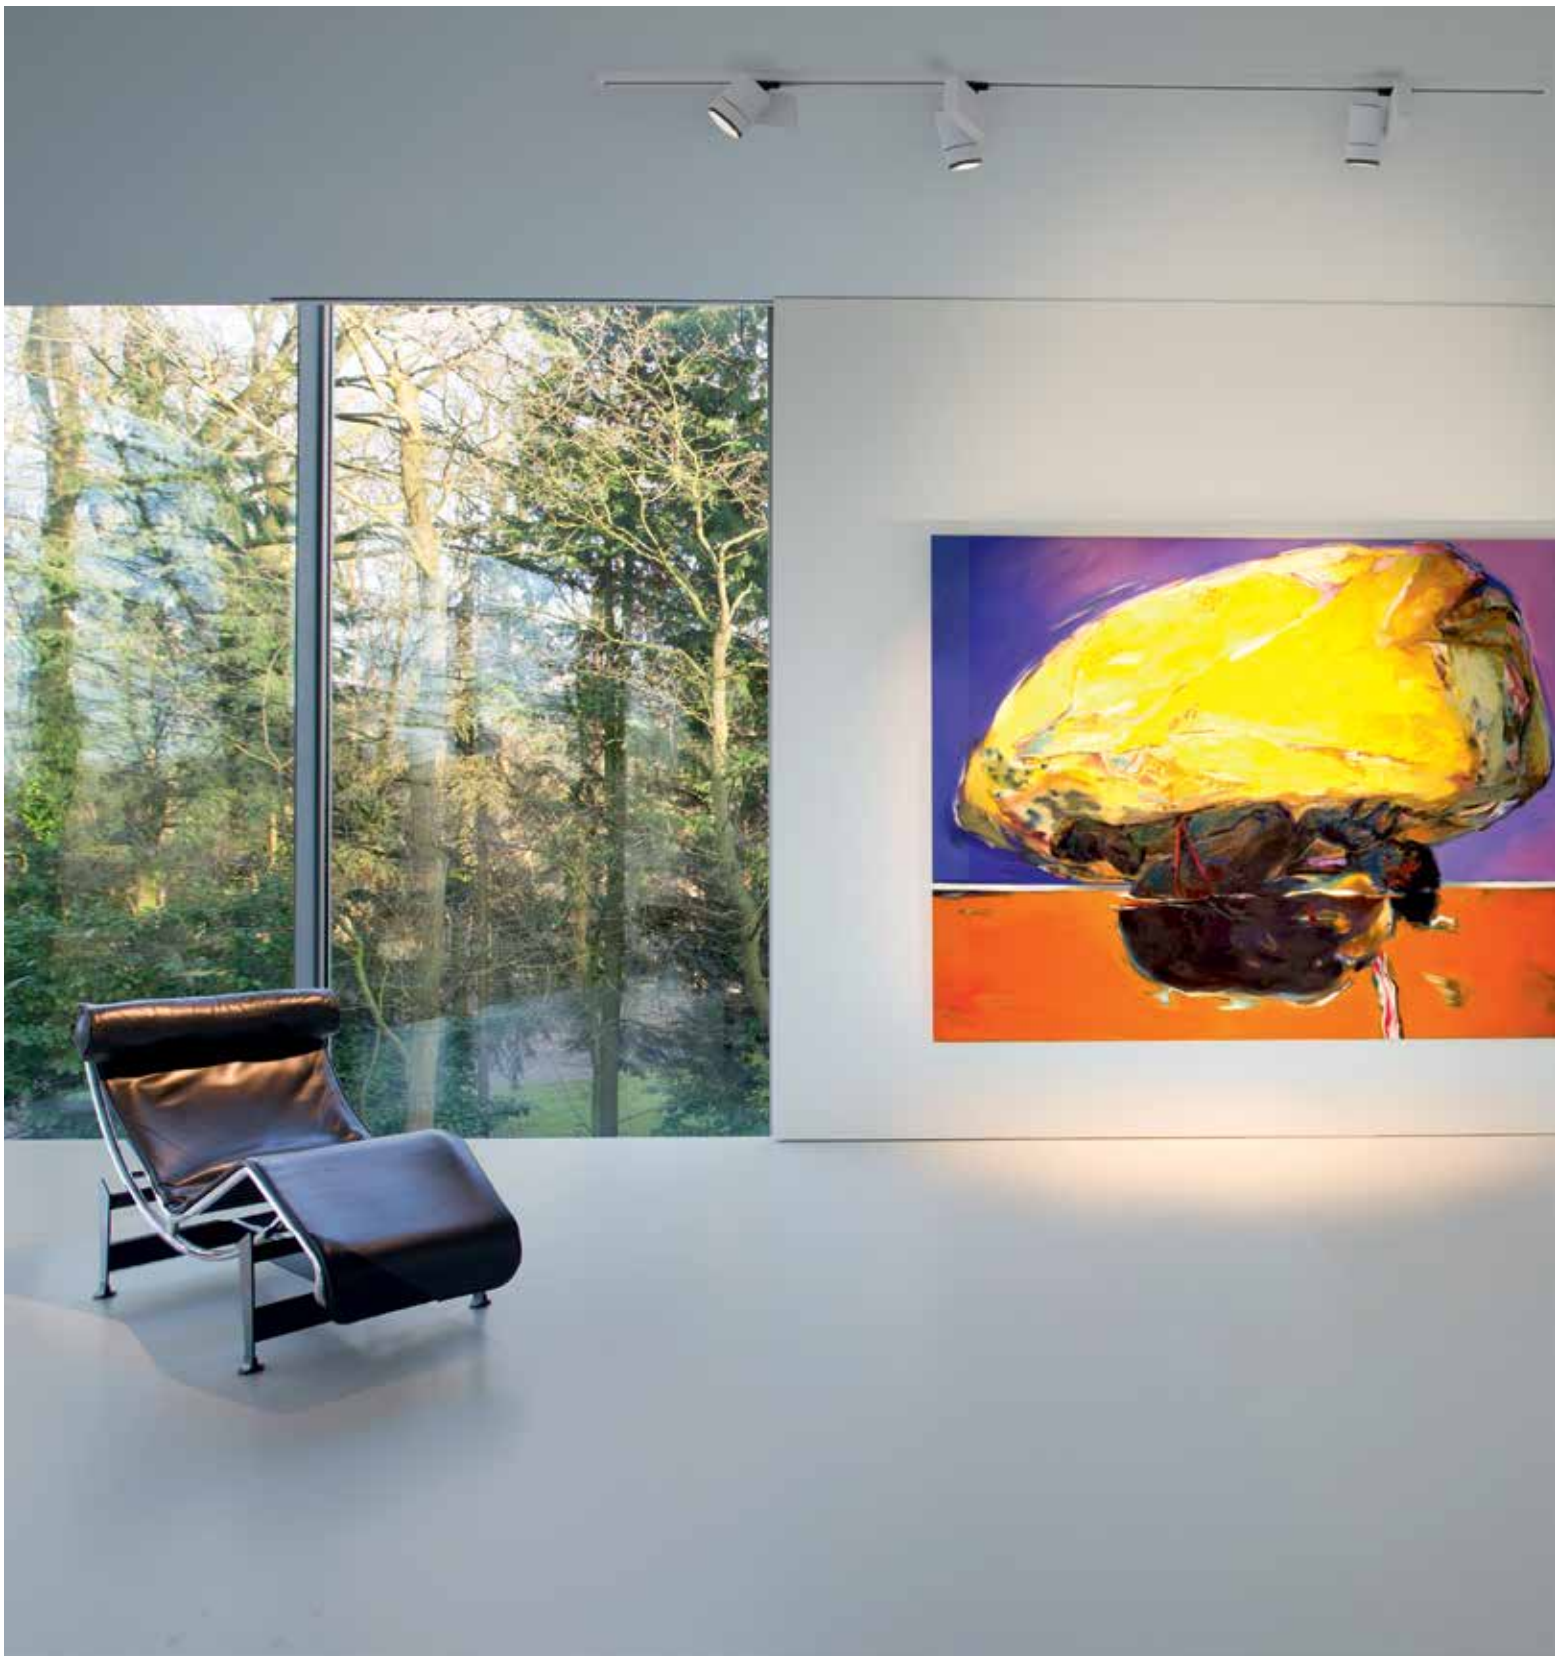





Booster HIC AD



up to 90% efficiency





BOOSTER HIC-35 SP18 AD ◇
313 22 1935-18 AD ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-35 FL28 AD ◇
313 22 1935-28 AD ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-35 WFL52 AD ◇
313 22 1935-52 AD ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 35W

BOOSTER HIC-70 SP18 AD ◇
313 22 1970-18 AD ◇
INCL.1 x REFLECTOR SP-18° + GLASS

BOOSTER HIC-70 FL28 AD ◇
313 22 1970-28 AD ◇
INCL.1 x REFLECTOR FL-28° + GLASS

BOOSTER HIC-70 WFL52 AD ◇
313 22 1970-52 AD ◇
INCL.1 x REFLECTOR WFL-52° + GLASS

1 x HIT-TC 70W

◇ = B / W
ADJUSTABLE 145° / 350°
G8.5 / 220-240V / 50-60Hz / 1 x 1~EVG

CE 1,5 IP20 1,0

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)


Net terug
Net terug





HANRATHARCHITECT




EGIDE MEERTENS

Supernova XS Pivot AD

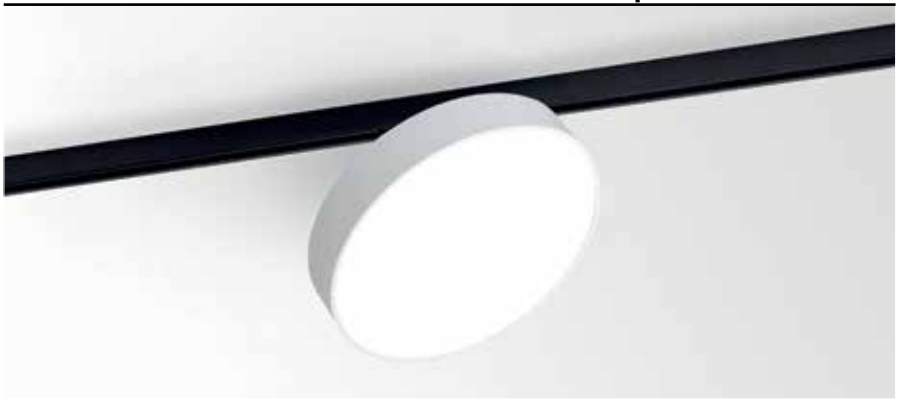



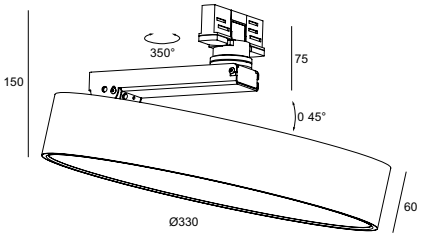

t

FULL	1580lm	2600lm
	**SUPERNOVA XS PIVOT 260 AD ◇** **274 88 2515 AD ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 15W / 3000K INCL.LED POWER SUPPLY 24V-DC 220-240V / 50-60Hz CE 1,2 IP40 REQUIREMENTS TRACK 3F (ALL INFO INT 598-599)	**SUPERNOVA XS PIVOT 330 AD ◇** **274 88 3224 AD ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 22W / 3000K INCL.LED POWER SUPPLY 1050 mA-DC 110-240V / 50-60Hz CE 1,4 IP40 REQUIREMENTS TRACK 3F (ALL INFO INT 598-599)
new 1-10V DIM	**SUPERNOVA XS PIVOT 260 AD DIM1 ◇** **274 88 2515 AD ED1 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 15W / 3000K INCL.LED POWER SUPPLY 600mA-DC DIMMING BY 1-10V 110-240V / 50-60Hz CE 1,2 IP40 REQUIREMENTS TRACK 3F DIM (ALL INFO INT 600-601)	**SUPERNOVA XS PIVOT 330 AD DIM1 ◇** **274 88 3224 AD ED1 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 22W / 3000K INCL.LED POWER SUPPLY 1050mA-DC DIMMING BY 1-10V 220-240V / 50-60Hz CE 1,4 IP40 REQUIREMENTS TRACK 3F DIM (ALL INFO INT 600-601)
new DALI DIM	**SUPERNOVA XS PIVOT 260 AD DIM5 ◇** **274 88 2515 AD ED5 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 15W / 3000K INCL.LED POWER SUPPLY 600mA-DC DIMMING BY DALI 110-240V / 50-60Hz CE 1,2 IP40 REQUIREMENTS TRACK 3F DIM (ALL INFO INT 600-601)	**SUPERNOVA XS PIVOT 330 AD DIM5 ◇** **274 88 3224 AD ED5 ◇** ◇ = W INCL.1 x PC SBL INCL.LED CLUSTER 22W / 3000K INCL.LED POWER SUPPLY 1050mA-DC DIMMING BY DALI 220-240V / 50-60Hz CE 1,4 IP40 REQUIREMENTS TRACK 3F DIM (ALL INFO INT 600-601)

AWARD DESIGN PLUS light+building
reddot design award winner 2013
GOOD DESIGN award
interior innovation award 2014
Selection



solvas



led

Mohow





	CRI > 80
4000K	
	ON REQUEST
3000K	3x 958lm (10W)
REFLECTOR SP-15°	**MOHOW LED 3015 AD ◇** **319 01 12312 AD ◇** ◇ = W
REFLECTOR FL-33°	**MOHOW LED 3033 AD ◇** **319 01 12322 AD ◇** ◇ = W
REFLECTOR WFL-45°	**MOHOW LED 3045 AD ◇** **319 01 12332 AD ◇** ◇ = W
2700K	3x 876lm (10W)
REFLECTOR SP-15°	**MOHOW LED 2715 AD ◇** **319 01 12313 AD ◇** ◇ = W
REFLECTOR FL-33°	**MOHOW LED 2733 AD ◇** **319 01 12323 AD ◇** ◇ = W
REFLECTOR WFL-45°	**MOHOW LED 2745 AD ◇** **319 01 12333 AD ◇** ◇ = W

ADJUSTABLE 0°- 90° / 360°
INCL.3 x POWERLED WHITE 10W
INCL.3 x EFT FILTER*
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 0 I 50-60Hz

□ CE 2,2 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

ON REQUEST CRI>90


*EFT / EQUALISING FILTER TECHNOLOGY

GOOD DESIGN award



Spatio Reo AD





t

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**SPATIO REO 3033 AD ◇** **311 13 8122 AD ◇** ◇ = A / W	**SPATIO REO 3033-9 AD ◇** **311 13 89122 AD ◇** ◇ = A / W
REFLECTOR WFL-50°	**SPATIO REO 3050 AD ◇** **311 13 8132 AD ◇** ◇ = A / W	**SPATIO REO 3050-9 AD ◇** **311 13 89132 AD ◇** ◇ = A / W
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**SPATIO REO 2733 AD ◇** **311 13 8123 AD ◇** ◇ = A / W	**SPATIO REO 2733-9 AD ◇** **311 13 89123 AD ◇** ◇ = A / W
REFLECTOR WFL-50°	**SPATIO REO 2750 AD ◇** **311 13 8133 AD ◇** ◇ = A / W	**SPATIO REO 2750-9 AD ◇** **311 13 89133 AD ◇** ◇ = A / W

INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

◇ CE 0,7 IP20

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)



EQUIPAL







KANNIBAAL / PIÈCEMONTÉE

FULL INFO / PAG TEC


Accessories


CLIP 50 ◇ **201 30 98** ◇ ◇ = A / B / W	Ø50 / H12
RING 66 ◇ **201 32 50** ◇ ◇ = A / W	Ø74
RING 109 ◇ **201 28 01** ◇ ◇ = A / B / W	Ø116
DICROIC FILTER 50 **201 30 11** 🔵 **201 30 12** 🟢 **201 30 13** 🔴 **201 30 14** 🟡	Ø50 max. 20W
CONE 50 ◇ **201 31 50** ◇ ◇ = ALU / W QR-CB51 max. 24°	Ø75 / Ø42 / H23
CONE 66 ◇ **201 32 52** ◇ ◇ = B	Ø66 / Ø45 / H38
CONE 111 ◇ **201 28 00** ◇ ◇ = ALU / B / C / W QR-LP111 max. 24°	Ø117 / Ø80 / H26
CLIP 111 ◇ **201 27 99 A** ◇ ◇ = A / B / W	Ø110 / H22
FRONTGLASS 109 **201 18 00**	Ø109
FRONTGLASS 111 **201 17 00**	Ø100
LENS 109 **201 48 01**	Ø109
LENS 111 **201 47 11**	Ø100
RASTER 66 ◇ **201 32 51** ◇ ◇ = B	Ø66
RASTER 109 ◇ **201 28 02** ◇ ◇ = B	Ø109

Spatio T50 AD









SPATIO 50 T50 AD ◇
311 10 105 AD ◇
◇ = A / W
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W

0,5 IP20 0,5

ACCESSORIES
RING 66 + RASTER 66
RING 66 + CONE 66
CONE 50
CLIP 50 + DICROIC FILTER 50


REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

SPATIO 111 T50 AD ◇
311 10 111 AD ◇
◇ = A / B / W
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W


0,6 IP20 1,0

ACCESSORIES
RING 109 + FRONTGLASS 109
RING 109 + LENS 109
RING 109 + RASTER 109
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

REQUIREMENTS
TRACK 3F (ALL INFO INT 598-599)

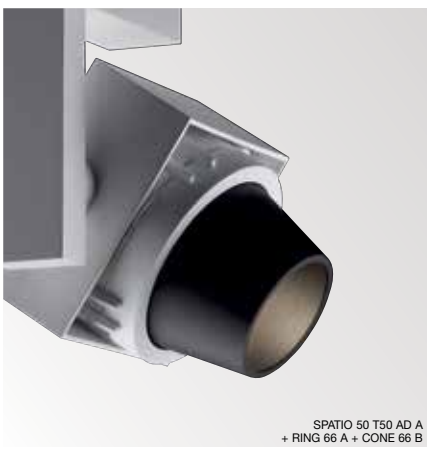

SPATIO 50 T50 AD A
+ RING 66 A + CONE 66 B

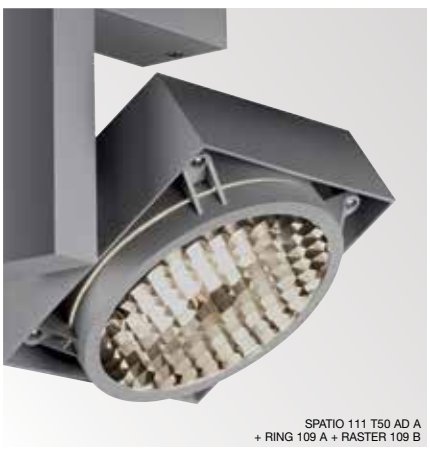

SPATIO 111 T50 AD A
+ RING 109 A + RASTER 109 B





INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 294

INTERIOR WALL RECESSED INT 496

INTERIOR WALL SURFACE INT 516

INTERIOR STAND ALONE INT 584

INTERIOR TRACK LIGHTING t INT 594

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 22

EXTERIOR WALL RECESSED EXT 40

EXTERIOR WALL SURFACE EXT 54

EXTERIOR FLOOR RECESSED EXT 110

EXTERIOR FLOOR SURFACE EXT 138

TECHNICAL INFO tech TEC 2

INDEX index IND 2

INTERIOR
EXTERIOR
PROFILES

Production of made-to-measure profile systems has become a vital and distinctive element of the Delta Light collection. For profiles especially, Delta Light® recently invested in stock and extra machinery to be able to keep up with the demand and cater for particular requests. As a result, Delta Light® scores a 99,83% success rate on its 10 day production promise, for all orders below 100m. Delivery of orders for custom profile designs above 100m are handled on a case by case basis, with extremely short term delivery terms as a standard.

The profile range includes various dimensions, diverse styles, different lamps and light modules, dimming and supply solutions, and a large number of accessories and combination options. Suspended, recessed or surface mounted, either for wall, floor or ceiling, interior and exterior, Delta Light® is your one-stop supplier for all profile lighting systems.

www.deltalight.com/IPR





INDEX
PROFILES

Splitline / Split-It

	Splitline 29 PRO 18	Splitline 52 PRO 26	Splitline 25 PRO 42	Splitline 51 PRO 42	Split-It PRO 52
led	•	•	•	•	
HALOGEN		•			•
DISCHARGE		•			•
T16					
T16-S	•		•	•	
T16-NS					

Endless

	Endless 30 PRO 96	Endless 30+ PRO 102
led	•	•
HALOGEN		
DISCHARGE		
T16		
T16-S	•	•
T16-NS		


Headliner

	Headliner 95 PRO 144	Headliner 75 PRO 144
led	•	•
HALOGEN		
DISCHARGE		
T16		
T16-S	•	•
T16-NS		


Microline

	Microline TR PRO 108	Microline TRW PRO 108	Microline TRH PRO 110	Microline 50 PRO 114	Microline 30 PRO 120	Microline 30+ PRO 132
led	• LEDSTRIP / LEDFLEX	• LEDSTRIP / LEDFLEX	•		•	•
HALOGEN				•	•	
DISCHARGE						
T16				•	•	•
T16-S						•
T16-NS						

Uniline



Uniline TR
PRO 154




Uniline TRT
PRO 154



Uniline 85
PRO 154



Uniline 70
PRO 155




Uniline Twin
PRO 155




Uniline Wall
PRO 155

led	•	•	•	•	•	•
HALOGEN	•	•	•	•	•	•
DISCHARGE						
T16	•	•	•	•	•	•
T16-S	•	•	•	•	•	•
T16-NS	•	•	•	•	•	•

Midiline L




Midiline 100L
PRO 166




Midiline 80L
PRO 166

led		
HALOGEN	•	•
DISCHARGE		
T16	•	•
T16-S	•	•
T16-NS		

NoBody



NoBody 200
PRO 186




NoBody 300
PRO 198

led	•	
HALOGEN	•	•
DISCHARGE		
T16	•	•
T16-S		
T16-NS		

T16: FLUORESCENT
T16-S: FLUORESCENT SEAMLESS
T16-NS: FLUORESCENT NON-STOP

INDEX
PROFILES

Borderline / Rendez-Vous

		
	Borderline PRO 56	**Rendez-Vous** PRO 64
led STRIP		•
led FLEX	•	•

Femtoline

			
	Femtoline 35 TR PRO 70	**Femtoline 35** PRO 70	**Femtoline 35 F** PRO 70
led STRIP			
led FLEX	•	•	•

Femtoline

				
	Femtoline 45 PRO 78	**Femtoline 25** PRO 78	**Femtoline 25 T** PRO 78	**Femtoline 25 F** PRO 79
led STRIP				
led FLEX	•	•	•	•

Nanoline / Wall Line S



Nanoline W
PRO 88

led STRIP •
led FLEX •





Wall Line S
PRO 88

•
•



B-Liner



B-Liner 70
PRO 138

led ARRAY •






B-Liner 65
PRO 138

•



Finnline



Finnline
PRO 174

led •




HOW TO BUILD
YOUR PROFILE


1 Select a profile.

Profile	led						◇
SPLITLINE 29	●	●					B
SPLITLINE 52	●	●			●		B
SPLITLINE 25	●	●			●		B
SPLITLINE 51	●	●			●		B
SPLIT-IT	●	●					B
BORDERLINE	●	●			●		W
RENDEZ-VOUS	●	●			●		ANO
new FEMTOLINE 35 TR	●	●			●		B
new FEMTOLINE 35	●		●			●	ANO / B / W
new FEMTOLINE 35 F	●		●			●	ANO / B / W
FEMTOLINE 45	●	●			●		ANO / B / W
FEMTOLINE 25	●		●			●	ANO / B / W
FEMTOLINE 25 T	●		●			●	ANO / B / W
FEMTOLINE 25 F	●		●			●	ANO / B / W
NANOLINE W	●		●			●	ANO
WALL LINE S	●					●	ANO
ENDLESS 30	●	●	●	●			B / W
ENDLESS 30+	●	●	●				B / W
new MICROLINE TR	●	●			●		ANO
new MICROLINE TRW	●	●			●		ANO
new MICROLINE TRH	●	●			●		ANO
MICROLINE 50	●	●					ANO / B / W
MICROLINE 30	●	●	●	●			ANO / W
MICROLINE 30+	●		●	●			ANO / B / W
B-LINER 70	●	●			●		ANO / B / W
B-LINER 65	●	●	●	●			ANO / B / W
HEADLINER 95	●	●					ANO / B / W
HEADLINER 75	●	●	●	●			ANO / B / W
UNILINE TR	●	●			●		ANO
UNILINE TRT	●	●			●		ANO
UNILINE 85	●	●					ANO / W
UNILINE 70	●	●	●	●			ANO / W
UNILINE TWIN	●			●			ANO / W
UNILINE WALL	●					●	ANO
MIDILINE 100L		●					ANO / W
MIDILINE 80L		●	●	●			ANO / W
new FINNLINE	●			●			B / W
NOBODY 200	●			●			ANO / W
NOBODY 300				●			ANO

2 Define dimensions.

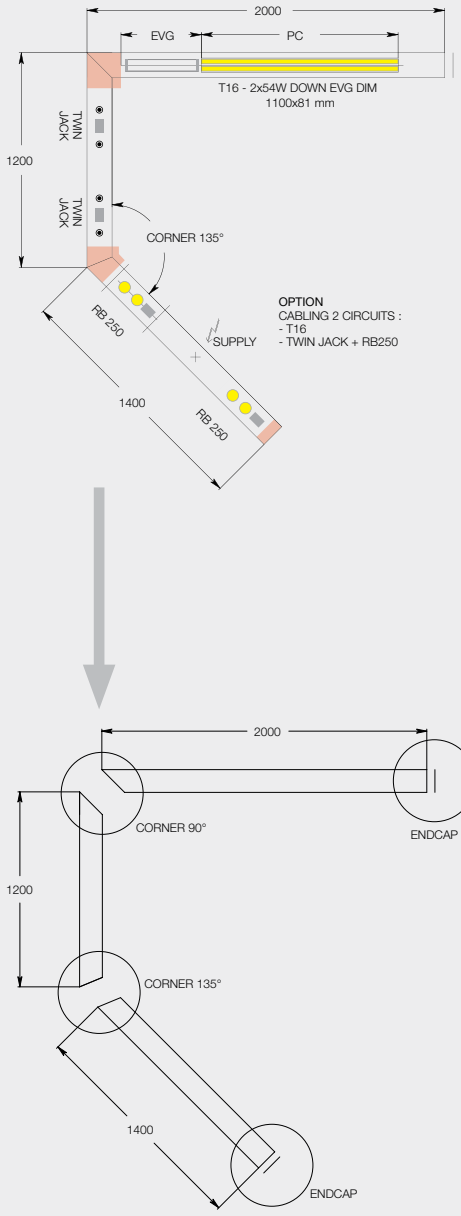


3 Select corner. Details may vary according to type of profile

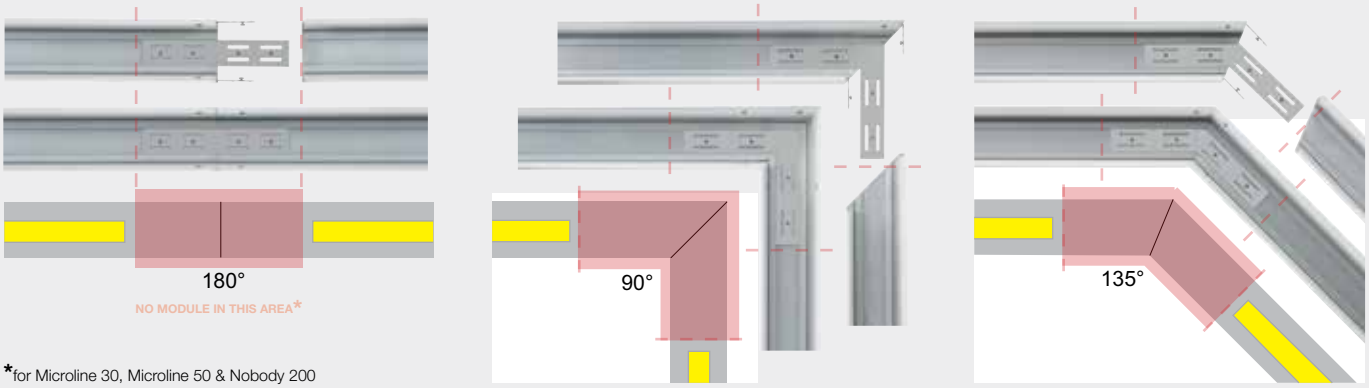


*for Microline 30, Microline 50 & Nobody 200


4 Select end cap.

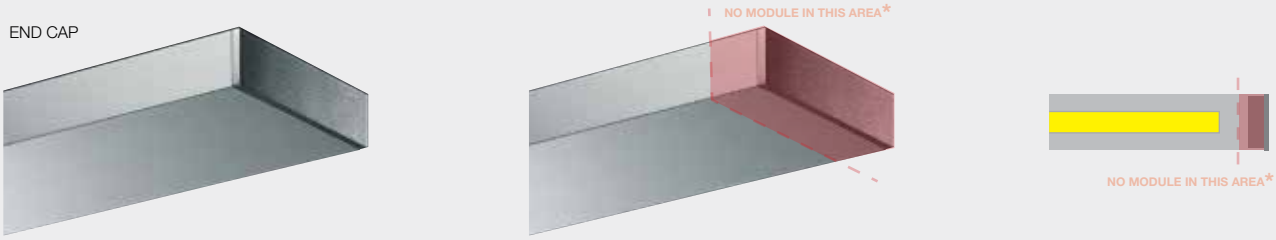



* for Femtoline 25, Nanoline, Wall line S, Endless 30/30+, Microline 30+, Uniline, Nobody 200

5 Select fixation.

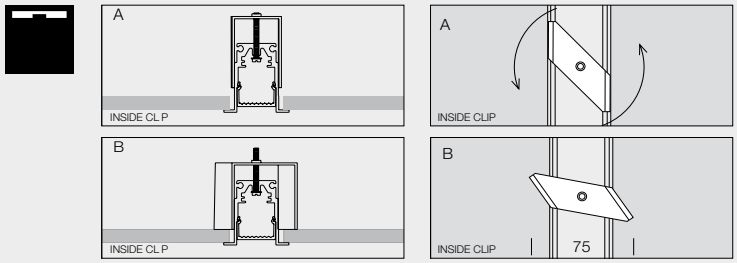



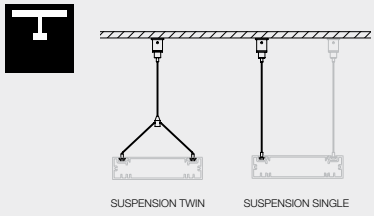



FIXATION

NO MODULE IN THIS AREA*



* for Endless 30/30+, Microline 30, Uniline 70, Uniline Twin, Midiline 80 L, Nobody 200/300


6 Select current supply cable.



CURRENT SUPPLY
L 1,6m / 3 x 0,75mm²
L 6,0m / 3 x 0,75mm²
L 1,6m / 5 x 0,75mm²
L 6,0m / 5 x 0,75mm² 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 /
S 62-80-90

NO MODULE IN THIS AREA*



* for Femtoline, Nanoline, Endless 30/30+, Microline 30, Uniline Twin, Nobody 200

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CABLE BASE R ◇ **203 99 55** ◇ ◇ = ANO / W / B	Ø57 x 41	
CABLE BASE S ◇ **203 99 56** ◇ ◇ = ANO / W / B	57 x 57 x 41	
COVERSET R ◇ **204 00 62** ◇ **204 00 90** ◇ **204 00 100** ◇ ◇ = ANO / B / W	 Ø62 Ø90 Ø100	
COVERSET S ◇ **204 62 62** ◇ **204 80 80** ◇ **204 90 90** ◇ ◇ = ANO / B / W	 62 x 62 80 x 80 90 x 90	

HOW TO BUILD
YOUR PROFILE

7 Select light modules.

LED



L 162






L 200



















EXAMPLE:

Requirements

UNI - PC SBL PROFILE
352 02 05 SBL

MAX.L / PROFILE : 5.8m - 0,2 / m

HALOGEN



L 100



JACK




L 210





RB150

FLUORESCENT




T16

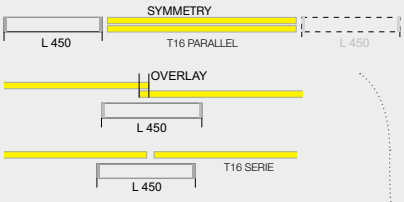



T16 SEAMLESS





PC inclusive



PC non-inclusive
Continuous pc = Requirement


Requirements (continuous PC)

MIC - PC SBL PROFILE
296 02 05 SBL


EXAMPLE: MAX.L / PROFILE : 5.8m - 0,1 / m




T16 BAP



DOWN / DOWN-UP / UP










8 Dimming.

EVG DIM 1




EVG DIM 2





REMOTE CONTROL : ON REQUEST

9 Define circuits.

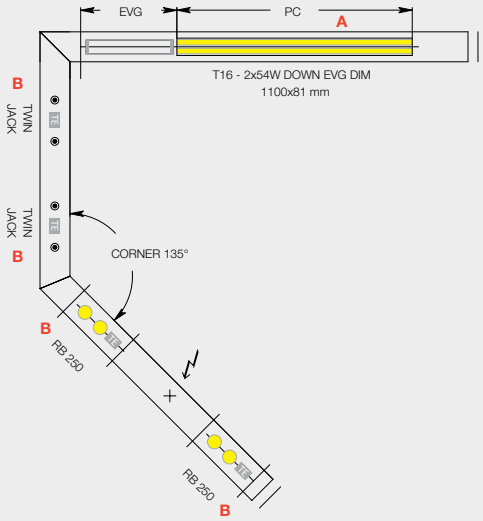


CIRCUIT **A** : T16 = 1 MODULE
CIRCUIT **B** : TWIN JACK + RB50 = 4 MODULES

MODULES B > # MODULES A
CIRCUIT **B** : STANDARD INCL.
CIRCUIT **A** : 1 x **328 90 01**

TRIMLESS
SUSPENSION / CONNECTION

Suspension trimless O.F.A.





62 x 80 9 or 12
102 x 80 (CONCRETE)

SUSPENSION TRIMLESS O.F.A.
328 10 01


INCL.1 x AUTOMATIC ADJUSTMENT

0,2

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

Suspension + connection trimless O.F.A.





62 x 80 9 or 12
102 x 80 (CONCRETE)

SUSPENSION + CONNECTION TRIMLESS O.F.A.
328 10 02


INCL.1 x CONNECTOR max. 2 x 2,5 mm^2 + PE
INCL.1 x AUTOMATIC ADJUSTMENT
4A / 250V

0,2

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

Connection trimless O.F.A.





62 x 80 9 or 12
102 x 80 (CONCRETE)

CONNECTION TRIMLESS O.F.A.
328 10 03

INCL.1 x CONNECTOR max. 2 x 2,5 mm^2+ PE
4A / 250V

0,2

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard



ENDLESS 30+
+ SUSPENSION + CONNECTION TRIMLESS



ENDLESS 30+
+ SUSPENSION TRIMLESS
+ CONNECTION TRIMLESS






SPLITLINE 29

This graphically refined profile effortlessly integrates with architecture, upgrading the uniqueness of the room.
The new dimensions of the Splitline 29 facilitates installation, including perfect 90° corner constructions. Thanks to the easy-to-use inside cover cabling in between modules can be hidden.
The new Midispy module further upgrades the architectural character of this profile

www.deltalight.com/splitline29



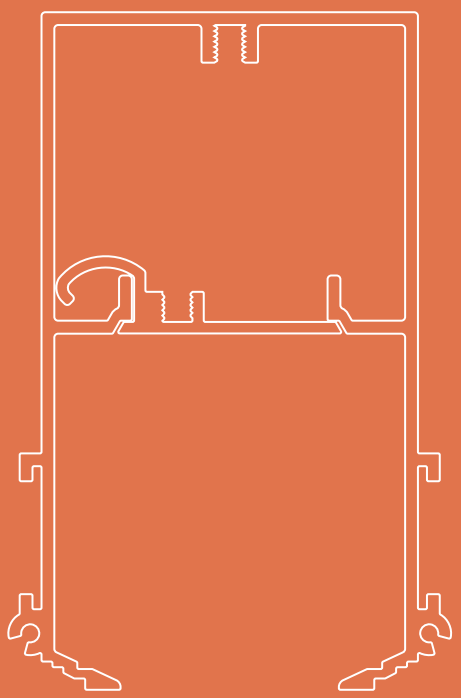


Splitline 29

PROFILE



SPL29 - PROFILE ◇
372 29 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m

1,0




TOL EN12020-2


END CAP



SPL29 - END CAP ◇
372 29 03 01 ◇
◇ = B

0,1






CORNER


SPL29 - CORNER 180°
372 29 06 01

0,3



SPL 29 - CORNER 90°
372 29 06 06

0,3




FIXATION

65 x (L + 5) x 125 max.25

SPL29 - CLIP
372 29 14 01

0,1



CURRENT SUPPLY

led

Splitline 29 M10

SPL29 - M10 ◇
372 29 61 01 ◇
◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
110-240V / 50-60Hz
0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 680lm
EXCL.LED POWER SUPPLY 350mA-DC
0,3 IP20

L 160

PS



led

Splitline 29 LED

SPL29 - 4 LED WW ◇
372 29 61 42 ◇
◇ = B
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz
0,3 IP20

L 130


PS



Splitline 29 Modules T16 Seamless Down

SPL29 - SL-T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz
0,8 IP20 0,1

L 390




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**372 29 75 124 E**	**372 29 75 124 ED1**	**372 29 75 124 ED2**
1 x 21/39	885	**372 29 75 139 E**	**372 29 75 139 ED1**	**372 29 75 139 ED2**
1 x 28/54	1185	**372 29 75 154 E**	**372 29 75 154 ED1**	**372 29 75 154 ED2**



SPL29 - SL-T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
1,6 IP20 0,1

L 450



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**372 29 75 239 E**	**372 29 75 239 ED1**	**372 29 75 239 ED2**
2 x 28/54	2370	**372 29 75 254 E**	**372 29 75 254 ED1**	**372 29 75 254 ED2**




T16 SEAMLESS LAMP - PAG TEC

new

Splitline 29 LED Line

SPL29 - FTL25F
INCL.FTL25F
INCL.2 x ENDCAP FTL25F
INCL.LEDFLEX FP 15W/m / 3000K
CRI >80 / 1000lm
EXCL.LED POWER SUPPLY 24V-DC
0,3 IP20

PS



Watt	Lmm	
1 x 9	614	**372 29 25 062** ◇
1 x 14	914	**372 29 25 092** ◇
1 x 18	1214	**372 29 25 122** ◇
1 x 23	1514	**372 29 25 152** ◇

◇ = B

LED POWER SUPPLY 24V-DC
0,2 IP20 λ >0,9

Watt	EVG	EVG DIM 1 10V	
20	**372 29 24 20**	**372 29 24 20 ED1**	110-240V / 50-60Hz*
60	**372 29 24 60**	**372 29 24 60 ED1**	220-240V / 50-60Hz



*for 110V max 15W


p




FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W












Splitline 29 - Midispy



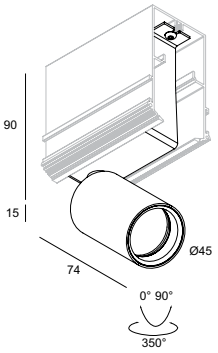

L 150

PS

p

	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W)	570lm (6W)	427lm (6W)
LENS FL-20°	**SPL29 - MIDISPY 83020 ◇** **372 29 272 832 ◇** ◇ = B / W		
REFLECTOR WFL-40°		**SPL29 - MIDISPY 83040 ◇** **372 29 271 833 ◇** ◇ = B / W	**SPL29 - MIDISPY 93040 ◇** **372 29 271 933 ◇** ◇ = B / W
2700K	360lm (4,1W)	530lm (6W)	400lm (6W)
LENS FL-20°	**SPL29 - MIDISPY 82720 ◇** **372 29 272 822 ◇** ◇ = B / W		
REFLECTOR WFL-40°		**SPL29 - MIDISPY 82740 ◇** **372 29 271 823 ◇** ◇ = B / W	**SPL29 - MIDISPY 92740 ◇** **372 29 271 923 ◇** ◇ = B / W
	ADJUSTABLE 0-90° / 350° INCL.1 x POWERLED WHITE 4,1W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz 0,6 IP20 REQUIREMENTS MIDISPY TUBE	ADJUSTABLE 0-90° / 350° INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz 0,6 IP20 REQUIREMENTS MIDISPY TUBE	



KEUKENS RERENS



JSA ARQUITECTURA





SPLITLINE 52

This recessed profile can be interpreted in very varied ways, depending on what the space needs, both functionally and in terms of design. The bigger Splitline 52 offers new opportunities thanks to the extended range of flexible modules, such as led modules, the new Midispy and Spy, or the You-Turn module, enabling an eye-catching combination of Splitline and You-Turn.

www.deltalight.com/splitline52

play.de talight.com/spl52

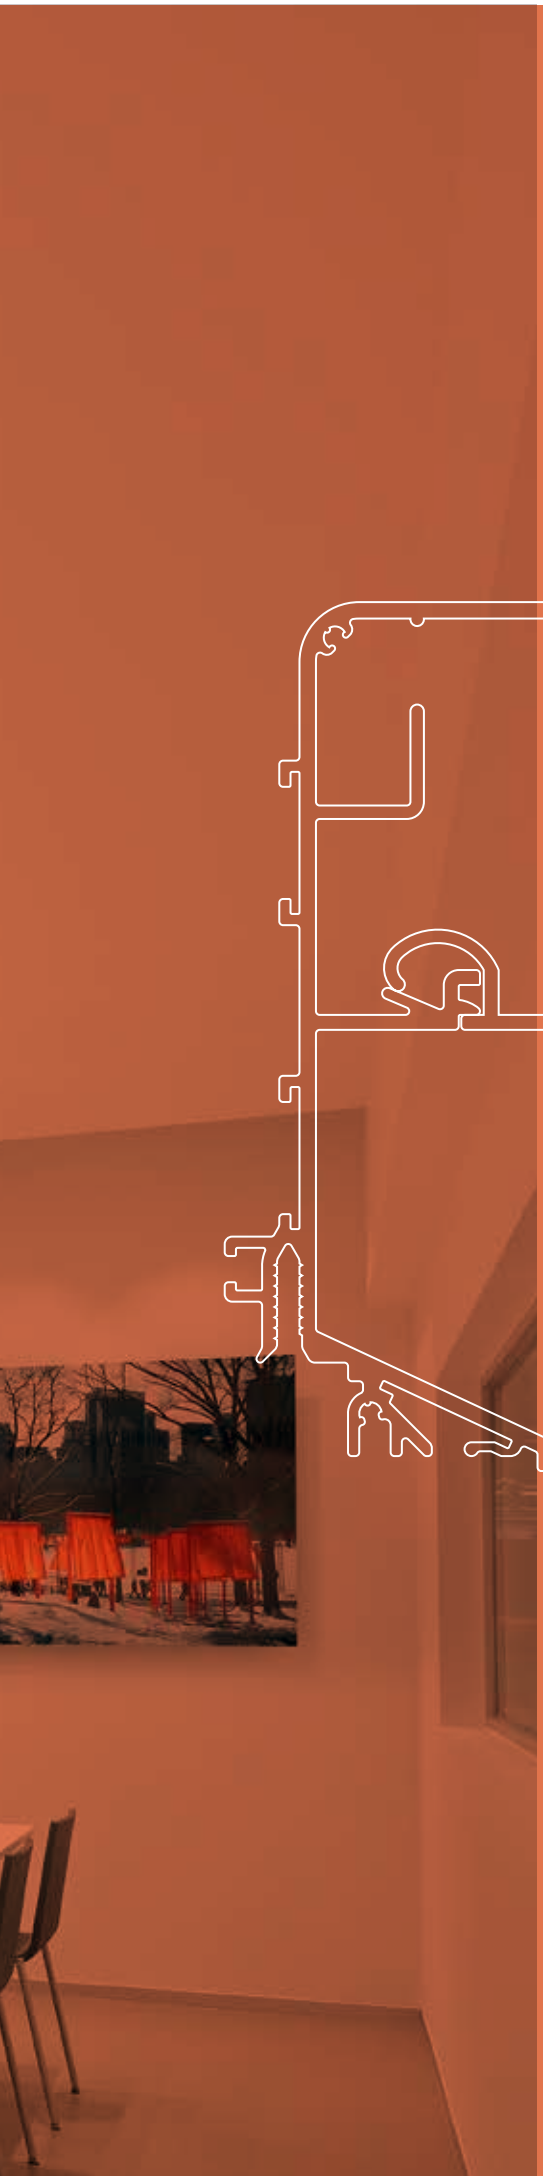

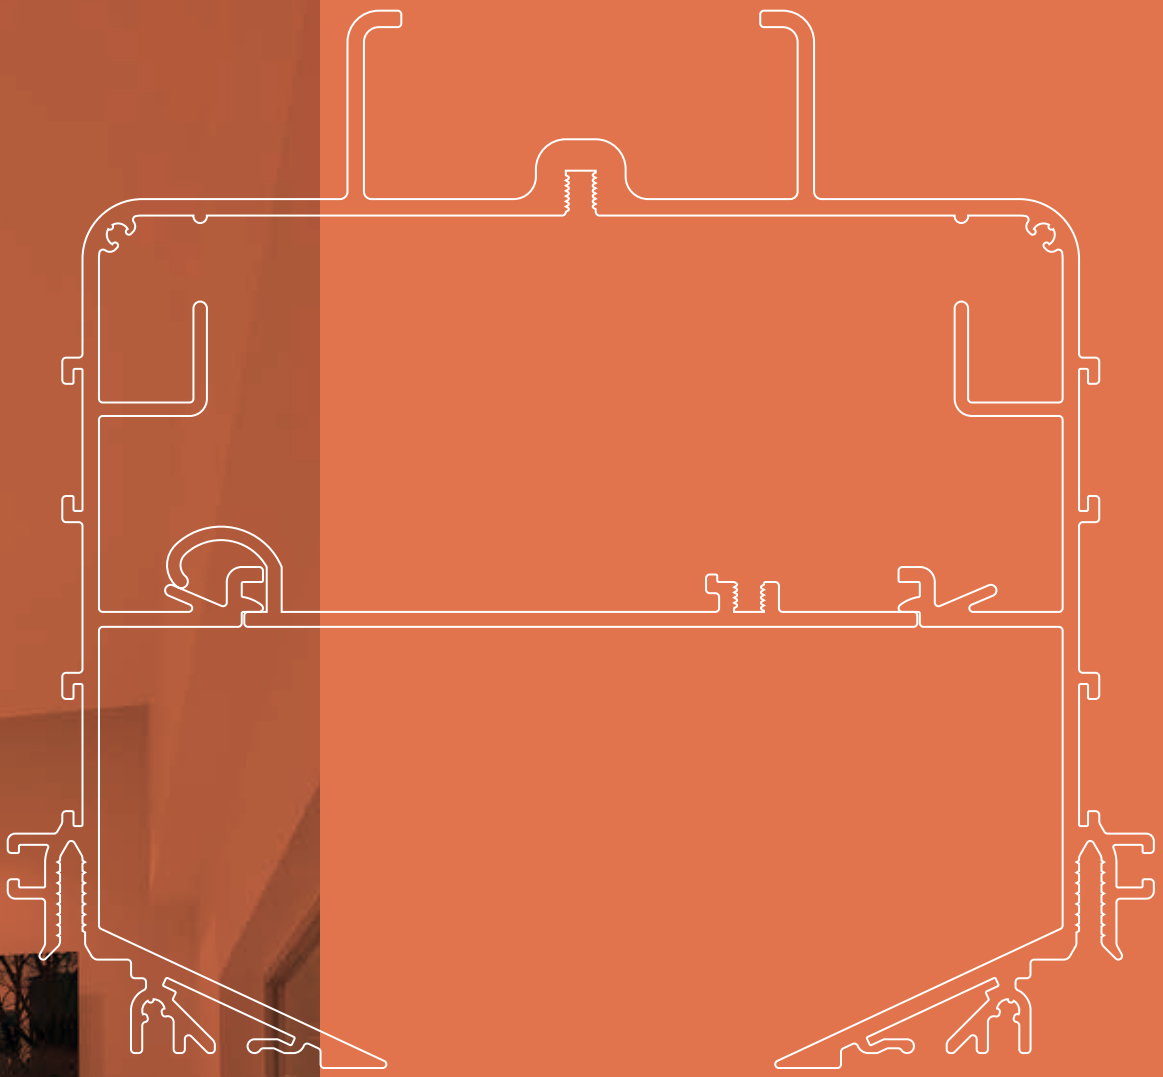


Splitline 52

PROFILE



SPL 52 - PROFILE ◇
372 52 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m


5,0



TOL EN12020-2

END CAP






SPL 52 - END CAP ◇
372 52 03 01 ◇
◇ = B

0,1

CORNER


SPL 52 - CORNER 180°
372 52 06 01

0,3




SPL 52 - CORNER 90°
372 52 06 06

0,3




FIXATION

max.12

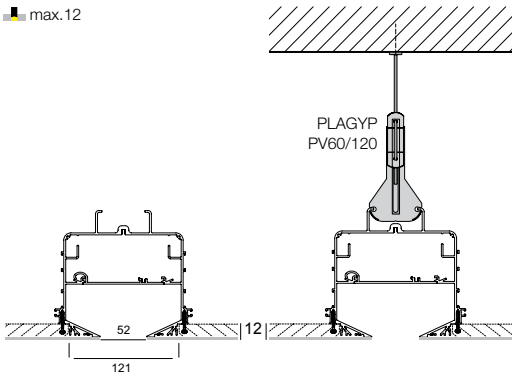

CURRENT SUPPLY



4000K

3000K

REFLECTOR FL-33°

REFLECTOR WFL-50°

2700K

REFLECTOR FL-33°

REFLECTOR WFL-50°

Splitline 52 M10

SPL52 - M10 ◇
372 52 61 01 ◇
◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
110-240V / 50-60Hz
CE 0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 680lm
EXCL.LED POWER SUPPLY 350mA-DC
CE 0,3 IP20

L 160
PS



Splitline 52 LED



L 130 PS | L 170 PS | L 205 PS

CRI > 80	CRI > 90
ON REQUEST	
680lm (7W)	566lm (7W)
SPL52 - 1 LED 3033 **372 52 61 8122**	**SPL52 - 1 LED 3033-9** **372 52 61 89122**
SPL52 - 2 LED 3033 **372 52 61 8222**	**SPL52 - 2 LED 3033-9** **372 52 61 89222**
SPL52 - 3 LED 3033 **372 52 61 8322**	**SPL52 - 3 LED 3033-9** **372 52 61 89322**
SPL52 - 1 LED 3050 **372 52 61 8132**	**SPL52 - 1 LED 3050-9** **372 52 61 89132**
SPL52 - 2 LED 3050 **372 52 61 8232**	**SPL52 - 2 LED 3050-9** **372 52 61 89232**
SPL52 - 3 LED 3050 **372 52 61 8332**	**SPL52 - 3 LED 3050-9** **372 52 61 89332**
618lm (7W)	525lm (7W)
SPL52 - 1 LED 2733 **372 52 61 8123**	**SPL52 - 1 LED 2733-9** **372 52 61 89123**
SPL52 - 2 LED 2733 **372 52 61 8223**	**SPL52 - 2 LED 2733-9** **372 52 61 89223**
SPL52 - 3 LED 2733 **372 52 61 8323**	**SPL52 - 3 LED 2733-9** **372 52 61 89323**
SPL52 - 1 LED 2750 **372 52 61 8133**	**SPL52 - 1 LED 2750-9** **372 52 61 89133**
SPL52 - 2 LED 2750 **372 52 61 8233**	**SPL52 - 2 LED 2750-9** **372 52 61 89233**
SPL52 - 3 LED 2750 **372 52 61 8333**	**SPL52 - 3 LED 2750-9** **372 52 61 89333**

FIXED
INCL.POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,3 IP20

Splitline 52 LED D



L 130 PS | L 170 PS | L 205 PS

CRI > 80	CRI > 90
ON REQUEST	
680lm (7W)	566lm (7W)
SPL52 - 1 LED D 3033 **372 52 61 8122 D**	**SPL52 - 1 LED D 3033-9** **372 52 61 89122 D**
SPL52 - 2 LED D 3033 **372 52 61 8222 D**	**SPL52 - 2 LED D 3033-9** **372 52 61 89222 D**
SPL52 - 3 LED D 3033 **372 52 61 8322 D**	**SPL52 - 3 LED D 3033-9** **372 52 61 89322 D**
618lm (7W)	525lm (7W)
SPL52 - 1 LED D 2733 **372 52 61 8123 D**	**SPL52 - 1 LED D 2733-9** **372 52 61 89123 D**
SPL52 - 2 LED D 2733 **372 52 61 8223 D**	**SPL52 - 2 LED D 2733-9** **372 52 61 89223 D**
SPL52 - 3 LED D 2733 **372 52 61 8323 D**	**SPL52 - 3 LED D 2733-9** **372 52 61 89323 D**

FIXED
INCL.POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,3 IP20

Splitline 52 RB LED



L 185 PS | L 365 PS

CRI > 80	CRI > 90
ON REQUEST	
680lm (7W)	566lm (7W)
SPL52 - 1 RB LED 3033 **372 52 63 8122**	**SPL52 - 1 RB LED 3033-9** **372 52 63 89122**
SPL52 - 2 RB LED 3033 **372 52 63 8222**	**SPL52 - 2 RB LED 3033-9** **372 52 63 89222**
SPL52 - 1 RB LED 3050 **372 52 63 8132**	**SPL52 - 1 RB LED 3050-9** **372 52 63 89132**
SPL52 - 2 RB LED 3050 **372 52 63 8232**	**SPL52 - 2 RB LED 3050-9** **372 52 63 89232**
618lm (7W)	525lm (7W)
SPL52 - 1 RB LED 2733 **372 52 63 8123**	**SPL52 - 1 RB LED 2733-9** **372 52 63 89123**
SPL52 - 2 RB LED 2733 **372 52 63 8223**	**SPL52 - 2 RB LED 2733-9** **372 52 63 89223**
SPL52 - 1 RB LED 2750 **372 52 63 8133**	**SPL52 - 1 RB LED 2750-9** **372 52 63 89133**
SPL52 - 2 RB LED 2750 **372 52 63 8233**	**SPL52 - 2 RB LED 2750-9** **372 52 63 89233**


ADJUSTABLE 0-30° / 350°
INCL.POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz


CE 0,3 IP20

FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W











new led


Splitline 52 LED




L 130 PS
L 170 PS

	CRI > 80
4000K	
	ON REQUEST
3000K	475lm (6W)
LENS FL-20°	**SPL52 - 1 LED 83020** **372 52 1832** **SPL52 - 2 LED 83020** **372 52 2832**
2700K	450lm (6W)
LENS FL-20°	**SPL52 - 1 LED 82720** **372 52 1822** **SPL52 - 2 LED 82720** **372 52 2822**
	FIXED INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 220-240V / 50-60Hz CE 0,6 IP20

Splitline 52 - Midispy

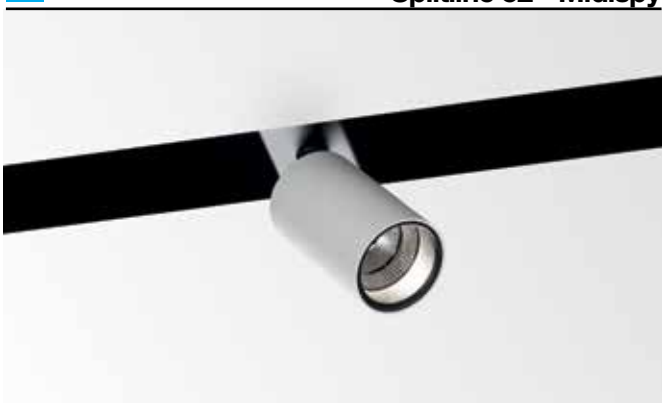

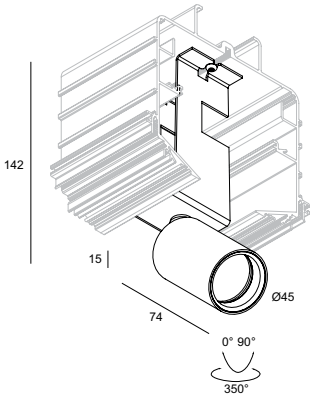

L 225

PS


p

	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	475lm (6W)	780lm (9W)	585lm (9W)
LENS FL-20°	**SPL52 - MIDISPY 83020 ◇** **372 52 272 832 ◇** ◇ = B / W		
REFLECTOR WFL-40°		**SPL52 - MIDISPY 83040 ◇** **372 52 271 833 ◇** ◇ = B / W	**SPL52 - MIDISPY 93040 ◇** **372 52 271 933 ◇** ◇ = B / W
2700K	450lm (6W)	726lm (9W)	548lm (9W)
LENS FL-20°	**SPL52 - MIDISPY 82720 ◇** **372 52 272 822 ◇** ◇ = B / W		
REFLECTOR WFL-40°		**SPL52 - MIDISPY 82740 ◇** **372 52 271 823 ◇** ◇ = B / W	**SPL52 - MIDISPY 92740 DIM8 ◇** **372 52 271 923 ◇** ◇ = B / W
	ADJUSTABLE 0-90° / 350° INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 220-240V / 50-60Hz 0,6 IP20 REQUIREMENTS MIDISPY TUBE	ADJUSTABLE 0-90° / 350° INCL.1 x POWERLED WHITE 9W INCL.LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 220-240V / 50-60Hz 0,6 IP20 REQUIREMENTS MIDISPY TUBE	

FULL INFO / PAG TEC

Requirements

SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



FULL INFO / PAG XXX

Accessories

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03




SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05



p




SPY TUBE W



SPY TUBE B


SPY TUBE MMAT

new led

Splitline 52 - Spy HP



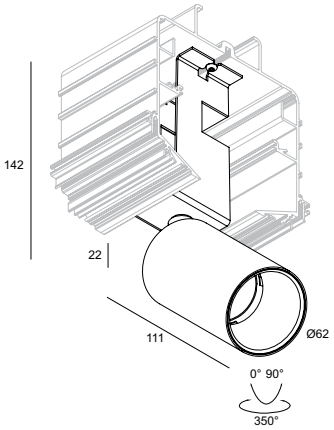

L 225
PS

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	1930lm (18W)	1639lm (18W)
REFLECTOR FL-33°	**SPL52 - SPY HP 83033 ◇** **372 52 371 21 831 ◇** ◇ = B / W	**SPL52 - SPY HP 93033 ◇** **372 52 371 21 931 ◇** ◇ = B / W
2700K	1787lm (18W)	1453lm (18W)
REFLECTOR FL-33°	**SPL52 - SPY HP 82733 ◇** **372 52 371 21 821 ◇** ◇ = B / W	**SPL52 - SPY HP 92733 ◇** **372 52 371 21 921 ◇** ◇ = B / W

ADJUSTABLE 0-90° / 350°
INCL.1 x POWERLED WHITE 18W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz


IP20

REQUIREMENTS
SPY TUBE

ACCESSORIES
HONEYCOMB 50
LINEAR SPREAD LENS 50
SPREAD LENS 50
SOFTENING LENS 50
GLASS SBL 50

Splitline 52 - Spy



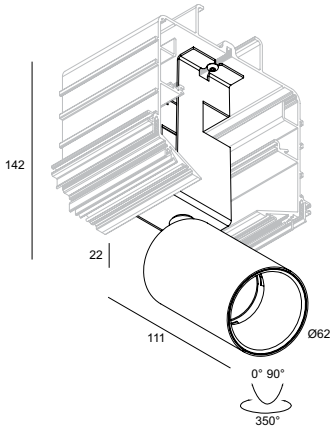

L 225

PS

p

	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	475lm (6W)	945lm (9,3W)	739lm (9,3W)
LENS SP-15°	**SPL52 - SPY 83015** ◇ **372 52 372 831** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPL52 - SPY 83018** ◇ **372 52 371 81831** ◇ ◇ = B / W	**SPL52 - SPY 93018** ◇ **372 52 371 81931** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPL52 - SPY 83033** ◇ **372 52 371 81832** ◇ ◇ = B / W	**SPL52 - SPY 93033** ◇ **372 52 371 81932** ◇ ◇ = B / W
2700K	450lm (6W)	893lm (9,3W)	698lm (9,3W)
LENS SP-15°	**SPL52 - SPY 82715** ◇ **372 52 372 821** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPL52 - SPY 82718** ◇ **372 52 371 81821** ◇ ◇ = B / W	**SPL52 - SPY 92718** ◇ **372 52 371 81921** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPL52 - SPY 82733** ◇ **372 52 371 81822** ◇ ◇ = B / W	**SPL52 - SPY 92733** ◇ **372 52 371 81922** ◇ ◇ = B / W
	ADJUSTABLE 0-90° / 350° INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 500mA-DC 110-240V / 50-60Hz CE 0,7 IP20 REQUIREMENTS SPY TUBE ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	ADJUSTABLE 0-90° / 350° INCL.1 x POWERLED WHITE 9,3W INCL.LED POWER SUPPLY 500mA-DC MAINS DIMMING (FE) 220-240V / 50-60Hz CE 0,7 IP20 REQUIREMENTS SPY TUBE ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	







FULL INFO / PAG TEC

Accessories

OPTO CLIP◇ **201 02 00**◇ ◇ = B	Ø102 / Ø83 / H22	
HONEYCOMB 78◇ **201 02 01**◇ ◇ = B	Ø78	
SOFTENING LENS 78 **201 02 04**	Ø78	




YOU-TURN OPTO + OPTO CLIP + HONEYCOMB 78


led

Splitline You-Turn LED









p

	CRI > 80	**CRI > 90** (> 97 ON REQUEST)	**CRI > 80**	**CRI > 90** (> 97 ON REQUEST)
4000K				
	ON REQUEST		ON REQUEST	
3000K	2592lm (25W)	2200lm (25W)	2592lm (25W)	2200lm (25W)
REFLECTOR SP-15°			**YOU-TURN SPL OPTO 20 83015 ◇** **313 121 21 831 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 93015 ◇** **313 121 21 931 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN SPL REO 20 83033 ◇** **313 120 21 832 ◇** ◇ = W-B	**YOU-TURN SPL REO 20 93033 ◇** **313 120 21 932 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 83033 ◇** **313 121 21 832 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 93033 ◇** **313 121 21 932 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN SPL REO 20 83050 ◇** **313 120 21 833 ◇** ◇ = W-B	**YOU-TURN SPL REO 20 93050 ◇** **313 120 21 933 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN SPL OPTO 20 83055 ◇** **313 121 21 833 ◇** ◇ = W-B	**YOU-TURN ON OPTO 20 93055 ◇** **313 121 21 933 ◇** ◇ = W-B
2700K	2399lm (25W)	1951lm (25W)	2399lm (25W)	1951lm (25W)
REFLECTOR SP-15°			**YOU-TURN SPL OPTO 20 82715 ◇** **313 121 21 821 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 92715 ◇** **313 121 21 921 ◇** ◇ = W-B
REFLECTOR FL-33°	**YOU-TURN SPL REO 20 82733 ◇** **313 120 21 822 ◇** ◇ = W-B	**YOU-TURN SPL REO 20 92733 ◇** **313 120 21 922 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 82733 ◇** **313 121 21 822 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 92733 ◇** **313 121 21 922 ◇** ◇ = W-B
REFLECTOR WFL-50°	**YOU-TURN SPL REO 20 82750 ◇** **313 120 21 823 ◇** ◇ = W-B	**YOU-TURN SPL REO 20 92750 ◇** **313 120 21 923 ◇** ◇ = W-B		
REFLECTOR WFL-55°			**YOU-TURN SPL OPTO 20 82755 ◇** **313 121 21 823 ◇** ◇ = W-B	**YOU-TURN SPL OPTO 20 92755 ◇** **313 121 21 923 ◇** ◇ = W-B
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 25W INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz ◇ CE 1,6 IP20		ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 25W INCL.1 x EFT FILTER* INCL.DIMMABLE LED POWER SUPPLY 700mA-DC MAINS DIMMING (FE) 110-240V / 50-60Hz ◇ CE 1,7 IP20 ACCESSORIES OPTO CLIP + HONEYCOMB 78 OPTO CLIP + SOFTENING LENS 78	


play.de talight.com/youturn

*EFT / EQUALISING FILTER TECHNOLOGY




Splitline You-Turn





YOU-TURN SPL 111 XL T50 ◇
313 12 121 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
◇ CE 1,6 IP20 1,0






YOU-TURN SPL H111-35 ◇
313 12 1935 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 35W
◇ CE 1,6 IP20 1,0

YOU-TURN SPL H111-70 ◇
313 12 1975 ◇
◇ = W-B
ADJUSTABLE 0°- 90° / 350°
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIR111-CE-P 70W
◇ CE 1,6 IP20 1,0



up to 93% efficiency



YOU-TURN SPL HIT-35 SP15 ◇
313 12 133 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN SPL HIT-35 FL24 ◇
313 12 133 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN SPL HIT-35 WFL43 ◇
313 12 133 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 35W
◇ CE 1,6 IP20 1,0

YOU-TURN SPL HIT-70 SP15 ◇
313 12 137 SP15 ◇
◇ = W-B
INCL.1 x REFLECTOR SP-15° + GLASS

YOU-TURN SPL HIT-70 FL24 ◇
313 12 137 FL24 ◇
◇ = W-B
INCL.1 x REFLECTOR FL-24° + GLASS

YOU-TURN SPL HIT-70 WFL43 ◇
313 12 137 WFL43 ◇
◇ = W-B
INCL.1 x REFLECTOR WFL-43° + GLASS

ADJUSTABLE 0°- 90° / 350°
G12 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x HIT 70W
◇ CE 1,6 IP20 1,0

play.de talight.com/youturn

reddot design award
winner 2012



VERSLUYS BOUWGROEP - CORPORATE BUILDING - OSTEND BELGIUM







SPLITLINE 25/51


With Splitline narrow and wide streets draw black lines through space and literally form a ‘lighting path’ that dialogues with the architecture of room. LED modules for accent lighting, T5 Seamless lamps for general light, or high-power LED modules for an extra-powerful solution. You can further upgrade your lighting design by combining the 25 with the 51 Splitline profile, and by adding the brandnew Midispy or Spy modules.



















www.deltalight.com/splitline25
www.deltalight.com/splitline51

play.de talight.com/spl25and51rm
play.de talight.com/spl25and51nc

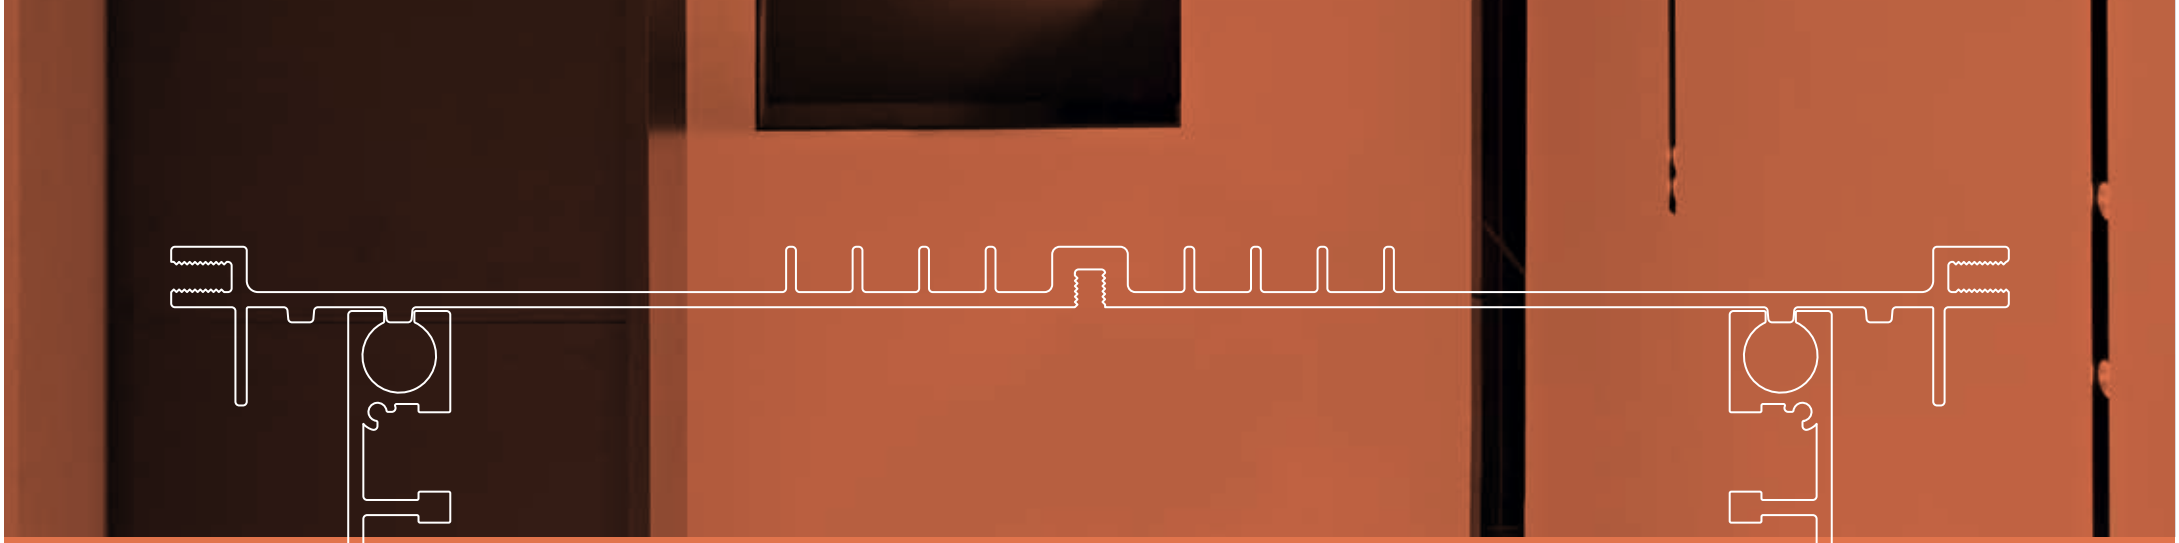

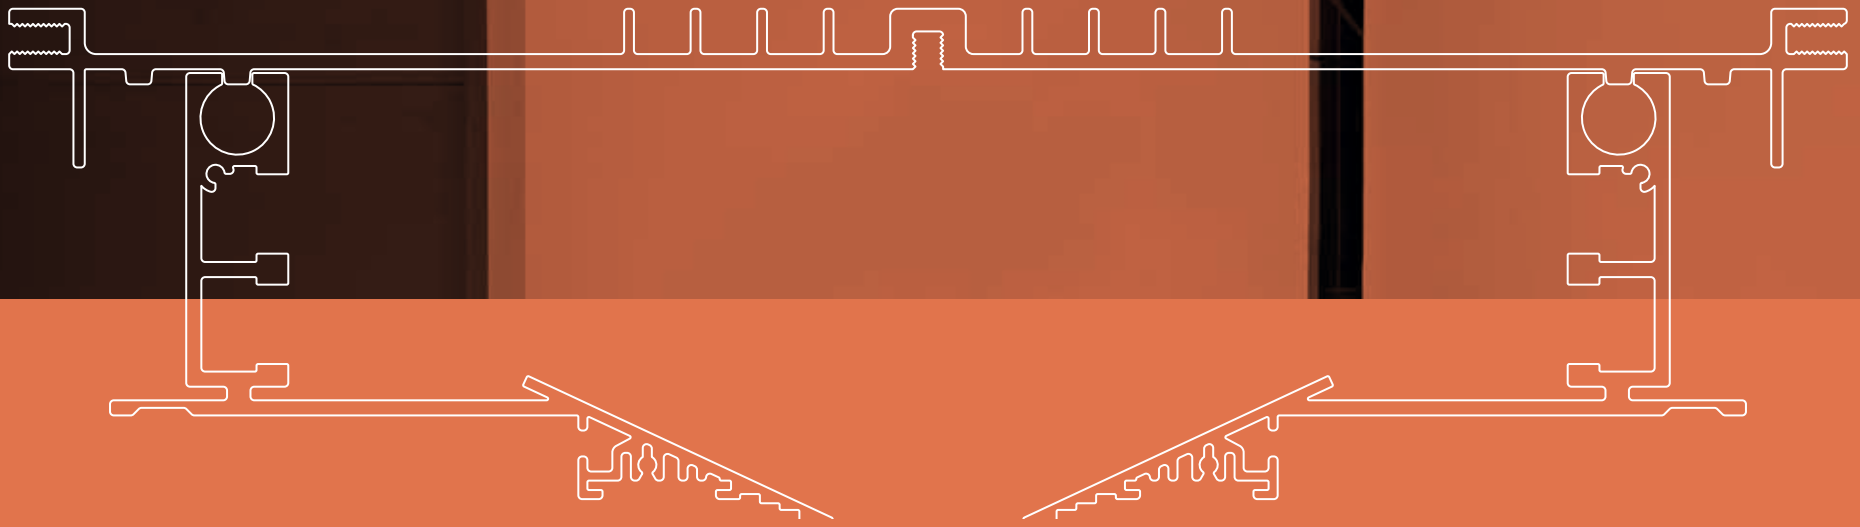

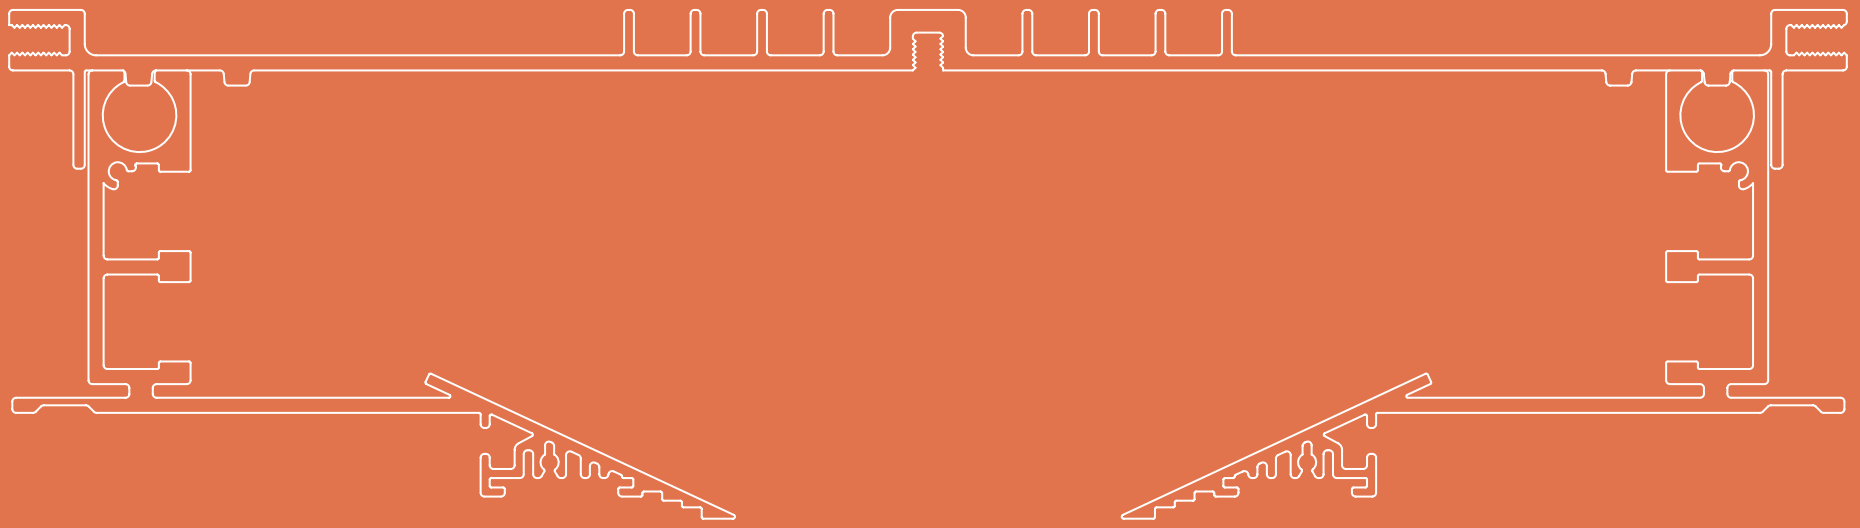

	Splitline 25	Splitline 51
PROFILE	 **SPL 25 - PROFILE ◇** **372 25 00 ◇** ◇ = B MAX.L / PROFILE : 6m Kg / m 4,3  TOL EN12020-2	 **SPL 51 - PROFILE ◇** **372 51 00 ◇** ◇ = B MAX.L / PROFILE : 6m Kg / m 4,3  TOL EN12020-2
END CAP	 **SPL 25 - END CAP ◇** **372 25 03 01 ◇** ◇ = B 0,1 	 **SPL 51 - END CAP ◇** **372 51 03 01 ◇** ◇ = B 0,1 
CORNER	**SPL 25 - CORNER 180°** **372 25 06 01** 0,3  **SPL 25 - CORNER 90°** **372 25 06 06** 0,3  **SPL - CORNER SET 90° MIX L** **372 25 51 06 L** 1,3   **SPL - CORNER SET 90° MIX R** **372 25 51 06 R** 1,3  	**SPL 51 - CORNER 180°** **372 51 06 01** 0,3  **SPL 51 - CORNER 90°** **372 51 06 06** 0,3  **SPL - CORNER SET 90° MIX L** **372 25 51 06 L** 1,3   **SPL - CORNER SET 90° MIX R** **372 25 51 06 R** 1,3  
FIXATION	INSTALLATION 	INSTALLATION 
CURRENT SUPPLY		

Splitline 25 LED

SPL25 - 4 LED WW ◇
372 61 42 ◇
◇ = B
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,1 IP20

L 162
PS



Splitline M10

SPL25 - M10 ◇
372 25 61 01 ◇

SPL51 - M10 ◇
372 51 61 01 ◇

◇ = B
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
110-240V / 50-60Hz

CE 0,3 IP20

L 160
PS

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 680lm
EXCL.LED POWER SUPPLY 350mA-DC

CE 0,3 IP20



new

Splitline 51 LED



L 130
PS

L 170
PS

	CRI > 80
4000K	
	ON REQUEST
3000K	380lm (4,1W)
LENS FL-20°	**SPL51 - 1 LED 83020** **372 51 1832** **SPL51 - 2 LED 83020** **372 51 2832**
2700K	360lm (4,1W)
LENS FL-20°	**SPL51 - 1 LED 82720** **372 51 1822** **SPL51 - 2 LED 82720** **372 51 2822**

FIXED
INCL.1 x POWERLED WHITE 4,1W
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,6 IP20

Splitline 51 LED



L 130
PS

L 170
PS

L 205
PS

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**SPL51 - 1 LED 3033** **372 61 8122**	**SPL51 - 1 LED 3033-9** **372 61 89122**
	SPL51 - 2 LED 3033 **372 61 8222**	**SPL51 - 2 LED 3033-9** **372 61 89222**
	SPL51 - 3 LED 3033 **372 61 8322**	**SPL51 - 3 LED 3033-9** **372 61 89322**
REFLECTOR WFL-50°	**SPL51 - 1 LED 3050** **372 61 8132**	**SPL51 - 1 LED 3050-9** **372 61 89132**
	SPL51 - 2 LED 3050 **372 61 8232**	**SPL51 - 2 LED 3050-9** **372 61 89232**
	SPL51 - 3 LED 3050 **372 61 8332**	**SPL51 - 3 LED 3050-9** **372 61 89332**
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**SPL51 - 1 LED 2733** **372 61 8123**	**SPL51 - 1 LED 2733-9** **372 61 89123**
	SPL51 - 2 LED 2733 **372 61 8223**	**SPL51 - 2 LED 2733-9** **372 61 89223**
	SPL51 - 3 LED 2733 **372 61 8323**	**SPL51 - 3 LED 2733-9** **372 61 89323**
REFLECTOR WFL-50°	**SPL51 - 1 LED 2750** **372 61 8133**	**SPL51 - 1 LED 2750-9** **372 61 89133**
	SPL51 - 2 LED 2750 **372 61 8233**	**SPL51 - 2 LED 2750-9** **372 61 89233**
	SPL51 - 3 LED 2750 **372 61 8333**	**SPL51 - 3 LED 2750-9** **372 61 89333**

FIXED
INCL.POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz


CE 0,3 IP20

p

FULL INFO / PAG TEC

Requirements

MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W

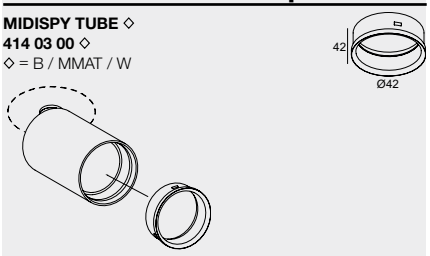




new
led

Splitline 25 - Midispy



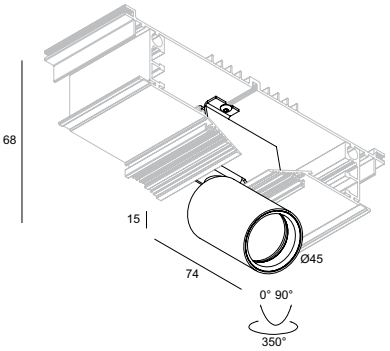



L 150
PS

p

	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W)	570lm (6W)	427lm (6W)
LENS FL-20°	**SPL25 - MIDISPY 83020** ◇ **372 25 272 832** ◇ ◇ = B / W		
REFLECTOR WFL-40°		**SPL25 - MIDISPY 83040** ◇ **372 25 271 833** ◇ ◇ = B / W	**SPL25 - MIDISPY 93040** ◇ **372 25 271 933** ◇ ◇ = B / W
2700K	360lm (4,1W)	530lm (6W)	400lm (6W)
LENS FL-20°	**SPL25 - MIDISPY 82720** ◇ **372 25 272 822** ◇ ◇ = B / W		
REFLECTOR WFL-40°		**SPL25 - MIDISPY 82740** ◇ **372 25 271 823** ◇ ◇ = B / W	**SPL25 - MIDISPY 92740** ◇ **372 25 271 923** ◇ ◇ = B / W
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 4,1W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz CE 0,6 IP20 REQUIREMENTS MIDISPY TUBE	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz CE 0,6 IP20 REQUIREMENTS MIDISPY TUBE	

Splitline 51 - Midispy

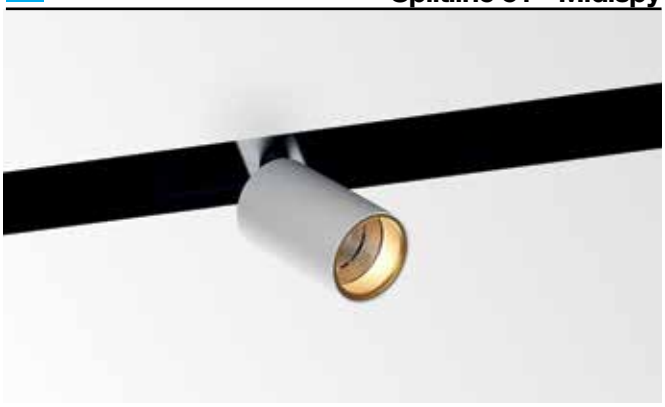

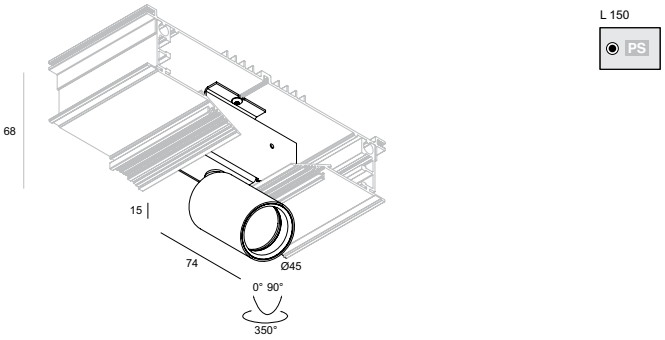

p


	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W)	570lm (6W)	427lm (6W)
LENS FL-20°	**SPL51 - MIDISPY 83020 ◇** **372 51 272 832 ◇** ◇ = B / W		
REFLECTOR WFL-40°		**SPL51 - MIDISPY 83040 ◇** **372 51 271 833 ◇** ◇ = B / W	**SPL51 - MIDISPY 93040 ◇** **372 51 271 933 ◇** ◇ = B / W
2700K	360lm (4,1W)	530lm (6W)	400lm (6W)
LENS FL-20°	**SPL51 - MIDISPY 82720 ◇** **372 51 272 822 ◇** ◇ = B / W		
REFLECTOR WFL-40°		**SPL51 - MIDISPY 82740 ◇** **372 51 271 823 ◇** ◇ = B / W	**SPL51 - MIDISPY 92740 ◇** **372 51 271 923 ◇** ◇ = B / W
	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 4,1W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz 0,6 IP20 REQUIREMENTS MIDISPY TUBE	ADJUSTABLE 0°- 90° / 350° INCL.1 x POWERLED WHITE 6W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz 0,6 IP20 REQUIREMENTS MIDISPY TUBE	



FULL INFO / PAG TEC

Requirements

SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W



FULL INFO / PAG XXX

Accessories

HONEYCOMB 50 ◇ Ø50
413 03 01 ◇
◇ = B



LINEAR SPREAD LENS 50 Ø50
413 03 02



SPREAD LENS 50 Ø50
413 03 03




SOFTENING LENS 50 Ø50
413 03 04



GLASS SBL 50 Ø50
413 03 05







SPY TUBE W


SPY TUBE B


SPY TUBE MMAT

Splitline 51 - Spy



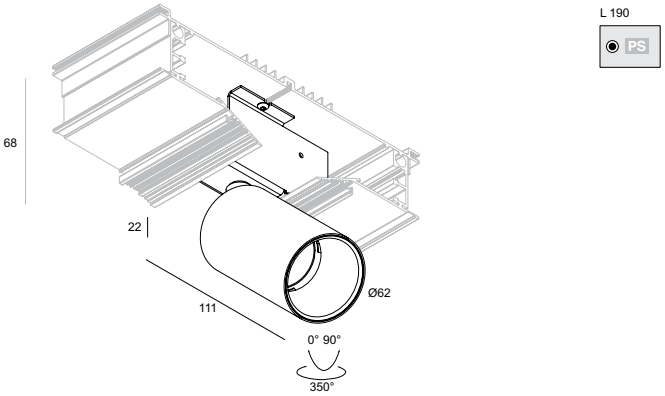


p

	CRI > 80	CRI > 80	CRI > 90
4000K			
	ON REQUEST	ON REQUEST	
3000K	380lm (4,1W)	703lm (6,2W)	550lm (6,2W)
LENS SP-15°	**SPL51 - SPY 83015** ◇ **372 51 372 831** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPL51 - SPY 83018** ◇ **372 51 371 81831** ◇ ◇ = B / W	**SPL51 - SPY 93018** ◇ **372 51 371 81931** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPL51 - SPY 83033** ◇ **372 51 371 81832** ◇ ◇ = B / W	**SPL51 - SPY 93033** ◇ **372 51 371 81932** ◇ ◇ = B / W
2700K	360lm (4,1W)	665lm (6,2W)	519lm (6,2W)
LENS SP-15°	**SPL51 - SPY 82715** ◇ **372 51 372 821** ◇ ◇ = B / W		
REFLECTOR SP-18°		**SPL51 - SPY 82718** ◇ **372 51 371 81821** ◇ ◇ = B / W	**SPL51 - SPY 92718** ◇ **372 51 371 81921** ◇ ◇ = B / W
REFLECTOR FL-33°		**SPL51 - SPY 82733** ◇ **372 51 371 81822** ◇ ◇ = B / W	**SPL51 - SPY 92733** ◇ **372 51 371 81922** ◇ ◇ = B / W
	INCL.1 x POWERLED WHITE 4,1W INCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz CE 0,6 IP20 REQUIREMENTS SPY TUBE ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	INCL.1 x POWERLED WHITE 6,2W EXCL.LED POWER SUPPLY 350mA-DC 100-240V / 50-60Hz CE 0,7 IP20 REQUIREMENTS SPY TUBE ACCESSORIES HONEYCOMB 50 LINEAR SPREAD LENS 50 SPREAD LENS 50 SOFTENING LENS 50 GLASS SBL 50	

Splitline Modules T16 Seamless Down

SPL SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**372 75 239 E**	**372 75 239 ED1**	**372 75 239 ED2**
2 x 28/54	2370	**372 75 254 E**	**372 75 254 ED1**	**372 75 254 ED2**




SPL SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**372 75 124 E**		
1 x 21/39	885	**372 75 139 E**	**372 75 139 ED1**	**372 75 139 ED2**
1 x 28/54	1185	**372 75 154 E**	**372 75 154 ED1**	**372 75 154 ED2**



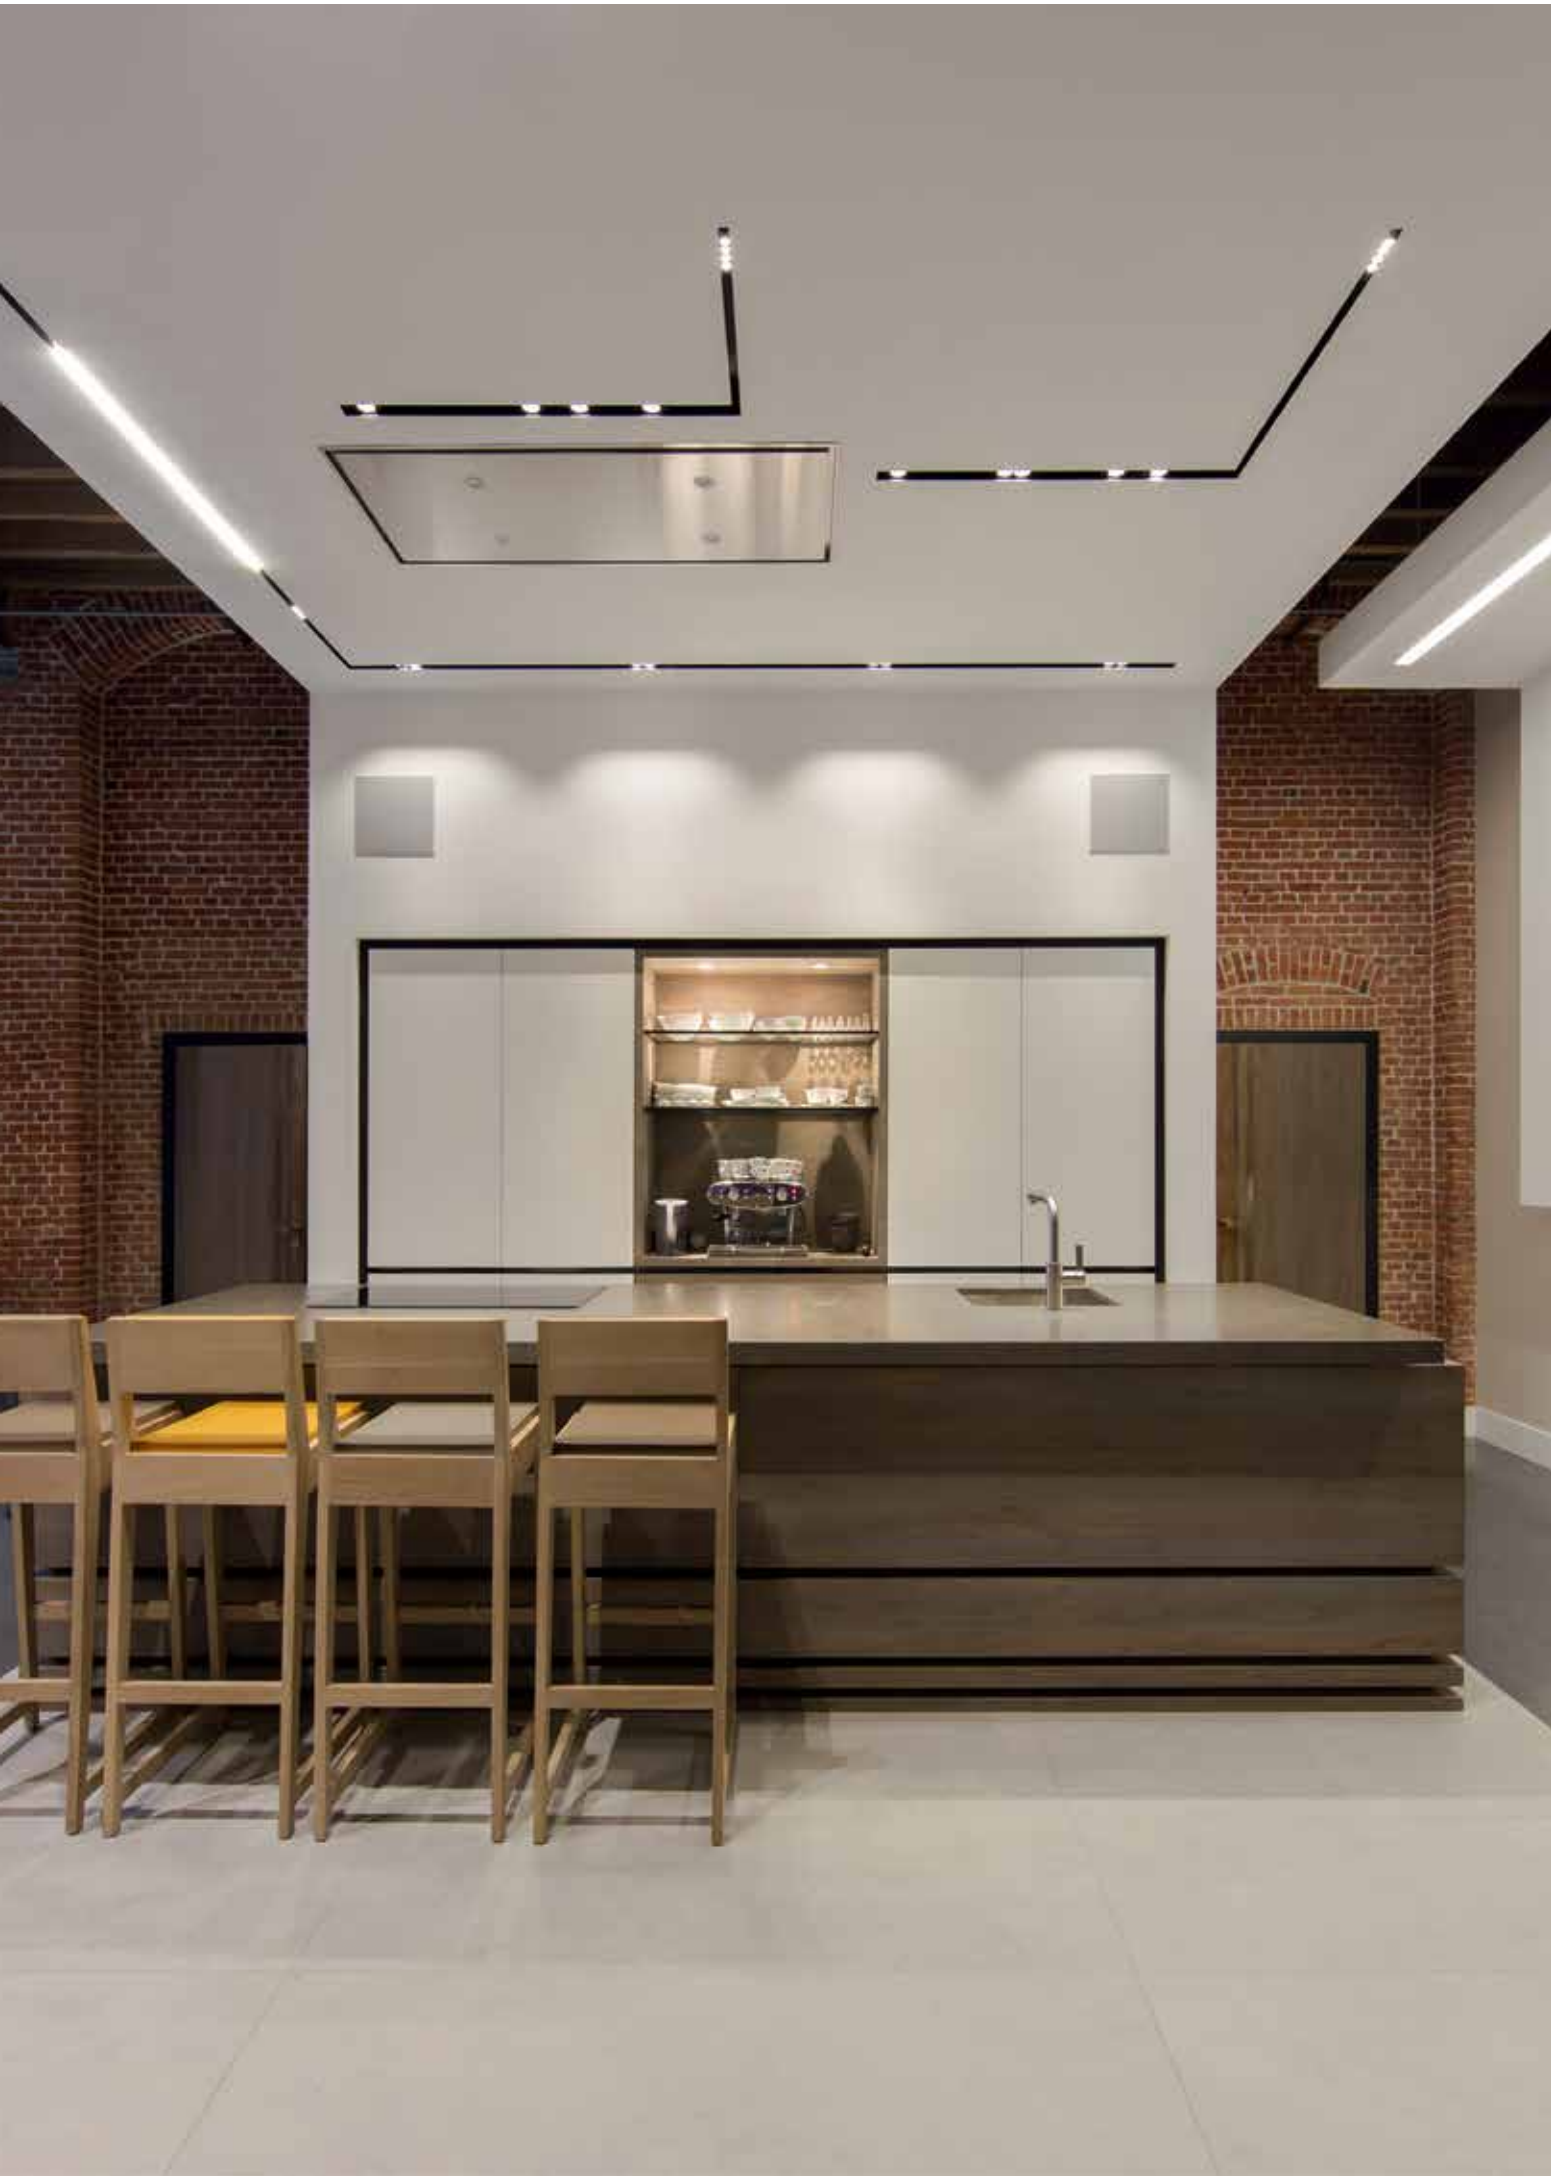




SPLIT-IT


The Split It profile concept demonstrates that form and functionality of recessed lighting have definitely gone down a new path, opening new ways to integrate “lighting paths” with architecture. The Split It is a single profile which can be used on its own, or in combination of two. Different led, halogen or discharge modules tilt out from the profile, offering maximum flexibility. When used as a single profile the Split-It can be used parallel with the wall. In a double set-up the Split It enables you to create a linear setting with dimensions of your choice.

www.deltalight.com/split-it

play.delta ight.com/sp it t



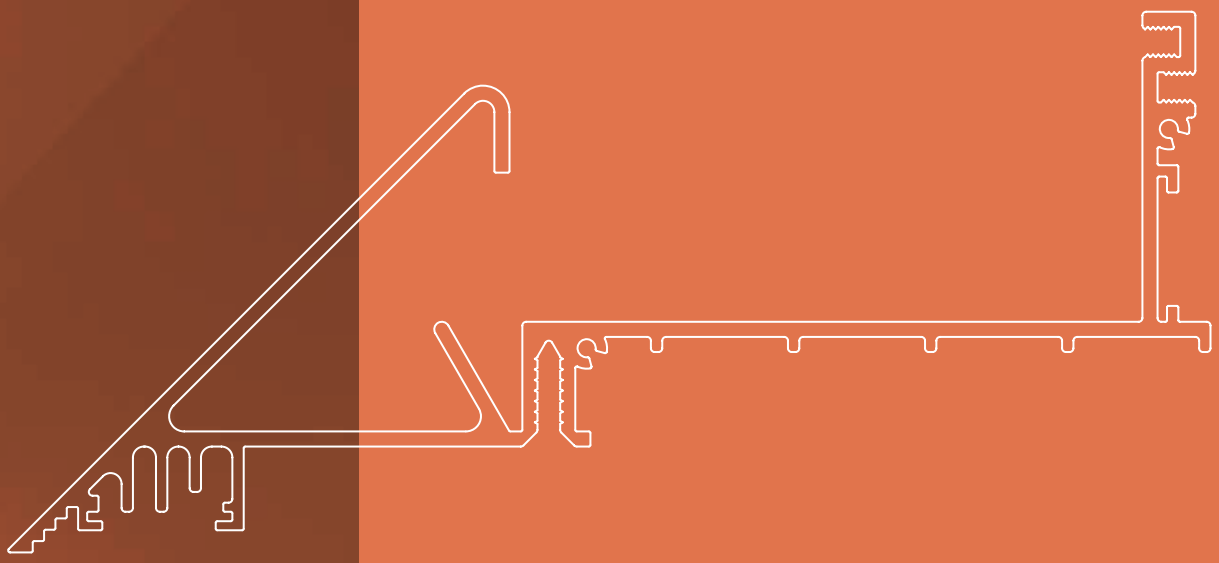

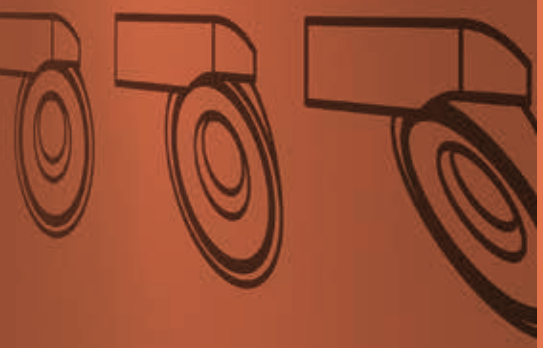


Split-it

PROFILE




SPT - PROFILE ◇
372 00 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m

2,2



TOL EN12020-2

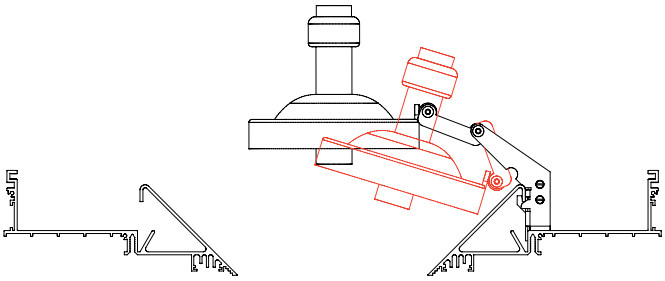


END CAP

CORNER


SPT - CORNER 180°
372 00 06 01

0,3




SPT - CORNER 90° INT
372 00 06 06

0,3




SPT - CORNER 90° EXT
372 00 06 16


0,3



FIXATION

POSITION FOR INSTALLATION

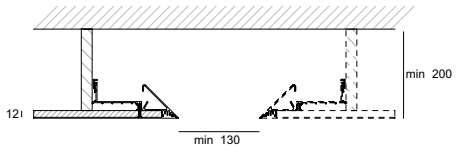

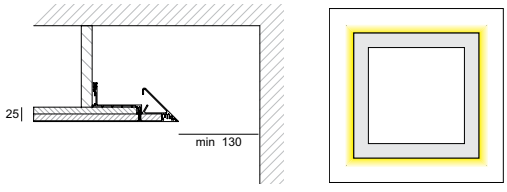

CURRENT SUPPLY

Split-it RB111

SPT - RB111 ◇
372 00 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
EXCL.MOUNTING
EXCL.CABLING
G53 / 220-240V / 50-60Hz / TE
led SOLUTION - PAG TEC
1 x QR-LP111 max.50W
0,5 IP20 1,0

L 390
TE



Split-it H111

SPT - H111-35 EVG ◇
372 00 61 1135 E ◇
1 x HIR111-CE-P 35W

SPT - H111-70 EVG ◇
372 00 61 1170 E ◇
1 x HIR111-CE-P 70W

◇ = B
ADJUSTABLE 0°-30°
EXCL.MOUNTING
EXCL.CABLING
GX8.5 / 220-240V / 50-60Hz / 1 x 1~EVG
1,6 IP20 0,5

L 350
EVG







SPLIT-IT RB111 B + REO 111 3033 B


p



BORDERLINE

The Borderline enables you to frame the room with light using led, creating a contemporary and atmospheric look and feel. This profile can be used for both wall and ceiling application and features a remarkable trimless finishing, although easy to install and finish. A contemporary indirect lighting solution with exceptional eye for architectural detail.


www.deltalight.com/borderline

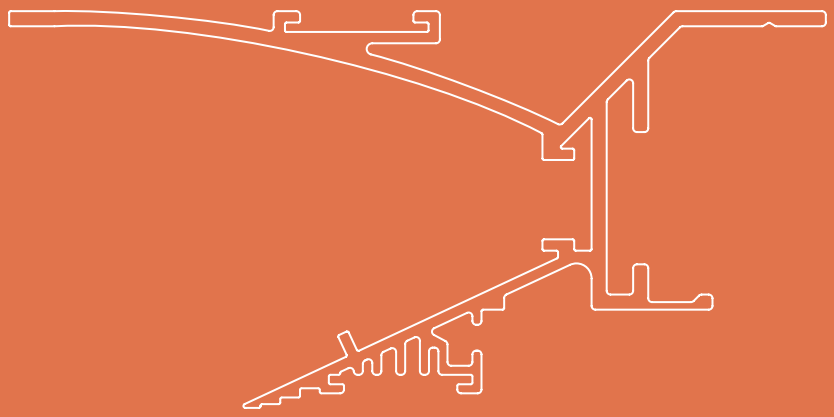

PROFILE



BL - PROFILE ◇
371 00 00 ◇
◇ = W
MAX.L / PROFILE : 6m
Kg / m
1,5




TOL EN12020-2


END CAP

CORNER


BL - CORNER 180°
371 06 01
0,3



BL - CORNER 90° INT
371 06 06
0,3




BL - CORNER 90° EXT
371 06 16
0,3



FIXATION

POSITION FOR INSTALLATION

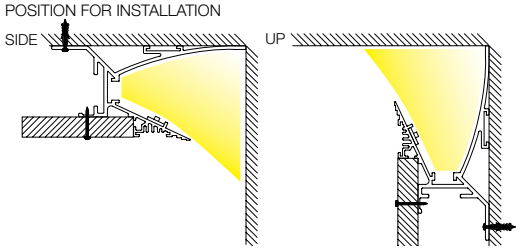

CURRENT SUPPLY

Ledflex

5m - 24V-DC 0,3



	White			RGB
	Dividable per 100mm 60 smd LED/m		Dividable per 33,3mm 180 smd LED/m	Dividable per 167mm 30 smd LED/m
led	**5W/m 360lm/m**	**15W/m 1000lm/m**	new **22W/m 1800lm/m**	**8W/m**
4000K				
IN	**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**		
OUT IP65	**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**		
3000K				
IN	**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	**LEDFLEX IN HP WW 300 91 54 02**	
OUT IP65	**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**		
2700K				
IN	**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	**LEDFLEX IN HP HW 300 91 54 03**	
OUT IP65	**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**		
RGB				
IN				**LEDFLEX IN RGB 300 91 52 33**
OUT IP65				**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC				
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.4 m	max.1 m	max.0,9 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.8 m	max.2,5 m	max.1,83 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.12 m	max.4 m (max.3m / Powerline)	max.2,76 m (max.3m / Powerline)	⊛ max.7,36 m
LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80	max.16 m	max.5 m (max.3m / Powerline)	max.3,7 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.30 m	max.10 m (max.3m / Powerline)	max.6,9 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.4 m	max.1 m	max.0,9 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.4 m	max.1 m	max.0,9 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330				⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / fal ing edge dimmer
DIM7: dimming by push button / 1-10V


p







WWW.SAAI.CO

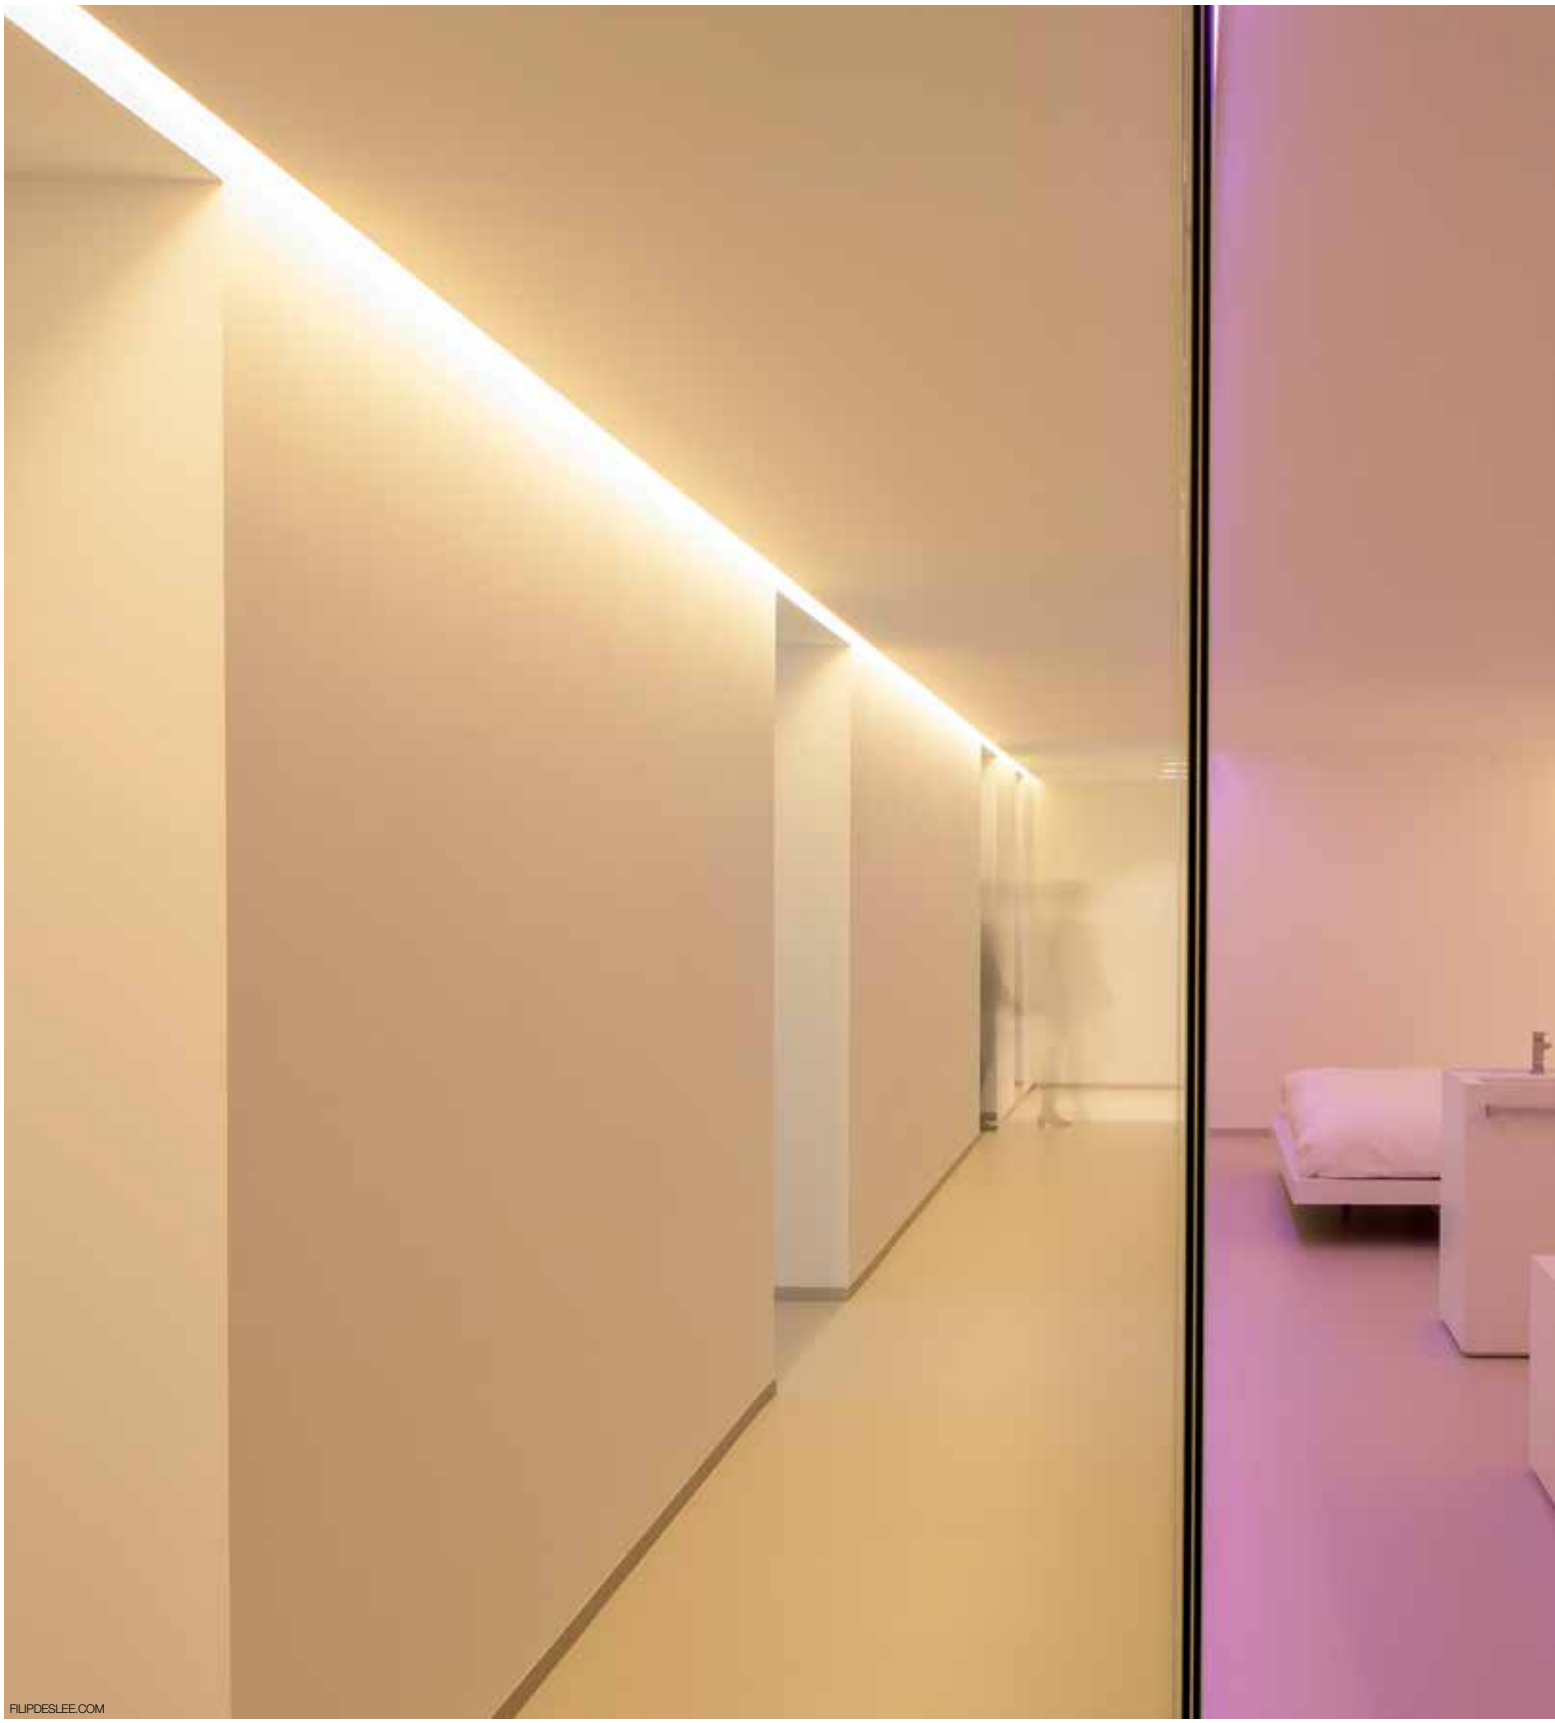
FILIPDESLEE.COM






RENDEZ-VOUS

The Rendez-vous is an anodized profile offering a variety of led solutions. It was designed as a skirting-board profile, but can also be invisibly worked into the wall or ceiling. A lighting rendez-vous where floor or ceiling meets the wall.

www.deltalight.com/rendez-vous




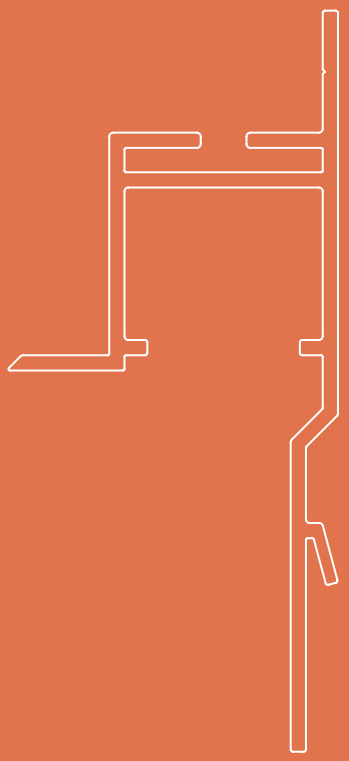

led

Rendez-Vous


PROFILE

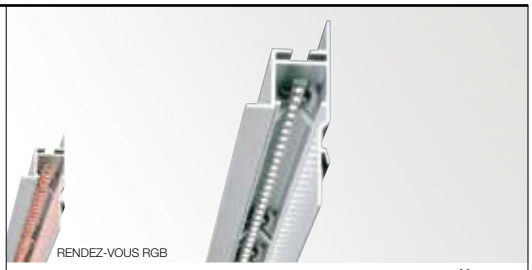

RENDEZ-VOUS RGB


RV - PROFILE ◇
333 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m

1,1




TOL EN12020-2

END CAP




CORNER


RV - CORNER 180°
333 06 01
0,3



RV - CORNER 90° INT
333 06 06
0,3




RV - CORNER 90° EXT
333 06 16
0,3




FIXATION


RV - WALL FIXATION
333 06 10



POSITION FOR INSTALLATION

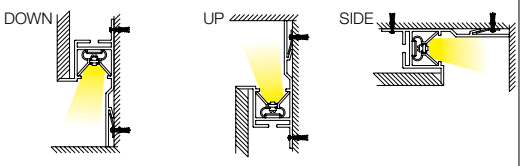

CURRENT SUPPLY

	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3 			
	White		RGB	White			RGB
	Dividable per 100mm 30 smd LED +/- 50K		Dividable per 100mm 30 smd LED	Dividable per 100mm 60 smd LED/m		Dividable per 33,3mm 180 smd LED/m	Dividable per 167mm 30 smd LED/m
led	6W/m 480lm/m	20W/m 1940lm/m	15W/m	5W/m 360lm/m	15W/m 1000lm/m	new 22W/m 1800lm/m	8W/m
4000K							
IN	**LEDSTRIP 11 F NW 300 91 10 11 F NW**	**LEDSTRIP 11 FP NW 300 91 10 11 FP NW**		**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**		
OUT IP65				**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**		
3000K							
IN	**LEDSTRIP 11 F WW 300 91 10 11 F WW**	**LEDSTRIP 11 FP WW 300 91 10 11 FP WW**		**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	**LEDFLEX IN HP WW 300 91 54 02**	
OUT IP65				**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**		
2700K							
IN	**LEDSTRIP 11 F HW 300 91 10 11 F HW**	**LEDSTRIP 11 FP HW 300 91 10 11 FP HW**		**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	**LEDFLEX IN HP HW 300 91 54 03**	
OUT IP65				**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**		
RGB							
IN			**LEDSTRIP 11 RGB 300 91 33 11**				**LEDFLEX IN RGB 300 91 52 33**
OUT IP65							**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC							
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.6	max.2	⊛ max.2	max.4 m	max.1 m	max.0,9 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	max.1,83 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	max.2,76 m (max.3m / Powerline)	⊛ max.7,36 m
LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	max.3,7 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	max.6,9 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.6	max.2		max.4 m	max.1 m	max.0,9 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.6	max.2		max.4 m	max.1 m	max.0,9 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331			⊛ use in combination with Led Power Supply 24V-DC				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330			⊛ use in combination with RGB Driver				⊛ use in combination w th RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

p


FILIPDESLEE.COM






new

FEMTOLINE 35

This new addition to the Femtoline led profile range offers additional installation ease, thanks to a separate cabling channel inside the profile. This allows you to connect the profile on one end, and extent power supply all the way through, staying inside the profile. Despite this additional channel the Femtoline still features an ultra-minimalistic design, to be used either trimless recessed or surface mounted. For trimless installation the Femtoline 35 needs to be used in combination with the Femtoline 35 TR base profile.

www.deltalight.com/femtoline35

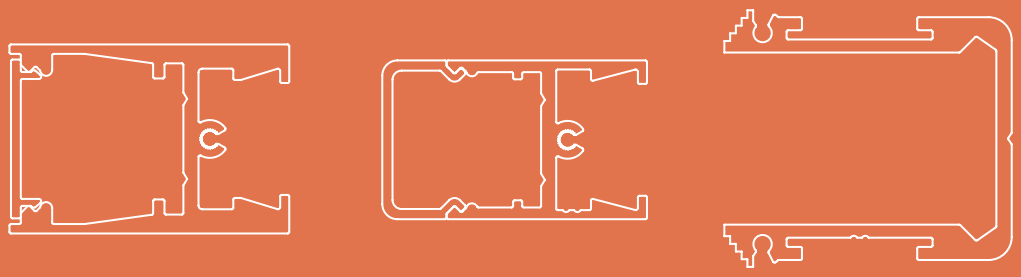

Femtoline 35 TR


Femtoline 35

Femtoline 35 F

PROFILE



FTL35 TR - PROFILE ◇
393 00 00 ◇
◇ = B
MAX.L / PROFILE : 6m
Kg / m
0,7




IN COMBINATION WITH FTL 35

TOL EN12020-2




FTL35 - PROFILE ◇
391 00 00 ◇
◇ = ANO / B / W
INCL. PC SBL
MAX.L / PROFILE : 6m
Kg / m
0,7



TOL EN12020-2




FTL35 F - PROFILE ◇
392 00 00 ◇
◇ = ANO / B / W
INCL. PC SBL
MAX.L / PROFILE : 6m
Kg / m
0,6



TOL EN12020-2


END CAP






FTL35 TR - END CAP ◇
393 03 01 ◇
◇ = B
SET OF 2 PCS
0,1





FTL35 - END CAP SET ◇
391 03 01 ◇
◇ = ANO / B / W
SET OF 2 PCS
0,2







FTL35 F - END CAP SET ◇
392 03 01 ◇
◇ = ANO / B / W
SET OF 2 PCS
0,2

CORNER


FTL35 TR - CORNER 180°
393 06 01
0,1




FTL35 TR - CORNER 90°
393 06 06
0,1




FTL35 - FIXATION SET / CORNER 180°
391 06 11
SET OF 2 PCS
0,1




FTL35 - CORNER 90°
391 06 06
0,1



FTL35 - FIXATION SET / CORNER 180°
391 06 11
SET OF 2 PCS
0,1




FTL35 - CORNER 90°
391 06 06
0,1




FIXATION

37 x (L + 6) x 60 min.9 / max.18

FTL35 TR - CLIP
393 14 01
0,4




POSITION FOR INSTALLATION

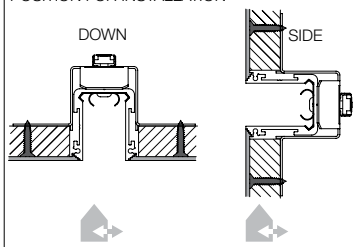


FTL35 - FIXATION SET / CORNER 180°
391 06 11
SET OF 2 PCS
0,1

POSITION FOR INSTALLATION

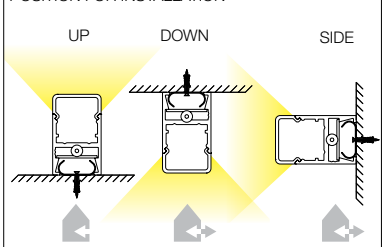


FTL35 - FIXATION SET / CORNER 180°
391 06 11
SET OF 2 PCS
0,1

POSITION FOR INSTALLATION

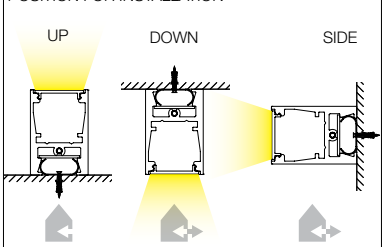


REQUIREMENT

FTL35 - PROFILE



FTL35 TR + FTL35





FTL35 TR + FTL35



FTL35 TR + FTL35

Ledflex

5m - 24V-DC 0,3


White

RGB

led	Dividable per 100mm 60 smd LED/m		Dividable per 33,3mm 180 smd LED/m	Dividable per 167mm 30 smd LED/m
	5W/m 360lm/m	**15W/m 1000lm/m**	new **22W/m 1800lm/m**	**8W/m**
4000K				
IN	**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**		
OUT IP65	**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**		
3000K				
IN	**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	**LEDFLEX IN HP WW 300 91 54 02**	
OUT IP65	**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**		
2700K				
IN	**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	**LEDFLEX IN HP HW 300 91 54 03**	
OUT IP65	**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**		
RGB				
IN				**LEDFLEX IN RGB 300 91 52 33**
OUT IP65				**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC				
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.4 m	max.1 m	max.0,9 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.8 m	max.2,5 m	max.1,83 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.12 m	max.4 m (max.3m / Powerline)	max.2,76 m (max.3m / Powerline)	⊛ max.7,36 m
LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80	max.16 m	max.5 m (max.3m / Powerline)	max.3,7 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.30 m	max.10 m (max.3m / Powerline)	max.6,9 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.4 m	max.1 m	max.0,9 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.4 m	max.1 m	max.0,9 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330				⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / fal ing edge dimmer
DIM7: dimming by push button / 1-10V





p







AID ARCHITECTEN







FEMTOLINE 45/25


Multifunctional in use, the Femtoline led profile can be used in both interior and exterior lighting concepts. The ultra-minimalistic design and extensive options in flexible RGB, warm and cold white LED allow you to create endless lines of light, either recessed or surface mounted. The polycarbonate guarantees a pleasurable light effect, and unifies single led dots to one continuous line.


www.deltalight.com/femtoline25
www.deltalight.com/femtoline45




















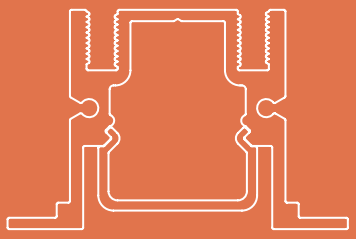







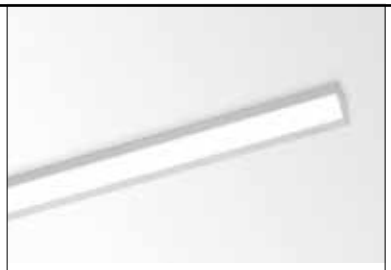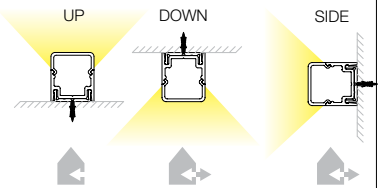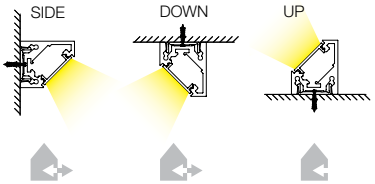
	Femtoline 45	Femtoline 25	Femtoline 25 T
PROFILE	 **FTL45 - PROFILE ◇** **376 00 00 ◇** ◇ = ANO / B / W INCL. PC SBL MAX.L / PROFILE : 6m Kg / m 0,8  TOL EN12020-2 MAX.15W/m	 **FTL25 - PROFILE ◇** **375 00 00 ◇** ◇ = ANO / B / W INCL. PC SBL INCL.FIXATION CLIP MAX.L / PROFILE : 6m Kg / m 0,4  TOL EN12020-2 MAX.15W/m	 **FTL25 T - PROFILE ◇** **381 00 00 ◇** ◇ = ANO / B / W INCL. PC SBL INCL.FIXATION CLIP MAX.L / PROFILE : 6m Kg / m 0,7  TOL EN12020-2 MAX.15W/m
END CAP	  **FTL45 - END CAP SET ◇** **376 03 01 ◇** ◇ = ANO / B / W SET OF 2 PCS 0,2  	  **FTL25 - END CAP SET ◇** **375 03 01 ◇** ◇ = A / B / W SET OF 2 PCS 0,1  	  **FTL25 T - END CAP SET ◇** **381 03 01 ◇** ◇ = A / B / W SET OF 2 PCS 0,2 
CORNER	**FTL45 - CORNER 90°** **376 06 06** 0,2  	**FTL25 - CORNER 90°** **375 06 06** 0,2  	
FIXATION	37 x (L + 12) x 40 max.13 **FTL45 - FIXATION** **376 14 01** SET OF 2 PIECES 0,1  POSITION FOR INSTALLATION  	POSITION FOR INSTALLATION  	POSITION FOR INSTALLATION 
CURRENT SUPPLY	 	 	


Femtoline 25 F




FTL25 F - PROFILE ◇
382 00 00 ◇
◇ = ANO / B / W
INCL. PC SBL
MAX.L / PROFILE : 6m
Kg / m


0,6






TOL EN12020-2






FTL25 F - END CAP SET ◇
382 03 01 ◇
◇ = A / B / W
SET OF 2 PCS

0,1




NL - FIXATION SET
364 06 11
SET OF 10 PCS

0,1



POSITION FOR INSTALLATION

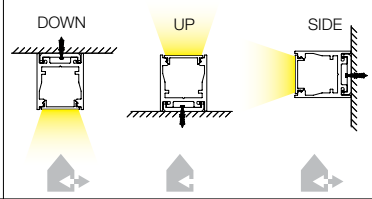



Ledflex

5m - 24V-DC 0,3

	White			RGB
	Dividable per 100mm 60 smd LED/m		Dividable per 33,3mm 180 smd LED/m	Dividable per 167mm 30 smd LED/m
led	5W/m 360lm/m	15W/m 1000lm/m	new 22W/m 1800lm/m	8W/m
4000K				
IN	**LEDFLEX IN NW** **300 91 52 04**	**LEDFLEX IN FP NW** **300 91 53 04**		
OUT IP65	**LEDFLEX OUT NW** **300 91 62 04**	**LEDFLEX OUT FP NW** **300 91 63 04**		
3000K				
IN	**LEDFLEX IN WW** **300 91 52 02**	**LEDFLEX IN FP WW** **300 91 53 02**	**LEDFLEX IN HP WW** **300 91 54 02**	
OUT IP65	**LEDFLEX OUT WW** **300 91 62 02**	**LEDFLEX OUT FP WW** **300 91 63 02**		
2700K				
IN	**LEDFLEX IN HW** **300 91 52 03**	**LEDFLEX IN FP HW** **300 91 53 03**	**LEDFLEX IN HP HW** **300 91 54 03**	
OUT IP65	**LEDFLEX OUT HW** **300 91 62 03**	**LEDFLEX OUT FP HW** **300 91 63 03**		
RGB				
IN				**LEDFLEX IN RGB** **300 91 52 33**
OUT IP65				**LEDFLEX OUT RGB** **300 91 62 33**
FULL INFO / PAG TEC				
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	max.4 m	max.1 m	max.0,9 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W **300 89 24 40**	max.8 m	max.2,5 m	max.1,83 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W **300 89 24 60**	max.12 m	max.4 m (max.3m / Powerline)	max.2,76 m (max.3m / Powerline)	⊛ max.7,36 m
LED POWER SUPPLY 24V-DC / 80W DIM1 **300 89 24 80**	max.16 m	max.5 m (max.3m / Powerline)	max.3,7 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W **300 89 24 150**	max.30 m	max.10 m (max.3m / Powerline)	max.6,9 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 **300 90 60**	max.4 m	max.1 m	max.0,9 m	
LED POWER SUPPLY MULTI POWER DIM6 **300 90 61**	max.4 m	max.1 m	max.0,9 m	
RGB DRIVER 12/24V-DC 75/150W **300 90 331**				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX **300 90 330**				⊛ use in combination with RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V



GOVAERT & VANHOUTTE







ARTUUR






BECKERS NOYEZ ARCHITECTEN






NANOLINE W

Nanoline is a very slim and multifunctional led profile, which can be used in both interior and exterior lighting concepts.



www.deltalight.com/nanoline

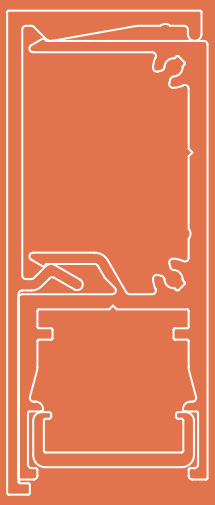

WALL LINE S

The Wall Line S is a very slim wall profile which can be used either up or downlight. It can be equipped with ledstrips to create continuous light lines.

www.deltalight.com/walllines

Nanoline W

PROFILE




NLW - PROFILE CL ◇
366 00 00 CL ◇
◇ = ANO
INCL.NANOLINE - PC CLEAR

NLW - PROFILE SBL ◇
366 00 00 SBL ◇
◇ = ANO
INCL.NANOLINE - PC SBL

MAX.L / PROFILE : 6m
Kg / m
1,1


TOL EN12020-2




END CAP



NL - END CAP SET ◇
364 03 01 ◇
◇ = A
SET OF 2 PCS
0,1







CORNER

FIXATION

NL - FIXATION SET
364 06 11
SET OF 10 PCS
0,1



POSITION FOR INSTALLATION



CURRENT SUPPLY



Wall Line S

PROFILE




WLS - PROFILE CL ◇
358 00 00 CL ◇
◇ = ANO
INCL.WALL LINE S - PC CLEAR

WLS - PROFILE SBL ◇
358 00 00 SBL ◇
◇ = ANO
INCL.WALL LINE S - PC SBL

MAX.L / PROFILE : 6m
Kg / m
1,4


TOL EN12020-2




END CAP



WLS - END CAP SET ◇
358 03 01 ◇
◇ = ANO
SET OF 2 PCS
0,1







CORNER

FIXATION

POSITION FOR INSTALLATION
UP DOWN




INSTALLATION LIMIT
BETWEEN 2 WALLS



CURRENT SUPPLY



p

	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3			
	White		RGB	White			RGB
	Dividable per 100mm 30 smd LED +/- 50K		Dividable per 100mm 30 smd LED	Dividable per 100mm 60 smd LED/m		Dividable per 33,3mm 180 smd LED/m	Dividable per 167mm 30 smd LED/m
led	**6W/m 480lm/m**	**20W/m 1940lm/m**	**15W/m**	**5W/m 360lm/m**	**15W/m 1000lm/m**	new **22W/m 1800lm/m**	**8W/m**
4000K							
IN	**LEDSTRIP 12 F NW 300 91 10 12 F NW**	**LEDSTRIP 12 FP NW 300 91 10 12 FP NW**		**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**		
OUT IP65				**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**		
3000K							
IN	**LEDSTRIP 12 F WW 300 91 10 12 F WW**	**LEDSTRIP 12 FP WW 300 91 10 12 FP WW**		**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	**LEDFLEX IN HP WW 300 91 54 02**	
OUT IP65				**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**		
2700K							
IN	**LEDSTRIP 12 F HW 300 91 10 12 F HW**	**LEDSTRIP 12 FP HW 300 91 10 12 FP HW**		**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	**LEDFLEX IN HP HW 300 91 54 03**	
OUT IP65				**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**		
RGB							
IN			**LEDSTRIP 12 RGB 300 91 33 12**				**LEDFLEX IN RGB 300 91 52 33**
OUT IP65							**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC							
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.6	max.2	⊛ max.2	max.4 m	max.1 m	max.0,9 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	max.1,83 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	max.2,76 m (max.3m / Powerline)	⊛ max.7,36 m
LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	max.3,7 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	max.6,9 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.6	max.2		max.4 m	max.1 m	max.0,9 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.6	max.2		max.4 m	max.1 m	max.0,9 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331			⊛ use in combination with Led Power Supply 24V-DC				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330			⊛ use in combination with RGB Driver				⊛ use in combination w th RGB Driver


DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

p

ISAGEN / AIA





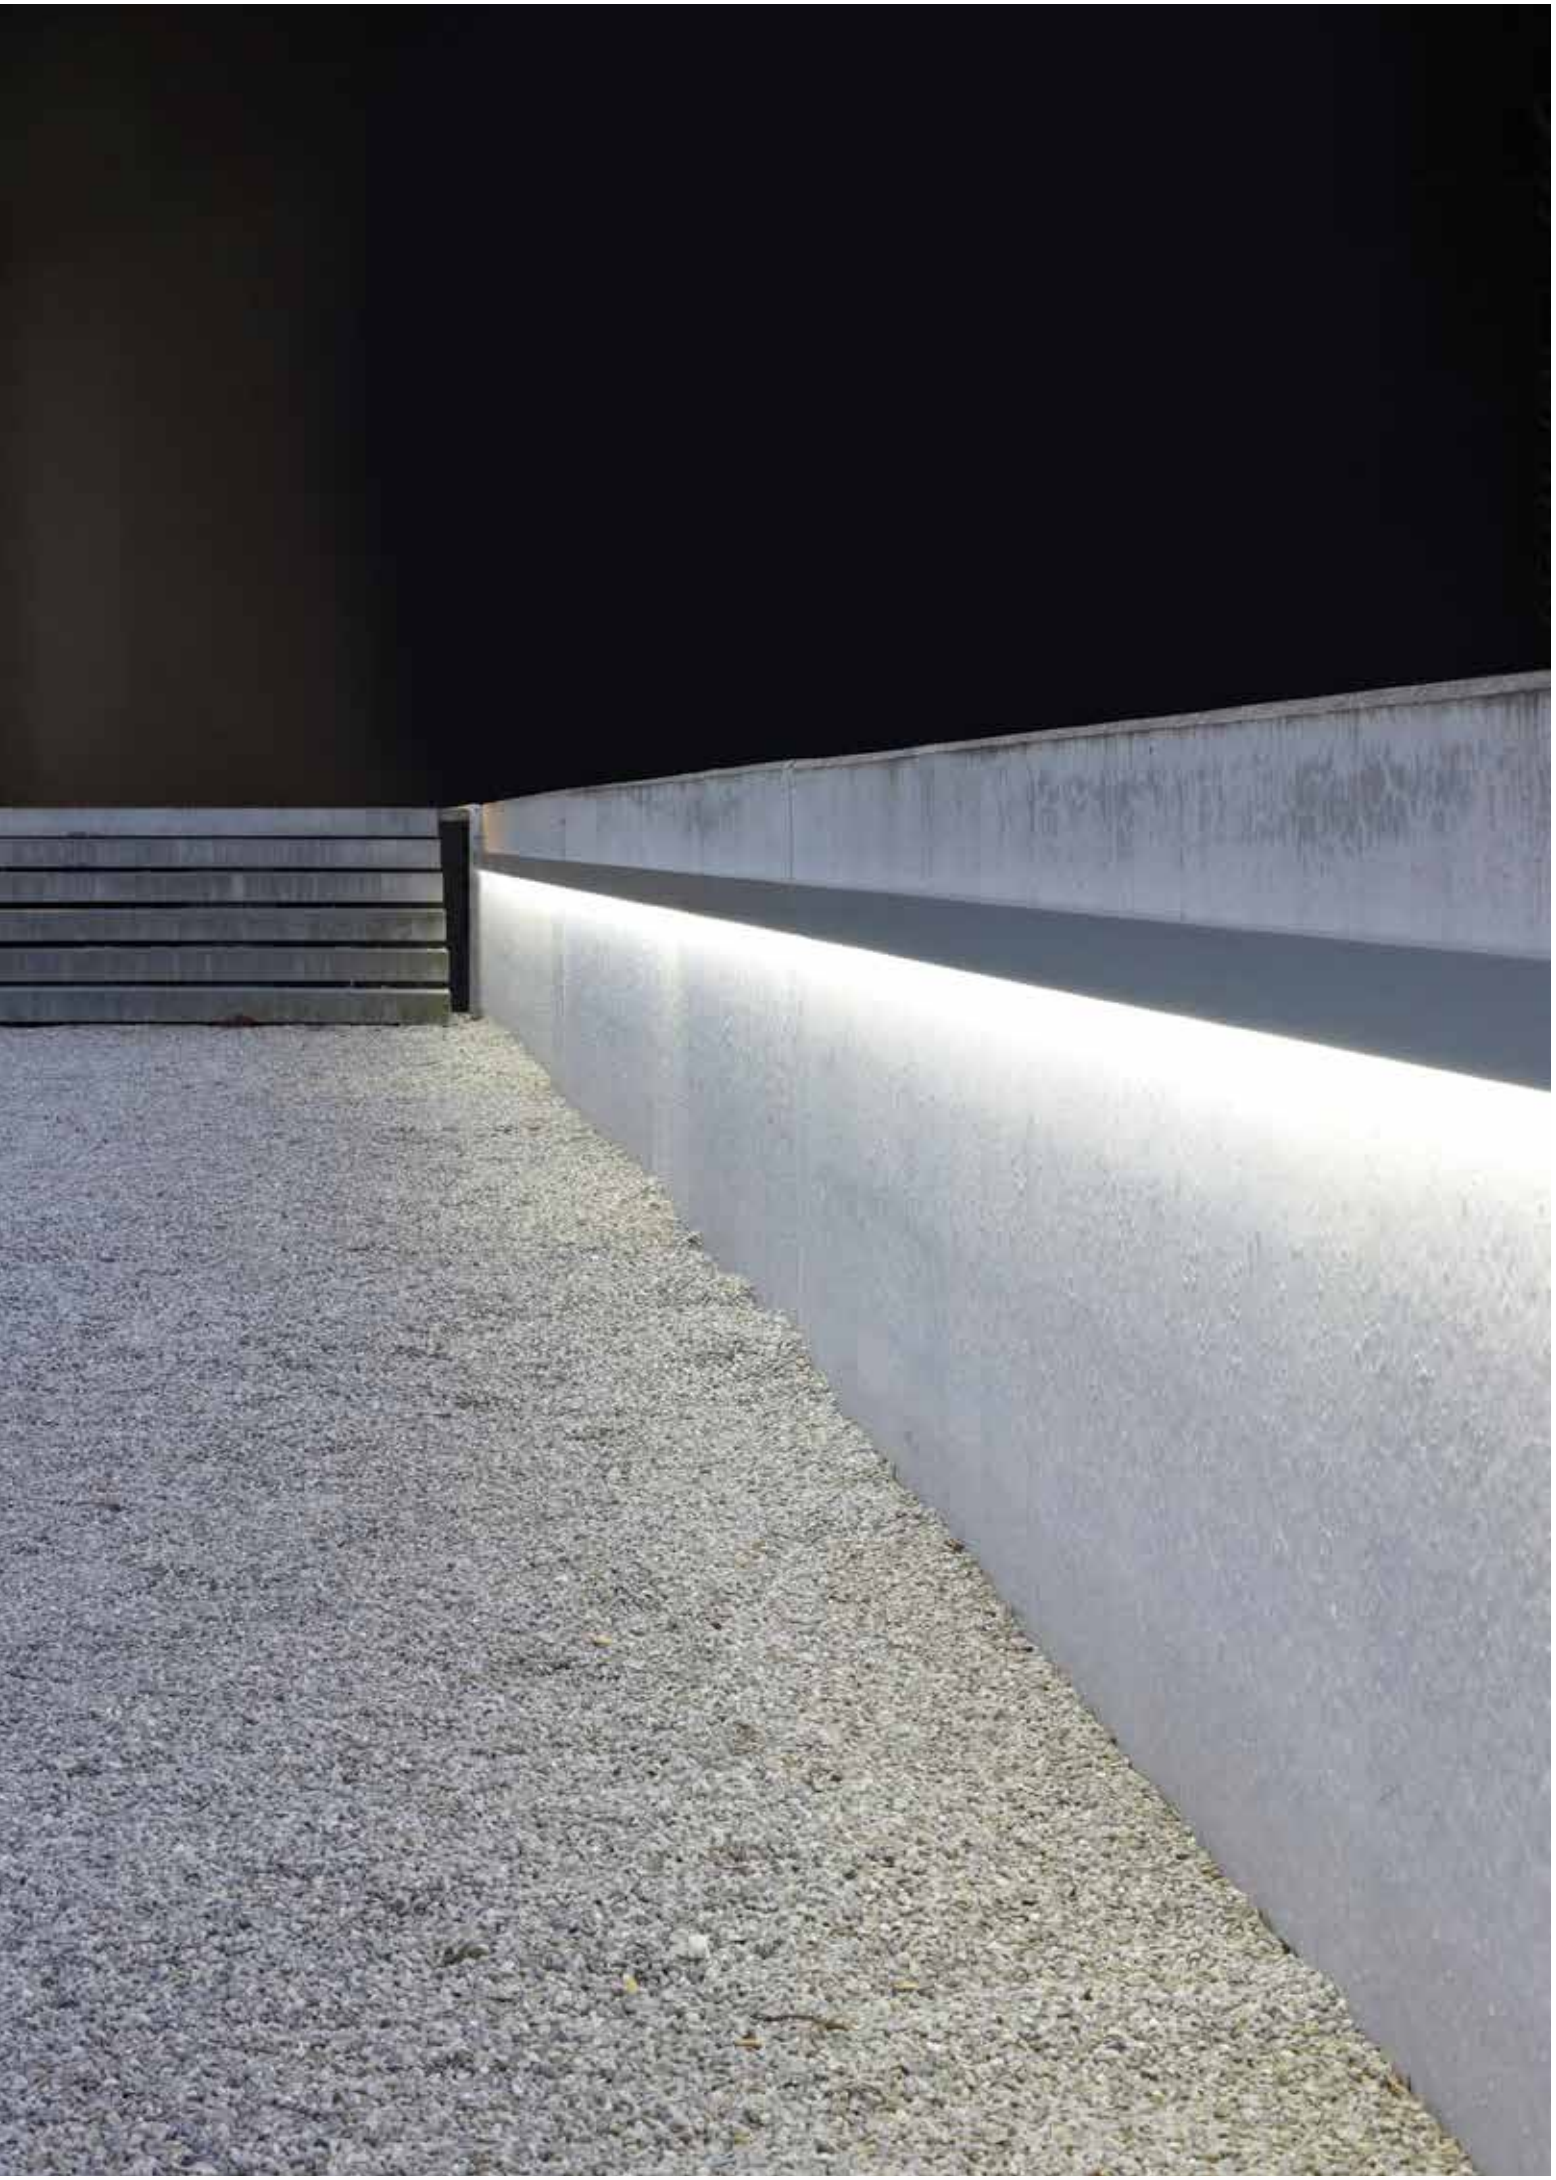





ENDLESS 30

Building on the success of the standard size Endless, the entire range is now also available in the profile chapter, offering tailor-made endless lighting solutions. The Endless profile is known for its exceptionally small body, enabling you to create an endless line of light without shadows by use of T5 seamless lamps. Besides T5 seamless lamps Endless is now also available with powerled modules, either surface mounted or suspended.

www.deltalight.com/endless30

DEHULLU ARCHITECTEN

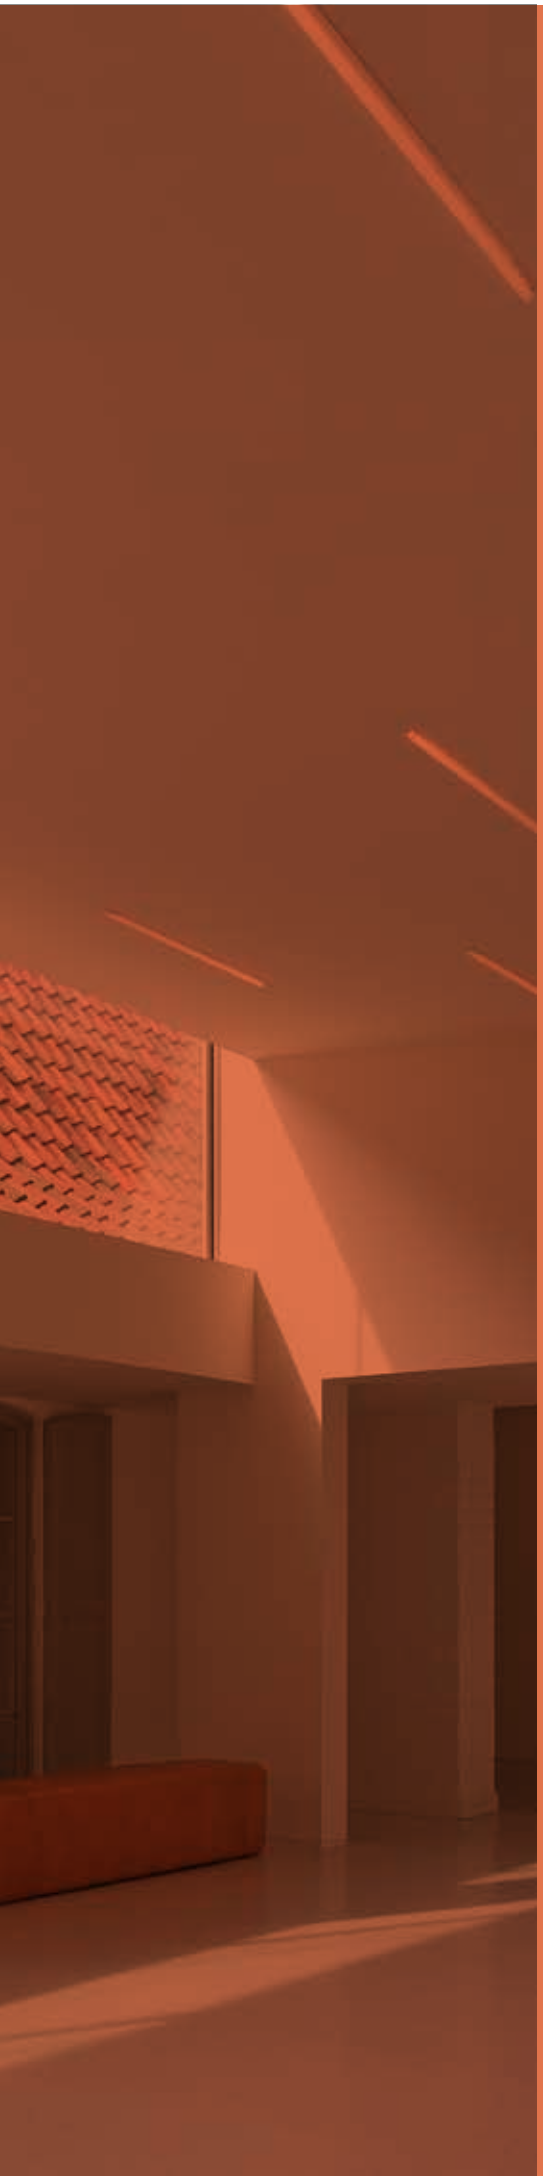

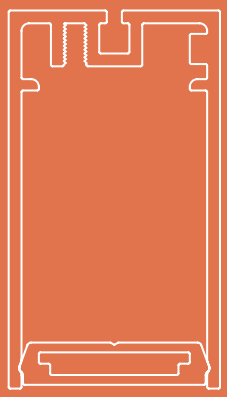


Endless 30

PROFILE



END30 - PROFILE ◇
369 00 00 ◇
◇ = B / W
MAX.L / PROFILE : 6m
Kg / m


1,0




TOL EN12020-2

END CAP








END30 - END CAP ◇
369 03 01 ◇
◇ = B / W

0,1

CORNER

END - CORNER 180°
369 06 01

0,3




FIXATION

SUSPENSION 6 SINGLE 1,6
328 17 01
L 1,6m

SUSPENSION 6 SINGLE 6,0
328 17 06
L 6,0m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **369 98 51**
L 6,0m / 3 x 0,75mm² **369 98 56**
L 1,6m / 5 x 0,75mm² **369 99 51**
L 6,0m / 5 x 0,75mm² **369 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W

203 99 56 ◇
◇ = ANO / B / W

0,1



Endless LED

END - 4 LED WW ◇
369 61 42 ◇
◇ = B / C
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,3 IP20

L 300


PS




Endless Modules T16 Seamless Down

END SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

CE 0,8 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**369 75 124 E**		
1 x 21/39	885	**369 75 139 E**	**369 75 139 ED1**	**369 75 139 ED2**
1 x 28/54	1185	**369 75 154 E**	**369 75 154 ED1**	**369 75 154 ED2**






END SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

CE 1,6 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**369 75 239 E**	**369 75 239 ED1**	**369 75 239 ED2**
2 x 28/54	2370	**369 75 254 E**	**369 75 254 ED1**	**369 75 254 ED2**






T16 SEAMLESS - PAG TEC

p



DEHULLU ARCHITECTEN

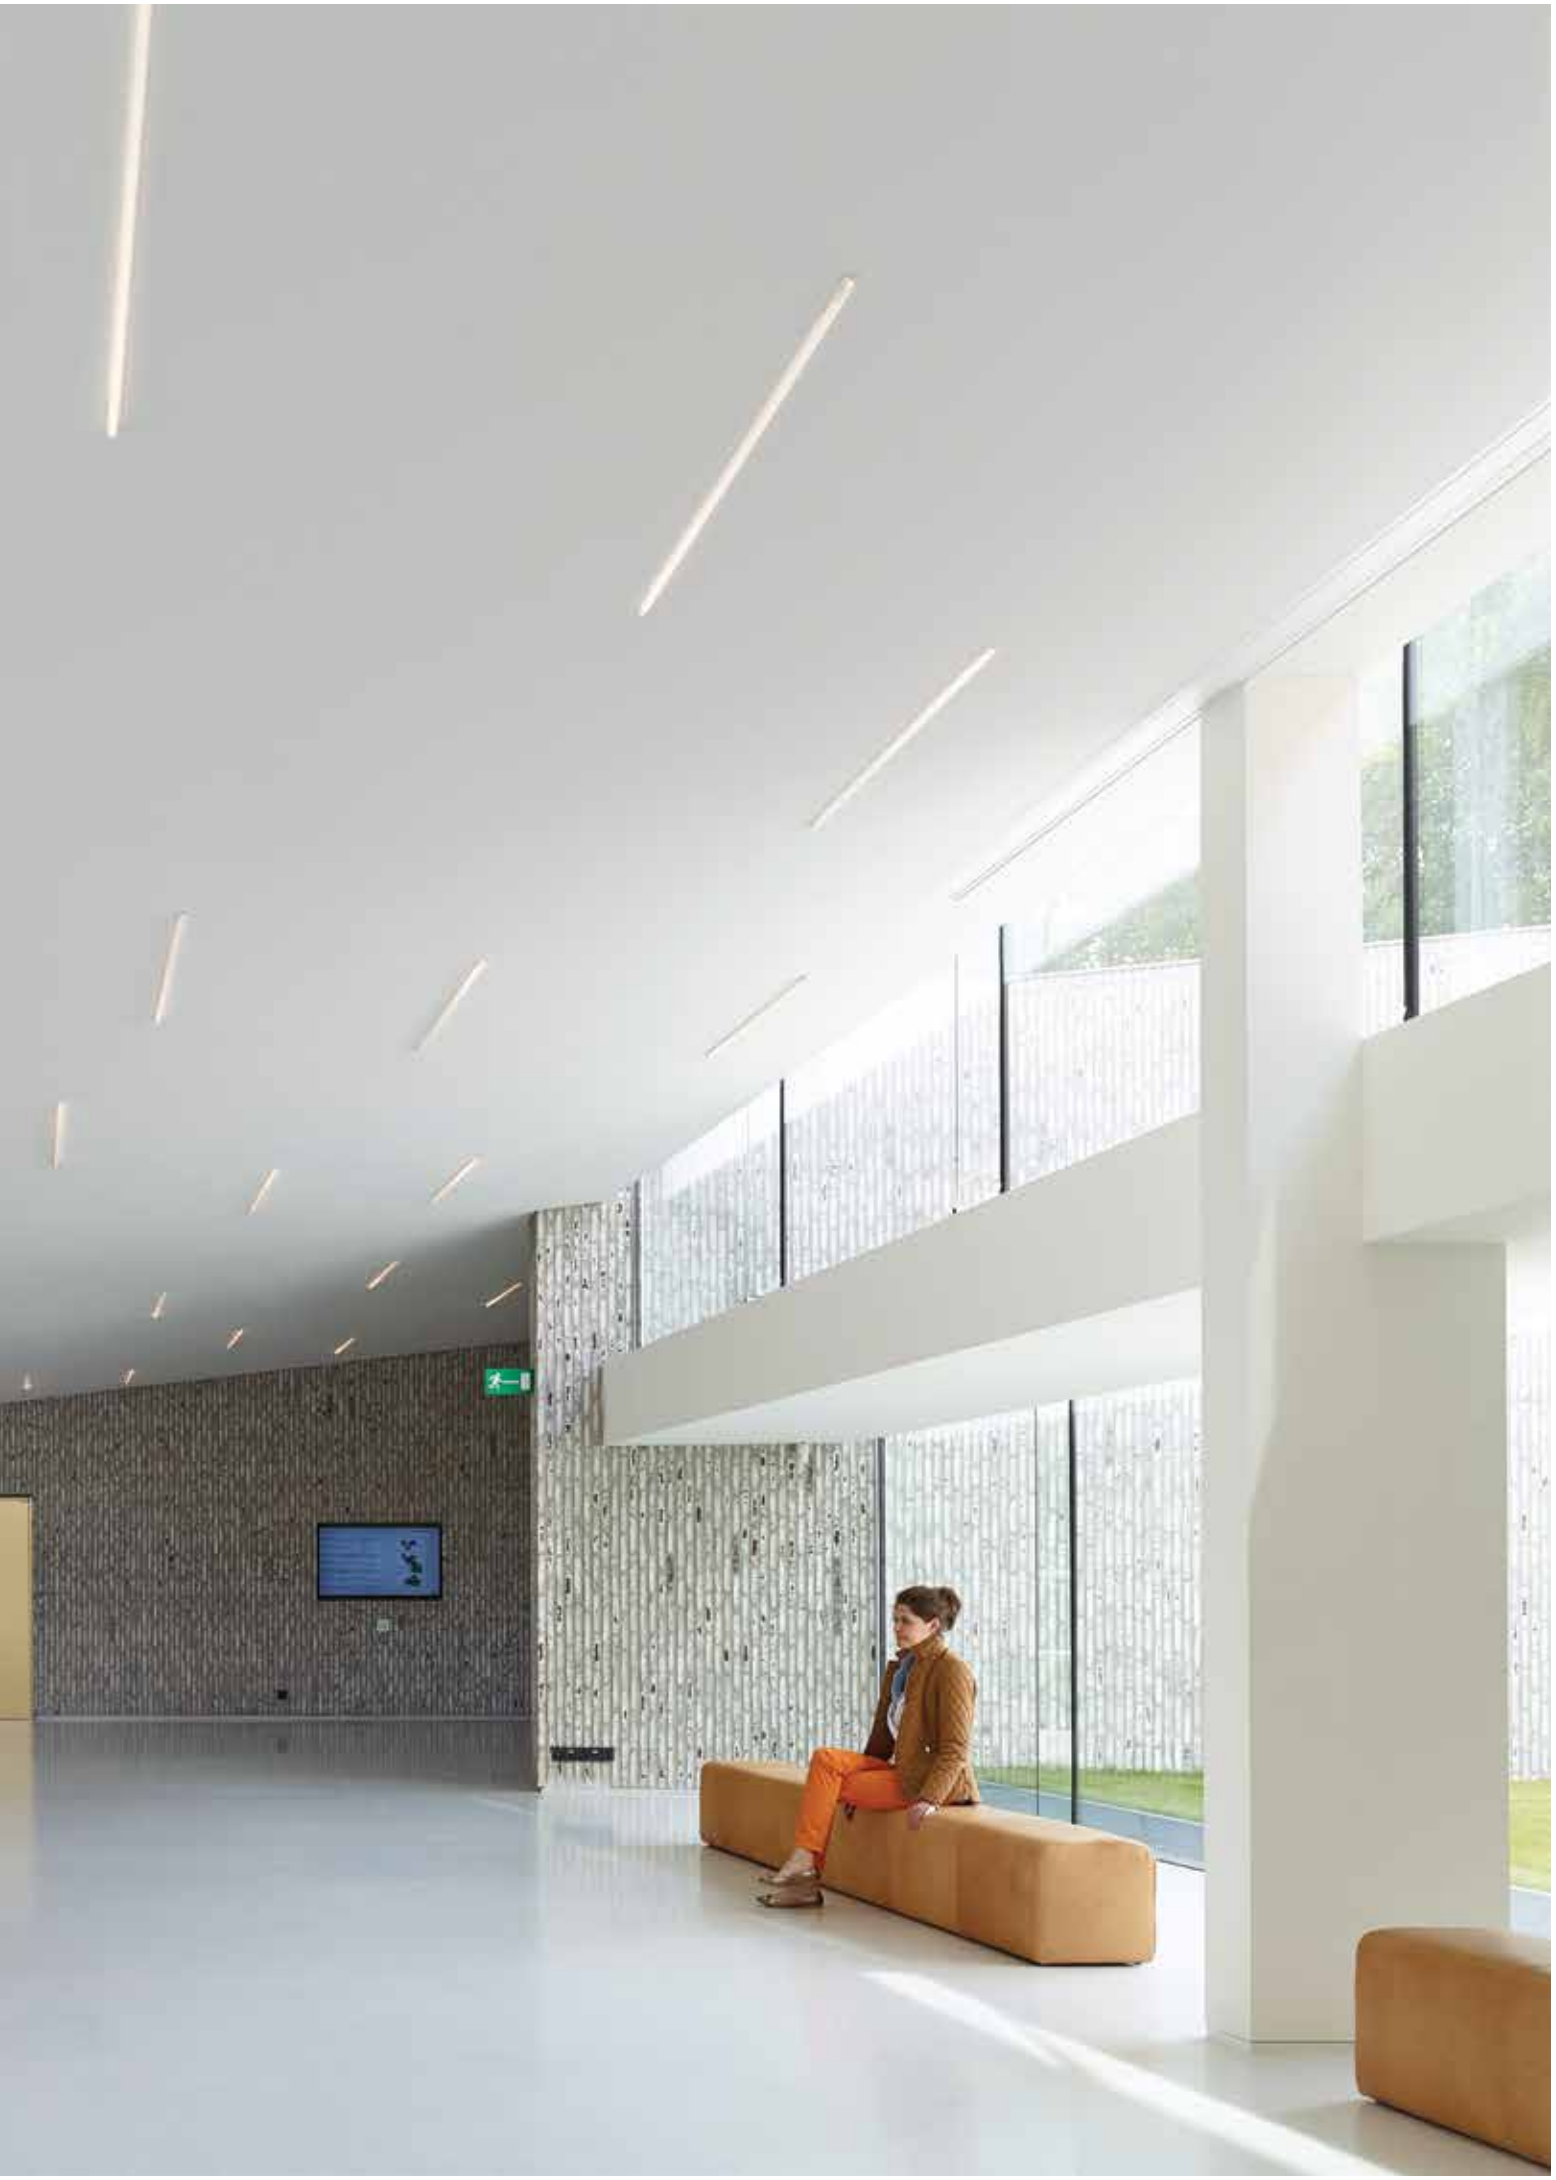




ENDLESS 30+

The Endless 30+ is a very minimalistic and well thought out designed profile, specifically developed for the extremely thin T5 fluorescent seamless lamps. The 30+ version differs from the standard Endless 30 profile as the lamp is placed inside the profile, and as such completely covered.


www.deltalight.com/endless-30+-profile



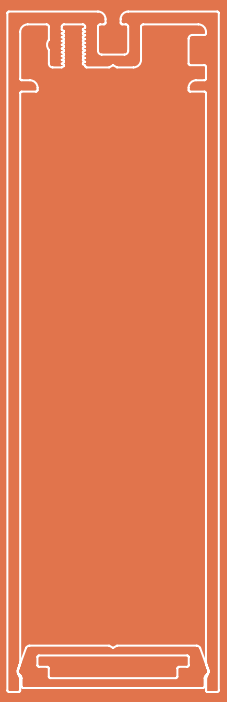


Endless 30+

PROFILE

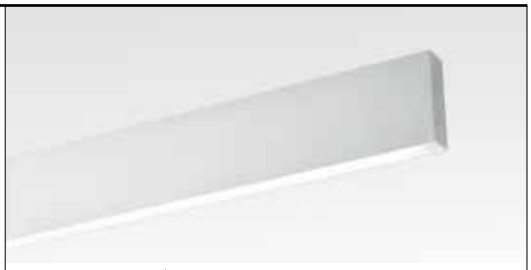

END30+ - PROFILE ◇
374 00 00 ◇
◇ = B / W
MAX.L / PROFILE : 3.6m
Kg / m

1,3




TOL EN12020-2


END CAP



END30+ - END CAP ◇
374 03 01 ◇
◇ = B / W

0,1





CORNER

FIXATION

CURRENT SUPPLY

p

Endless 30+ LED

END30+ - 4 LED ◇
374 61 42 ◇
◇ = B / C
INCL.4 x POWERLED WHITE 1W / 3000K
INCL.4 x LENS 40°
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

◇ CE 0,3 IP20

L 300


PS



Endless 30+ Modules T16 Seamless Down

END30+ SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

◇ CE 0,8 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	585	**374 75 124 E**		
1 x 21/39	885	**374 75 139 E**	**374 75 139 ED1**	**374 75 139 ED2**
1 x 28/54	1185	**374 75 154 E**	**374 75 154 ED1**	**74 75 154 ED2**



END30+ SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

◇ CE 1,6 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**374 75 239 E**	**374 75 239 ED1**	**374 75 239 ED2**
2 x 28/54	2370	**374 75 254 E**	**374 75 254 ED1**	**374 75 254 ED2**



T16 SEAMLESS - PAG TEC

p

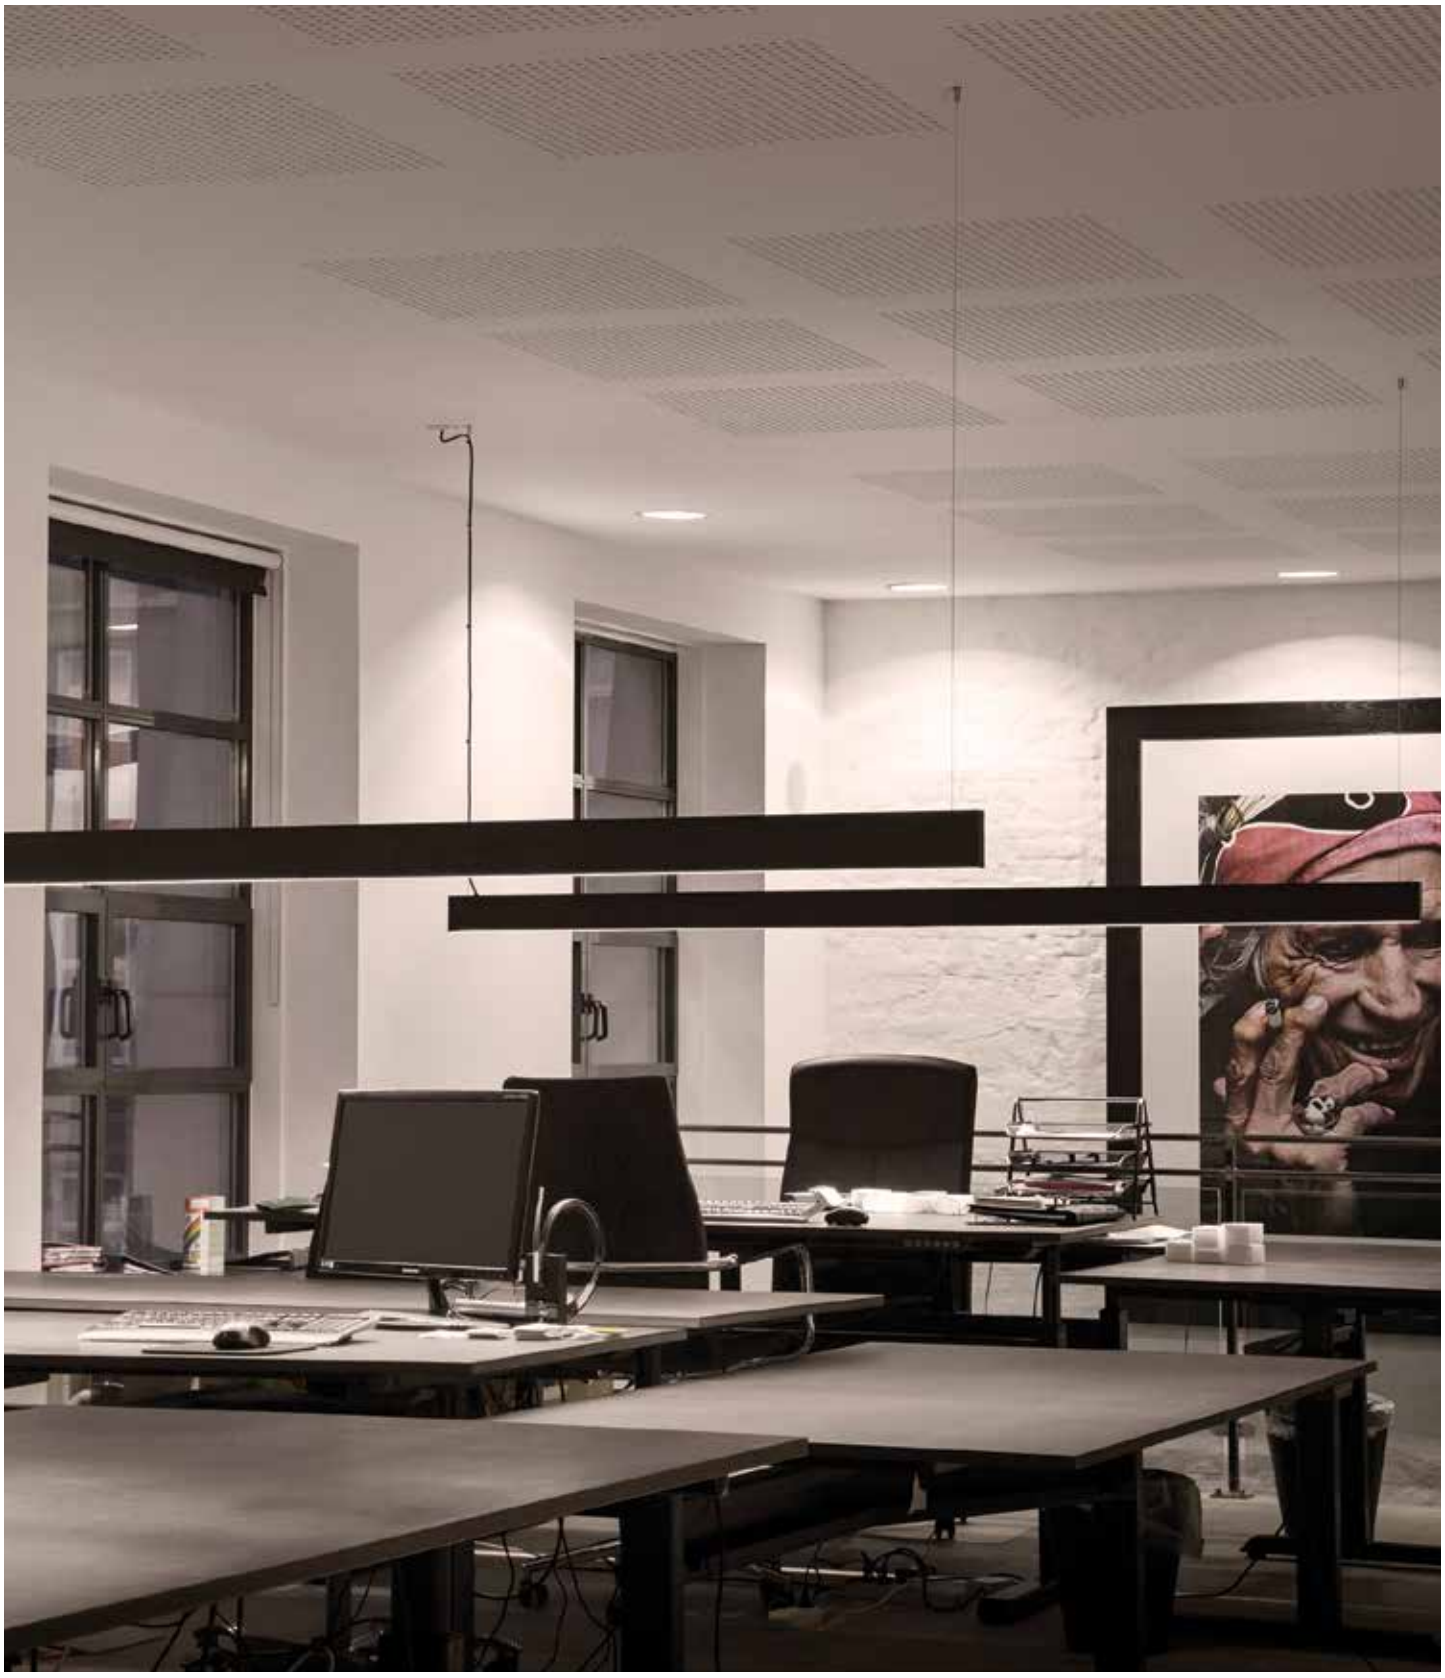





new


MICROLINE TR


A series of slim recessed led profiles, available for either down or sidewards installation. Installation is made easy thanks to perforated trim on both sides, facilitating trimless installation and finishing from below. The TRW version can be used for cove lighting, the TRH version has more recessed depth to include the power supply.


www.deltalight.com/microlinetrimless

ALIX DE CROMBRUGGHE



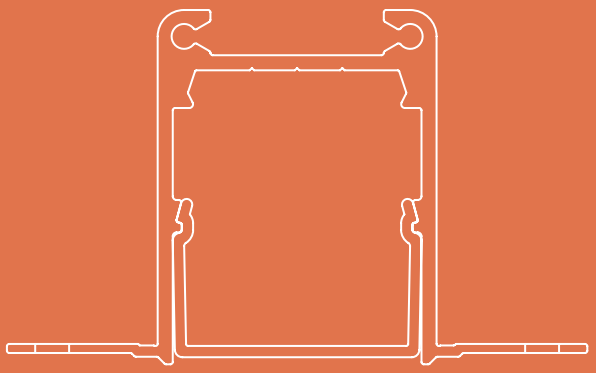

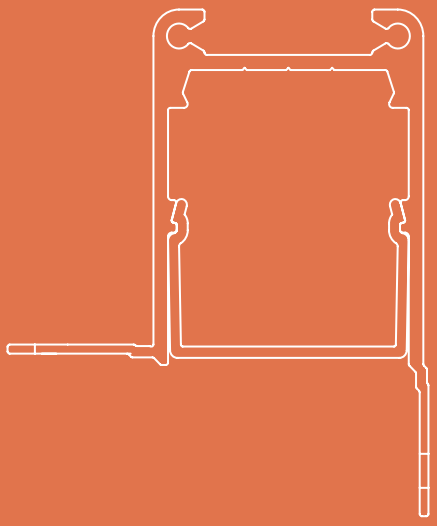

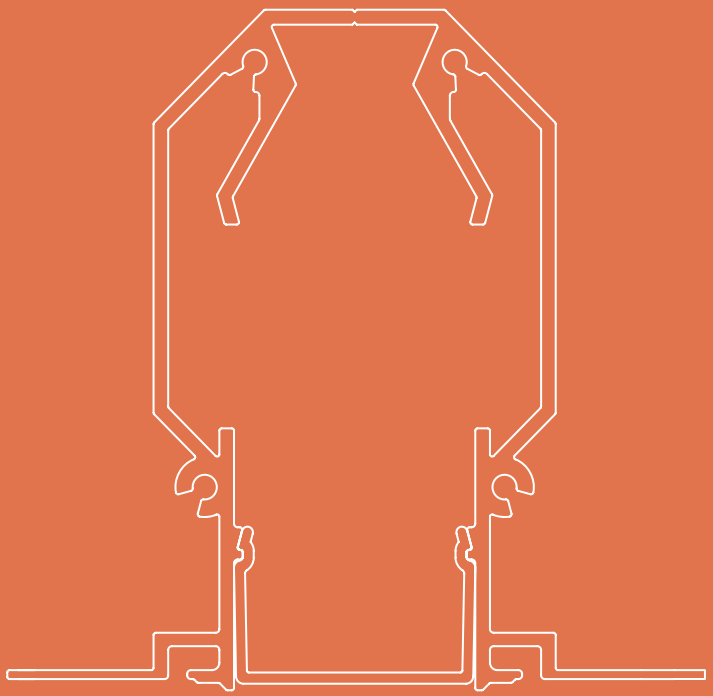

Microline TR


Microline TRW

PROFILE



MIC TR - PROFILE ◇
394 00 00 ◇
◇ = ANO
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

1,0




TOL EN12020-2



MIC TRW - PROFILE ◇
396 00 00 ◇
◇ = ANO
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

1,0




TOL EN12020-2


END CAP

CORNER


MIC TR - CORNER 180°
394 06 01
0,3




MIC TR - CORNER 90°
394 06 06
0,3




MIC TRW - CORNER 180°
396 06 01
0,3



MIC TRW - CORNER 90° INT
396 06 06
0,3




MIC TRW - CORNER 90° EXT
396 06 16
0,3





FIXATION

39 x L
POSITION FOR INSTALLATION

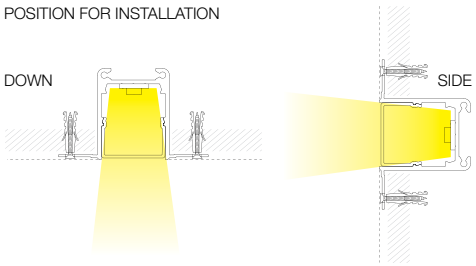


39 x L
POSITION FOR INSTALLATION

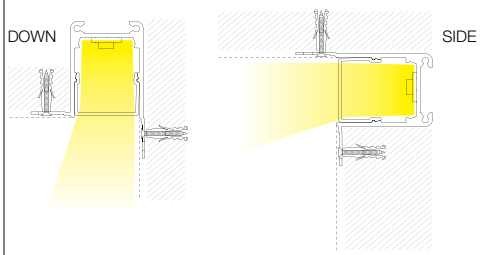





	Ledstrip 0,5m - 24V-DC 0,1 			Ledflex 5m - 24V-DC 0,3 			
	White		RGB	White			RGB
	Dividable per 100mm 30 smd LED +/- 50K		Dividable per 100mm 30 smd LED	Dividable per 100mm 60 smd LED/m		Dividable per 33,3mm 180 smd LED/m	Dividable per 167mm 30 smd LED/m
led	6W/m 480lm/m	20W/m 1940lm/m	15W/m	5W/m 360lm/m	15W/m 1000lm/m	new 22W/m 1800lm/m	8W/m
4000K							
IN	**LEDSTRIP 15 F NW 300 91 10 15 F NW**	**LEDSTRIP 15 FP NW 300 91 10 15 FP NW**		**LEDFLEX IN NW 300 91 52 04**	**LEDFLEX IN FP NW 300 91 53 04**		
OUT IP65				**LEDFLEX OUT NW 300 91 62 04**	**LEDFLEX OUT FP NW 300 91 63 04**		
3000K							
IN	**LEDSTRIP 15 F WW 300 91 10 15 F WW**	**LEDSTRIP 15 FP WW 300 91 10 15 FP WW**		**LEDFLEX IN WW 300 91 52 02**	**LEDFLEX IN FP WW 300 91 53 02**	**LEDFLEX IN HP WW 300 91 54 02**	
OUT IP65				**LEDFLEX OUT WW 300 91 62 02**	**LEDFLEX OUT FP WW 300 91 63 02**		
2700K							
IN	**LEDSTRIP 15 F HW 300 91 10 15 F HW**	**LEDSTRIP 15 FP HW 300 91 10 15 FP HW**		**LEDFLEX IN HW 300 91 52 03**	**LEDFLEX IN FP HW 300 91 53 03**	**LEDFLEX IN HP HW 300 91 54 03**	
OUT IP65				**LEDFLEX OUT HW 300 91 62 03**	**LEDFLEX OUT FP HW 300 91 63 03**		
RGB							
IN			**LEDSTRIP 15 RGB 300 91 33 15**				**LEDFLEX IN RGB 300 91 52 33**
OUT IP65							**LEDFLEX OUT RGB 300 91 62 33**
FULL INFO / PAG TEC							
LED POWER SUPPLY 24V-DC / 20W 300 89 24 20	max.6	max.2	⊛ max.2	max.4 m	max.1 m	max.0,9 m	⊛ max.2,4 m
LED POWER SUPPLY 24V-DC / 40W 300 89 24 40	max.13	max.4	⊛ max.5	max.8 m	max.2,5 m	max.1,83 m	⊛ max.5 m
LED POWER SUPPLY 24V-DC / 60W 300 89 24 60	max.20	max.6	⊛ max.7	max.12 m	max.4 m (max.3m / Powerline)	max.2,76 m (max.3m / Powerline)	⊛ max.7,36 m
LED POWER SUPPLY 24V-DC / 80W DIM1 300 89 24 80	max.26	max.8 (max.6 / Powerline)		max.16 m	max.5 m (max.3m / Powerline)	max.3,7 m (max.3m / Powerline)	
LED POWER SUPPLY 24V-DC / 150W 300 89 24 150	max.50	max.15 (max.6 / Powerline)	⊛ max.18	max.30 m	max.10 m (max.3m / Powerline)	max.6,9 m (max.3m / Powerline)	⊛ max.18,72 m
LED POWER SUPPLY MULTI POWER DIM7 300 90 60	max.6	max.2		max.4 m	max.1 m	max.0,9 m	
LED POWER SUPPLY MULTI POWER DIM6 300 90 61	max.6	max.2		max.4 m	max.1 m	max.0,9 m	
RGB DRIVER 12/24V-DC 75/150W 300 90 331			⊛ use in combination with Led Power Supply 24V-DC				⊛ use in combination with Led Power Supply 24V-DC
RGB TOUCH CONTROLLER DMX 300 90 330			⊛ use in combination with RGB Driver				⊛ use in combination w th RGB Driver

DIM1: dimming by 1-10V
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V

p


Microline TRH

PROFILE



MIC TRH - PROFILE ◇
395 00 00 ◇
◇ = ANO
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

2,4




TOL EN12020-2

END CAP



MIC TRH - END CAP ◇
395 03 01 ◇
◇ = ANO


0,1



CORNER


MIC TRH - CORNER 180°
395 06 01

0,3




MIC TRH - CORNER 90°
395 06 06


0,3



FIXATION

57 x (L + 6)







Microline TRH Led Array Down

MIC TRH - LED ARRAY DOWN
220-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W

CE 1,6 IP20







Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 15	560	**395 610 22 E**	**395 610 22 ED1**	**395 610 22 ED2**
1 x 22	841		**395 610 32 ED1**	**395 610 32 ED2**
1 x 30	1121	**395 610 42 E**	**395 610 42 ED1**	**395 610 42 ED2**
1 x 45	1682	**395 610 62 E**		**395 610 62 ED2**
1 x 60	2242	**395 610 82 E**		**395 610 82 ED2**



p




MICROLINE 50

The Microline 50 is a recessed profile which can be used in ceiling and/or wall. The various models can be equipped with T16 fluorescent lamps, halogen or ledstrips, providing you with multiple options to create an appealing lighting scenario.

www.deltalight.com/microline50

3XN ARCHITECTS



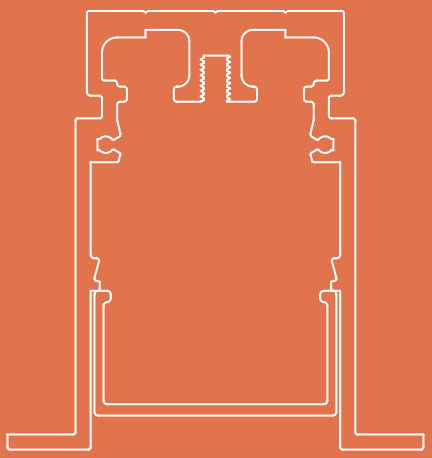


Microline 50

PROFILE



MIC50 - PROFILE ◇
297 00 00 ◇
◇ = ANO / B / W
MAX.L / PROFILE : 6m
Kg / m


1,8



TOL EN12020-2

END CAP






MIC50 - END CAP ◇
297 03 01 ◇
◇ = ANO / B / W

0,1

CORNER


MIC50 - CORNER 180°
297 06 01

0,3




MIC50 - CORNER 135°
297 06 05


0,3



MIC50 - CORNER 90°
297 06 06

0,3



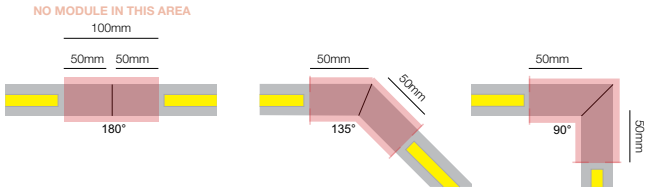


FIXATION

45 x (L + 5) x 100 max.22

MIC50 - INSIDE CLIP
297 14 01

0,1



CURRENT SUPPLY

Microline 50 Single Jack

MIC50 - SINGLE JACK
297 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

IP20



L 300




Microline 50 Twin Jack

MIC50 - TWIN JACK
297 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

IP20



L 355



Spot JAC


SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC


p

Microline 50 Modules T16 Down

MIC50 - T16 DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MIC - PC SBL PROFILE



CE 0,8 IP20 0,1




Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m


Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	605	**297 71 124 E**	**297 71 124 ED1**	**297 71 124 ED2**
1 x 21/39	905	**297 71 139 E**	**297 71 139 ED1**	**297 71 139 ED2**
1 x 28/54	1205	**297 71 154 E**	**297 71 154 ED1**	**297 71 154 ED2**
1 x 35/80	1505	**297 71 180 E**	**297 71 180 ED1**	**297 71 180 ED2**



MIC50 - T16 SERIE DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MIC - PC SBL PROFILE




CE 1,6 IP20 0,1




Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1810	**297 71 239 E**	**297 71 239 ED1**	**297 71 239 ED2**
2 x 28/54	2410	**297 71 254 E**	**297 71 254 ED1**	**297 71 254 ED2**
2 x 35	3010	**297 71 235 E**	**297 71 235 ED1**	**297 71 235 ED2**

MIC50 - T16 BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN




CE 1,0 IP20 0,1




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1205	**297 61 154 EB**	**297 61 154 ED1B**	**297 61 154 ED2B**



MIC50 - T16 SERIE BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x BAP DOWN



CE 2,0 IP20 0,1




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	2410	**297 61 254 EB**	**297 61 254 ED1B**	**297 61 254 ED2B**

Requirement

MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

MIC - PC SBL profile



MIC - PC SBL PROFILE



BECKERS NOYEZ ARCHITECTEN




MICROLINE 30

Microline 30 can be used either for recessed, surface mounted or suspended application.
It enables you to create narrow light lines, equipped either with T16 fluorescent lamps, halogen or ledstrips.

www.deltalight.com/microline30

FILIPDESLEE.COM



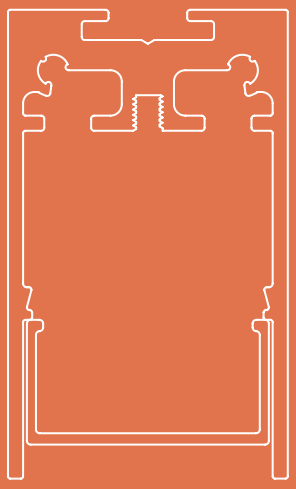


Microline 30

PROFILE



MIC30 - PROFILE ◇
296 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m


1,8



TOL EN12020-2

END CAP






MIC30 - END CAP ◇
296 03 01 ◇
◇ = ANO / W

0,1

CORNER


MIC30 - CORNER 180°
296 06 01

0,3




MIC30 - CORNER 135°
296 06 05


0,3



MIC30 - CORNER 90°
296 06 06

0,3




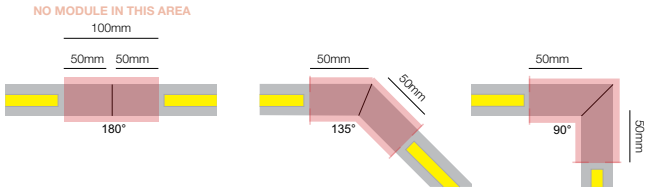


FIXATION

MIC30 - WALL FIXATION 90°
296 06 10

0,3







SUSPENSION 3 SINGLE 1,6
328 13 01
L 1,6m

SUSPENSION 3 SINGLE 6,0
328 13 06
L 6,0m


0,1



RECESSED FIXATION



DIRECT FIXATION




CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **296 98 51**
L 6,0m / 3 x 0,75mm² **296 98 56**
L 1,6m / 5 x 0,75mm² **296 99 51**
L 6,0m / 5 x 0,75mm² **296 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90





Spot JAC

SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC

led

Microline 30 M10

MIC30 - M10
297 61 01 ◇
◇ = ANO / W
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

CE 0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 680lm
EXCL.LED POWER SUPPLY 350mA-DC

CE 0,3 IP20



L 210
PS

Microline 30 Single Jack

MIC30 - SINGLE JACK
296 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

CE 0,3 IP20



L 300
TE

Microline 30 Twin Jack

MIC30 - TWIN JACK
296 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

CE 0,3 IP20




L 355
TE
275

p

Microline 30 Modules T16 Down - Compressed

MIC30 - T16 DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.MIC - PC SBL PROFILE

CE 0,8 IP20 0,1





L 160

Watt	Lmm	EVG
1 x 14	605	**296 76 114 E**
1 x 21	905	**296 76 121 E**
1 x 28	1205	**296 76 128 E**

Requirements
MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m


Requirement

MIC - PC SBL PROFILE
296 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,1 / m

MIC - PC SBL profile



MIC - PC SBL PROFILE

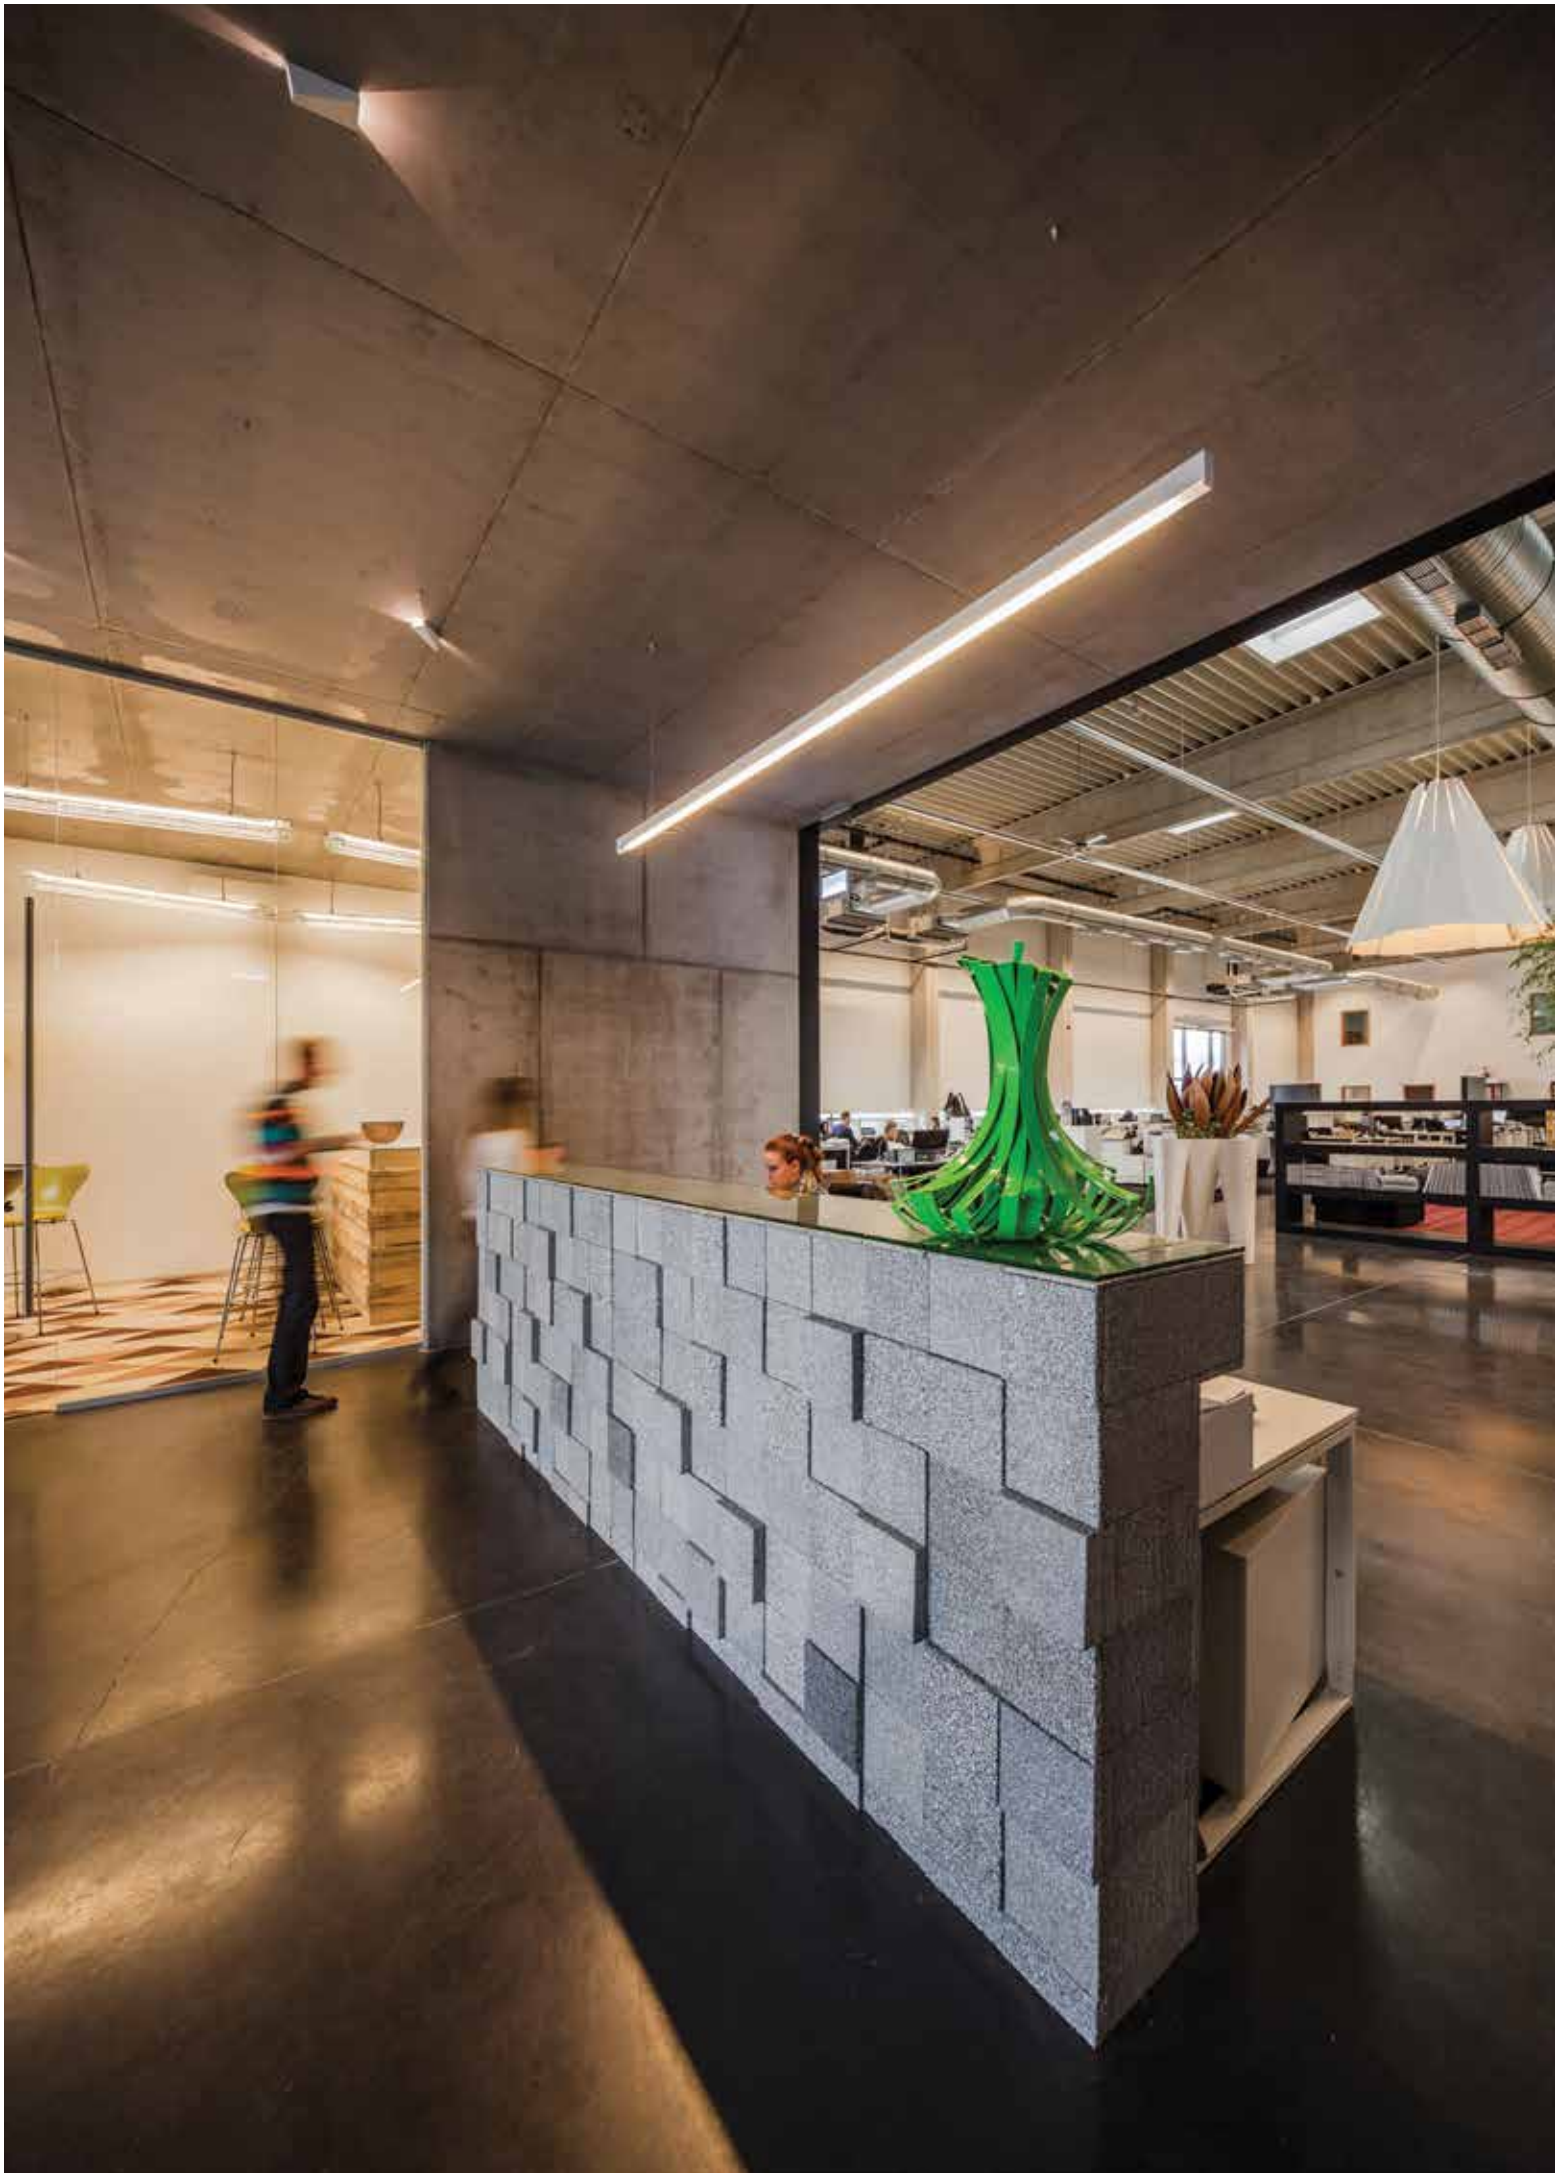

Microline 30 Modules T16 Down

MIC30 - T16 PC SBL DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC SBL DOWN

CE 0,8 IP20 0,1






Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	1085	**296 61 124 E**	1145	**296 61 124 ED1**	**296 61 124 ED2**
1 x 21/39	1385	**296 61 139 E**	1445	**296 61 139 ED1**	**296 61 139 ED2**
1 x 28/54	1685	**296 61 154 E**	1745	**296 61 154 ED1**	**296 61 154 ED2**
1 x 35/80	1985	**296 61 180 E**	2045	**296 61 180 ED1**	**296 61 180 ED2**



MIC30 - T16 SERIE PC SBL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x PC SBL DOWN

CE 1,6 IP20 0,1





Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1710	**296 61 224 E**	1770	**296 61 224 ED1**	**296 61 224 ED2**
2 x 21/39	2310	**296 61 239 E**	2370	**296 61 239 ED1**	**296 61 239 ED2**
2 x 28/54	2910	**296 61 254 E**	2970	**296 61 254 ED1**	**296 61 254 ED2**

p

MIC30 - T16 BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 0,8 IP20 0,1






Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1685	**296 61 154 EB**	1745	**296 61 154 ED1B**	**296 61 154 ED2B**



MIC30 - T16 SERIE BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x BAP DOWN

CE 1,6 IP20 0,1






Watt	Lmm	EVG	Lmm DIM	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	2910	**296 61 254 EB**	2970	**296 61 254 ED1B**	**296 61 254 ED2B**



Microline 30 Link Combination-Middle






	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	2x 680lm (7W)	2x 566lm (7W)
REFLECTOR FL-33°	**LINK 2 REO 3033 CM** ◇ **315 41 8222 CM** ◇ ◇ = W	**LINK 2 REO 3033-9 CM** ◇ **315 41 89222 CM** ◇ ◇ = W
2700K	2x 618lm (7W)	2x 525lm (7W)
REFLECTOR FL-33°	**LINK 2 REO 2733 CM** ◇ **315 41 8223 CM** ◇ ◇ = W	**LINK 2 REO 2733-9 CM** ◇ **315 41 89223 CM** ◇ ◇ = W

ADJUSTABLE 0°- 30° / 350°
INCL.2 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,8 IP20

Microline 30 Link Combination-Middle






LINK 211 CM ◇
315 12 00 CM ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W

CE 1,4 IP20 1,0

p

reddot design award winner 2011

GOOD DESIGN award

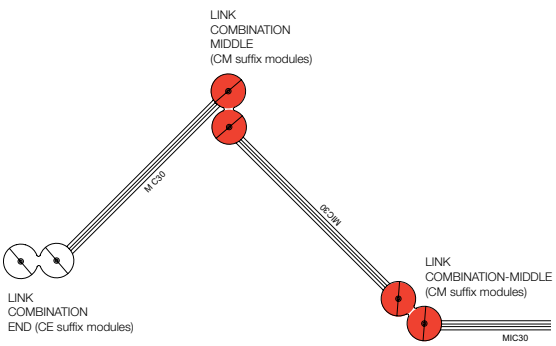



4000K

3000K

REFLECTOR FL-33°

2700K

REFLECTOR FL-33°


led


Microline 30 Link Combination-End













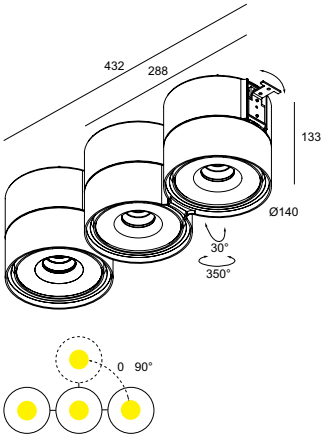

CRI > 80	CRI > 90	CRI > 80	CRI > 90	CRI > 80	CRI > 90
ON REQUEST		ON REQUEST		ON REQUEST	
680lm (7W)	566lm (7W)	2x 680lm (7W)	2x 566lm (7W)	3x 680lm (7W)	3x 566lm (7W)
LINK 1 REO 3033 CE ◇ **315 41 8122 CE ◇** ◇ = W	**LINK 1 REO 3033-9 CE ◇** **315 41 89122 CE ◇** ◇ = W	**LINK 2 REO 3033 CE ◇** **315 41 8222 CE ◇** ◇ = W	**LINK 2 REO 3033-9 CE ◇** **315 41 89222 CE ◇** ◇ = W	**LINK 3 REO 3033 CE ◇** **315 41 8322 CE ◇** ◇ = W	**LINK 3 REO 3033-9 CE ◇** **315 41 89322 CE ◇** ◇ = W
618lm (7W)	525lm (7W)	2x 618lm (7W)	2x 525lm (7W)	3x 618lm (7W)	32x 525lm (7W)
LINK 1 REO 2733 CE ◇ **315 41 8123 CE ◇** ◇ = W	**LINK 1 REO 2733-9 CE ◇** **315 41 89123 CE ◇** ◇ = W	**LINK 2 REO 2733 CE ◇** **315 41 8223 CE ◇** ◇ = W	**LINK 2 REO 2733-9 CE ◇** **315 41 89223 CE ◇** ◇ = W	**LINK 3 REO 2733 CE ◇** **315 41 8323 CE ◇** ◇ = W	**LINK 3 REO 2733-9 CE ◇** **315 41 89323 CE ◇** ◇ = W
ADJUSTABLE 0°- 30° / 350° INCL.1 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz ◇ CE 0,9 IP20		ADJUSTABLE 0°- 30° / 350° INCL.2 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz ◇ CE 1,8 IP20		ADJUSTABLE 0°- 30° / 350° INCL.3 x POWERLED WHITE 7W INCL.LED POWER SUPPLY 350mA-DC 120-240V / 50-60Hz ◇ CE 2,7 IP20	

reddot design award
winner 2011

GOOD DESIGN award

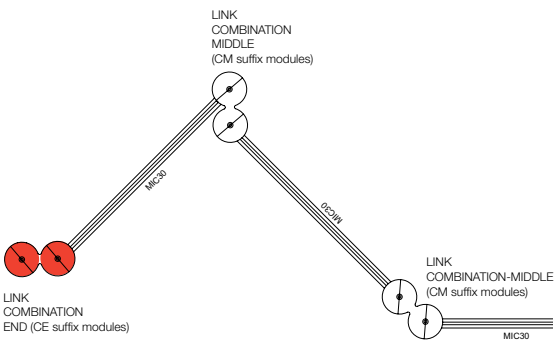

p





Microline 30 Link Combination-End












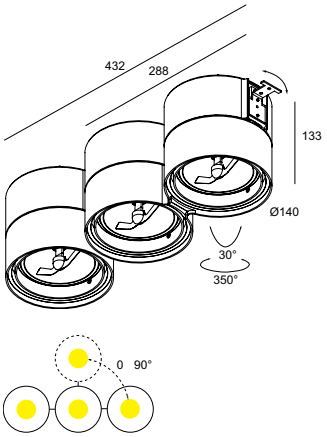


LINK 111 CE ◇
315 11 00 CE ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
CE 0,7 IP20 1,0

LINK 211 CE ◇
315 12 00 CE ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 1,4 IP20 1,0

LINK 311 CE ◇
315 13 00 CE ◇
◇ = W
ADJUSTABLE 0°- 30° / 350°
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
CE 2,1 IP20 1,0

reddot design award winner 2011

GOOD DESIGN award

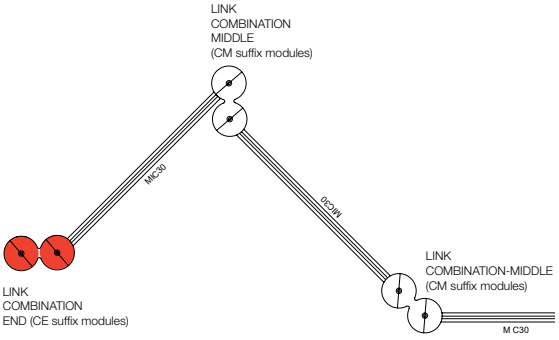




MICROLINE 30+

All the benefits of the Microline 30 T16 profile with an additional plus… as it is possible to equip the Microline 30+ profile with seamless lamps or ledstrips. This profile enables you to create uniformly illuminated light lines, preventing any dark spots along the line.

www.deltalight.com/microline-30+-profile



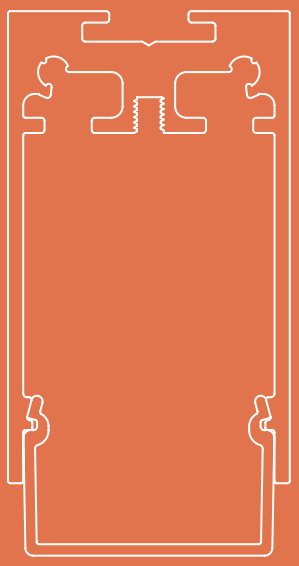


Microline 30+

PROFILE



MIC30+ - PROFILE ◇
346 00 00 ◇
◇ = ANO / B / W
INCL.MICROLINE 30 - PC SBL
MAX.L / PROFILE : 6m
Kg / m


1,8




TOL EN12020-2

END CAP








MIC30+ - END CAP ◇
346 03 01 ◇
◇ = ALU / B / W

0,1

CORNER


MIC30+ - CORNER 180°
346 06 01

0,3



MIC30+ - CORNER 90°
346 06 06


0,3




FIXATION

MIC30 - WALL FIXATION 90°
296 06 10

0,3






SUSPENSION 3 SINGLE 1,6
328 13 01
L 1,6m

SUSPENSION 3 SINGLE 6,0
328 13 06
L 6,0m



0,1


DIRECT FIXATION



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **296 98 51**
L 6,0m / 3 x 0,75mm² **296 98 56**
L 1,6m / 5 x 0,75mm² **296 99 51**
L 6,0m / 5 x 0,75mm² **296 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W
203 99 56 ◇
◇ = ANO / B / W


0,1




Microline 30+ Led Array Down

MIC30+ - LED ARRAY DOWN
220-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W

1,6 IP20 0,1









Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 15	560	**346 610 22 E**	**346 610 22 ED1**	**346 610 22 ED2**
1 x 22	841		**346 610 32 ED1**	**346 610 32 ED2**
1 x 30	1121	**346 610 42 E**	**346 610 42 ED1**	**346 610 42 ED2**
1 x 45	1682	**346 610 62 E**		**346 610 62 ED2**
1 x 60	2242	**346 610 82 E**		**346 610 82 ED2**

Microline 30+ Modules T16 Down

MIC30+ - T16 SERIE DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,6 IP20 0,1









Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	1210	**346 61 224 E**	**346 61 224 ED1**	**346 61 224 ED2**
2 x 21/39	1810	**346 61 239 E**	**346 61 239 ED1**	**346 61 239 ED2**
2 x 28/54	2410	**346 61 254 E**	**346 61 254 ED1**	**346 61 254 ED2**
2 x 35	3010	**346 61 235 E**	**346 61 235 ED1**	**346 61 235 ED2**
2 x 80	3010	**346 61 280 E**	**346 61 280 ED1**	**346 61 280 ED2**

MIC30+ - T16 DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz

0,8 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 14/24	605	**346 61 124 E**	**346 61 124 ED1**	**346 61 124 ED2**
1 x 21/39	905	**346 61 139 E**	**346 61 139 ED1**	**346 61 139 ED2**
1 x 28/54	1205	**346 61 154 E**	**346 61 154 ED1**	**346 61 154 ED2**
1 x 35/80	1505	**346 61 180 E**	**346 61 180 ED1**	**346 61 180 ED2**

Microline 30+ Modules T16 Seamless Down

MIC30+ SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz

1,6 IP20 0,1








Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**346 75 239 E**	**346 75 239 ED1**	**346 75 239 ED2**
2 x 28/54	2370	**346 75 254 E**	**346 75 254 ED1**	**346 75 254 ED2**

MIC30+ SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz

0,8 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 24	585	**346 75 124 E**		
1 x 21/39	885	**346 75 139 E**	**346 75 139 ED1**	**346 75 139 ED2**
1 x 28/54	1185	**346 75 154 E**	**346 75 154 ED1**	**346 75 154 ED2**

T16 SEAMLESS - PAG TEC











B-LINER

Despite its remarkably slim dimensions, the B-liner wows you with its outstanding performance and efficiency. Thanks to the use of highly powerful led arrays, the B-liner scores a very high light output. The perfect solution if you are looking for a very compact but powerful and energy-efficient lighting solution, for both down and down-up light, with LED.

www.deltalight.com/b-liner-65
www.deltalight.com/b-liner-70



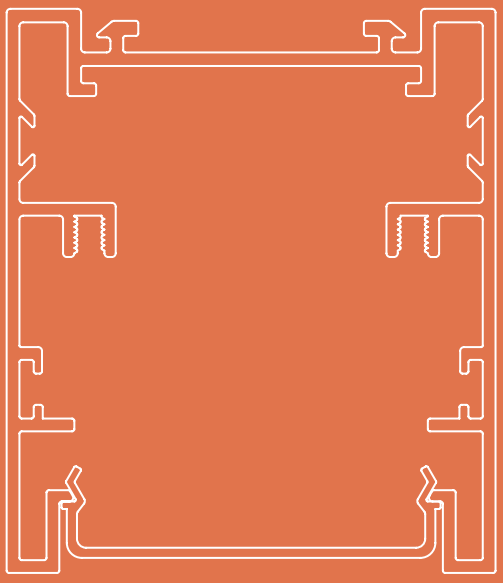

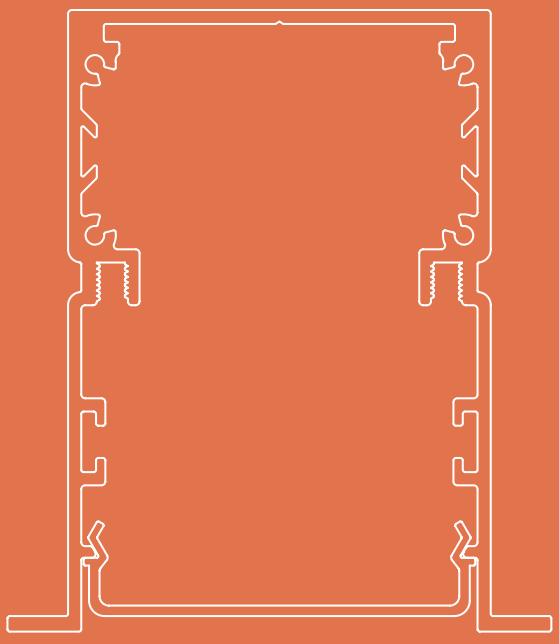

B-Liner 70


B-Liner 65

PROFILE



BLN 70 - PROFILE ◇
385 00 00 ◇
◇ = ANO / B / W
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

1,6




TOL EN12020-2



BLN 65 - PROFILE ◇
384 00 00 ◇
◇ = ANO / B / W
INCL.PC SBL
MAX.L / PROFILE : 6m
Kg / m

1,7




TOL EN12020-2


END CAP



BLN 70 - END CAP ◇
385 03 01 ◇
◇ = ANO / B / W


0,1





BLN 65 - END CAP ◇
384 03 01 ◇
◇ = A / B / W


0,1



CORNER


BLN - CORNER 180°
385 06 01

0,3




BLN - CORNER 90°
385 06 06

0,3




BLN - CORNER 180°
385 06 01

0,3



BLN - CORNER 90°
385 06 06


0,3



FIXATION


62 x (L + 5) x 125 max.35
BLN 70 - INSIDE CLIP
385 14 01

0,1



BLN 65/HDL 75 - WALL FIXATION 90°
377 06 10

0,3



BLN 65/HDL 75 - DIRECT FIXATION SET
377 12 00

0,3



SUSPENSION 20 SINGLE 1,6
377 20 21
L 1,6m

SUSPENSION 20 SINGLE 6,0
377 20 26
L 6m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **298 98 51**
L 6,0m / 3 x 0,75mm² **298 98 56**
L 1,6m / 5 x 0,75mm² **298 99 51**
L 6,0m / 5 x 0,75mm² **298 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W
203 99 56 ◇
◇ = ANO / B / W


0,1




B-Liner Led Array Down

BLN - LED ARRAY DOWN
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W
EXCL.BLN - PC SBL PROFILE

1,6 IP20 0,1









Watt	L (mm)	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 15	560	**385 610 22 ED1**	**385 610 22 ED2**
1 x 30	1121	**385 610 42 ED1**	**385 610 42 ED2**

B-Liner Led Array Up

BLN - LED ARRAY UP (1)
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W
INCL.BLN - PC CLEAR UP PROFILE

1,6 IP20 0,1








Watt	L (mm)	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 15	560	**384 620 22 ED1**	**384 620 22 ED2**
1 x 30	1121	**384 620 42 ED1**	**384 620 42 ED2**

(1) only in combination with B-LINER LED ARRAY DOWN













OBUMEX




HEADLINER 95/75


The Headliner is a no-nonsense made-to-measure profile solution, with superior efficiency and light output results thanks to the use of specially designed segmented reflectors. Pure light in homogeneously illuminated lines, using T16 fluorescent lamps, halogen or new generation leds. The Headliner enables you to easily take light around the corner.

www.deltalight.com/headliner95
www.deltalight.com/headliner75

STEVEN VERCRUYSSE




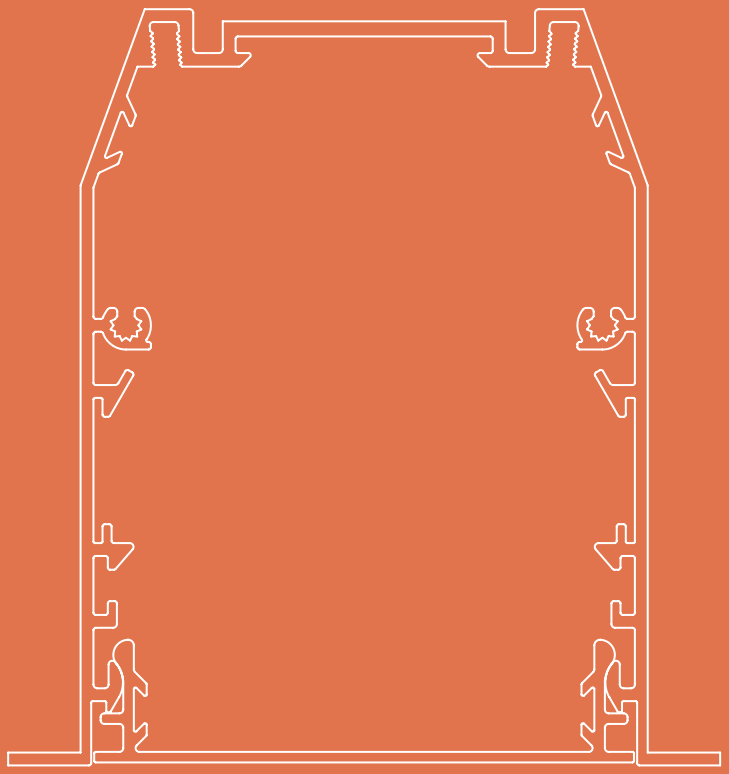

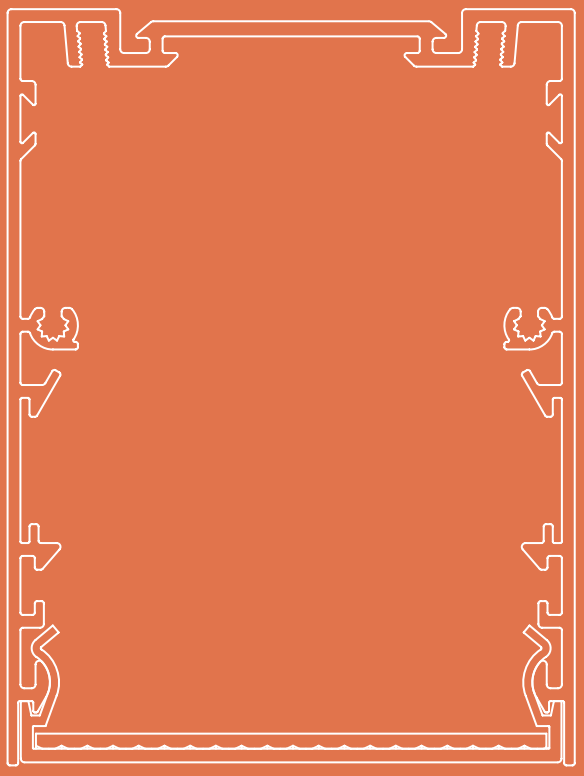


Headliner 95

PROFILE

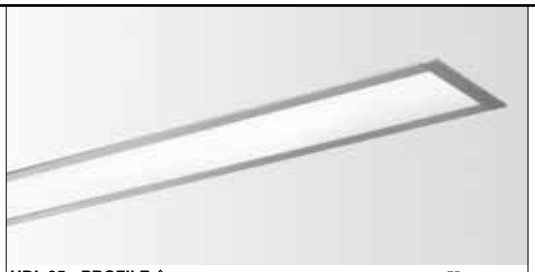


HDL 95 - PROFILE ◇
378 00 00 ◇
◇ = ANO / B / W
MAX.L / PROFILE : 6m
Kg / m

2,0




TOL EN12020-2


END CAP



HDL 95 - END CAP ◇
378 03 01 ◇
◇ = ANO / B / W

0,2






CORNER


HDL - CORNER 180°
378 06 01

0,3



HDL - CORNER 90°
378 06 06


0,3



FIXATION

82 x (L+5) x 145 max.35
HDL 95 - INSIDE CLIP
378 14 01

0,3



CURRENT SUPPLY


Headliner 75

PROFILE



HDL 75 - PROFILE ◇
377 00 00 ◇
◇ = ANO / B / W
MAX.L / PROFILE : 6m
Kg / m

1,9




TOL EN12020-2


END CAP



HDL 75 - END CAP ◇
377 03 01 01 ◇
◇ = A / B / W

0,2






CORNER


HDL - CORNER 180°
378 06 01

0,3



HDL - CORNER 90°
378 06 06


0,3



FIXATION


BLN 65/HDL 75 - WALL FIXATION 90°
377 06 10

0,3



BLN 65/HDL 75 - DIRECT FIXATION SET
377 12 00


0,3



SUSPENSION 20 SINGLE 1,6
377 20 21
L 1,6m

SUSPENSION 20 SINGLE 6,0
377 20 26
L 6m

0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **377 98 51**
L 6,0m / 3 x 0,75mm² **377 98 56**
L 1,6m / 5 x 0,75mm² **377 99 51**
L 6,0m / 5 x 0,75mm² **377 99 56**



203 99 55 ◇
◇ = ANO / B / W

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 56 ◇
◇ = ANO / B / W

0,1

0,3

led

Headliner M10

HDL - M10
378 61 01 ◇
◇ = ANO / B / W
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 680lm
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP20

L 160



led

Headliner 1 Reo



L 220

led

Headliner 2 Reo



L 295

62

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	680lm (7W)	566lm (7W)
REFLECTOR FL-33°	**HDL - 1 REO 3033** **378 61 8122**	**HDL - 1 REO 3033-9** **378 61 89122**
REFLECTOR WFL-50°	**HDL - 1 REO 3050** **378 61 8132**	**HDL - 1 REO 3050-9** **378 61 89132**
2700K	618lm (7W)	525lm (7W)
REFLECTOR FL-33°	**HDL - 1 REO 2733** **378 61 8123**	**HDL - 1 REO 2733-9** **378 61 89123**
REFLECTOR WFL-50°	**HDL - 1 REO 2750** **378 61 8133**	**HDL - 1 REO 2750-9** **378 61 89133**

FIXED
INCL.1 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

0,3 IP20

	CRI > 80	CRI > 90
ON REQUEST		
2x 680lm (7W)	2x 566lm (7W)	
HDL - 2 REO 3033 **378 61 8222**	**HDL - 2 REO 3033-9** **378 61 89222**	
HDL - 2 REO 3050 **378 61 8232**	**HDL - 2 REO 3050-9** **378 61 89232**	
2x 618lm (7W)	2x 525lm (7W)	
HDL - 2 REO 2733 **378 61 8223**	**HDL - 2 REO 2733-9** **378 61 89223**	
HDL - 2 REO 2750 **378 61 8233**	**HDL - 2 REO 2750-9** **378 61 89233**	

FIXED
INCL.2 x POWERLED WHITE 7W
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

0,4 IP20

p


Headliner Modules T16 Seamless Down

HDL SL - T16 SERIE DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.HDL - PC SBL/PRISMATIC PROFILE

CE 1,6 IP20 0,1

OPTIONS
HDL - HE REFLECTOR T16 SEAMLESS DOWN









Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	**378 75 239 E**	**378 75 239 ED1**	**378 75 239 ED2**
2 x 28/54	2370	**378 75 254 E**	**378 75 254 ED1**	**378 75 254 ED2**

HDL SL - T16 DOWN
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.HDL - PC SBL/PRISMATIC PROFILE

CE 0,8 IP20 0,1

OPTIONS
HDL - HE REFLECTOR T16 SEAMLESS DOWN





Requirements
HDL - PC SBL PROFILE
378 02 05 SBL
or
HDL - PC PRISMATIC PROFILE
378 02 06 PR
MAX.L / PROFILE : 5.8m - 0,2 / m


Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 24	585	**378 75 124 E**		
1 x 21/39	885	**378 75 139 E**	**378 75 139 ED1**	**378 75 139 ED2**
1 x 28/54	1185	**378 75 154 E**	**378 75 154 ED1**	**378 75 154 ED2**

T16 SEAMLESS LAMP - PAG TEC


Headliner Led Array Down

HDL - LED ARRAY DOWN
220-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W
EXCL.HDL - PC SBL PROFILE

CE 1,6 IP20 0,1







Requirements
HDL - PC SBL PROFILE
378 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 22	841	**378 610 32 E**	**378 610 32 ED1**	**378 610 32 ED2**
1 x 30	1121	**378 610 42 E**	**378 610 42 ED1**	**378 610 42 ED2**
1 x 37	1401	**378 610 52 E**	**378 610 52 ED1**	**378 610 52 ED2**
1 x 45	1682	**378 610 62 E**	**378 610 62 ED1**	**378 610 62 ED2**
1 x 60	2242	**378 610 82 E**	**378 610 82 ED1**	**378 610 82 ED2**

Requirement



HDL - PC SBL PROFILE



HDL - PC SBL PROFILE
378 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

HDL - PC profile



HDL - PC PRISMATIC PROFILE




HDL - PC PRISMATIC PROFILE
378 02 06 PR
MAX.L / PROFILE : 5.8m - 0,2 / m

OPTIONS

Headliner HE Reflector T16 Seamless Down

HDL - HE REFLECTOR T16 SEAMLESS DOWN [1]
HIGH EFFICIENT REFLECTOR
Kg / m
0,2

Watt	Lmm	
1 x 24	585	**378 52 124**
1 x 21/39	885	**378 52 139**
1 x 28/54	1185	**378 52 154**





[1] only with module T16 Seamless Down

Efficiency



HEADLINER
T16 SEAMLESS DOWN



HEADLINER HE REFLECTOR
T16 SEAMLESS DOWN




HEADLINER T16 SEAMLESS
DOWN + HE REFLECTOR

up to 71% efficiency


The Headliner

is a no-nonsense made-to-measure profile solution, with excellent efficiency and light output results.

The white lacquered reflector of the standard Headliner is optimized to produce perfect lighting conditions, achieving a light output of 53%.
+
HE Reflector
Specially designed reflector in sheet metal plate provides superior reflection abilities. Resulting in increase of efficiency of 34%, guaranteeing reduced energy consumption.
=
Exceptional output results are achieved by adding the HE Reflector to the standard Headliner module, resulting in 71% efficiency.



HEADLINER MODULE SBL
T16 SEAMLESS DOWN





HIGH EFFICIENCY

Headliner T16 Down

HDL - T16 BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN


CE 1,2 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1185	**378 61 154 EB**	**378 61 154 ED1B**	**378 61 154 ED2B**

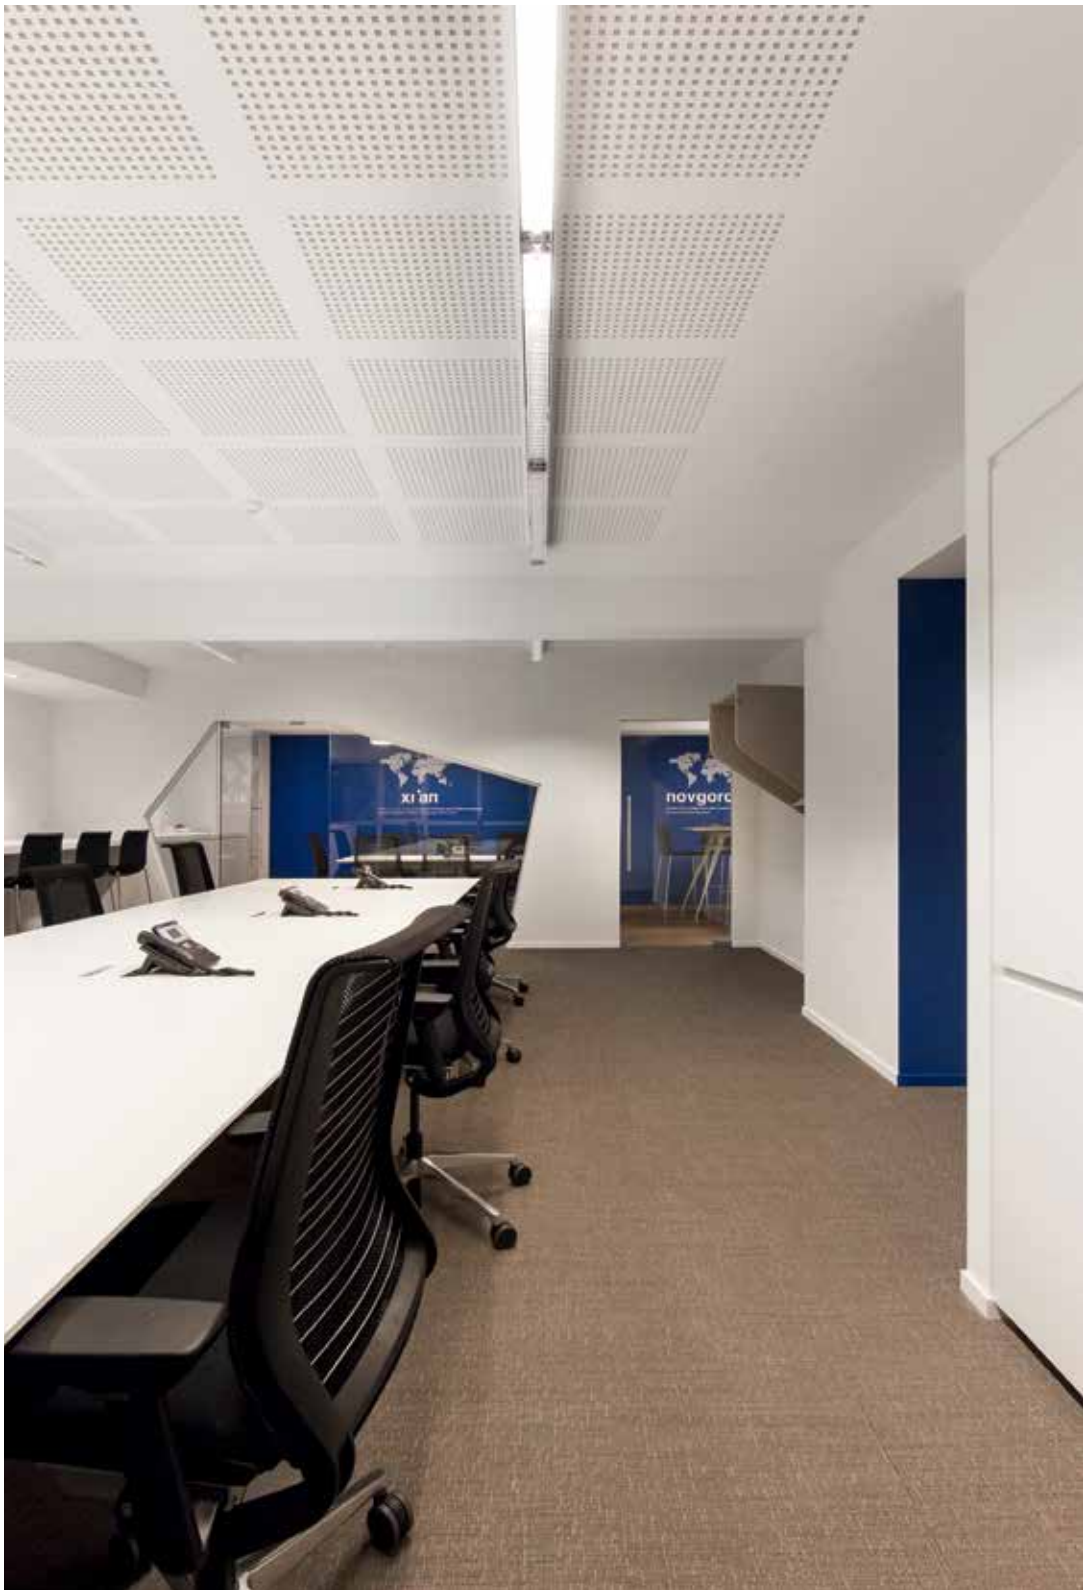
xi'an





EDWARD SORGELOOSE





















UNILINE TR / TRT / 85 / 70 / TWIN / WALL

The Uniline is without doubt the most versatile range in Delta Light's profile collection. Throughout all different applications, dimensions and applications, the Uniline combinations allow you to fill any possible length with light. No light restrictions, even when it comes down to centimeters.

www.deltalight.com/unilinetrimless
www.deltalight.com/unilinetrimlesstilted
www.deltalight.com/uniline85
www.deltalight.com/uniline70
www.deltalight.com/unilinetwin
www.deltalight.com/unilinewall



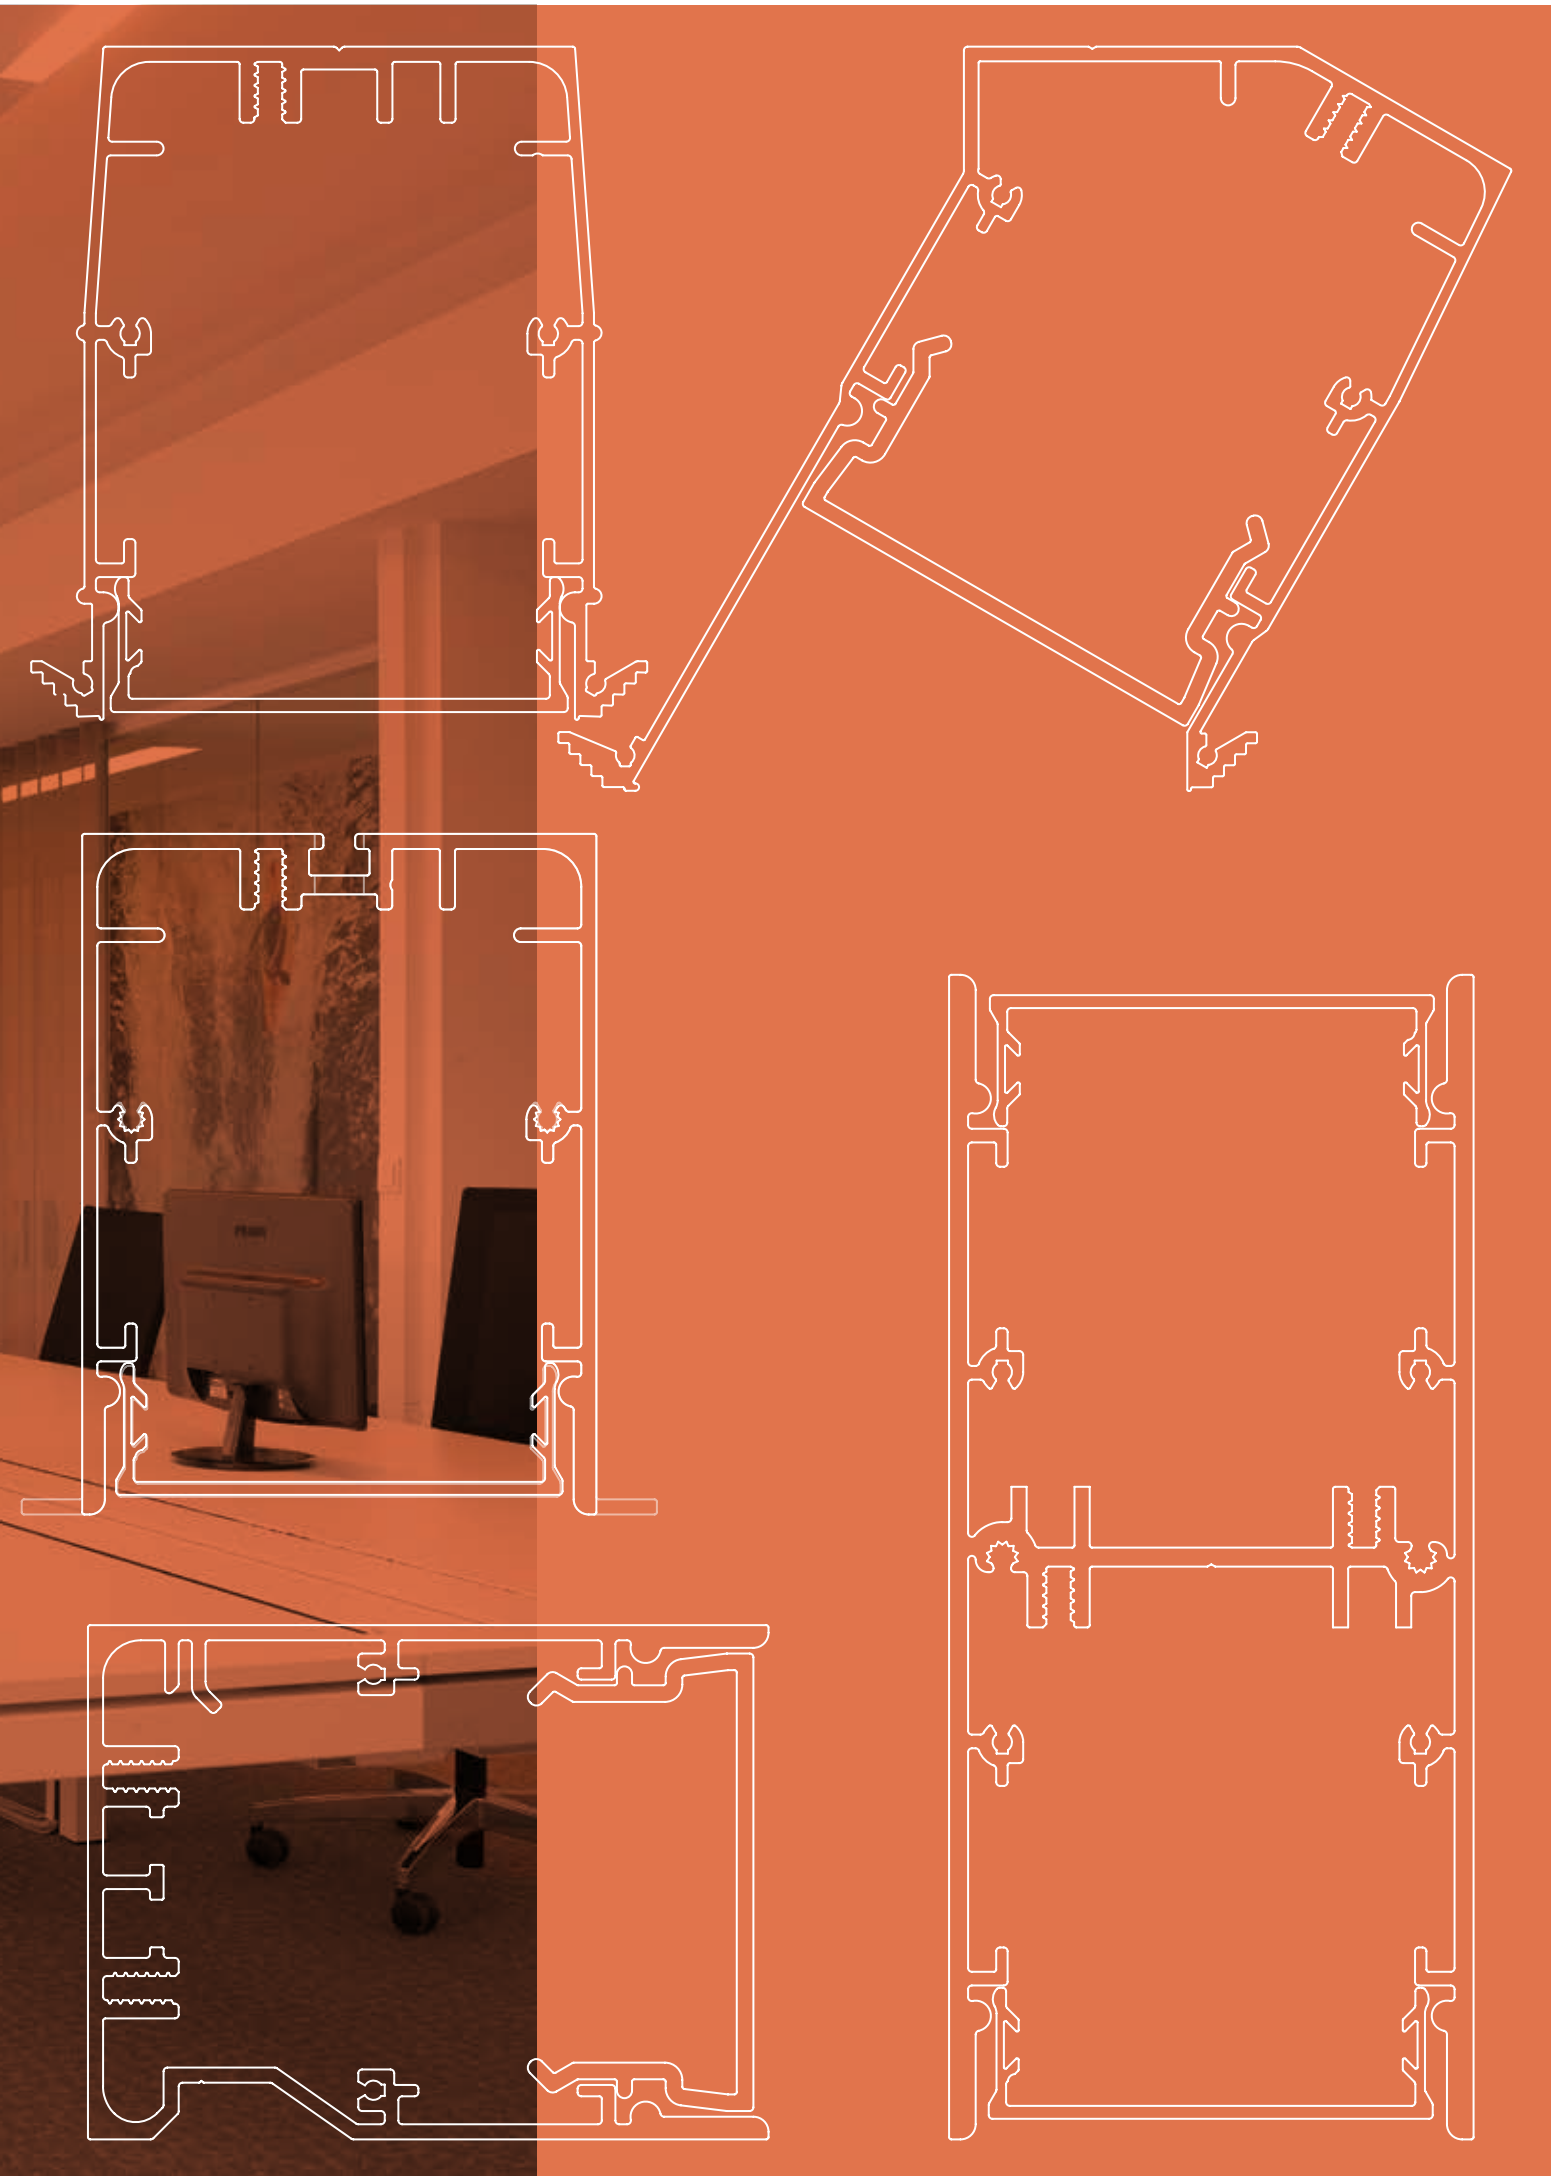


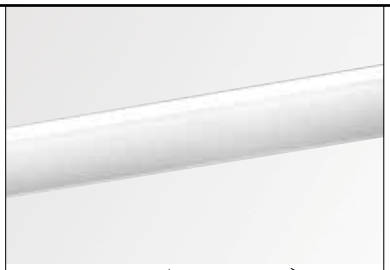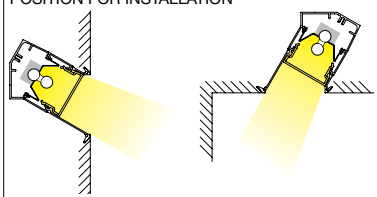	Uniline TR	Uniline TRT	Uniline 85
PROFILE	 **UNI TR - PROFILE ◇** **355 00 00 ◇** ◇ = ANO MAX.L / PROFILE : 6m Kg / m 2,1  TOL EN12020-2	 **UNI TRT - PROFILE ◇** **368 00 00 ◇** ◇ = ANO MAX.L / PROFILE : 6m Kg / m 2,5  TOL EN12020-2	 **UNI85 - PROFILE ◇** **352 00 00 ◇** ◇ = ANO / W MAX.L / PROFILE : 6m Kg / m 2,6  TOL EN12020-2
END CAP	 **UNI TR - END CAP ◇** **355 03 01 ◇** ◇ = ANO 0,1 	 **UNI TRT - END CAP ◇** **368 03 01 ◇** ◇ = ANO 0,1 	 **UNI85 - END CAP ◇** **352 03 01 ◇** ◇ = ANO / W 0,1 
CORNER	**MIDL / UNI - CORNER 180°** **352 06 01** 0,3 	**MIDL / UNI - CORNER 180°** **352 06 01** 0,3 	**MIDL / UNI - CORNER 180°** **352 06 01** 0,2  **MIDL / UNI - CORNER 135°** **352 06 05** 0,2  **MIDL / UNI - CORNER 90°** **352 06 06** 0,2 
FIXATION	85 x (L + 5) x 125 min.6 / max.25 **UNI TR - CLIP** **355 14 01** 0,1 	102 x (L + 5) x 130 min.9 / max.15 **UNI TRT - CLIP** **368 14 01** 0,1  POSITION FOR INSTALLATION 	75 x (L + 5) x 135 max.35 **UNI85 - INSIDE CLIP** **352 14 01** 0,1 
CURRENT SUPPLY			


Uniline 70




UNI70 - PROFILE ◇
351 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m
2,5



TOL EN12020-2




UNI70 - END CAP ◇
351 03 01 ◇
◇ = ALU / W
0,1




MIDL / UNI - CORNER 180°
352 06 01
0,2


MIDL / UNI - CORNER 135°
352 06 05
0,2

MIDL / UNI - CORNER 90°
352 06 06
0,2




UNI70 - WALL FIXATION 90°
351 06 10
0,3





SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m

SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m
0,1



CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **351 98 51**
L 6,0m / 3 x 0,75mm² **351 98 56**
L 1,6m / 5 x 0,75mm² **351 99 51**
L 6,6m / 5 x 0,75mm² **351 99 56** 0,3


OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90




ANO **203 99 55 ANO**
W **203 99 55 W**
ANO **203 99 56 ANO**
W **203 99 56 W**
0,1



Uniline Twin

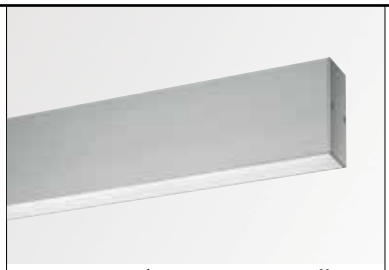


UNI T - PROFILE ◇
353 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m
4,5



TOL EN12020-2




UNI T - END CAP ◇
353 03 01 ◇
◇ = ALU / W
0,1




UNI T - CORNER 180°
353 06 01
0,2


UNI T - CORNER 135°
353 06 05
0,2

UNI T - CORNER 90°
353 06 06
0,2




UNI T - WALL FIXATION 90°
353 06 10
0,3





SUSPENSION 5 SINGLE 1,6
328 16 01
L 1,6m

SUSPENSION 5 SINGLE 6,0
328 16 06
L 6,0m
0,2



CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **353 98 51**
L 6,0m / 3 x 0,75mm² **353 98 56**
L 1,6m / 5 x 0,75mm² **353 99 51**
L 6,0m / 5 x 0,75mm² **353 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**
ANO **203 99 56 ANO**
W **203 99 56 W**
0,1




NO MODULE IN THIS AREA
120mm NON DIM / 210mm DIM



Uniline Wall




UNI W - PROFILE ◇
354 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m
2,2




TOL EN12020-2




UNI70 - END CAP ◇
351 03 01 ◇
◇ = ALU
0,1




MIDL / UNI - CORNER 180°
352 06 01
0,2




UNI W - FIXATION
354 06 10
0,3



UP



DOWN



p

Uniline Single Jack

UNI - SINGLE JACK
352 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W



0,3 IP20

Spot JAC

SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC



Uniline Twin Jack

UNI - TWIN JACK
352 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W



0,3 IP20

Spot JAC

SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC





led

Uniline Led Array

UNI LED ARRAY
110-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W
EXCL.UNI - PC SBL PROFILE

1,6 IP20 0,1



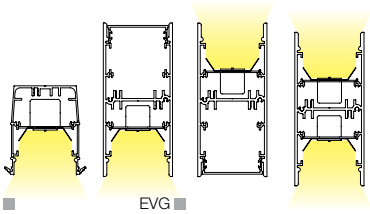

Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 15	560	**352 610 22 E**	**352 610 22 ED1**	**352 610 22 ED2**
1 x 22	841	**352 610 32 E**	**352 610 32 ED1**	**352 610 32 ED2**
1 x 30	1121	**352 610 42 E**	**352 610 42 ED1**	**352 610 42 ED2**


Requirements
UNI - PC SBL PROFILE
352 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m




Uniline T16 Down

UNI - T16 PARALLEL BAP DOWN
1 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

1,2 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 28/54	1205	**352 61 154 EB**	**352 61 154 ED1B**	**352 61 154 ED2B**



Requirement



UNI - PC SBL PROFILE

UNI - PC SBL PROFILE
352 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

UNI - PC profile




UNI - PC SBL PROFILE CL

UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m


Uniline Modules T16 Non Stop

UNI NS - T16 SERIE DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.UNI - PC SBL PROFILE

IP20 0,1



CONTINUOUS LIGHTLINE

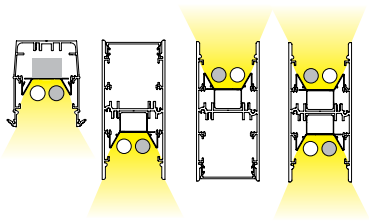



Requirements

UNI - PC SBL PROFILE
352 02 05 SBL
or
UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

COMPOSITION	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH	MODULES
1	1190	352 79 001 E	352 79 001 ED1	352 79 001 ED2	1x(1x28/54W)
2	1490	352 79 002 E	352 79 002 ED1	352 79 002 ED2	1x(1x35/80W)
3	2150-2277	352 79 003 E	352 79 003 ED1	352 79 003 ED2	1x(2x28/54W)
4	2597-2877	352 79 004 E	352 79 004 ED1	352 79 004 ED2	1x(2x35/80W)
5	2932-3079	352 79 005 E	352 79 005 ED1	352 79 005 ED2	1x(1x21/39W) + 1x(2x28/54W)
6	3079-3115	352 79 006 E	352 79 006 ED1	352 79 006 ED2	1x(1x14/24W) + 1x(2x35/80W)
7	3115-3379	352 79 007 E	352 79 007 ED1	352 79 007 ED2	1x(1x28/54W) + 1x(2x28/54W)
8	3379-3410	352 79 008 E	352 79 008 ED1	352 79 008 ED2	1x(1x21/39W) + 1x(2x35/80W)
9	3410-3562	352 79 009 E	352 79 009 ED1	352 79 009 ED2	1x(1x35/80W) + 1x(2x28/54W)
10	3562-3709	352 79 010 E	352 79 010 ED1	352 79 010 ED2	1x(2x35/80W) + 1x(1x28/54W)
11	3709-4269	352 79 011 E	352 79 011 ED1	352 79 011 ED2	1x(1x35/80W) + 1x(2x35/80W)
12	4269-4456	352 79 012 E	352 79 012 ED1	352 79 012 ED2	2x(2x28/54W)
13	4456-4552	352 79 013 E	352 79 013 ED1	352 79 013 ED2	1x(2x35/80W) + 1x(1x35/80W) + 1x(1x14/24W)
14	4552-4816	352 79 014 E	352 79 014 ED1	352 79 014 ED2	2x(2x28/54W) + 1x(1x14/24W)
15	4816-5656	352 79 015 E	352 79 015 ED1	352 79 015 ED2	2x(2x35/80W)
16	5656-6000	352 79 016 E	352 79 016 ED1	352 79 016 ED2	1x(2x21/39W) + 2x(2x28/54W)
17	6000-7030	352 79 017 E	352 79 017 ED1	352 79 017 ED2	2x(2x35/80W) + 1x(1x35/80W))
18	7030-8200	352 79 018 E	352 79 018 ED1	352 79 018 ED2	3x(2x35/80W)
19	8200-9500	352 79 019 E	352 79 019 ED1	352 79 019 ED2	3x(2x35/80W) + 1x(1x35/80W)
20	9500-11000	352 79 020 E	352 79 020 ED1	352 79 020 ED2	4x(2x35/80W)
21	11000-12000	352 79 021 E	352 79 021 ED1	352 79 021 ED2	4x(2x35/80W) + 1x(1x35/80W)
COMBINATION OF COMPOSITIONS	>12000				

ED1 / ED2 - 80W NOT ADVISED


Uniline Modules T16 Seamless

UNI SL - T16 SERIE
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.UNI - PC SBL PROFILE

IP20 0,1



CONTINUOUS LIGHTLINE

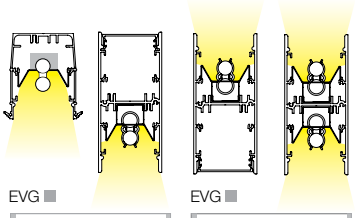




Requirements

UNI - PC SBL PROFILE
352 02 05 SBL
or
UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 21/39	1770	352 75 239 E	352 75 239 ED1	352 75 239 ED2
2 x 28/54	2370	352 75 254 E	352 75 254 ED1	352 75 254 ED2

UNI SL - T16
1 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.UNI - PC SBL PROFILE

IP20 0,1




Requirements


UNI - PC SBL PROFILE
352 02 05 SBL
or
UNI - PC SBL PROFILE CL
352 02 06 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 24	585	352 75 124 E		
1 x 21/39	885	352 75 139 E	352 75 139 ED1	352 75 139 ED2
1 x 28/54	1185	352 75 154 E	352 75 154 ED1	352 75 154 ED2

T16 SEAMLESS - PAG TEC

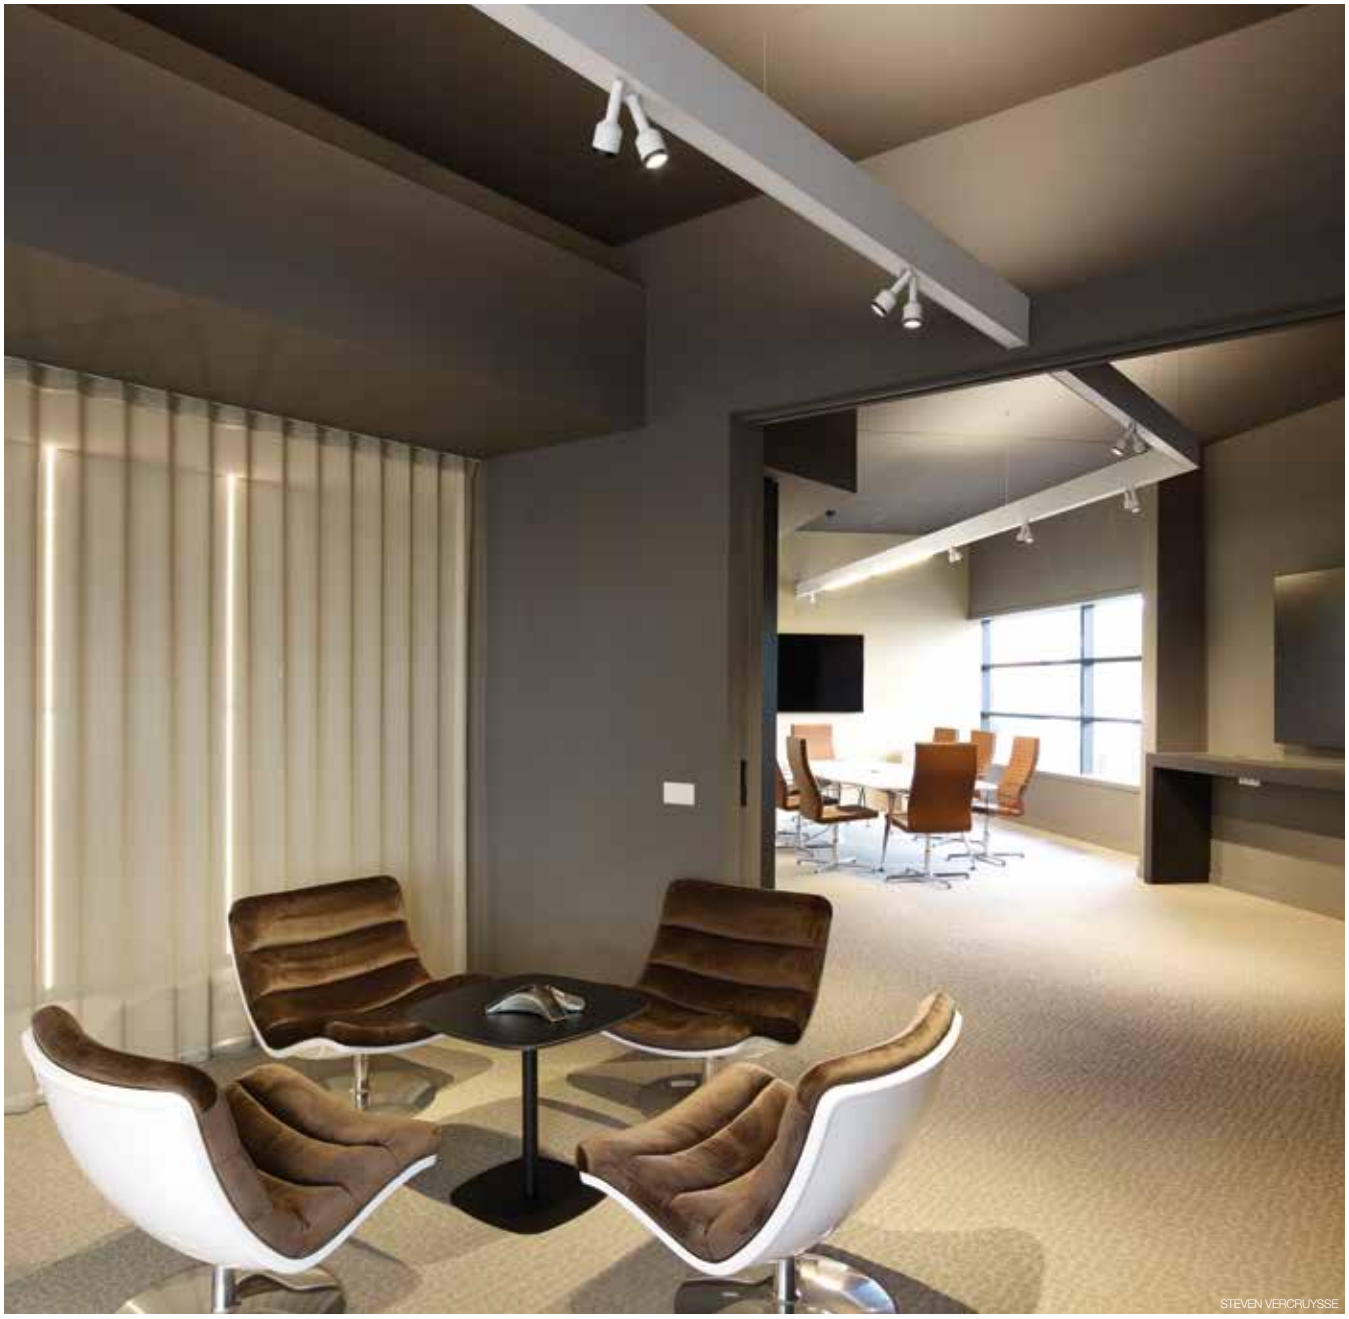



STEVEN VERCRUYSSE

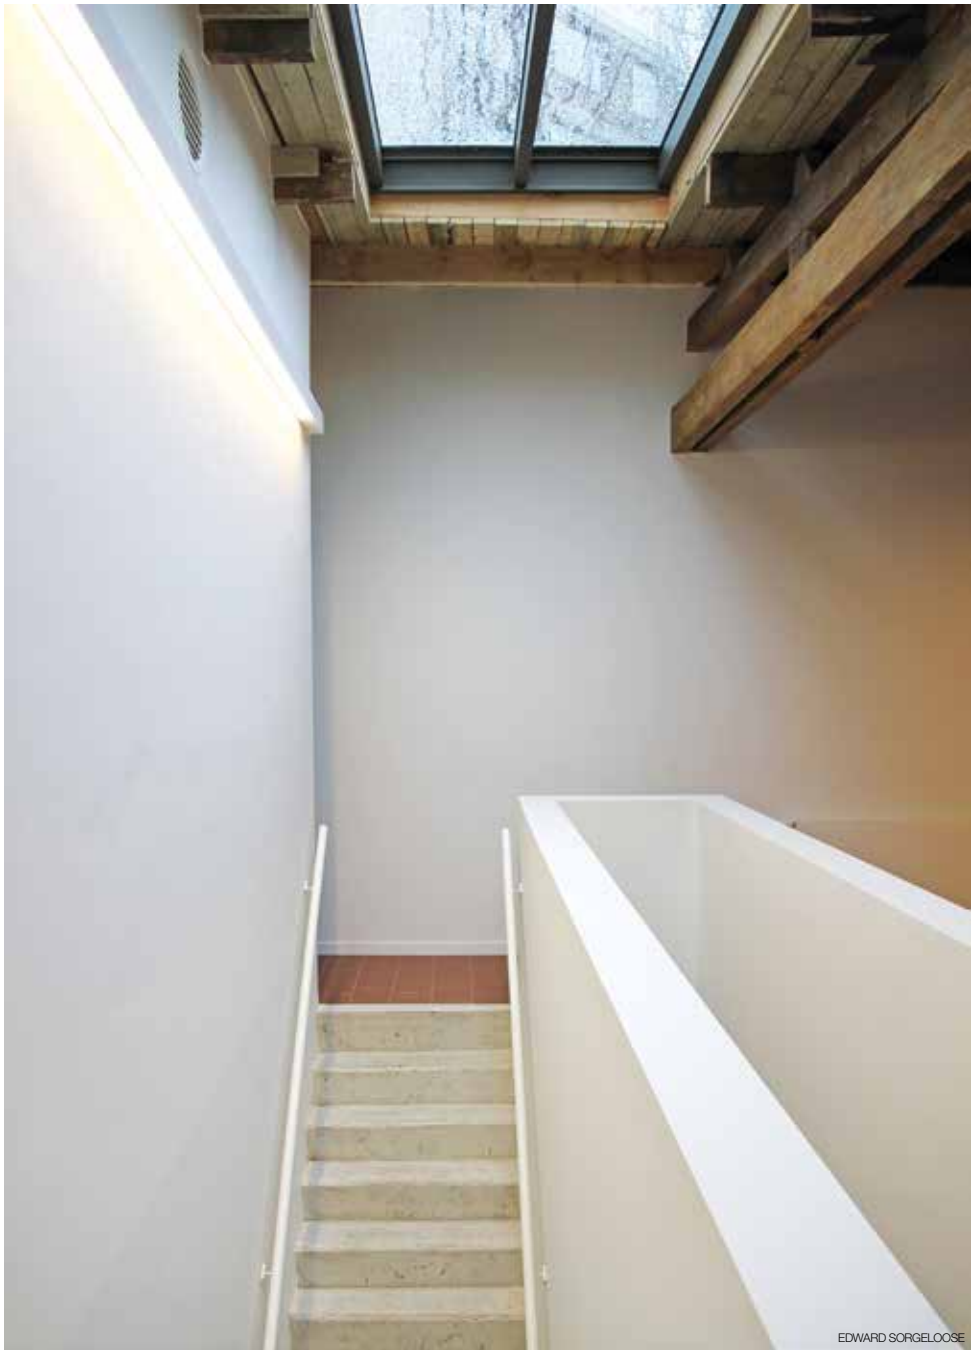

EDWARD SORGELOOSE



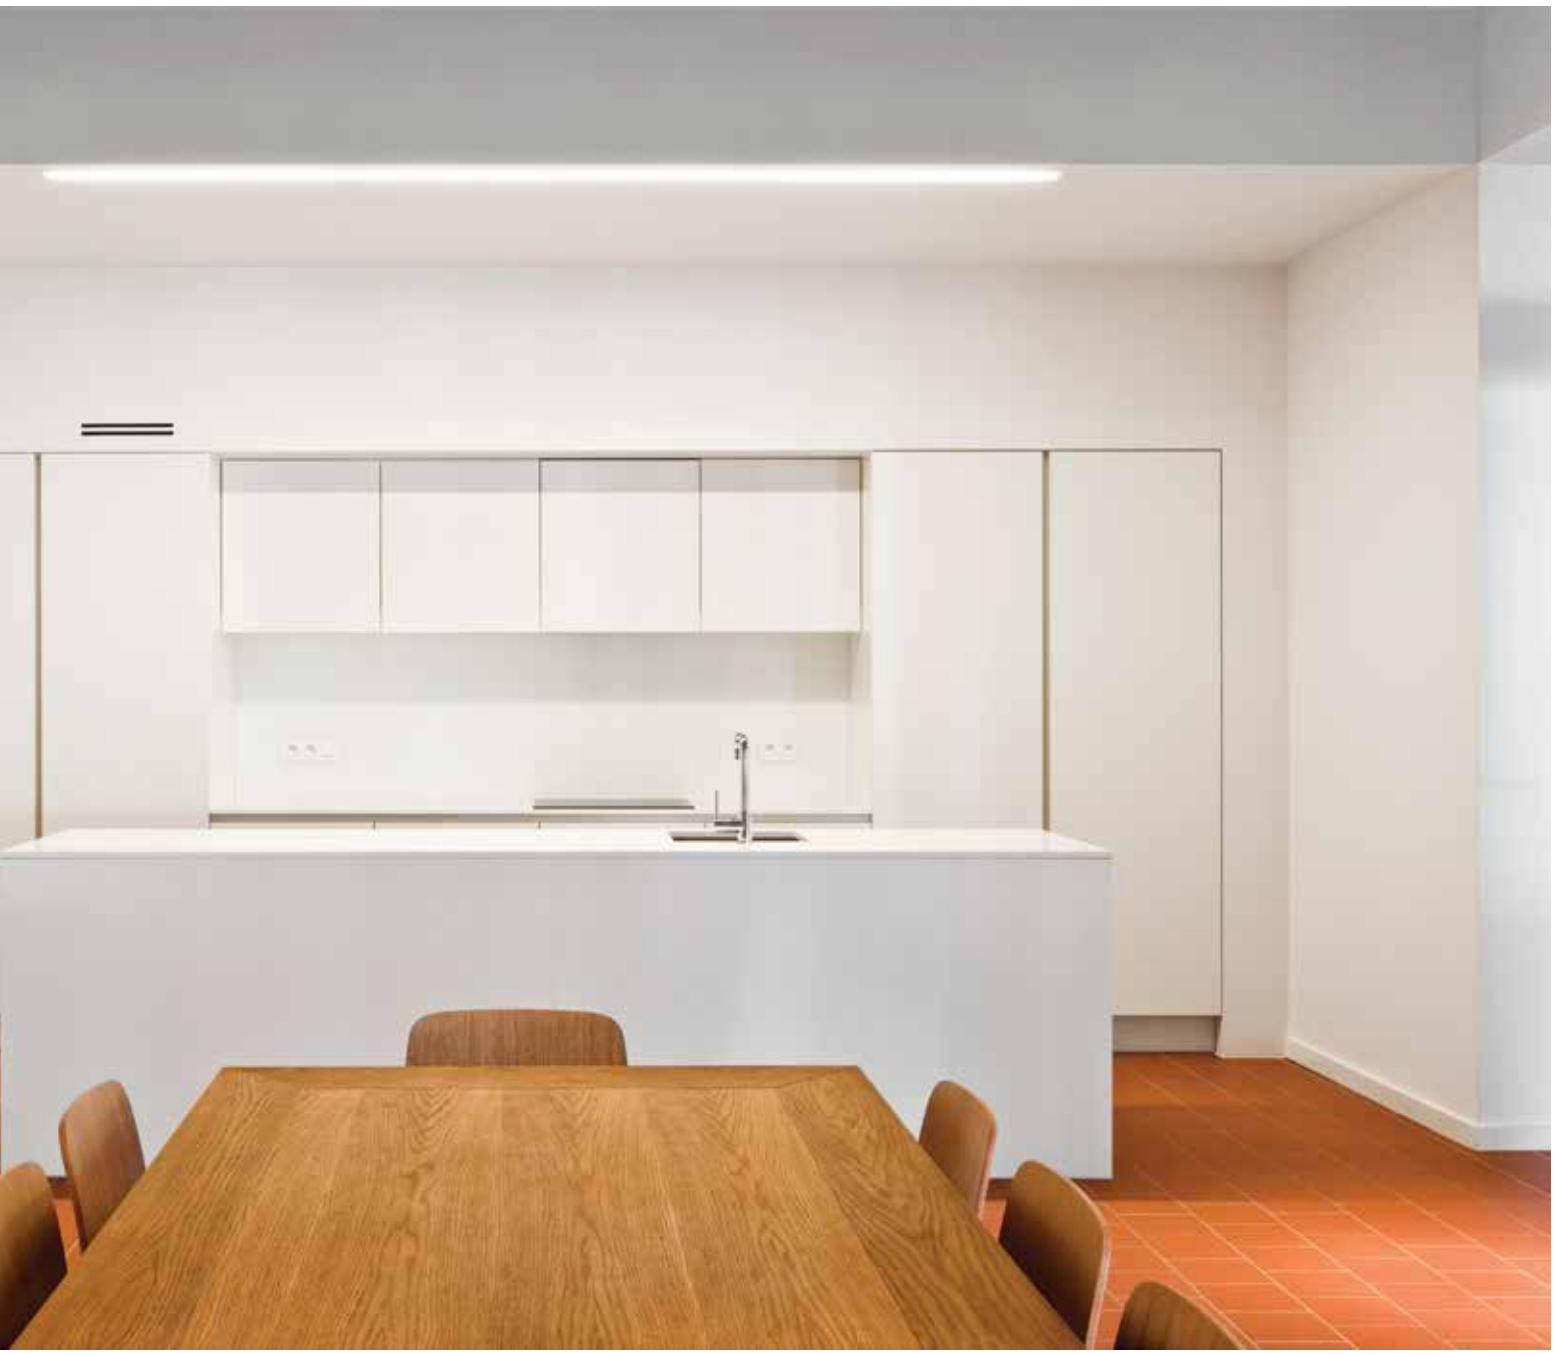



ARCHITECTSLAB



DARIUS CEKANAUSKAS

MIDILINE 100L / 80L


A profile for suspended or surface mounted use, featuring modules which can be equipped with T16 fluorescent lamps, seamless or halogen lamps.


www.deltalight.com/midiline100l
www.deltalight.com/midiline80l



UNITED CLOTHING OF BELGIUM



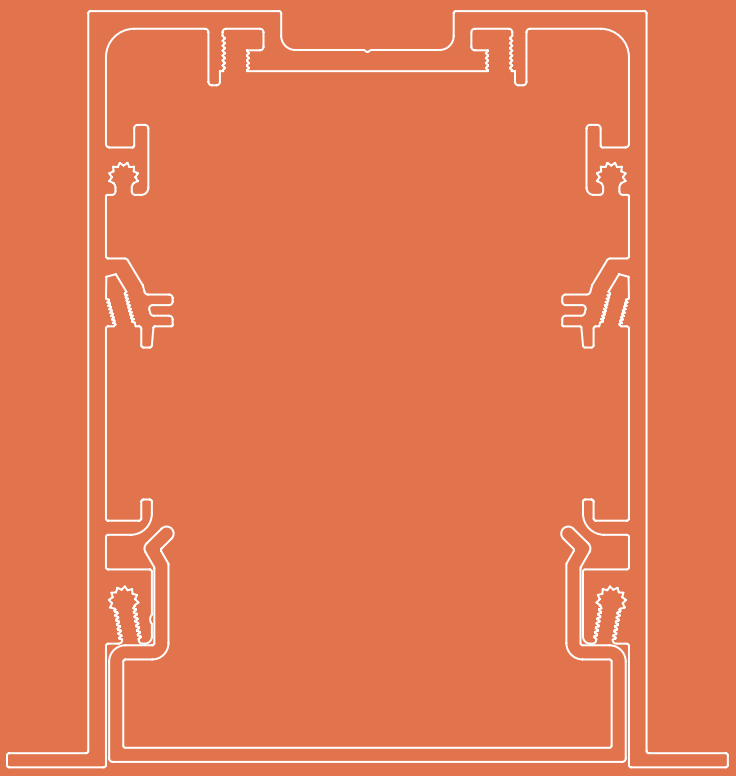


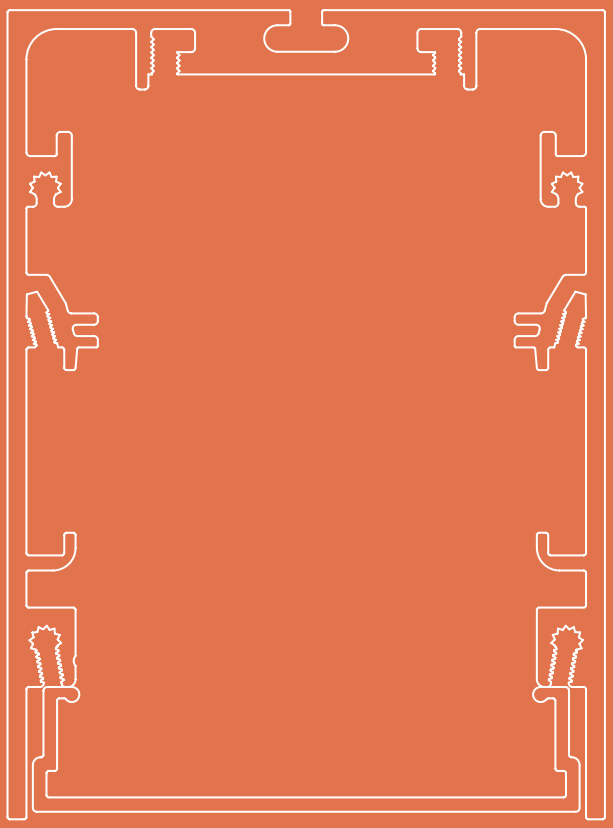

Midiline 100L


Midiline 80L

PROFILE

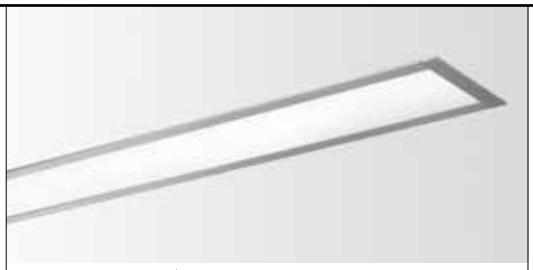

MID 100L - PROFILE ◇
361 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

3,5




TOL EN12020-2



MID 80L - PROFILE ◇
360 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

3,5




TOL EN12020-2

END CAP



MID 100L - END CAP ◇
361 03 01 ◇
◇ = ANO / W


0,1





MID 80L - END CAP ◇
360 03 01 ◇
◇ = ANO / W


0,1



CORNER


MIDL / UNI - CORNER 180°
352 06 01

0,3




MIDL / UNI - CORNER 135°
352 06 05

0,3




MIDL / UNI - CORNER 90°
352 06 06

0,3




MIDL / UNI - CORNER 180°
352 06 01

0,3




MIDL / UNI - CORNER 135°
352 06 05

0,3



MIDL / UNI - CORNER 90°
352 06 06


0,3



FIXATION


90 x (L + 5) x 110 max.35
MID 100L - INSIDE CLIP
361 14 01


0,1



MID 80L - WALL FIXATION 90°
360 06 10

0,3






SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m

SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **298 98 51**
L 6,0m / 3 x 0,75mm² **298 98 56**
L 1,6m / 5 x 0,75mm² **298 99 51**
L 6,0m / 5 x 0,75mm² **298 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1



Midiline L RB150

MIDL - RB150 ◇
361 61 150 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-C51 max.50W

0,3 IP20 0,5

L 220






Midiline L RB250

MIDL - RB250 ◇
361 61 250 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-C51 max.50W

0,5 IP20 0,5

L 300





Midiline L Single Jack

MIDL - SINGLE JACK
361 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

L 150



0,3 IP20

Spot JAC

SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC



Midiline L Twin Jack

MIDL - TWIN JACK
361 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

L 225



0,3 IP20

Spot JAC

SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC





EDWARD SORGELOOSE


Midiline L Modules T16 Down

MIDL - T16 PARALLEL PC SBL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
EXCL.1 x MIDL - PC SBL PROFILE

CE 1,2 IP20 0,1



Requirements
MID - PC SBL PROFILE
298 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	605	**361 71 224 E**	**361 71 224 ED1**	**361 71 224 ED2**
2 x 28/54	1205	**361 71 254 E**	**361 71 254 ED1**	**361 71 254 ED2**
2 x 35	1505	**361 71 235 E**	**361 71 235 ED1**	**361 71 235 ED2**



Midiline L Modules T16 Seamless Down


MIDL SL - T16 DOWN
2 x T16-S / G5 / 220-240V / 0 I 50-60Hz
EXCL.1 x MIDL - PC SBL PROFILE

CE 1,0 IP20 0,1



Requirements
MID - PC SBL PROFILE
298 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

CONTINUOUS LIGHTLINE



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 24	585	**361 75 224 E**		
2 x 21/39	885	**361 75 239 E**	**361 75 239 ED1**	**361 75 239 ED2**
2 x 28/54	1185	**361 75 254 E**	**361 75 254 ED1**	**361 75 254 ED2**



T16 SEAMLESS - PAG TEC


Requirement

MID - PC SBL PROFILE
298 02 05 SBL
MAX.L / PROFILE : 5.8m - 0,2 / m

MID - PC SBL profile



MID - PC SBL PROFILE

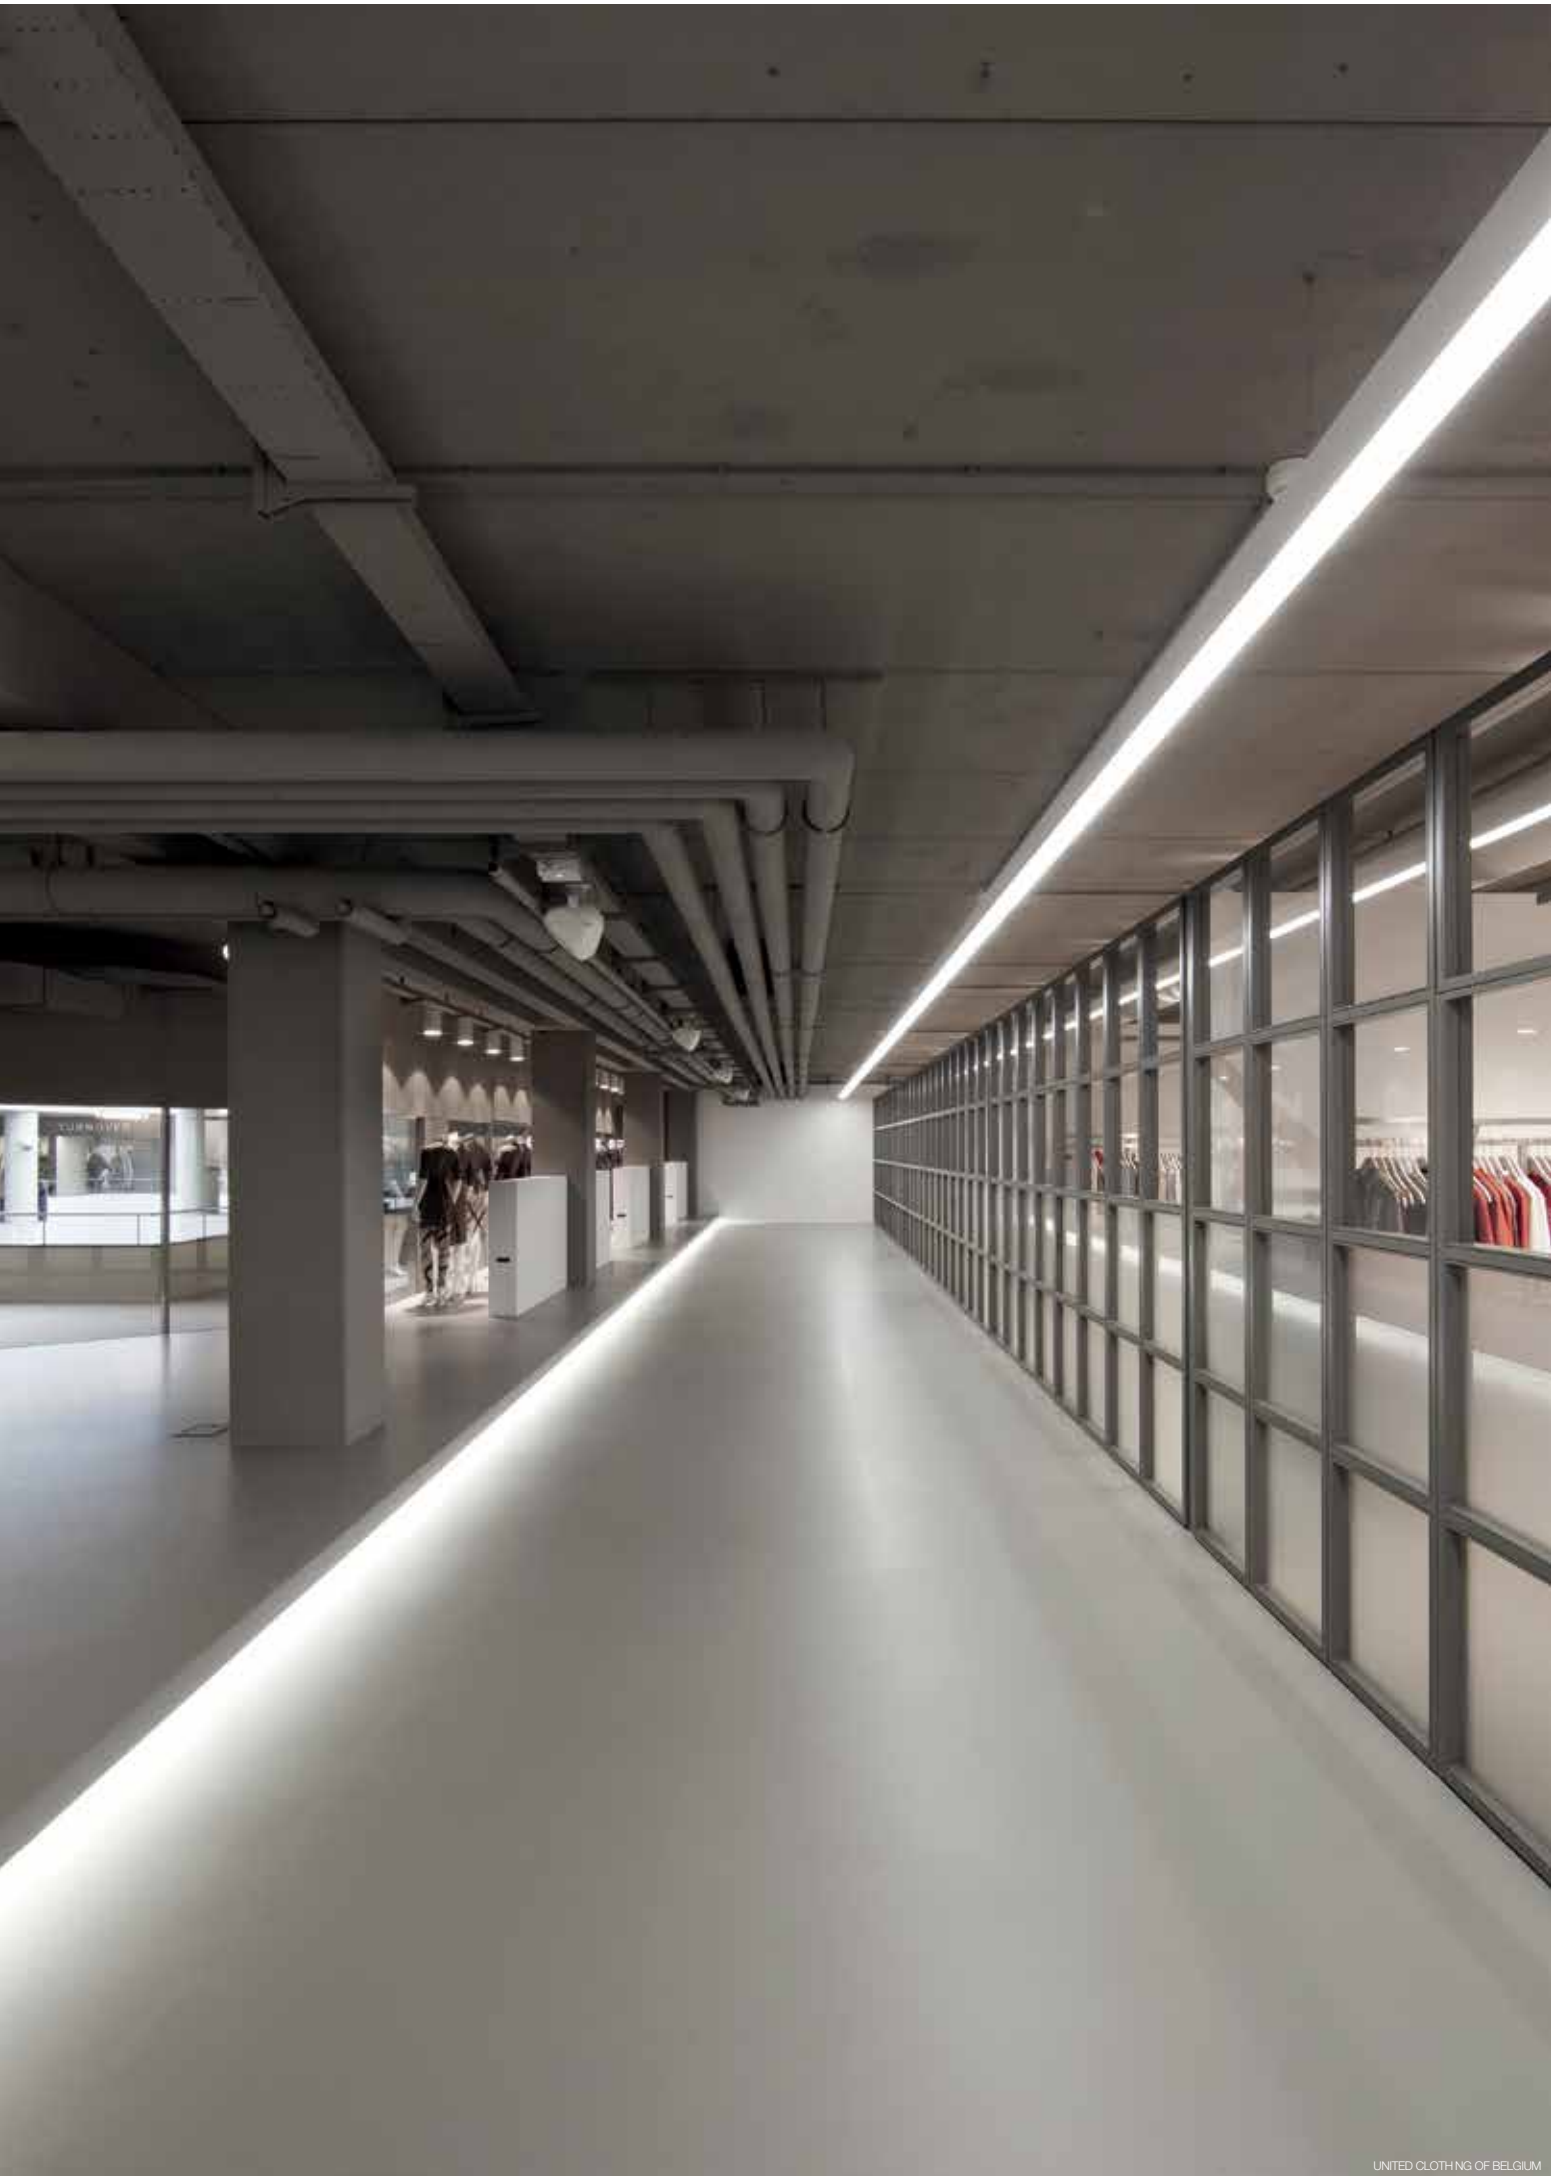

UNITED CLOTHING OF BELGIUM



ALEXANDER HUGELIER - BEELDPUNT





new


FINNLINE

The Finnline is an extremely thin and versatile made-to-measure profile solution. Used either as a down, up or down-up lighting profile, the Finnline caters for a very wide range of applications. Despite its extremely slim design, the Finnline allows you to make suprising combinations, using Delta Light's unique Tweeter and Mini Spy, a graphic combination of thin led lines, or as a fully functional and efficient led profile.

www.deltalight.com/finnline


reddot design award winner 2015

GOOD DESIGN award

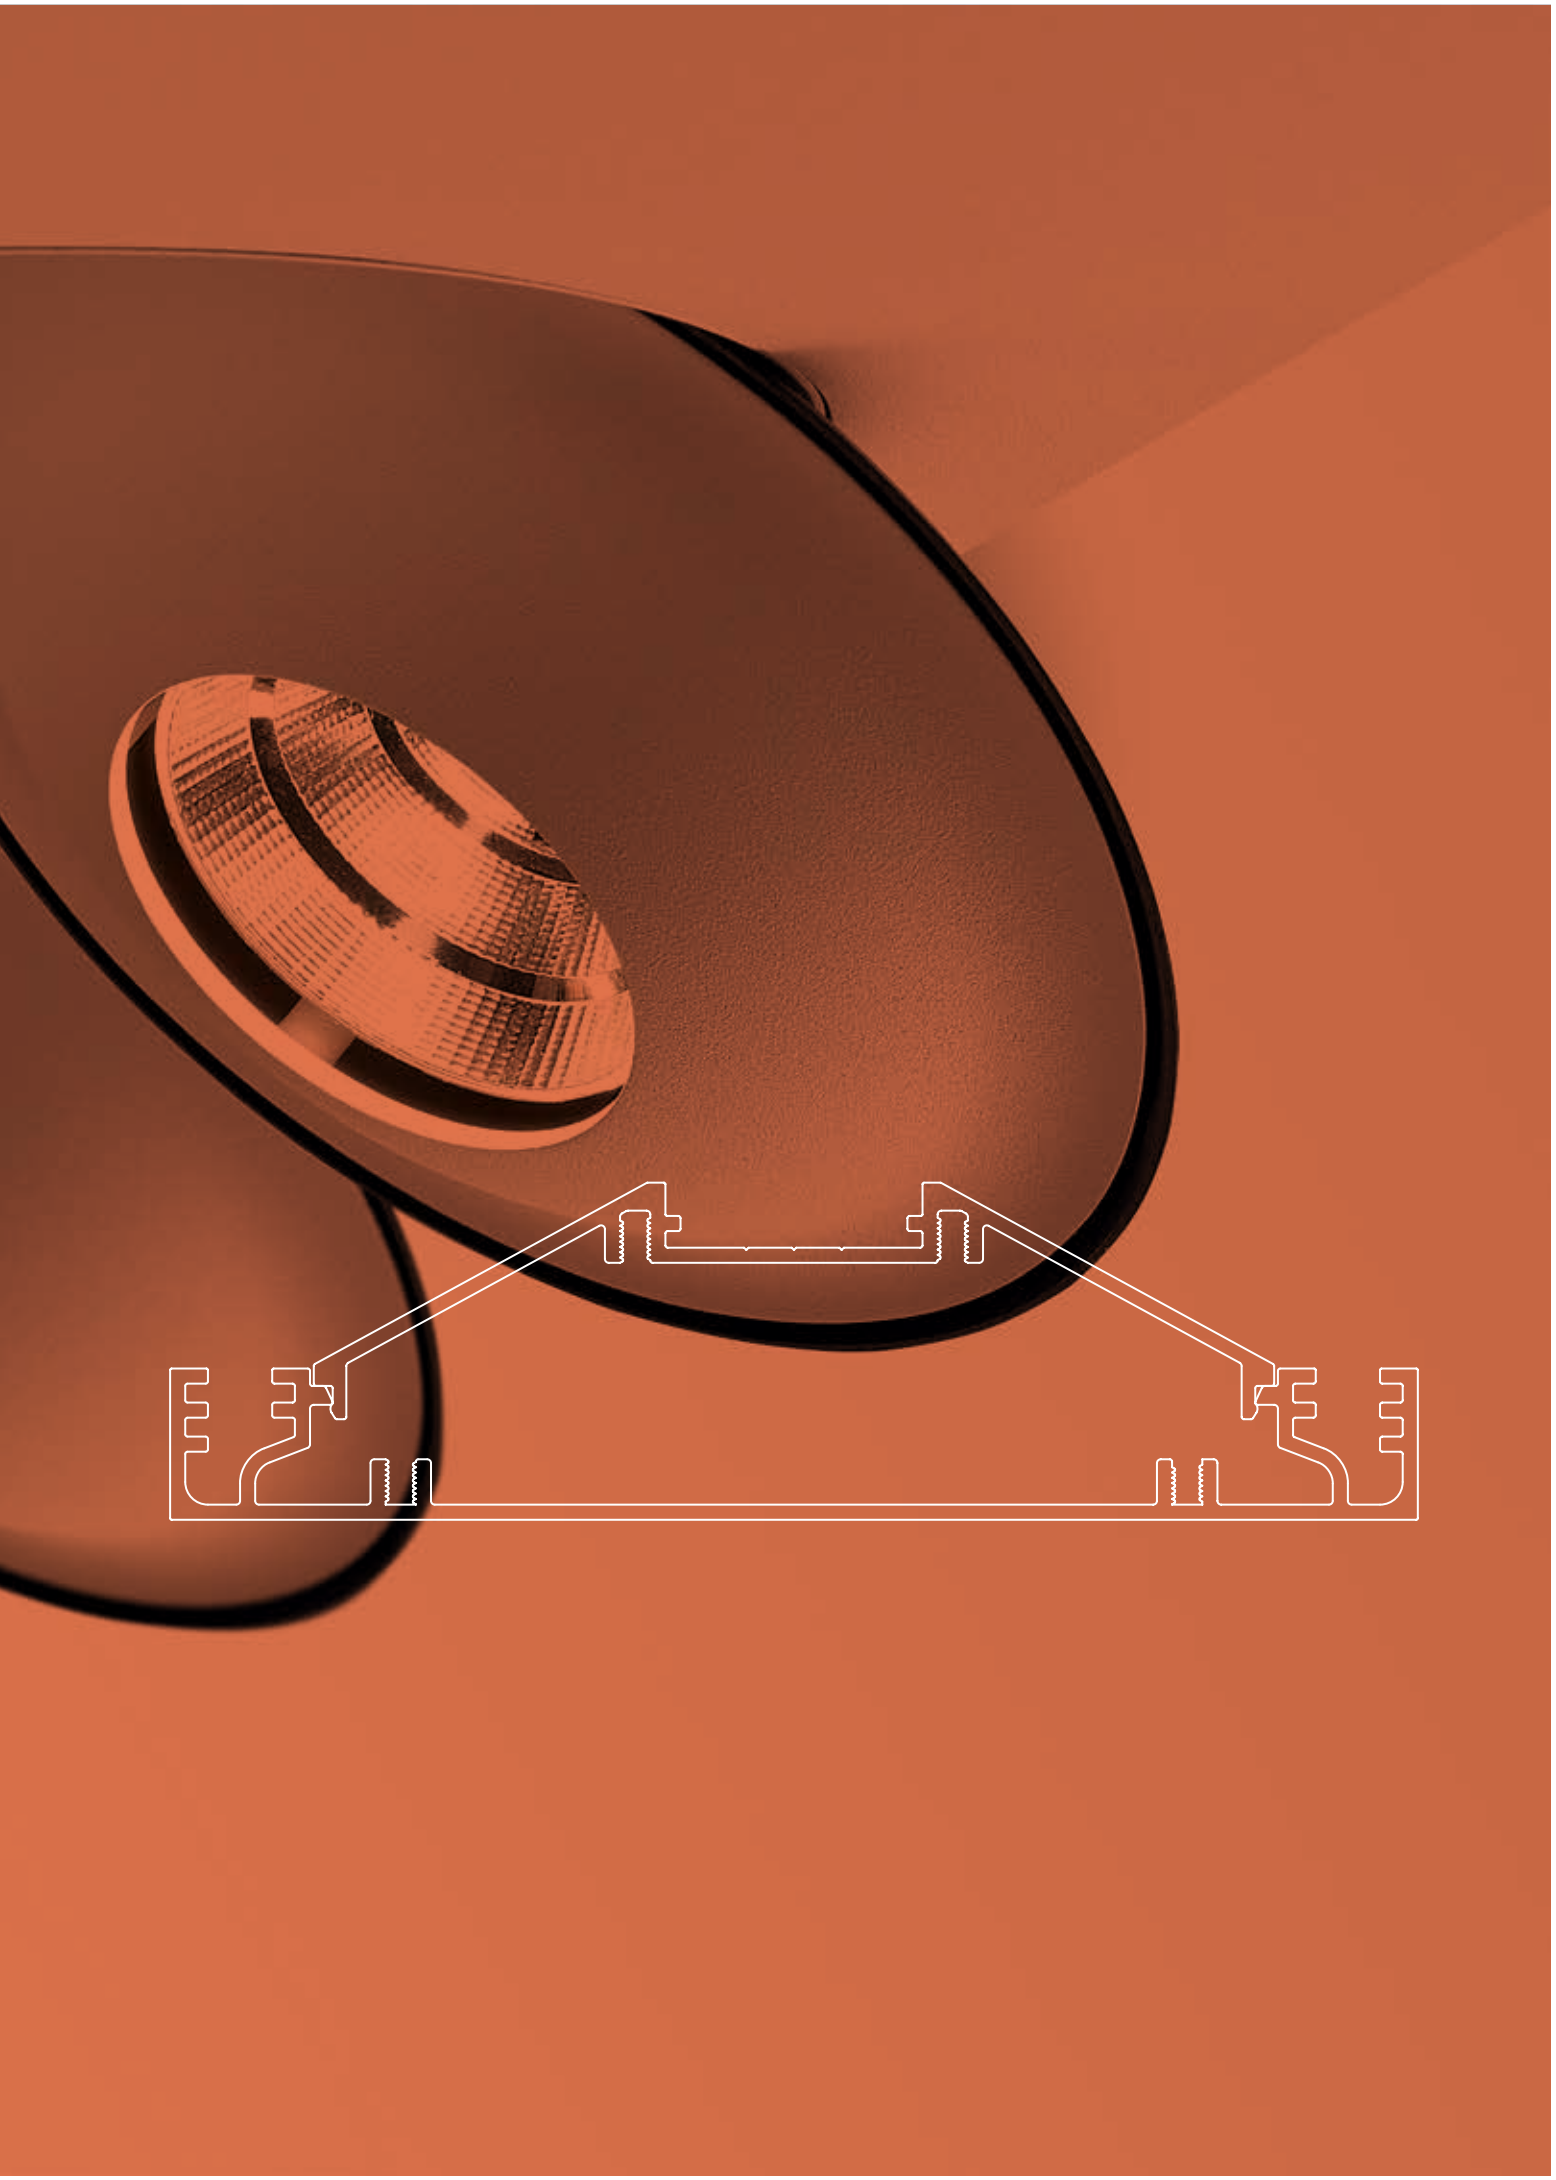


Finnline

PROFILE

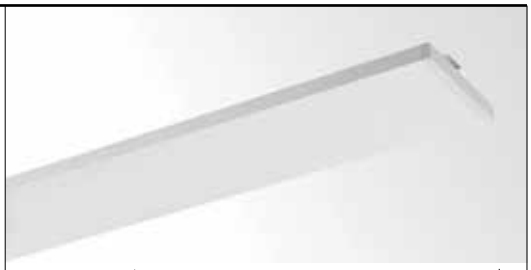

FNL - PROFILE ◇
390 00 00 ◇
◇ = B / W
MAX.L / PROFILE : 6m
Kg / m
1,6




TOL EN12020-2

END CAP




FNL - END CAP ◇
390 03 01 ◇
◇ = B-C / W-C
0,1





CORNER

FNL - CORNER 180°
390 06 01
0,3

FNL - CORNER 90°
390 06 06
0,3








FIXATION

FNL - WALL FIXATION 90°
390 06 10
0,3



SUSPENSION 7 SINGLE 1,6
328 18 01
L 1,6m


SUSPENSION 7 SINGLE 6,0
328 18 06
L 6m
0,1



CURRENT SUPPLY


CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **390 98 51**
L 6,0m / 3 x 0,75mm² **390 98 56**
L 1,6m / 5 x 0,75mm² **390 99 51**
L 6,0m / 5 x 0,75mm² **390 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W
203 99 56 ◇
◇ = ANO / B / W
0,1





4000K

3000K

REFLECTOR FL-33°

REFLECTOR WFL-50°

2700K

REFLECTOR FL-33°


REFLECTOR WFL-50°

p

Finnline 1 Tweeter



L 250



CRI > 80	CRI > 90
ON REQUEST	
958lm (10W)	803lm (10W)
FNL - 1 TWEETER 3033 ◇ **390 61 8122** ◇ ◇ = B / W	**FNL - 1 TWEETER 3033-9** ◇ **390 61 89122** ◇ ◇ = B / W
FNL - 1 TWEETER 3050 ◇ **390 61 8132** ◇ ◇ = B / W	**FNL - 1 TWEETER 3050-9** ◇ **390 61 89132** ◇ ◇ = B / W
876lm (10W)	742lm (10W)
FNL - 1 TWEETER 2733 ◇ **390 61 8123** ◇ ◇ = B / W	**FNL - 1 TWEETER 2733-9** ◇ **390 61 89123** ◇ ◇ = B / W
FNL - 1 TWEETER 2750 ◇ **390 61 8133** ◇ ◇ = B / W	**FNL - 1 TWEETER 2750-9** ◇ **390 61 89133** ◇ ◇ = B / W

ADJUSTABLE 0°-45° / 350°
INCL.1 x POWERLED WHITE 10W
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz

CE 0,3 IP20


ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40

PATENTED EX-CENTRIC ROTATION SYSTEM®

Finnline 2 Tweeter



L 480



CRI > 80	CRI > 90
ON REQUEST	
2x 958lm (10W)	2x 803lm (10W)
FNL - 2 TWEETER 3033 ◇ **390 61 8222** ◇ ◇ = B / W	**FNL - 2 TWEETER 3033-9** ◇ **390 61 89222** ◇ ◇ = B / W
FNL - 2 TWEETER 3050 ◇ **390 61 8232** ◇ ◇ = B / W	**FNL - 2 TWEETER 3050-9** ◇ **390 61 89232** ◇ ◇ = B / W
2x 876lm (10W)	2x 742lm (10W)
FNL - 2 TWEETER 2733 ◇ **390 61 8223** ◇ ◇ = B / W	**FNL - 2 TWEETER 2733-9** ◇ **390 61 89223** ◇ ◇ = B / W
FNL - 2 TWEETER 2750 ◇ **390 61 8233** ◇ ◇ = B / W	**FNL - 2 TWEETER 2750-9** ◇ **390 61 89233** ◇ ◇ = B / W

ADJUSTABLE 0°-45° / 350°
INCL.2 x POWERLED WHITE 10W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 0,4 IP20

ACCESSORIES
TWEETER CLIP + HONEYCOMB 40
TWEETER CLIP + LINEAR SPREAD LENS 40
TWEETER CLIP + SPREAD LENS 40
TWEETER CLIP + SOFTENING LENS 40
TWEETER CLIP + GLASS SBL 40

PATENTED EX-CENTRIC ROTATION SYSTEM®

p

Accessories

FULL INFO / PAG TEC

TWEETER CLIP ◇ **201 03 00** ◇ ◇ = B / W	Ø45 / H13	
HONEYCOMB 40 ◇ **201 03 01** ◇ ◇ = ALU / B	Ø40	
LINEAR SPREAD LENS 40 **201 03 02**	Ø40	
SPREAD LENS 40 **201 03 03**	Ø40	
SOFTENING LENS 40 **201 03 04**	Ø40	
GLASS SBL 40 **201 03 05**	Ø40	

led

Finnline Mini Spy

FNL - MINI SPY 2 LEFT ◇
390 61 22 L ◇
◇ = B / W
INCL.2 x POWERLED WHITE 2W / 3000K
INCL.2 x LENS 19°
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz
0,3 IP20

L 190



TOPVIEW L

FNL - MINI SPY 2 RIGHT ◇
390 61 22 R ◇
◇ = B / W
INCL.2 x POWERLED WHITE 2W / 3000K
INCL.2 x LENS 19°
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz
0,3 IP20

L 190



TOPVIEW R




led

Finnline Mini Spy Asymmetric

FNL - MINI SPY 3 ASYMMETRIC LEFT ◇
390 61 32 AL ◇
◇ = B / W
INCL.3 x POWERLED WHITE 2W / 3000K
INCL.3 x LENS 19°
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz
0,3 IP20


L 270



TOPVIEW L

FNL - MINI SPY 3 ASYMMETRIC RIGHT ◇
390 61 32 AR ◇
◇ = B / W
INCL.3 x POWERLED WHITE 2W / 3000K
INCL.3 x LENS 19°
INCL.LED POWER SUPPLY 500mA-DC
110-240V / 50-60Hz
0,3 IP20

L 270



TOPVIEW R




PATENTED EX-CENTRIC ROTATION SYSTEM®

p

led

Finnline Led Array Up

FNL - LED ARRAY UP
INCL.FNL - PC SBL PROFILE UP
INCL.POWER SUPPLY
INCL.LED STRIP UP 500mm - 3000K - 10W/strip - 1940lm/m - 99lm/W
220-240V / 50-60Hz






Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 10	1000	**390 620 22 E**		
4 x 10	2000	**390 620 42 E**		
6 x 10	3000	**390 620 62 E**		



led

Finnline Led Array Down Finn

FNL - LED ARRAY DOWN FINN
INCL.FNL - PC SBL PROFILE DOWN
INCL.POWER SUPPLY
INCL.LED ARRAY DOWN - 3000K - 3616lm/m - 135lm/W
220-240V / 50-60Hz






	Watt	L (mm)	X (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
	2 x 15W	1180	100	**390 611 22 L E**	**390 611 22 L ED1**	**390 611 22 L ED2**
	2 x 30W	1980	420	**390 611 42 L E**	**390 611 42 L ED1**	**390 611 42 L ED2**
	2 x 15W	1180	100	**390 611 22 R E**	**390 611 22 R ED1**	**390 611 22 R ED2**
	2 x 30W	1980	420	**390 611 42 R E**	**390 611 42 R ED1**	**390 611 42 R ED2**




Finnline Ready-Made

PROFILE

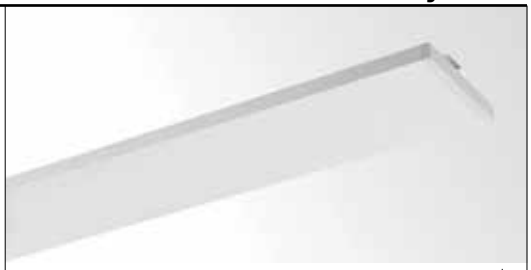


FNL - PROFILE READY-MADE



TOL EN12020-2

END CAP






FNL - END CAP ◇
390 03 01 ◇
◇ = B-C / W-C

0,1

CORNER

FNL - CONNECTION SET RM 180°
390 06 018

0,3




FIXATION

SUSPENSION 7 SINGLE 1,6
328 18 01
L 1,6m

SUSPENSION 7 SINGLE 6,0
328 18 06
L 6m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **390 98 51**
L 6,0m / 3 x 0,75mm² **390 98 56**
L 1,6m / 5 x 0,75mm² **390 99 51**
L 6,0m / 5 x 0,75mm² **390 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



203 99 55 ◇
◇ = ANO / B / W

203 99 56 ◇
◇ = ANO / B / W


0,1



Finnline Ready-Made Led Array Down

FNL - RM LED ARRAY DOWN
INCL.1 x FNL - PROFILE
INCL.FNL - PC SBL PROFILE DOWN
INCL.LED ARRAY DOWN - 3000K - 3616lm/m - 135lm/W
INCL.POWER SUPPLY
220-240V / 50-60Hz

IP20 0,1







Watt	L1 (mm)	L2 (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 30W	1880	1100	**390 518 42 E** ◇	**390 518 42 ED1** ◇	**390 518 42 ED2** ◇
1 x 45W	2440	1660	**390 518 62 E** ◇		**390 518 62 ED2** ◇
1 x 60W	3000	2220	**390 518 82 E** ◇		**390 518 82 ED2** ◇
			◇ = B / W	◇ = B / W	◇ = B / W

Finnline Ready-Made Led Array Down-Up

FNL - RM LED ARRAY DOWN-UP
INCL.1 x FNL - PROFILE
INCL.FNL - PC SBL PROFILE DOWN
INCL.LED ARRAY DOWN - 3000K - 3616lm/m - 135lm/W
INCL.POWER SUPPLY
INCL.LEDSTRIP UP 500mm - 3000K - 10W/STRIP - 99lm/W
INCL PC CLEAR UP
INCL.POWER SUPPLY 24V-DC
220-240V / 50-60Hz / 2 CIRCUITS


IP20 0,1






Watt	L1 (mm)	L2 (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 30W DWN + 3x10 UP	1880	1100	**390 538 42 32 E** ◇	**390 538 42 32 ED1** ◇	**390 538 42 32 ED2** ◇
1 x 45W DWN + 4x10 UP	2440	1660	**390 538 62 42 E** ◇		**390 538 62 42 ED2** ◇
1 x 60W DWN + 5x10 UP	3000	2220	**390 538 82 52 E** ◇		**390 538 82 52 ED2** ◇
			◇ = B / W	◇ = B / W	◇ = B / W

p

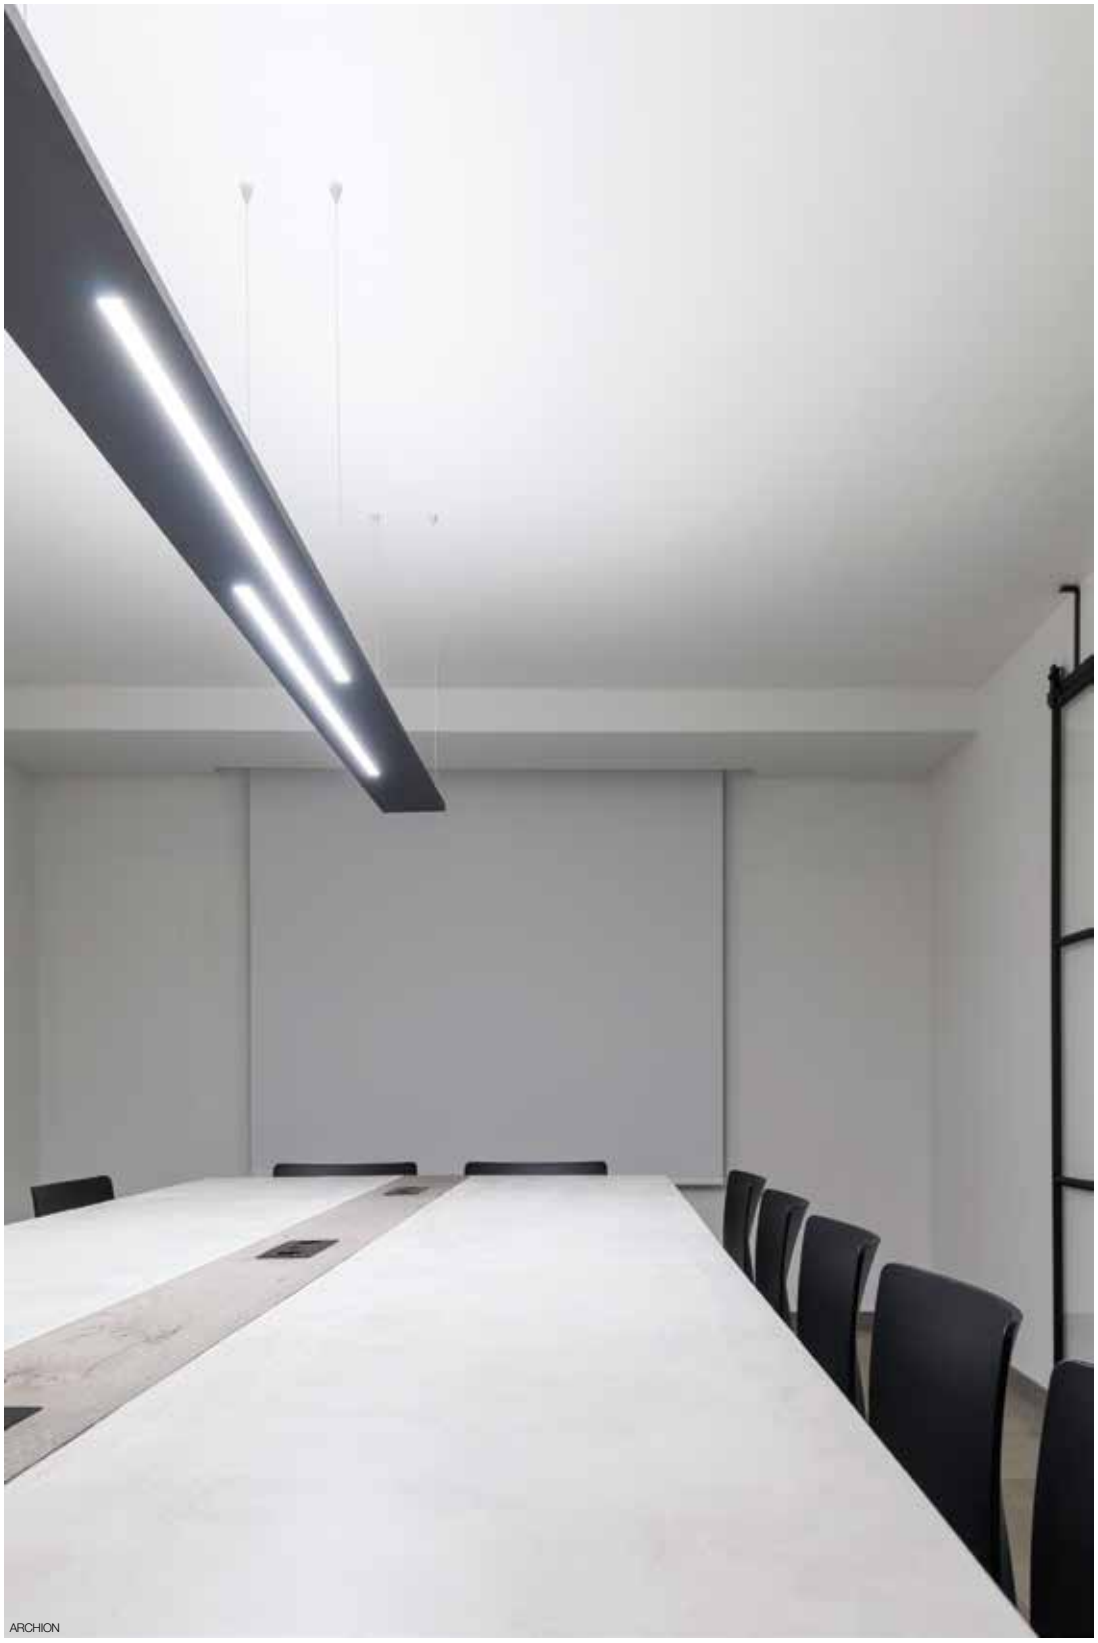

ARCHION

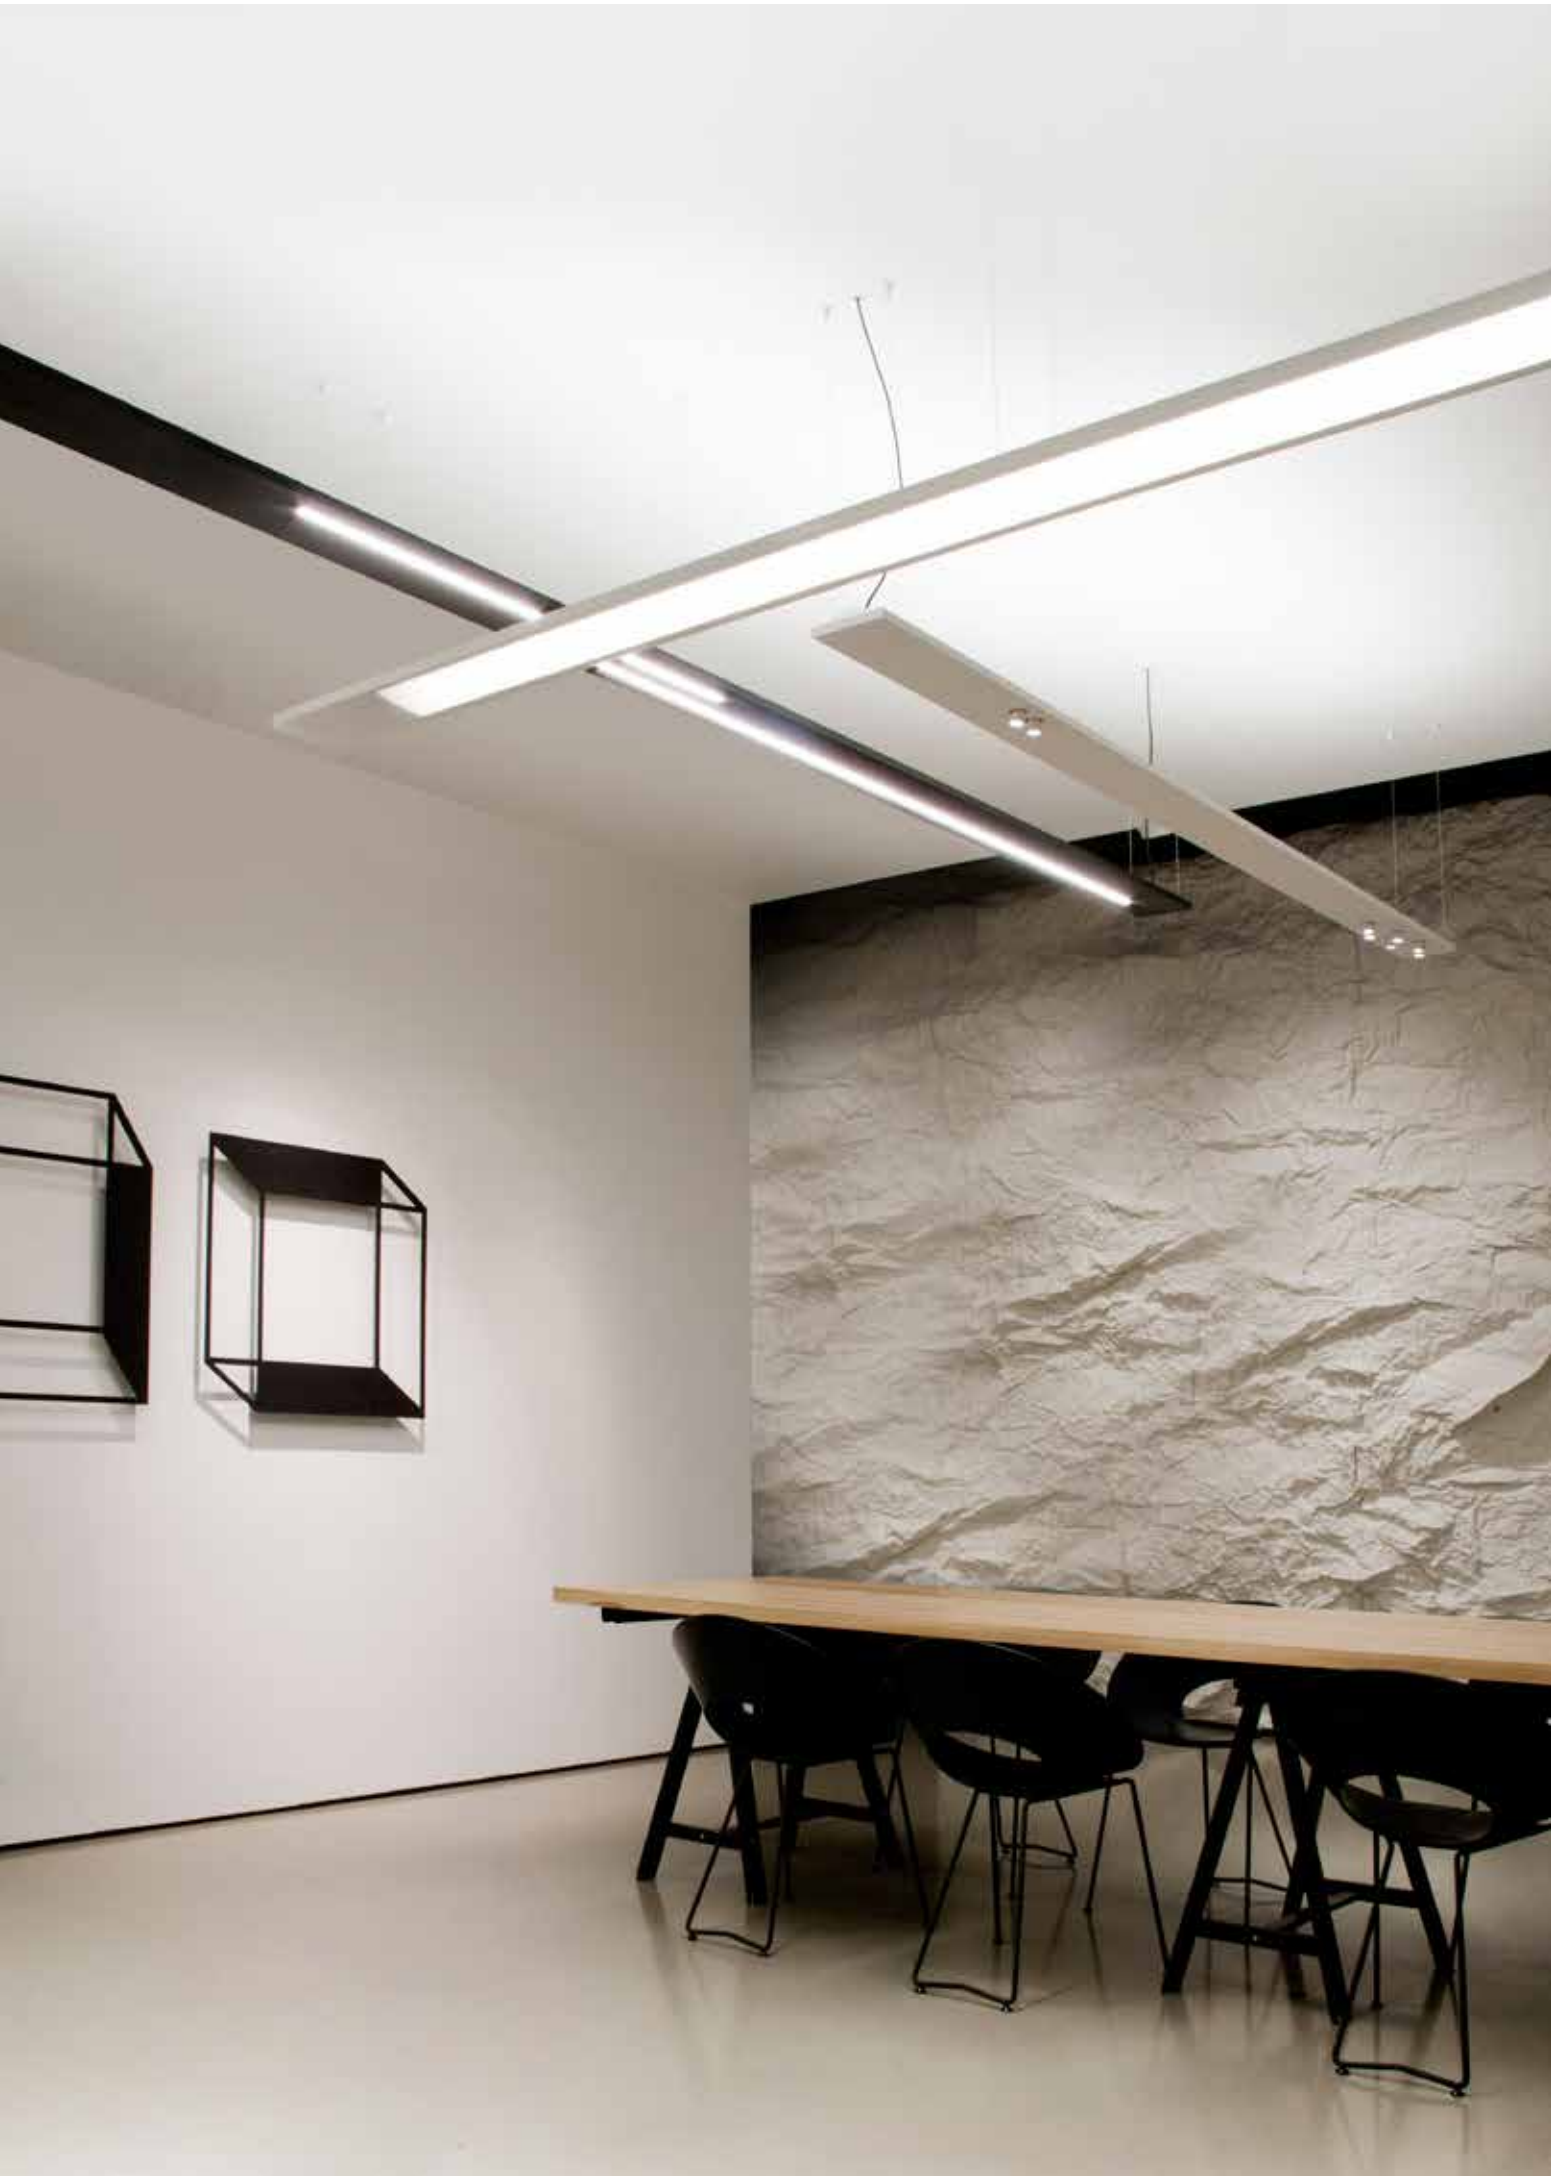




NATHALIE CALLEWAERT





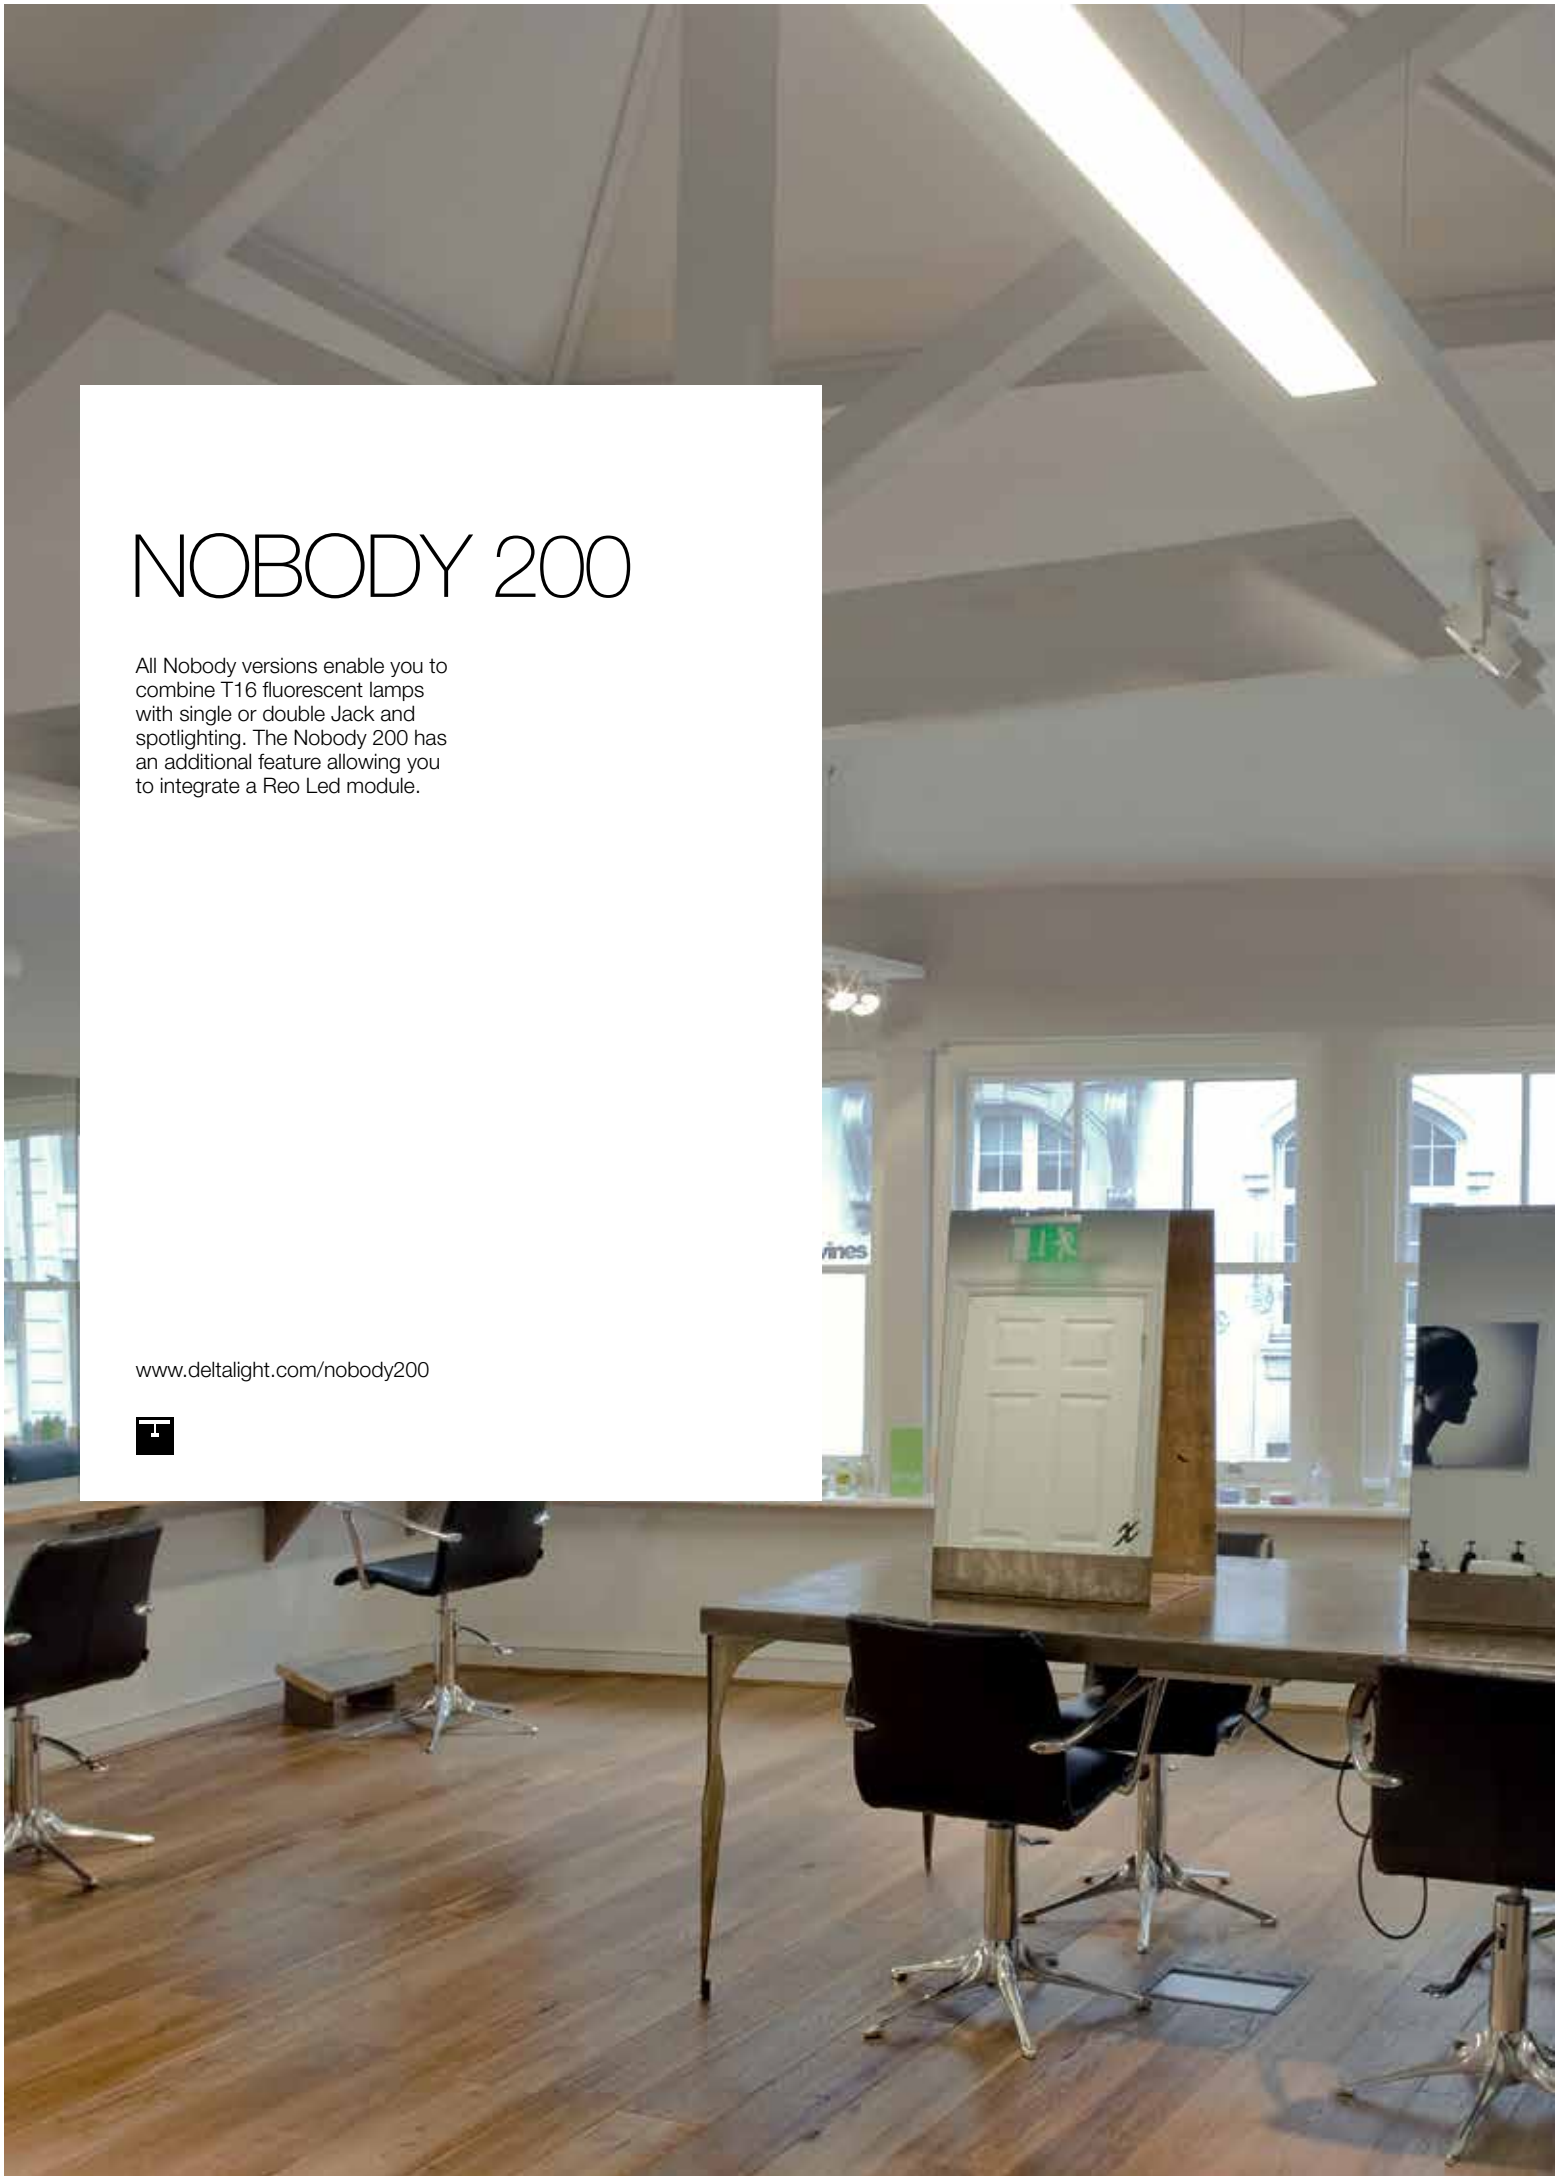


NOBODY 200

All Nobody versions enable you to combine T16 fluorescent lamps with single or double Jack and spotlighting. The Nobody 200 has an additional feature allowing you to integrate a Reo Led module.


www.deltalight.com/nobody200



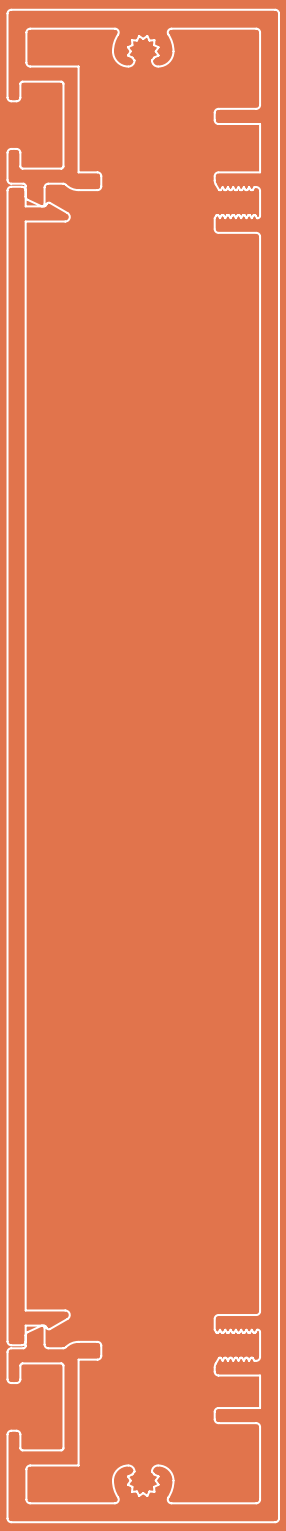


NoBody 200

PROFILE

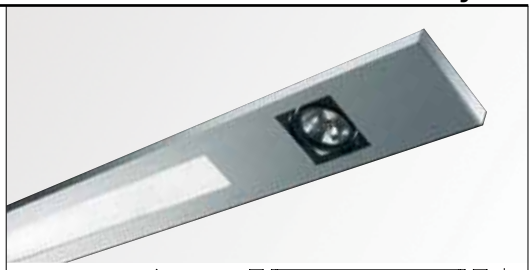

NB200 - PROFILE ◇
331 00 00 ◇
◇ = ANO / W
MAX.L / PROFILE : 6m
Kg / m

2,9




TOL EN12020-2


END CAP



NB200 - END CAP ◇
331 03 01◇
◇ = ALU / W

0,2





CORNER

NB200 - CORNER 180°
331 06 01


0,3


NB200 - CORNER 135°
331 06 05

0,3

NB200 - CORNER 90°
331 06 06

0,3




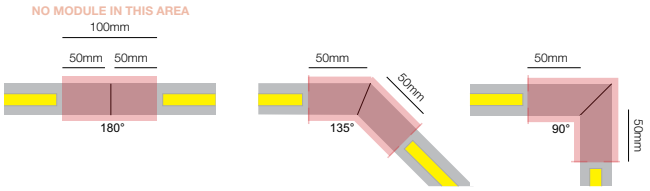


FIXATION

NB200 - WALL FIXATION 90°
331 06 10

0,3






SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m


SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m

0,1



SUSPENSION 2 TWIN 1,6
328 22 01
L 1,6m


0,1



CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **330 98 51**
L 6,0m / 3 x 0,75mm² **330 98 56**
L 1,6m / 5 x 0,75mm² **330 99 51**
L 6,0m / 5 x 0,75mm² **330 99 56** 0,3

OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90




ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1





FULL INFO / PAG TEC Accessories



CONE 111◇ Ø117 / Ø80 / H26
201 28 00◇
◇= ALU / B / C / W
QR-LP111 max. 24°



CLIP 111◇ Ø110 / H22
201 27 99 A ◇
◇= A / B / W



FRONTGLASS 111 Ø100
201 17 00



LENS 111 Ø100
201 47 11



NoBody 200 1 Reo OK



L 200

PS

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	958lm (10W)	803lm (10W)
REFLECTOR FL-33°	**NB200 - 1 REO 3033 OK ◇** **331 61 8122 ◇** ◇ = A / W	**NB200 - 1 REO 3033-9 OK ◇** **331 61 89122 ◇** ◇ = A / W
REFLECTOR WFL-50°	**NB200 - 1 REO 3050 OK ◇** **331 61 8132 ◇** ◇ = A / W	**NB200 - 1 REO 3050-9 OK ◇** **331 61 89132 ◇** ◇ = A / W
2700K	876lm (10W)	742lm (10W)
REFLECTOR FL-33°	**NB200 - 1 REO 2733 OK ◇** **331 61 8123 ◇** ◇ = A / W	**NB200 - 1 REO 2733-9 OK ◇** **331 61 89123 ◇** ◇ = A / W
REFLECTOR WFL-50°	**NB200 - 1 REO 2750 OK ◇** **331 61 8133 ◇** ◇ = A / W	**NB200 - 1 REO 2750-9 OK ◇** **331 61 89133 ◇** ◇ = A / W

ADJUSTABLE 0°-30° / 350°
INCL.1 x POWERLED WHITE 10W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 0,3 IP20

NoBody 200 2 Reo OK



L 320

120

PS

	CRI > 80	CRI > 90
	ON REQUEST	
	2x 958lm (10W)	2x 803lm (10W)
	NB200 - 2 REO 3033 OK ◇ **331 61 8222 ◇** ◇ = A / W	**NB200 - 2 REO 3033-9 OK ◇** **331 61 89222 ◇** ◇ = A / W
	NB200 - 2 REO 3050 OK ◇ **331 61 8232 ◇** ◇ = A / W	**NB200 - 2 REO 3050-9 OK ◇** **331 61 89232 ◇** ◇ = A / W
	2x 876lm (10W)	2x 742lm (10W)
	NB200 - 2 REO 2733 OK ◇ **331 61 8223 ◇** ◇ = A / W	**NB200 - 2 REO 2733-9 OK ◇** **331 61 89223 ◇** ◇ = A / W
	NB200 - 2 REO 2750 OK ◇ **331 61 8233 ◇** ◇ = A / W	**NB200 - 2 REO 2750-9 OK ◇** **331 61 89233 ◇** ◇ = A / W

ADJUSTABLE 0°-30° / 350°
INCL.2 x POWERLED WHITE 10W
INCL.LED POWER SUPPLY 500mA-DC
220-240V / 50-60Hz

CE 0,4 IP20

p

NoBody 200 RB150

NB200 - RB150 ◇
331 61 201 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE

1 x QR-CB51 max.50W

CE 0,3 IP20 0,5



L 210

TE

NoBody 200 RB250

NB200 - RB250 ◇
331 61 202 ◇
◇ = A / W
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE

2 x QR-CB51 max.50W

CE 0,4 IP20 0,5



L 310

TE

100

NoBody 200 RB111

NB200 - RB111 ◇
331 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE

1 x QR-LP111 max.50W

CE 0,5 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



L 230

TE

NoBody 200 RB211

NB200 - RB211 ◇
331 61 232 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE

2 x QR-LP111 max.50W

CE 0,7 IP20 1,0

ACCESSORIES
CONE111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111



L 370

TE

140

Spot JAC

SPOTNIC JAC PAG INT 413
SPATIO JAC PAG INT 419
CREDO JAC PAG INT 423
PHANTOM JAC PAG INT 425
RAND JAC PAG INT 425

* EXCEPT CREDO REO JAC

led

NoBody 200 M10

NB200 - M10
331 61 01
INCL.LED POWER SUPPLY 350mA-DC
EXCL.1 x SPOTNIC M10
220-240V / 50-60Hz

0,3 IP20

SPOTNIC M10
M10 89 28122 ◇
◇ = W
INCL.POWERLED WHITE 7W / 3000K
CRI >80 / 680lm
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP20

L 160

PS



NoBody 200 Single Jack

NB200 - SINGLE JACK
331 61 10
EXCL.1 x SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W

0,3 IP20

L 110

TE



NoBody 200 Twin Jack

NB200 - TWIN JACK
331 61 16
EXCL.2 x SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W

0,3 IP20

L 200

TE

150





p

NoBody 200 Led Array Down

NB200 - LED ARRAY DOWN
220-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W
INCL.1 x PC OPAL DOWN

CE 1,6 IP20 0,1









Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 30	1220	**331 610 42 E**	**331 610 42 ED1**	**331 610 42 ED2**

NoBody 200 Led Array Up

NB200 - LED ARRAY UP
220-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY - 3000K - 3616lm/m - 135lm/W
INCL.1 x PC CLEAR UP

CE 1,6 IP20 0,1









Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 30	1220	**331 620 42 E**	**331 620 42 ED1**	**331 620 42 ED2**

NoBody 200 Led Array Down-Up

NB200 - LED ARRAY DOWN-UP
220-240V / 50-60Hz
INCL.POWER SUPPLY
INCL.LED ARRAY DOWN - 3000K - 3616lm/m - 135lm/W
INCL.LED ARRAY UP - 3000K - 3616lm/m - 135lm/W
INCL.1 x PC OPAL DOWN
INCL.1 x PC CLEAR UP
1 CIRCUIT

CE 1,6 IP20 0,1



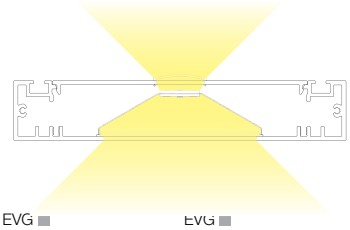






Watt	L (mm)	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
1 x 30 DWN + 1 x 15 UP	1220	**331 630 62 E**		**331 630 62 ED2**

p


NoBody 200 Modules T16 Down

NB200 - T16 PARALLEL PC OPAL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC OPAL DOWN






CE 1,2 IP20 0,1




Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	650	**331 61 224 E**	**331 61 224 ED1**	**331 61 224 ED2**
2 x 21/39	950	**331 61 239 E**	**331 61 239 ED1**	**331 61 239 ED2**
2 x 28/54	1250	**331 61 254 E**	**331 61 254 ED1**	**331 61 254 ED2**
2 x 35	1550	**331 61 235 E**	**331 61 235 ED1**	**331 61 235 ED2**
2 x 80	1550	**331 61 280 E**	**331 61 280 ED1**	**331 61 280 ED2**

NB200 - T16 PARALLEL BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN





CE 1,4 IP20 0,1



Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1250	**331 61 254 EB**	**331 61 254 ED1B**	**331 61 254 ED2B**


p


NoBody 200 Modules T16 Up

NB200 - T16 PARALLEL UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	650	**331 62 224 E**	**331 62 224 ED1**	**331 62 224 ED2**
2 x 21/39	950	**331 62 239 E**	**331 62 239 ED1**	**331 62 239 ED2**
2 x 28/54	1250	**331 62 254 E**	**331 62 254 ED1**	**331 62 254 ED2**
2 x 35	1550	**331 62 235 E**	**331 62 235 ED1**	**331 62 235 ED2**
2 x 80	1550	**331 62 280 E**	**331 62 280 ED1**	**331 62 280 ED2**





NoBody 200 Modules T16 Down-Up

NB200 - T16 PARALLEL PC OPAL DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x PC OPAL DOWN


1,2 IP20 0,1


ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	650	**331 63 224 E**	**331 63 224 ED1**	**331 63 224 ED2**
2 x 21/39	950	**331 63 239 E**	**331 63 239 ED1**	**331 63 239 ED2**
2 x 28/54	1250	**331 63 254 E**	**331 63 254 ED1**	**331 63 254 ED2**
2 x 35	1550	**331 63 235 E**	**331 63 235 ED1**	**331 63 235 ED2**
2 x 80	1550	**331 63 280 E**	**331 63 280 ED1**	**331 63 280 ED2**







NB200 - T16 PARALLEL BAP DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN


1,4 IP20 0,1


ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1250	**331 63 254 EB**	**331 63 254 ED1B**	**331 63 254 ED2B**





Emergency Unit 1H - 5W

	W %	led (BLF)	NoBody
1	W 30		330 91 0801
	% (16)		

BLF (%): BALLAST LUMEN FACTOR

NoBody 200 PC Clear UP

NB200 - PC CLEAR UP T16 24W
331 52 24

0,2

NB200 - PC CLEAR UP T16 39W
331 52 39

0,3

NB200 - PC CLEAR UP T16 54W
331 52 54

0,4

NB200 - PC CLEAR UP T16 80W
331 52 80

0,5




K-ONCEPT






VALLÁS, FILOZÓFIA
VALLÁS, FILOZÓFIA
TÖRTÉNELEM
TÖRTÉNELEM
SZÓTÁRAK, NYELVKÖNYVEK




NOBODY 300

The Nobody 300 caters for high demanding environments, enabling a forceful down and/or uplight solution. Respecting the same flat dimensions as its two brothers, the Nobody 300 easily combines style and functionality.

www.deltalight.com/nobody300


HIRSCH BEDNER ASSOCIATES



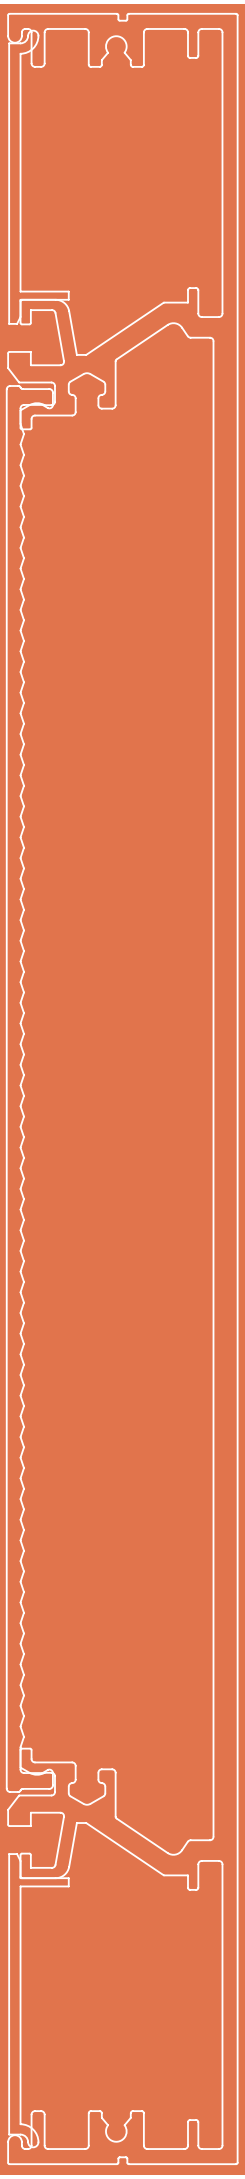


NoBody 300

PROFILE

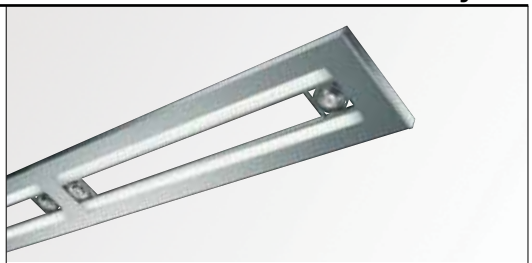

NB300 - PROFILE ◇
268 00 00 ◇
◇ = ANO
MAX.L / PROFILE : 6m
Kg / m




5,9

TOL EN12020-2

END CAP






NB300 - END CAP ◇
268 03 01◇
◇ = ALU

0,2

CORNER


NB300 - CORNER 180°
268 06 01

0,3




NB300 - CORNER 135°
268 06 05

0,3



NB300 - CORNER 90°
268 06 06


0,3



FIXATION

NB300 - WALL FIXATION 90°
268 06 10

0,3




NO MODULE IN THIS AREA
50 mm



SUSPENSION 2 SINGLE 1,6
328 12 01
L 1,6m

SUSPENSION 2 SINGLE 6,0
328 12 06
L 6,0m




0,1

CURRENT SUPPLY

CURRENT SUPPLY
L 1,6m / 3 x 0,75mm² **268 98 51**
L 6,0m / 3 x 0,75mm² **268 98 56**
L 1,6m / 5 x 0,75mm² **268 99 51**
L 6,0m / 5 x 0,75mm² **268 99 56** 0,3



OPTIONS
CABLE BASE R/S
COVERSET R 62-90-100 / S 62-80-90



ANO **203 99 55 ANO**
W **203 99 55 W**

ANO **203 99 56 ANO**
W **203 99 56 W**

0,1

FULL INFO / PAG TEC **Accessories**

CONE 111◇ Ø117 / Ø80 / H26
201 28 00◇
◇ = ALU / B / C / W
QR-LP111 max. 24°



CLIP 111◇ Ø110 / H22
201 27 99 A ◇
◇ = A / B / W



FRONTGLASS 111 Ø100
201 17 00



LENS 111 Ø100
201 47 11



Spot JAC

SPOTNIC JAC	PAG INT 413
SPATIO JAC	PAG INT 419
CREDO JAC	PAG INT 423
PHANTOM JAC	PAG INT 425
RAND JAC	PAG INT 425

* EXCEPT CREDO REO JAC

NoBody 300 RB150

NB300 - RB150 ◇
268 61 201 ◇
◇ = A
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CB51 max.50W
0,3 IP20 0,5

L 210



NoBody 300 RB250

NB300 - RB250 ◇
268 61 202 ◇
◇ = A
ADJUSTABLE 0°-30°
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CB51 max.50W
0,4 IP20 0,5

L 210
100



NoBody 300 RB111

NB300 - RB111 ◇
268 61 231 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
1 x QR-LP111 max.50W
0,5 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

L 230



NoBody 300 RB211

NB300 - RB211 ◇
268 61 232 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
0,7 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

L 370
140



NoBody 300 RB311

NB300 - RB311 ◇
268 61 233 ◇
◇ = B
ADJUSTABLE 0°-30°
G53 / 220-240V / 50-60Hz / TE
3 x QR-LP111 max.50W
1,0 IP20 1,0

ACCESSORIES
CONE 111
CONE / CLIP 111 + FRONTGLASS 111
CONE / CLIP 111 + LENS 111

L 580
140 140



NoBody 300 Single Jack

NB300 - SINGLE JACK
268 61 10
EXCL.1 x SPOT SPOT JAC
220-240V / 50-60Hz / TE
1 x max.50W
0,3 IP20

L 100



NoBody 300 Double Jack

NB300 - DOUBLE JACK
268 61 15
EXCL.2 x SPOT SPOT JAC
220-240V / 50-60Hz / TE
2 x max.50W
0,3 IP20

L 100
150




p

NoBody 300 Modules T16 Down

NB300 - T16 PARALLEL PC SBL DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x PC SBL DOWN

CE 1,2 IP20 0,1







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	670	**268 61 224 E**	**268 61 224 ED1**	**268 61 224 ED2**
2 x 21/39	970	**268 61 239 E**	**268 61 239 ED1**	**268 61 239 ED2**
2 x 28/54	1270	**268 61 254 E**	**268 61 254 ED1**	**268 61 254 ED2**
2 x 35	1570	**268 61 235 E**	**268 61 235 ED1**	**268 61 235 ED2**
2 x 80	1570	**268 61 280 E**	**268 61 280 ED1**	**268 61 280 ED2**



NB300 - T16 PARALLEL BAP DOWN
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

CE 1,4 IP20 0,1





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1270	**268 61 254 EB**	**268 61 254 ED1B**	**268 61 254 ED2B**





NoBody 300 Modules T16 Up

NB300 - T16 PARALLEL UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	630	**268 62 224 E**	**268 62 224 ED1**	**268 62 224 ED2**
2 x 21/39	930	**268 62 239 E**	**268 62 239 ED1**	**268 62 239 ED2**
2 x 28/54	1230	**268 62 254 E**	**268 62 254 ED1**	**268 62 254 ED2**
2 x 35	1530	**268 62 235 E**	**268 62 235 ED1**	**268 62 235 ED2**
2 x 80	1530	**268 62 280 E**	**268 62 280 ED1**	**268 62 280 ED2**




NB300 - T16 PARALLEL UP
4 x T16 / G5 / 220-240V / 0 I 50-60Hz

1,2 IP20 0,1

ACCESSORIES
PC CLEAR UP





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
4 x 14/24	630	**268 62 424 E**	**268 62 424 ED1**	**268 62 424 ED2**
4 x 21/39	930	**268 62 439 E**	**268 62 439 ED1**	**268 62 439 ED2**
4 x 28/54	1230	**268 62 454 E**	**268 62 454 ED1**	**268 62 454 ED2**
4 x 35	1530	**268 62 435 E**	**268 62 435 ED1**	**268 62 435 ED2**
4 x 80	1530	**268 62 480 E**	**268 62 480 ED1**	**268 62 480 ED2**

p

NoBody 300 PC Clear Up

NB300 - PC CLEAR UP T16 24W
268 52 24

0,3

NB300 - PC CLEAR UP T16 39W
268 52 39

0,4

NB300 - PC CLEAR UP T16 54W
268 52 54

0,5

NB300 - PC CLEAR UP T16 80W
268 52 80


0,8



NoBody 300 Modules T16 Down-Up

NB300 - T16 PARALLEL PC SBL DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.2 x PC SBL DOWN

1,2 IP20 0,1






Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	670	**268 63 224 E**	**268 63 224 ED1**	**268 63 224 ED2**
2 x 21/39	970	**268 63 239 E**	**268 63 239 ED1**	**268 63 239 ED2**
2 x 28/54	1270	**268 63 254 E**	**268 63 254 ED1**	**268 63 254 ED2**
2 x 35	1570	**268 63 235 E**	**268 63 235 ED1**	**268 63 235 ED2**
2 x 80	1570	**268 63 280 E**	**268 63 280 ED1**	**268 63 280 ED2**




NB300 - T16 PARALLEL BAP DOWN-UP
2 x T16 / G5 / 220-240V / 0 I 50-60Hz
INCL.1 x BAP DOWN

1,4 IP20 0,1

ACCESSORIES
PC CLEAR UP







Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 28/54	1270	**268 63 254 EB**	**268 63 254 ED1B**	**268 63 254 ED2B**



NB300 - T16 PARALLEL PC SBL DOWN-UP L50
2 x T16 / G5
2 x QR-CB51 max.50W / GX5.3 / TE
220-240V / 50-60Hz
INCL.CABLING 2 CIRCUITS
INCL.2 x PC SBL DOWN

1,5 IP20 0,5





Watt	Lmm	EVG	EVG DIM 1 10V	EVG DIM DALI SWITCH
2 x 14/24	670	**268 63 224 EL**	**268 63 224 ED1L**	**268 63 224 ED2L**
2 x 21/39	970	**268 63 239 EL**	**268 63 239 ED1L**	**268 63 239 ED2L**
2 x 28/54	1270	**268 63 254 EL**	**268 63 254 ED1L**	**268 63 254 ED2L**
2 x 35	1570	**268 63 235 EL**	**268 63 235 ED1L**	**268 63 235 ED2L**
2 x 80	1570	**268 63 280 EL**	**268 63 280 ED1L**	**268 63 280 ED2L**



p









DEHULLU ARCHITECTEN



INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 294

INTERIOR WALL RECESSED INT 496

INTERIOR WALL SURFACE INT 516

INTERIOR STAND ALONE INT 584

INTERIOR TRACK LIGHTING t INT 594

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 22

EXTERIOR WALL RECESSED EXT 40


EXTERIOR WALL SURFACE EXT 54

EXTERIOR FLOOR RECESSED EXT 110

EXTERIOR FLOOR SURFACE EXT 138

TECHNICAL INFO tech TEC 2

INDEX index IND 2

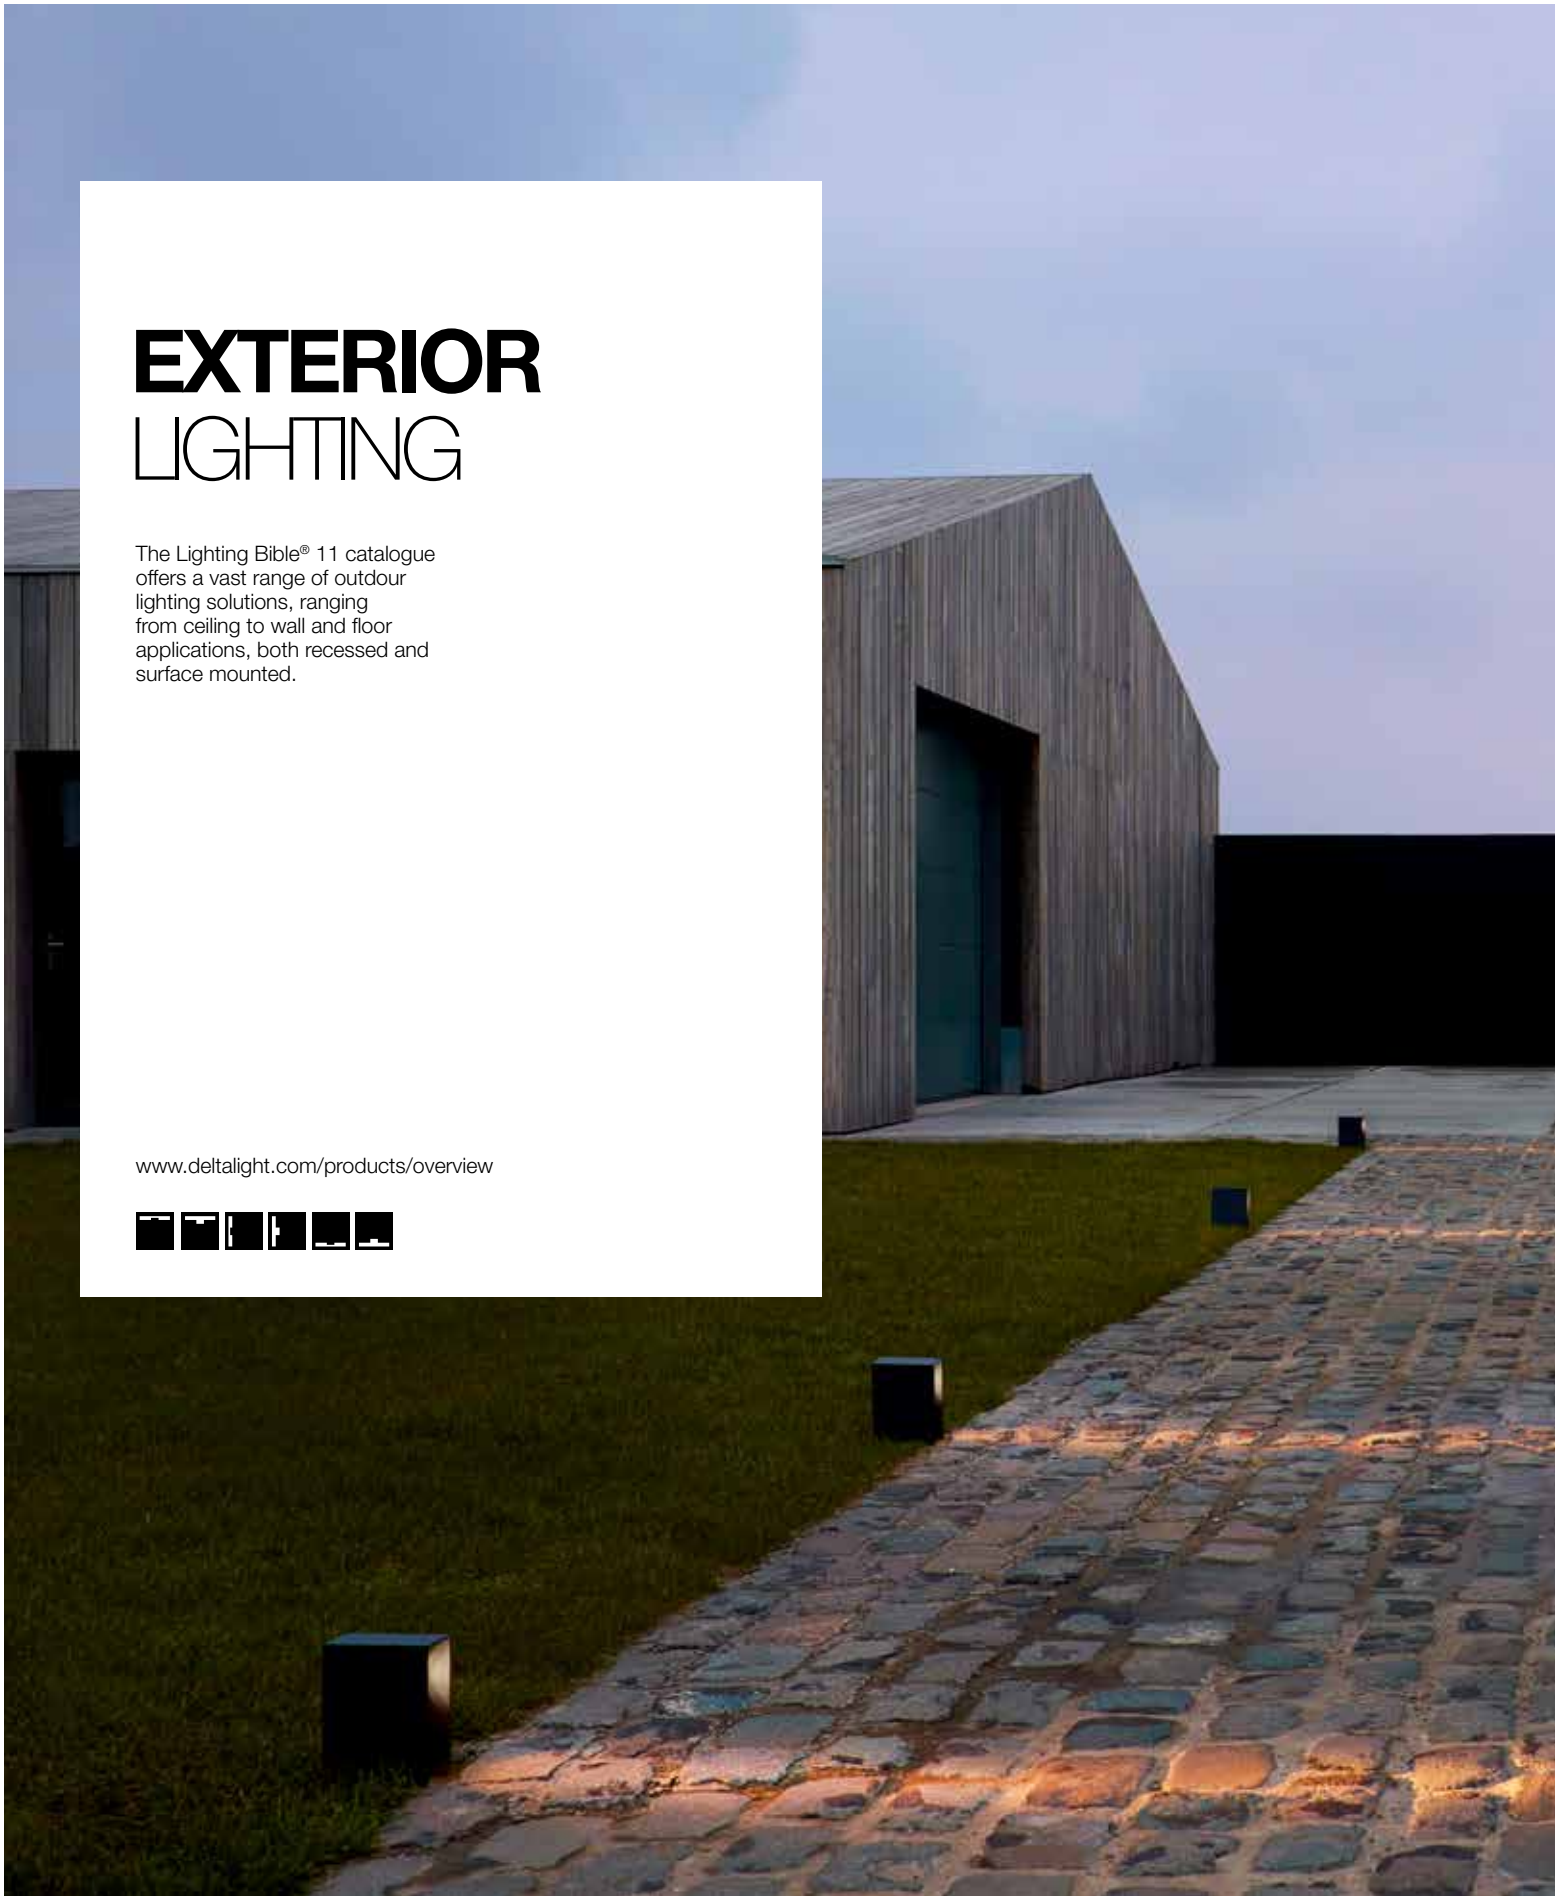


EXTERIOR
LIGHTING

The Lighting Bible® 11 catalogue offers a vast range of outdour lighting solutions, ranging from ceiling to wall and floor applications, both recessed and surface mounted.

www.deltalight.com/products/overview



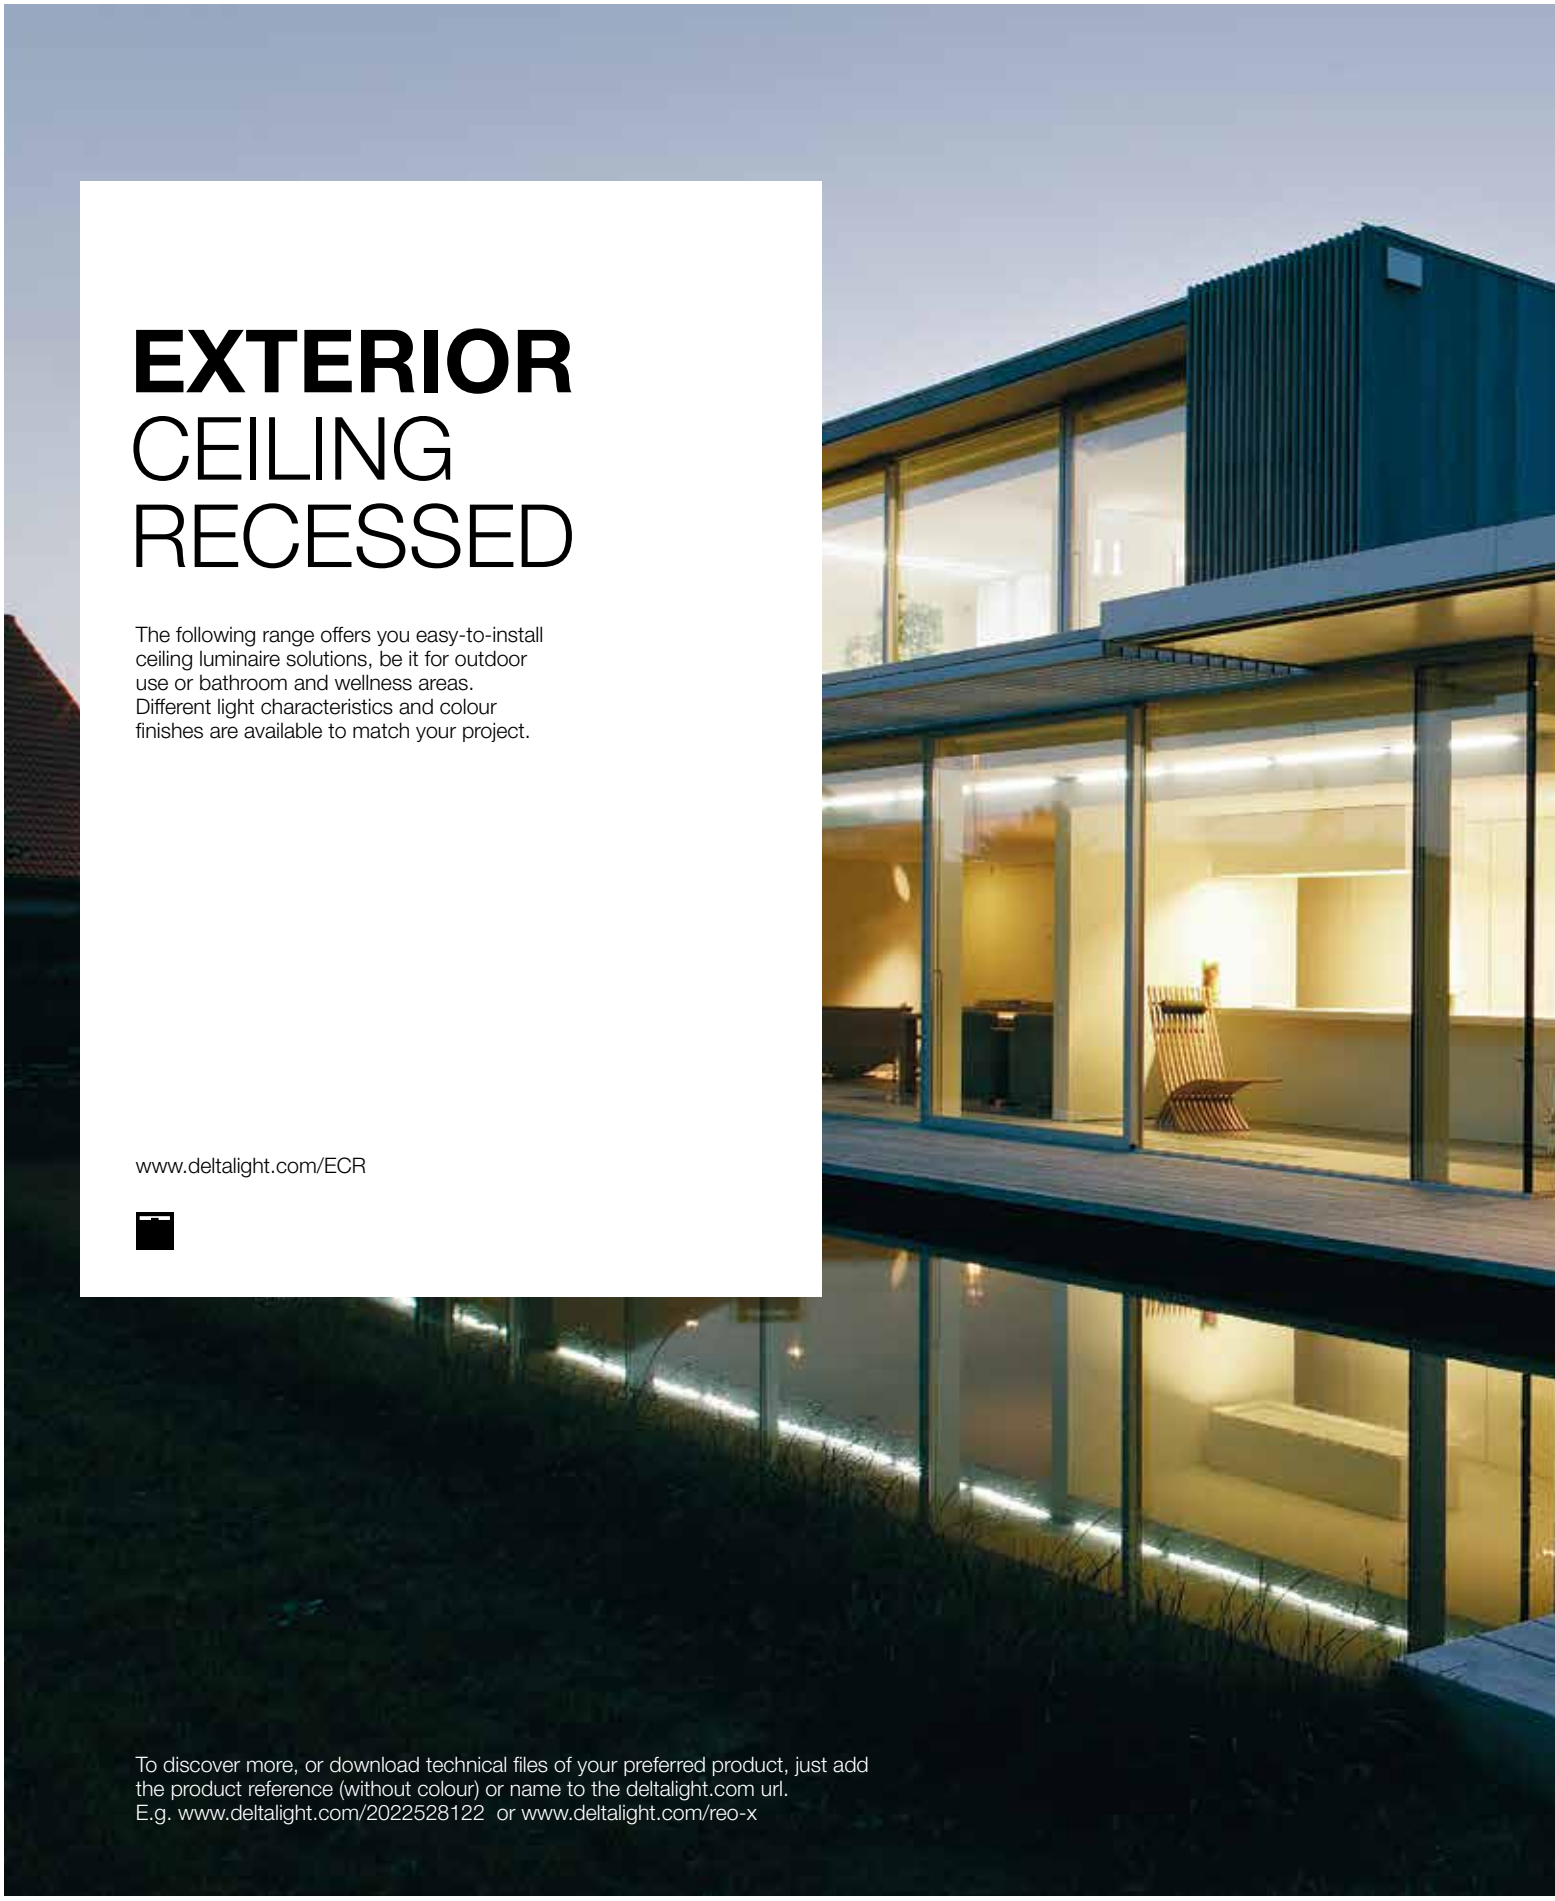


EXTERIOR
CEILING RECESSED

The following range offers you easy-to-install ceiling luminaire solutions, be it for outdoor use or bathroom and wellness areas. Different light characteristics and colour finishes are available to match your project.

www.deltalight.com/ECR

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2022528122 or www.deltalight.com/reo-x

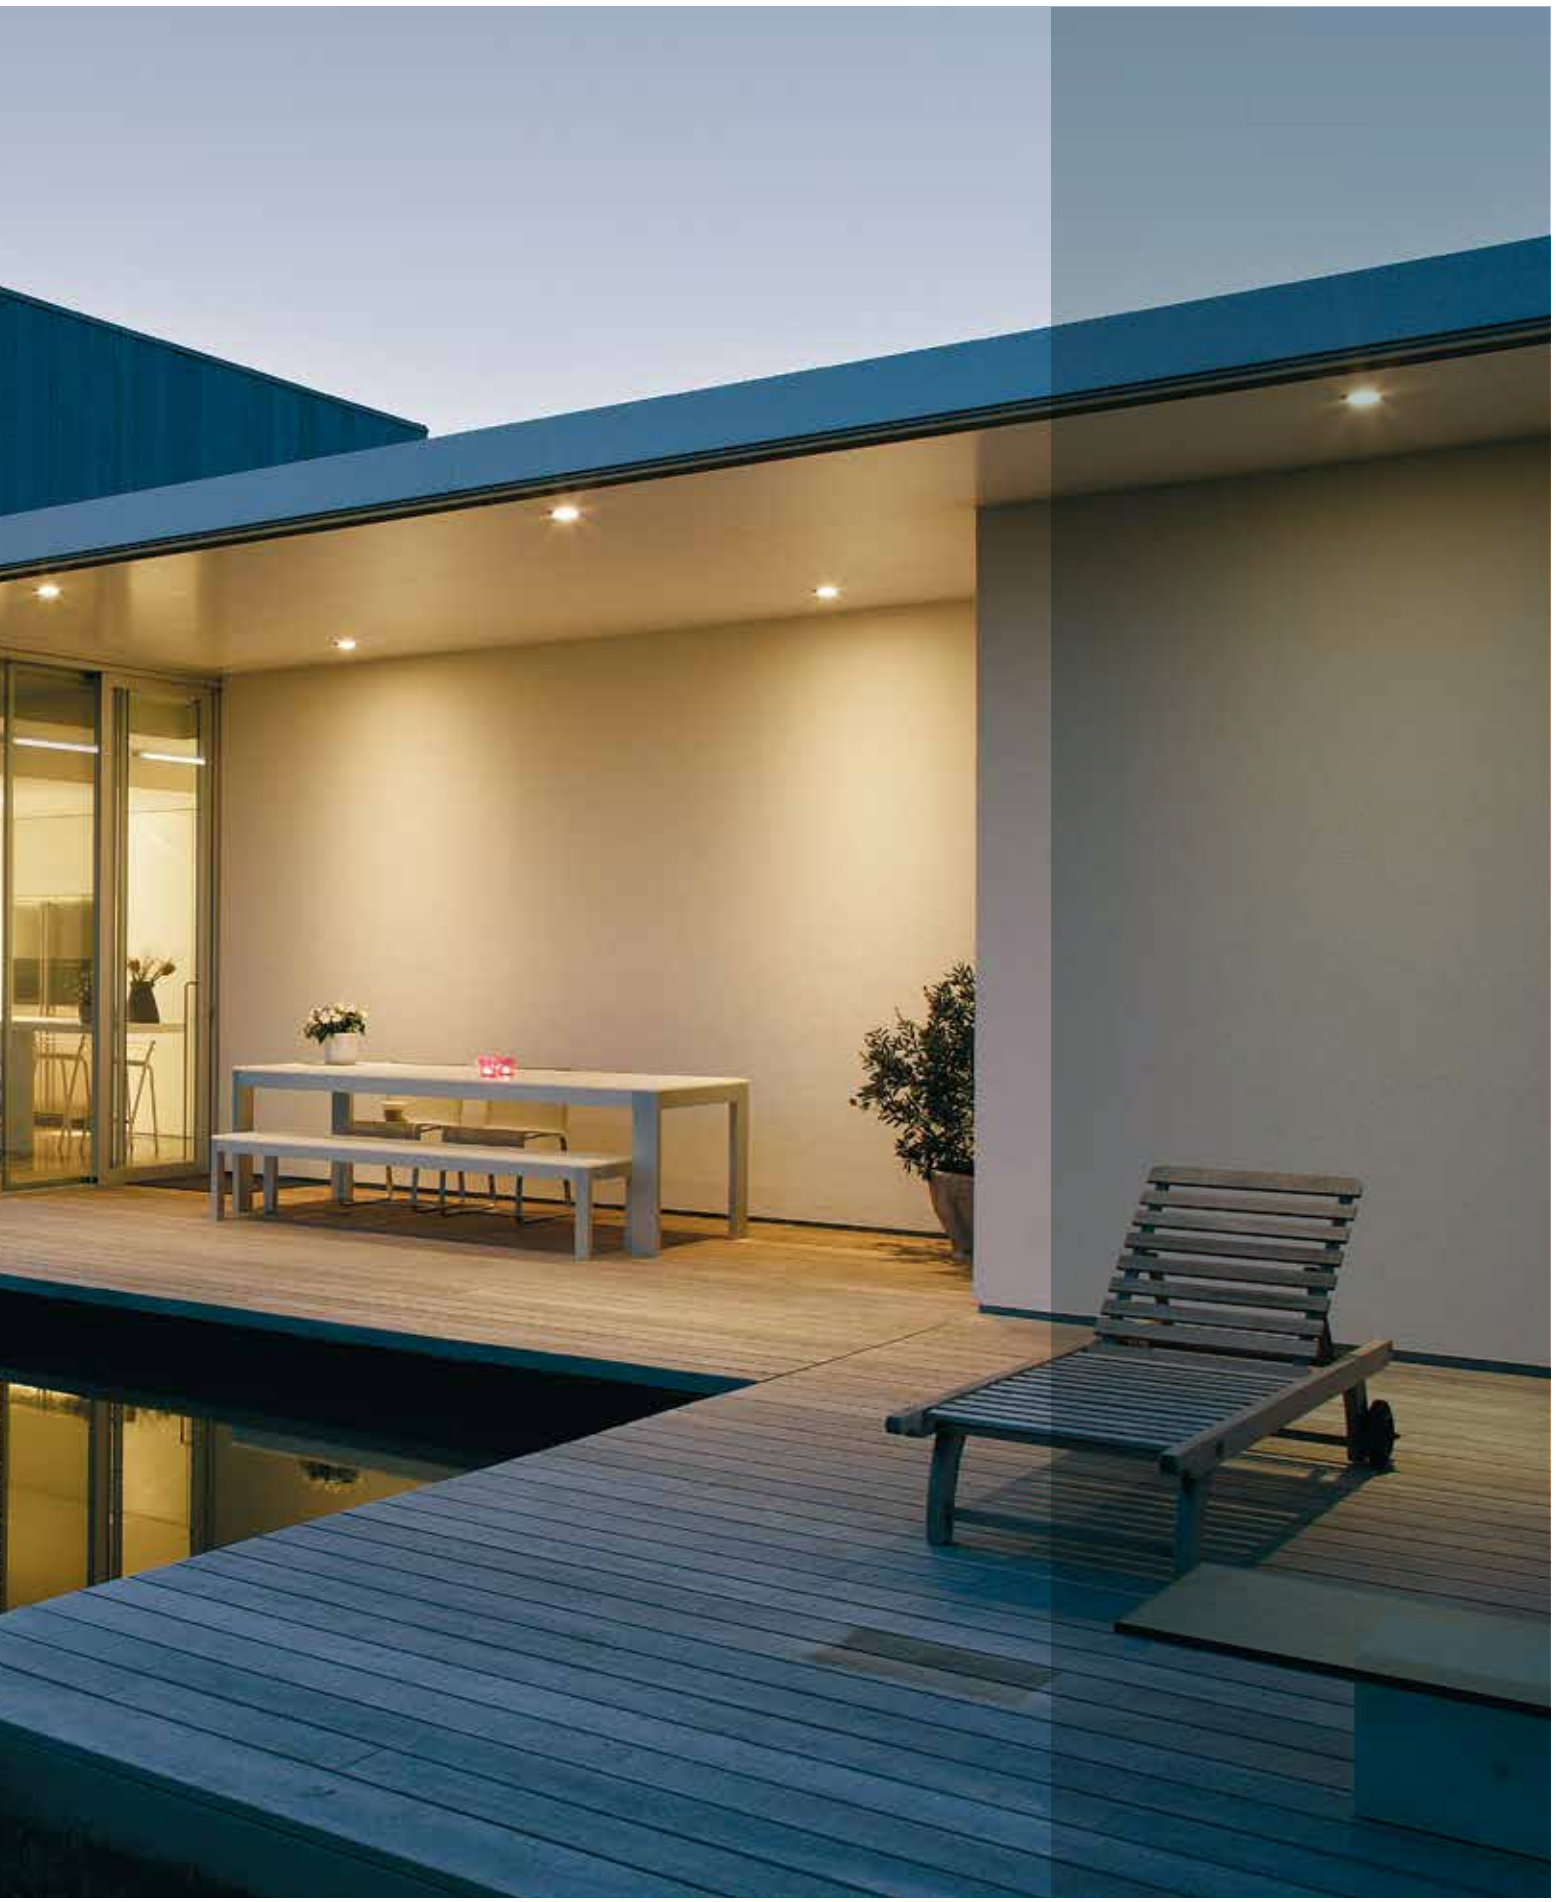



INDEX
EXTERIOR CEILING RECESSED



MINI REO X
EXT 11



REO X
EXT 11



DIRO GT
EXT 15



DIRO OK X
EXT 15



CARREE X
EXT 17

CARREE X	EXT 17
DIRO GT	EXT 15
DIRO OK X	EXT 15
MINI REO X	EXT 11
REO X	EXT 11


DB ARCHITECTEN

Options


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



Mini Reo X





IP65

67 x 60 min.5

MINI REO X 83040 ◇
415 151 833 ◇
◇ = B / W
FIXED
INCL.1 x POWERLED WHITE [D] 7W / CRI>80 / 3000K / 638lm

MINI REO X 82740 ◇
415 151 823 ◇
◇ = B / W
FIXED
INCL.1 x POWERLED WHITE [D] 7W / CRI>80 / 2700K / 595lm

INCL.1 x PC
INCL.1 x REFLECTOR WFL-40°
EXCL.LED POWER SUPPLY 350mA-DC


CE 0,2 IP65

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

ON REQUEST 4000K

Reo X






IP65

76 x 55 max.22

REO X 3033-65 S1 ◇
202 256 28122 ◇
◇ = A / W
FIXED
INCL.1 x PC
INCL.1 x POWERLED WHITE [I] 7-10W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,4 IP65

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM



IP65


76 x 55

REO X 3033-65 S2 ◇
202 2562 28122 ◇
◇ = A / W
FIXED
INCL.1 x PC
INCL.1 x POWERLED WHITE [I] 7-10W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,4 IP65

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

CRI >80 680lm (7W) / 865lm (10W)
ON REQUEST 2700K/4000K




76 x 55 max.22

REO X 3033 S1 ◇
202 25 28122 ◇
◇ = A / W
FIXED
INCL.1 x PC
INCL.1 x POWERLED WHITE [I] 7-10W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,4 IP20 IP44

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM



76 x 55

REO X 3033 S2 ◇
202 252 28122 ◇
◇ = A / W
FIXED
INCL.1 x PC
INCL.1 x POWERLED WHITE [I] 7-10W / 3000K
INCL.1 x REFLECTOR FL-33°
EXCL.LED POWER SUPPLY 350-500mA-DC

CE 0,4 IP20 IP44

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

CRI >80 680lm (7W) + 865lm (10W)
ON REQUEST 2700K/4000K







ISAGEN / AIA

FULL INFO / PAG TEC

Options


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 100W IP67 80 x 32 x 27
200 47 10

Diro GT LED





76 x 125 min.5

DIRO GT LED 3033 ◇
202 342 28122 ◇
◇ = A / W
FIXED
INCL.1 x POWERLED WHITE [I] 7-10W
EXCL.LED POWER SUPPLY 350-500mA-DC


IP20 IP44

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM

CRI >80 680lm (7W) / 865lm (10W)
ON REQUEST 2700K/4000K

Diro GT





76 x 125 min.5


DIRO GT ◇
202 34 12 ◇
◇ = A / W
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 IP44 0,5

OPTIONS
TRANSFO

Diro OK X





76 x 100 max.22

DIRO OK X S1 ◇
202 14 13 ◇
◇ = A
ADJUSTABLE 0°- 20°
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

IP20 IP23 0,5

OPTIONS
TRANSFO



MARTIN'S HOTELS

FULL INFO / PAG TEC

Options

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

TRANSFO 100W IP67 80 x 32 x 27
200 47 10

new

Carree X LED






IP65

75 x 75 x 80 max.35

CARREE X LED 3033-65 S1 ◇
202 206 28122 ◇
◇ = A / **N**
FIXED
INCL.1 x POWERLED WHITE [I] 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.1 x PC
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP65

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM




75 x 75 x 80 max.35

CARREE X LED 3033 S1 ◇
202 20 28122 ◇
◇ = A / **N**
FIXED
INCL.1 x POWERLED WHITE [I] 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.1 x PC
EXCL.LED POWER SUPPLY 350mA-DC

0,3 IP20 IP44

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM



IP65

75 x 75 x 80

CARREE X LED 3033-65 S2 ◇
202 207 28122 ◇
◇ = A / **N**
FIXED
INCL.1 x POWERLED WHITE [I] 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.1 x PC
EXCL.LED POWER SUPPLY 350mA-DC


0,3 IP65

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

CRI >80 680lm (7W)

Carree II X






75 x 75 x 90 max.35

CARREE II X S1 ◇
202 20 41 ◇
◇ = A
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 IP23 0,5

OPTIONS
TRANSFO



75 x 75 x 90

CARREE II X S2 ◇
202 20 42 ◇
◇ = A
FIXED
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.50W

0,2 IP20 IP23 0,5

OPTIONS
TRANSFO



HANS BEEN



© Claudia Uribe 2012



CLAUDIA URIBE






EXTERIOR
CEILING SURFACE

The following range offers you easy-to-install ceiling luminaire solutions, be it for outdoor use or bathroom and wellness areas. Different light characteristics and colour finishes are available to match your project.

www.deltalight.com/ECS

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2320107 or www.deltalight.com/dox100s



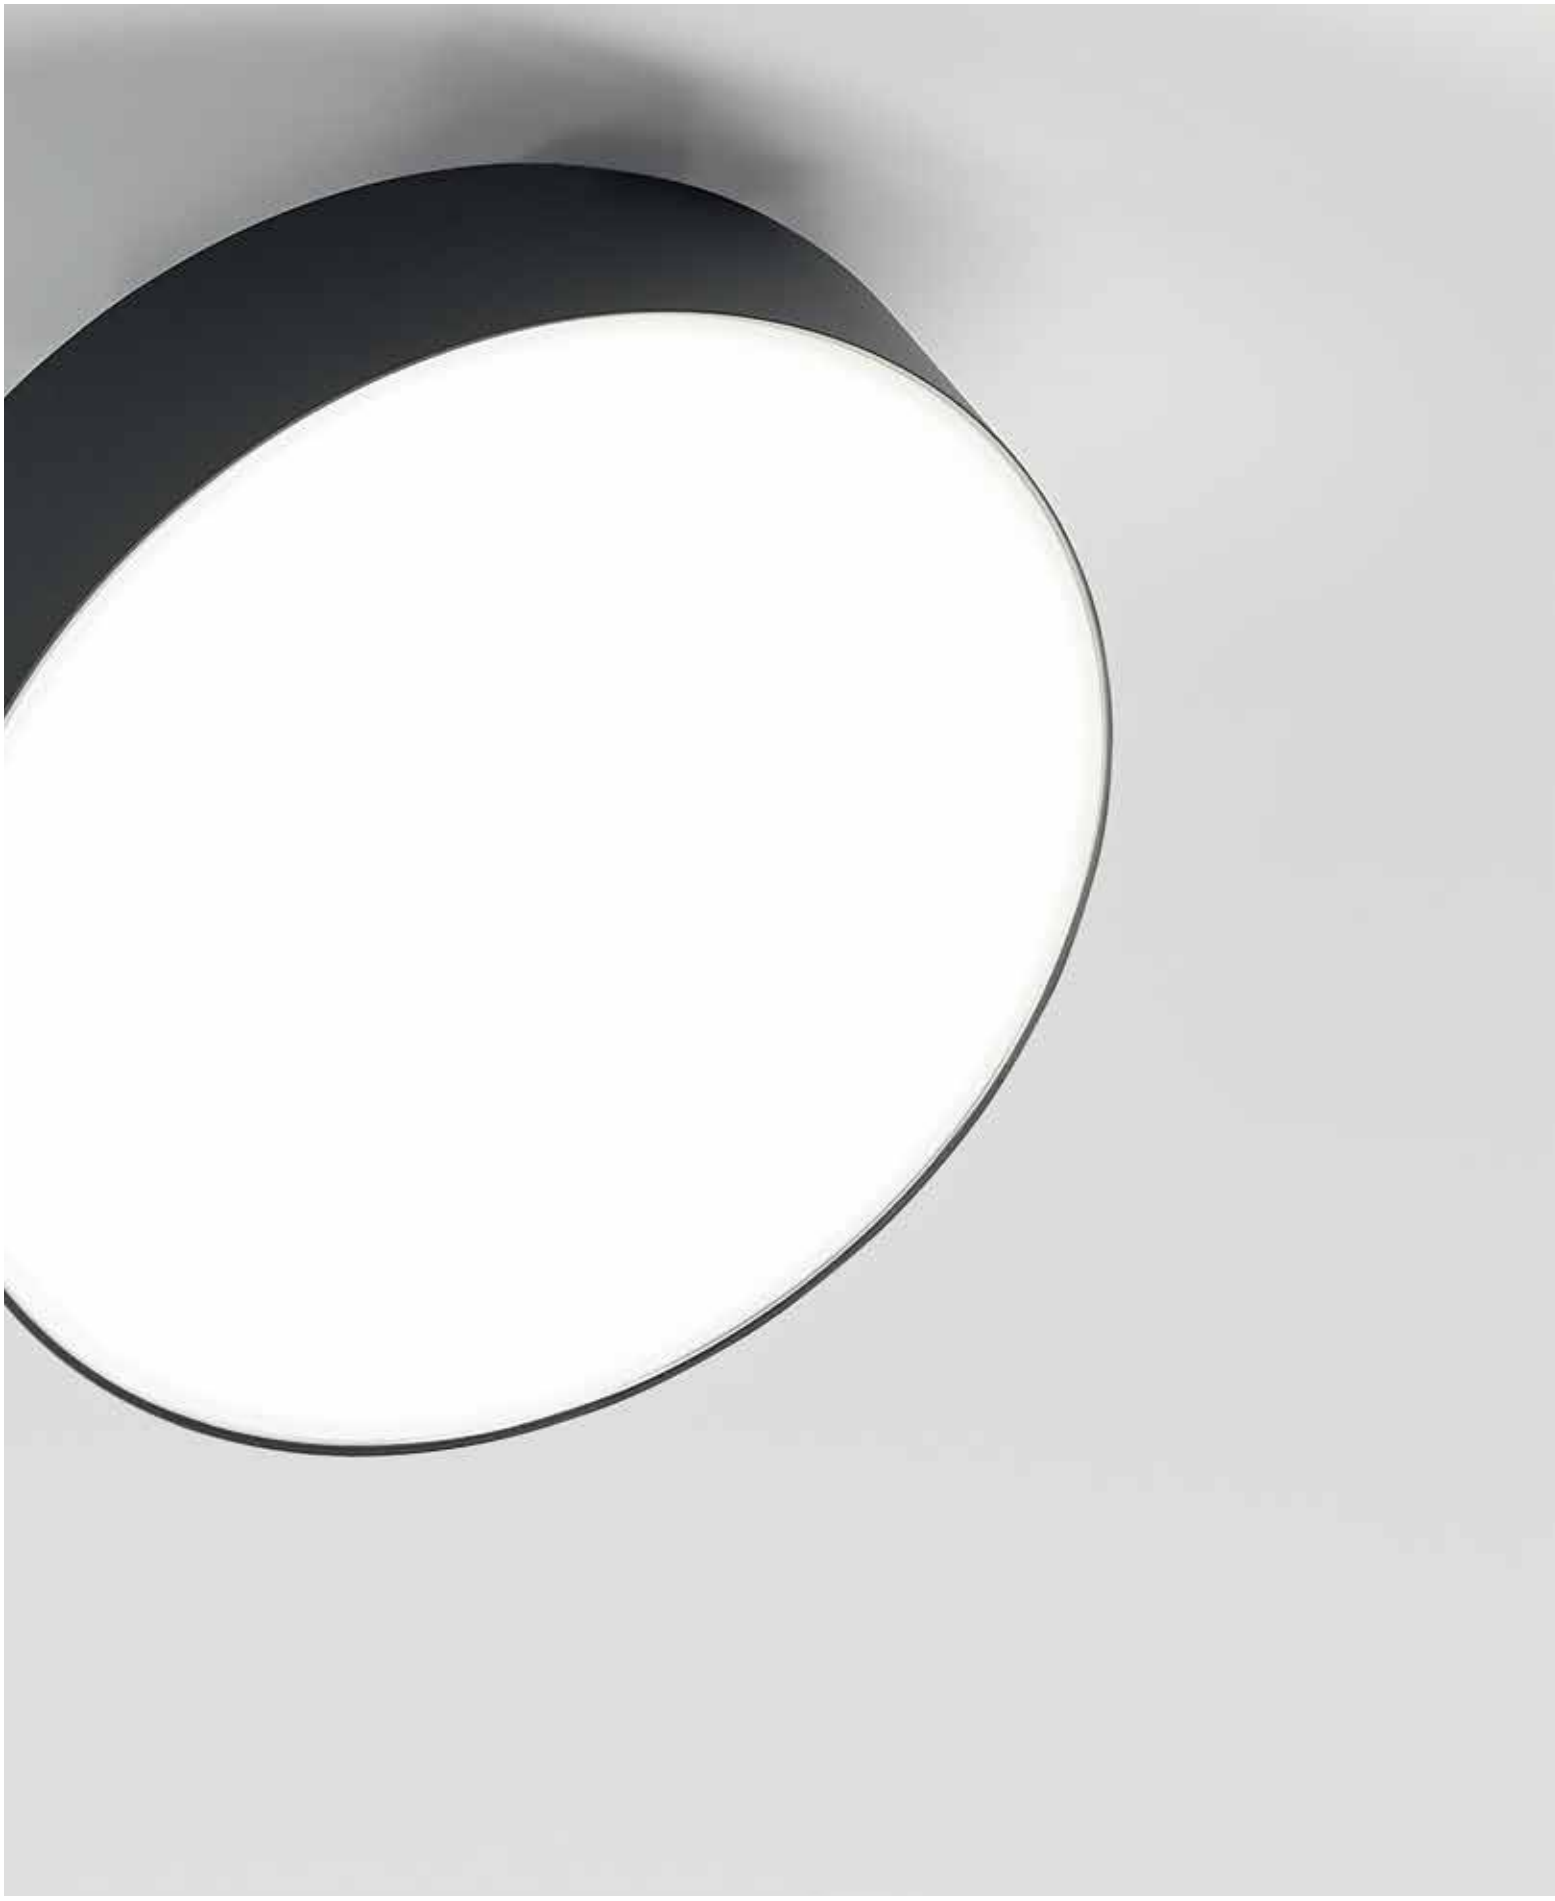

INDEX
EXTERIOR CEILING SURFACE



BOXY R
EXT 27



BOXY L+ LED
EXT 37



DOX 100 S
EXT 29



BOXY +
EXT 37



SUPERNOVA XS X
EXT 31



KIX S
EXT 39



B-LINER 65 IP
EXT 33



INDUSTRIAL S
EXT 39



MONTUR S
EXT 35



MONTUR M
EXT 35

B-LINER 65 IP	EXT 33
BOXY +	EXT 37
BOXY L+ LED	EXT 37
BOXY R	EXT 27
DOX 100 S	EXT 29
INDUSTRIAL S	EXT 39
KIX S	EXT 39
MONTUR M	EXT 35
MONTUR S	EXT 35
SUPERNOVA XS X	EXT 31




new

led

Boxy R





DIM8

	CRI > 80	CRI > 90
4000K		
	ON REQUEST	
3000K	945lm (9,3W)	739lm (9,3W)
REFLECTOR FL-33°	**BOXY R 83033 DIM8** ◇ **251 70 81832 ED8** ◇ ◇ = B-B / W-B / W-W	**BOXY R 93033 DIM8** ◇ **251 70 81932 ED8** ◇ ◇ = B-B / W-B / W-W
2700K	893lm (9,3W)	698lm (9,3W)
REFLECTOR FL-33°	**BOXY R 82733 DIM8** ◇ **251 70 81822 ED8** ◇ ◇ = B-B / W-B / W-W	**BOXY R 92733 DIM8** ◇ **251 70 81922 ED8** ◇ ◇ = B-B / W-B / W-W

INCL.1 x POWERLED WHITE 9,3W
INCL.DIMMABLE LED POWER SUPPLY 500mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

IP53



BOXY R LED B-B / W-W




new

led

Dox 100 S LED





IP65


DOX 100 S LED ◇
232 01 09 ◇
◇ = N
INCL.1 x POWERLED WHITE 8W / 3000K
INCL.1 x REFLECTOR FL-35°
INCL.LED POWER SUPPLY 450mA-DC
110-240V / 50-60Hz

CE 0,7 IP65

CRI>80 750lm (8W)


Dox 100 S





DOX 100 S ◇
232 01 07 ◇
◇ = A
GX53 / 100-240V / 50-60Hz
1 x TC-FSE max.9W

CE 0,6 IP55 0,1

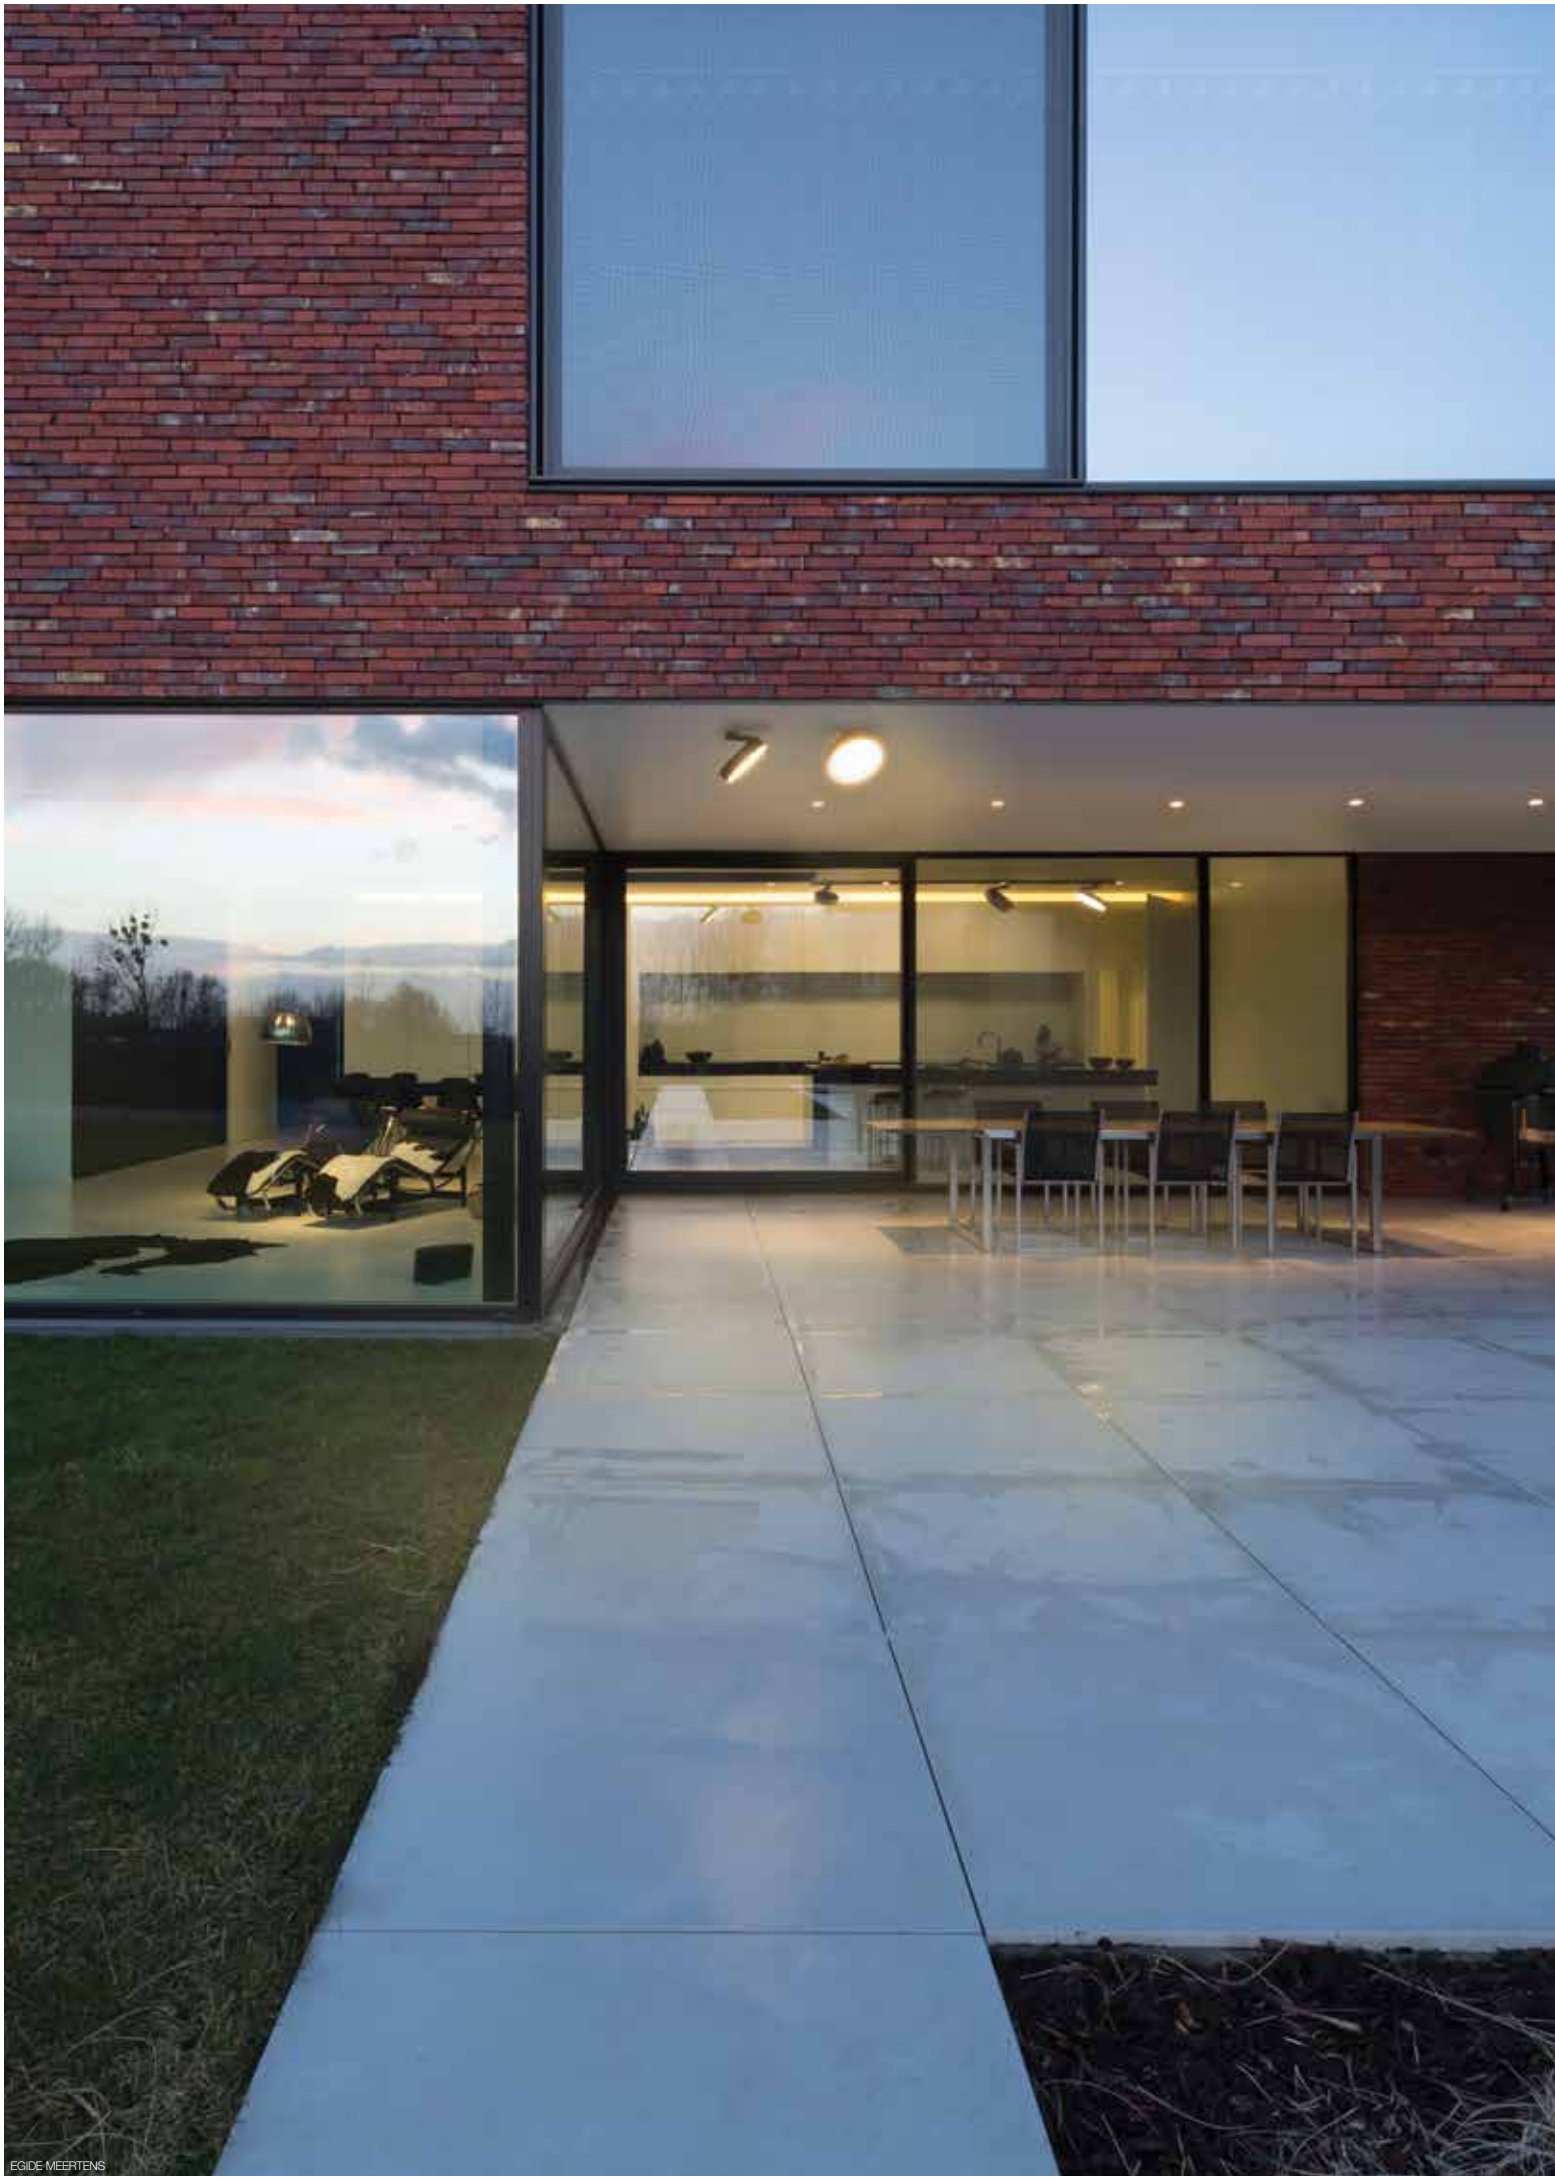


EGIDE MEERTENS



Supernova XS Pivot X





IP64


SUPERNOVA XS PIVOT 260 X ◇
274 88 2610 83 ◇
◇ = A / N / W
ADJUSTABLE 0°-45°
INCL.1 x GLASS OPAL
INCL.LED CLUSTER 10W / 3000K
110-240V / 50-60Hz

2,9 IP64

CRI>80 900lm (10W)

Supernova XS X







IP64

SUPERNOVA XS 260 X ◇
274 87 2610 83 ◇
◇ = A / N / W
INCL.1 x GLASS OPAL
INCL.LED CLUSTER 10W / 3000K
110-240V / 50-60Hz

2,4 IP64

AWARD DESIGN PLUS light+building
reddot design award winner 2013
GOOD DESIGN award
interior innovation award 2014
Selection

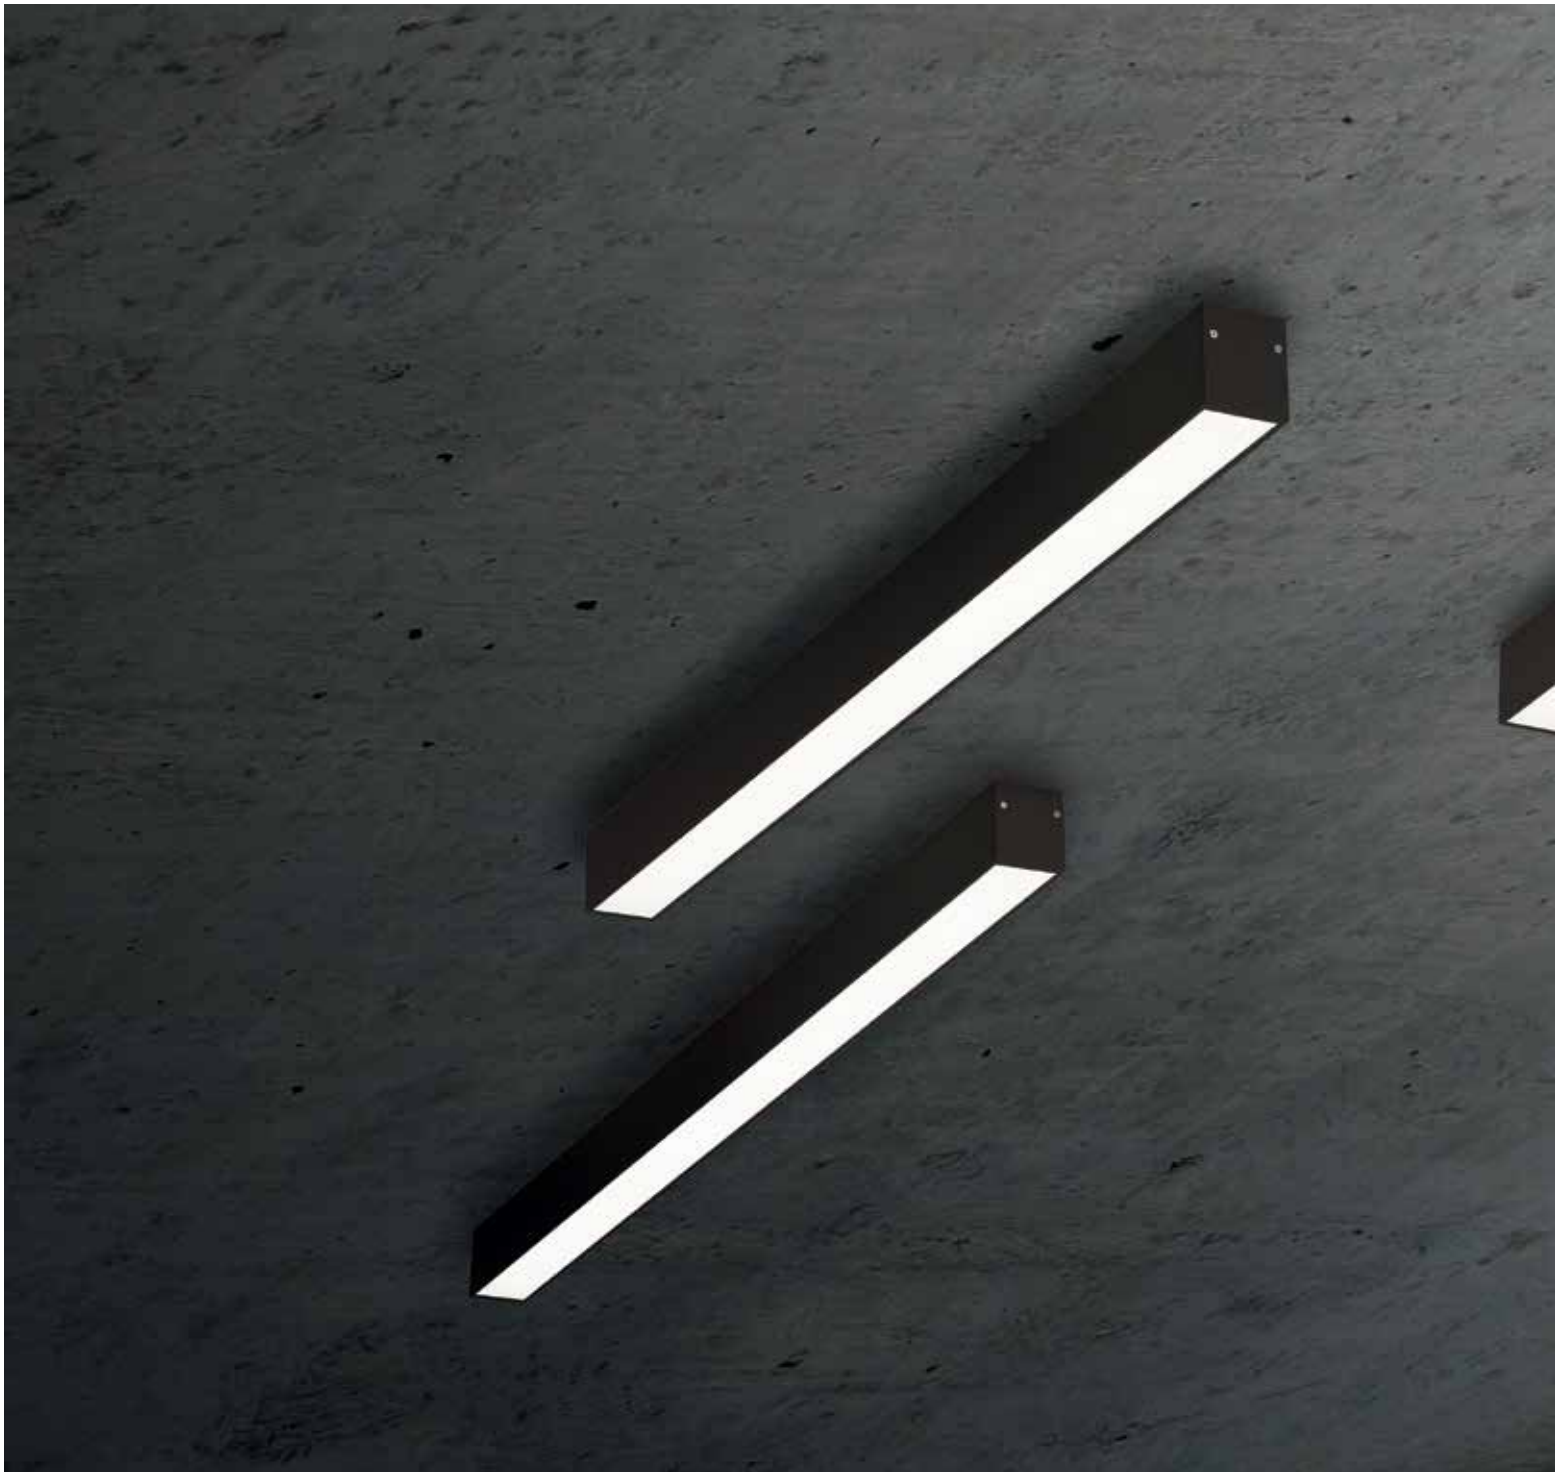

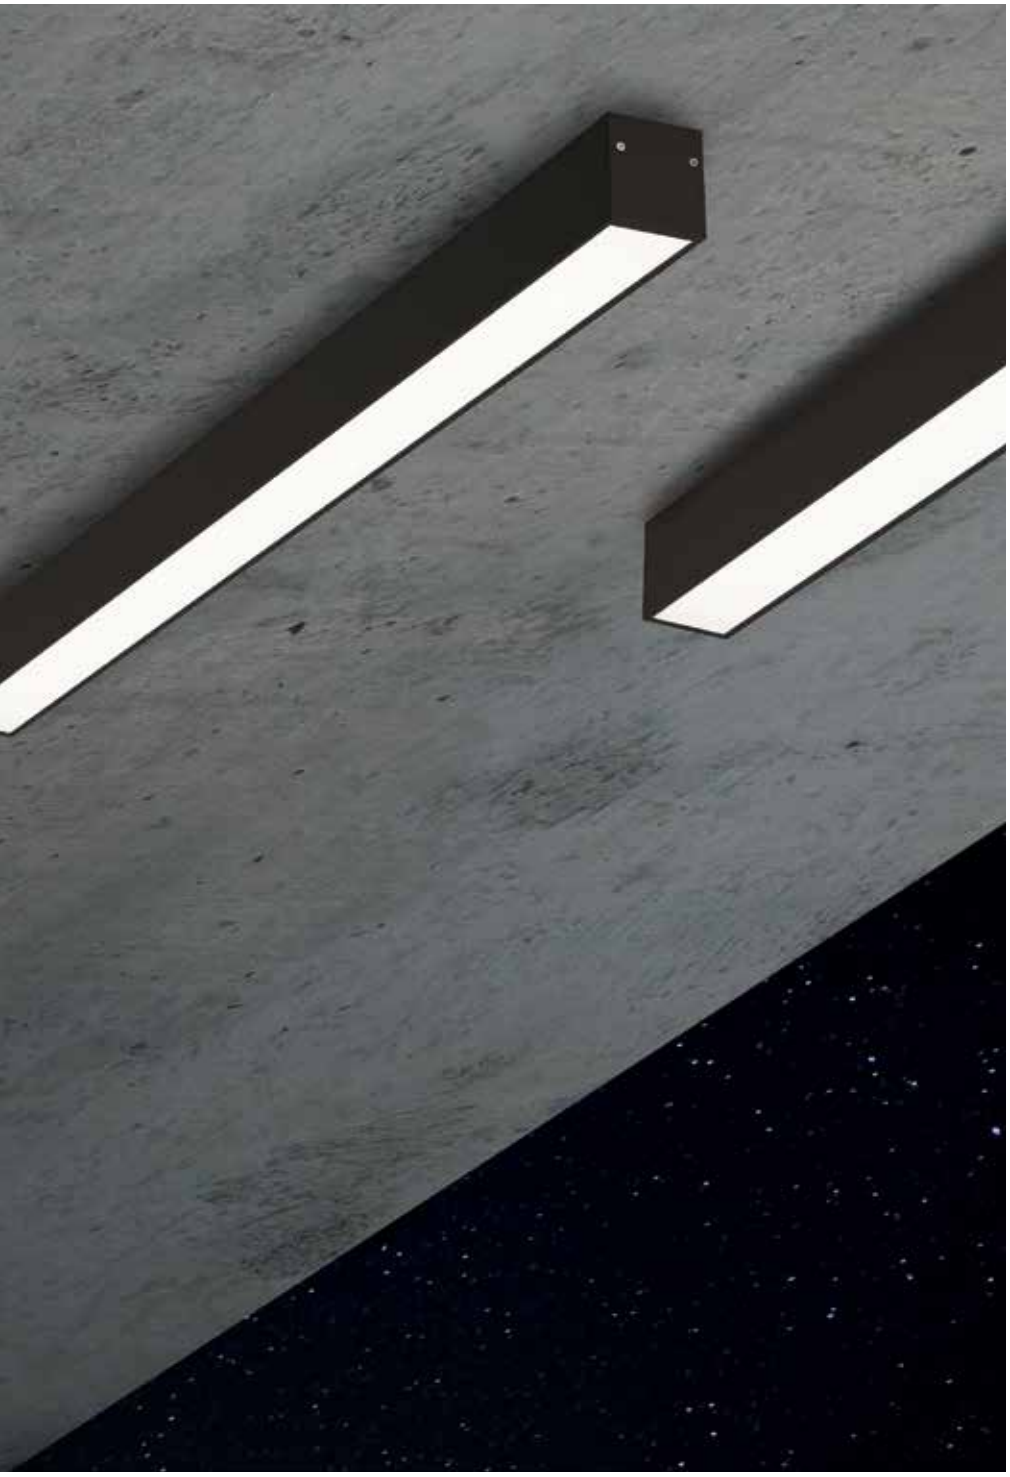


new

led

B-Liner 65 IP



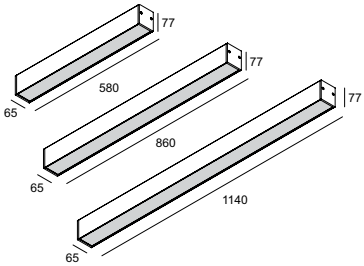

IP65

B-LINER 6522 IP ◇
388 01 22 ◇
◇ = A / N / W
INCL.1 x PC SBL
INCL.1 x LED ARRAY 15W / 3000K / 1960lm
INCL.1 x LED POWERSUPPLY
110-240V / 50-60Hz

CE 1,7 IP65

B-LINER 6532 IP ◇
388 01 32 ◇
◇ = A / N / W
INCL.1 x PC SBL
INCL.1 x LED ARRAY 22W / 3000K / 2940lm
INCL.1 x LED POWERSUPPLY
110-240V / 50-60Hz

CE 2,1 IP65


B-LINER 6542 IP ◇
388 01 42 ◇
◇ = A / N / W
INCL.1 x PC SBL
INCL.1 x LED ARRAY 30W / 3000K / 3920lm
INCL.1 x LED POWERSUPPLY
110-240V / 50-60Hz

CE 2,6 IP65



Montur S





IP65


MONTUR S LED ◇
232 112 83 ◇
◇ = A / B / W
INCL.1 x GLASS OPAL
INCL1 x LED CLUSTER 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 2,0 IP65

CRI>80 505lm (7W)

Montur M





IP65

MONTUR M LED ◇
232 212 83 ◇
◇ = A / B / W
INCL.1 x GLASS OPAL
INCL1 x LED CLUSTER 6,3W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 2,6 IP65

CRI>80 840lm (6,3W)



FULL INFO / PAG TEC


Options

CONTROL GEAR	A B C
TRANSFO 100W IP67 **200 47 10**	80 x 32 x 27



Boxy L+ LED






BOXY L+ LED 3033 ◇
251 67 8122 ◇
◇ = A-A / B-B / G-G / W-W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

0,6 IP53






BOXY 2L+ LED 3033 ◇
251 67 8222 ◇
◇ = A-A / B-B / W-W
INCL.2 x POWERLED WHITE 7W / 3000K
INCL.2 x REFLECTOR FL-33°
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

0,8 IP53

CRI>80 680lm (7W)

Boxy +





BOXY + ◇
251 67 44 ◇
◇ = A / G / W
GU10 / 100-240V / 50-60Hz
1 x QPAR51 35W

0,4 IP44 0,5

BOXY + 12V ◇
251 67 43 ◇
◇ = A / W
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-C51 max.35W

0,4 IP44 0,5

OPTIONS
TRANSFO



FULL INFO / PAG TEC

Options

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER




new

led

Kix S





IP65

KIX S ◇
232 08 831 ◇
◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K
INCL.1 x LENS SP-10°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC


0,3 IP65

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM

led

Industrial S





IP67


INDUSTRIAL S NW ◇
306 01 04 ◇
◇ = A
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 4000K

INDUSTRIAL S WW ◇
306 01 02 ◇
◇ = A
INCL.1 x POWERLED WHITE 1,1-2,3W / 3000K

INCL.1 x LENS 10°
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

0,2 IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM

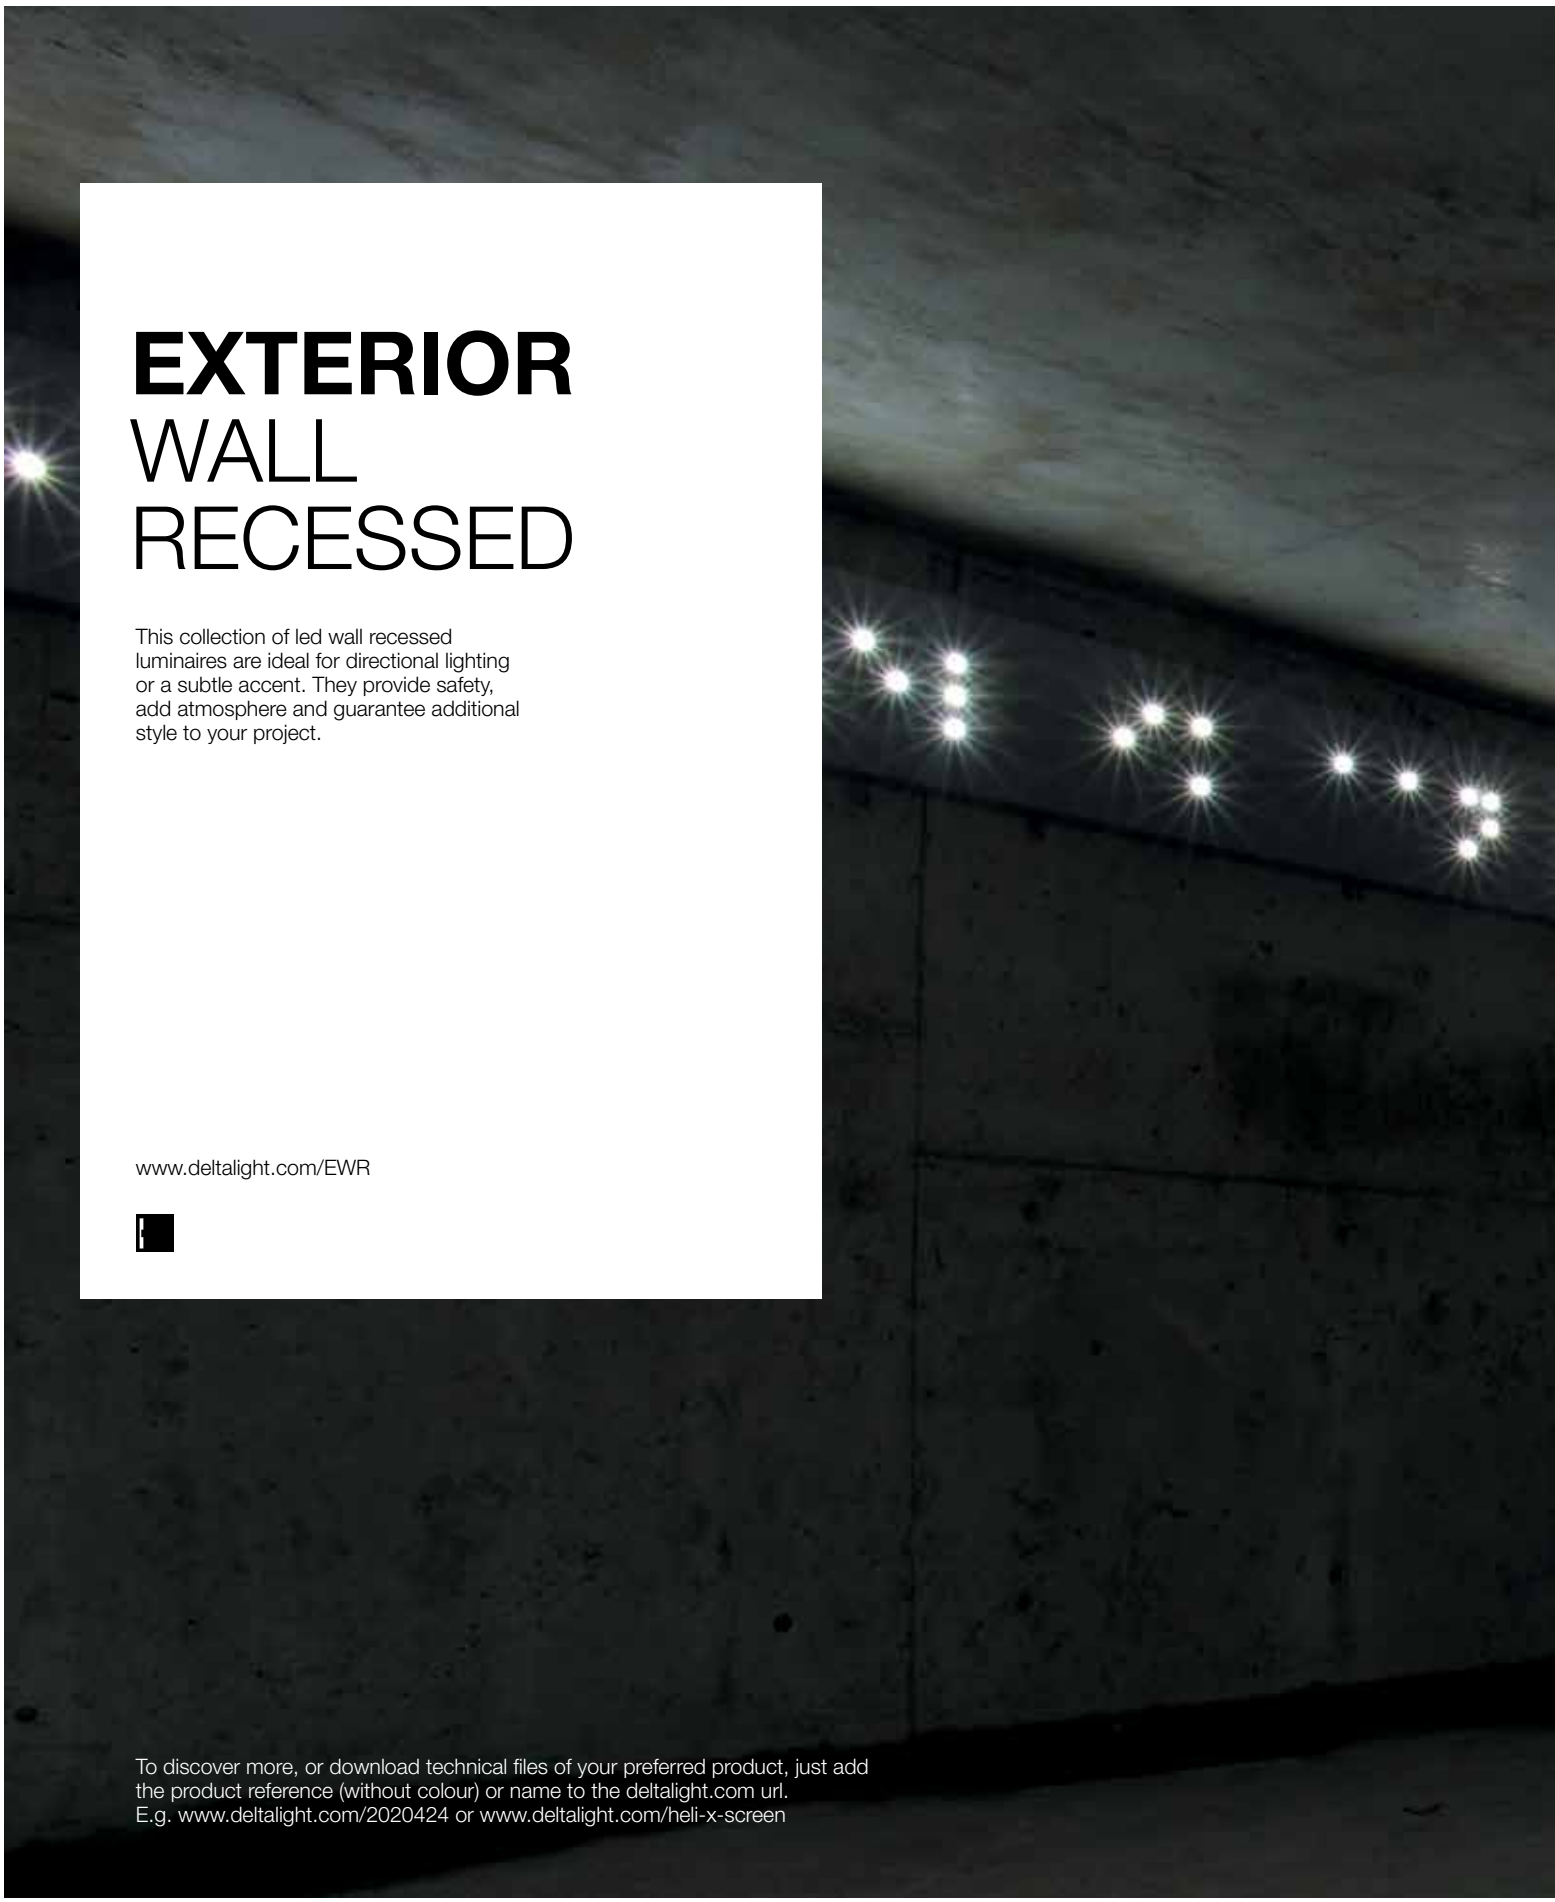

EXTERIOR
WALL RECESSED

This collection of led wall recessed luminaires are ideal for directional lighting or a subtle accent. They provide safety, add atmosphere and guarantee additional style to your project.

www.deltalight.com/EWR

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2020424 or www.deltalight.com/heli-x-screen





INDEX
EXTERIOR WALL RECESSED




LOGIC MINI R
EXT 44



LEDS C S
EXT 51



LOGIC MINI S
EXT 44



HELI X SCREEN
EXT 53



LOGIC W L
EXT 45



LOGIC W S
EXT 45



LEDS GO IN FORTE
EXT 49



LEDS C R
EXT 51


HELI X SCREEN LED	EXT 53
LEDS C®	EXT 51
LEDS GO IN FORTE	EXT 49
LOGIC MINI W R	EXT 44
LOGIC MINI W S	EXT 44
LOGIC W L	EXT 45
LOGIC W S	EXT 45

FULL INFO / PAG TEC


Requirements

INSTALLATION


CONCRETE BOX 191
270 11 191
315 x 80



CONCRETE BOX 192
270 11 192
135 x 125



CONCRETE PACK LOGIC W L
304 32 96
315 x 80



CONCRETE PACK LOGIC W S
304 33 96
135 x 125



FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CONCRETE BOX 188 **270 11 188**	Ø60 x 65	Ø67 x 70


CONTROL GEAR	A B C
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	146 x 55 x 19

new

led

Logic Mini W R





Ø 55 x 50
LOGIC MINI W R ◇
304 30 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 0,6W / 3000K
EXCL.LED POWER SUPPLY 24V-DC

IP54

OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC


CRI>80 40lm

new

led

Logic Mini W S





Ø 55 x 50
LOGIC MINI W S ◇
304 31 12 ◇
◇ = A / W
INCL.1 x POWERLED WHITE 0,6W / 3000K
EXCL.LED POWER SUPPLY 24V-DC

IP54


OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC


CRI>80 40lm

Logic W L





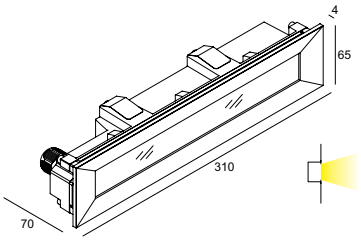

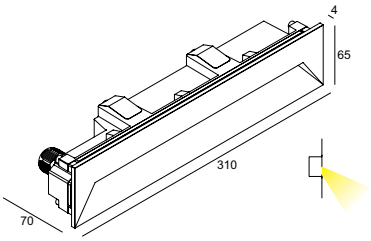

IP65

BOX 110-135
LOGIC W L F ◇
304 32 02 83 ◇
◇ = A / N / W
INCL.1 x GLASS SBL
INCL.1 x LED CLUSTER 9,5W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL. 1 x PG11
110-240V / 50-60Hz

CE 1,0 IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

IP65

BOX 110-135
LOGIC W L ◇
304 32 01 83 ◇
◇ = A / N / W
INCL.1 x GLASS SBL
INCL.1 x LED CLUSTER 9,5W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL. 1 x PG11
110-240V / 50-60Hz


CE 1,0 IP65

REQUIREMENTS
CONCRETE BOX 191
or
CONCRETE PACK LOGIC W L

CRI>80 1270lm

Logic W S





IP65

BOX 115-140
LOGIC W S ◇
304 33 01 83 ◇
◇ = A / N / W
INCL.1 x PC SBL
INCL.1 x LED CLUSTER 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL. 1 x PG11
110-240V / 50-60Hz

CE 1,0 IP65

REQUIREMENTS
CONCRETE BOX 192
or
CONCRETE PACK LOGIC W S

CRI>80 703lm











DEHULLU ARCHITECTEN





FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Leds Go In Forte





IP67

38 x 38 x 45

LEDS GO IN FORTE NW ◇
302 10 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS GO IN FORTE WW ◇
302 10 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

III CE 0,1 IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM



ISAGEN / AIA

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER


led


Leds C®














IP67

41 x 38
LEDS C® R ST NW ◇
302 20 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS C® R ST WW ◇
302 20 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

41 x 38
LEDS C® R NW ◇
302 20 10 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS C® R WW ◇
302 20 12 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

LEDS C® R BLUE ◇
302 20 11 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE [A] 1,1W

EXCL.LED POWER SUPPLY - 350mA-DC

IP54

OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY - 350mA-DC / DIM

38 x 38 x 38
LEDS C® S NW ◇
302 20 44 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS C® S WW ◇
302 20 42 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

LEDS C® S BLUE ◇
302 20 41 BL ◇
◇ = ANO
INCL.1 x POWERLED BLUE [A] 1,1W

EXCL.LED POWER SUPPLY - 350mA-DC

IP54

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY - 350mA-DC / DIM





FULL INFO / PAG TEC

Options

INSTALLATION

CONCRETE BOX 187 **270 11 187**	80 x 95 x 70	85 x 100


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Heli X Screen LED





75 x 87 x 60

HELI X SCREEN LED NW ◇
202 04 24 ◇
◇ = A / N
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K
EXCL.LED POWER SUPPLY 350mA-DC

HELI X SCREEN LED WW ◇
202 04 22 ◇
◇ = A / N
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K
EXCL.LED POWER SUPPLY 350mA-DC

CE 0,3 IP54

OPTIONS
CONCRETE BOX 187
LED POWER SUPPLY 350mA-DC / DIM



EXTERIOR
WALL SURFACE

Upgrade your façade with soft lighting elements or by using a parabolic and far-reaching lighting pattern. A remarkable feature in the wall surface range is the combination of LED with a lens, fusing architectural light effects and energy efficiency, offering new possibilities in exterior lighting.

www.deltalight.com/EWS

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2321018112 or www.deltalight.com/kix



INDEX
EXTERIOR WALL SURFACE



MONTUR S
EXT 58



KIX
EXT 62


MONO
EXT 79


VIKTOR
EXT 95


BE COOL X
EXT 107



MONTUR M
EXT 58


INDUSTRIAL S
EXT 67


GALA L
EXT 85


TWEETER X W
EXT 97


GRAFITI
EXT 109



MONTUR L
EXT 59


LOOK OUT
EXT 69



VISA X LED
EXT 87


NOX
EXT 99




SONTUR L
EXT 59


TOPIX L X
EXT 71


TIGA LED
EXT 87


ULTRA X
EXT 101



KIX S
EXT 62


YUPI X
EXT 73


VISION OUT
EXT 89


AYA
EXT 103



KIX M
EXT 63


MOMBA LED
EXT 75


SONAR 101
EXT 93




DOX 100
EXT 105

AYA	EXT 103
BE COOL® X	EXT 107
DOX 100	EXT 105
GALA L LED	EXT 85
GRAFITI	EXT 109
INDUSTRIAL S	EXT 67
KIX	EXT 62
KIX M	EXT 63
KIX S	EXT 62
LOOK OUT	EXT 69
MOMBA LED	EXT 75
MONO	EXT 79
MONTUR L	EXT 59
MONTUR M	EXT 58
MONTUR S	EXT 58
NOX	EXT 99
SONAR 101	EXT 93
SONTUR L	EXT 59
TIGA LED	EXT 87
TOPIX L X	EXT 71
TWEETER X W	EXT 97
ULTRA X LED	EXT 101
VIKTOR	EXT 95
VISA X LED	EXT 87
VISION OUT	EXT 89
YUPI X	EXT 73

Montur S





IP65


MONTUR S LED ◇
232 112 83 ◇
◇ = A / B / W
INCL.1 x GLASS OPAL
INCL1 x LED CLUSTER 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 2,0 IP65

CRI>80 505lm (7W)

Montur M






IP65 led

MONTUR M LED ◇
232 212 83 ◇
◇ = A / B / W
INCL.1 x GLASS OPAL
INCL1 x LED CLUSTER 6,3W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 2,6 IP65

CRI>80 840lm (6,3W)





IP65

MONTUR M E27 ◇
232 213 00 ◇
◇ = A / B / W
INCL.1 x GLASS CLEAR
E27Ls / 220-240V / 50-60Hz
1 x A60 max.40W

CE 2,5 IP65


OPTIONS
led LED SOLUTION - PAG TEC 4-5

new

led

Montur L



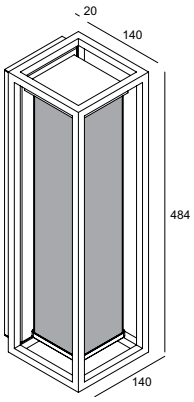

MONTUR L PC LED ◇
232 318 83 ◇
◇ = A / B
INCL.1 x PC SBL
INCL1 x LED CLUSTER 14,7W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 0 I 50-60Hz


2,6 IP54

CRI>80 1960lm (14,7W)

led

Sontur L



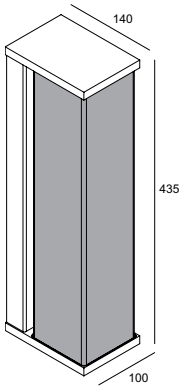


SONTUR L PC LED ◇
232 008 83 ◇
◇ = A / B / W
INCL.1 x PC SBL
INCL1 x LED CLUSTER 14,7W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 0 I 50-60Hz

1,5 IP54

CRI>80 1960lm (14,7W)





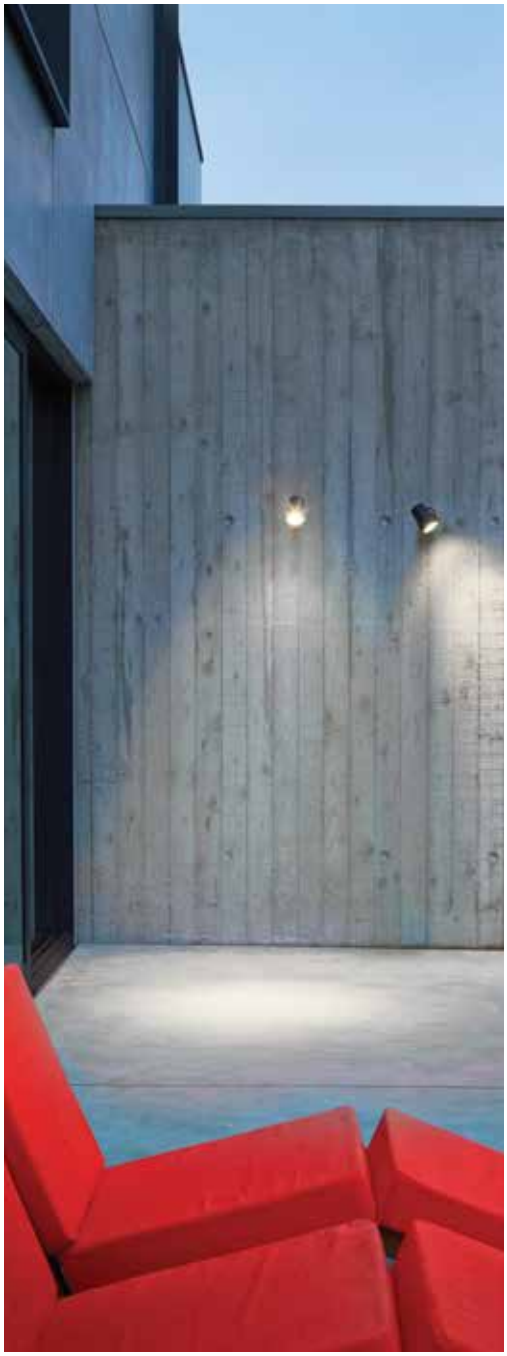

FULL INFO / PAG TEC

Options

INSTALLATION	A B	C
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

FULL INFO / PAG 50

Accessories

KAP KIX ◇
232 10 00 ◇
◇ = N
Ø102 / Ø81 / H98

HONEYCOMB KIX ◇
232 10 03 ◇
◇ = N
Ø70




KIX + HONEYCOMB KIX + KAP KIX

new

led

Kix S





IP65

KIX S ◇
232 08 831 ◇
◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K
INCL.1 x LENS SP-10°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC


0,3 IP65

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80

Kix M





IP65


KIX M ◇
232 12 833 ◇
◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS FL-30°
INCL.1 x KAP STRIPER N (REMOVABLE)
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,9 IP65

CRI>80 638lm (7W)

Kix





IP65

KIX 3011 ◇
232 10 18112 ◇
INCL.1 x REFLECTOR SP-11°

KIX 3030 ◇
232 10 18122 ◇
INCL.1 x REFLECTOR FL-30°

KIX 3055 ◇
232 10 18132 ◇
INCL.1 x REFLECTOR WFL-55°

KIX 30120 ◇
232 10 81833 ◇
WFL-120°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


CE 0,9 IP65

ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI >80 703lm (6,2W)

Kix HP





IP65

KIX HP 3011 ◇
232 10 21 831 ◇
INCL.1 x REFLECTOR SP-11°

KIX HP 3030 ◇
232 10 21 832 ◇
INCL.1 x REFLECTOR FL-30°

KIX HP 3055 ◇
232 10 21 833 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE [J] 18W / 3000K
EXCL. LED POWER SUPPLY 500mA-DC

CE 0,7 IP65

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM


ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI >80 1930lm (18W)





LILA ROSSO ZURICH

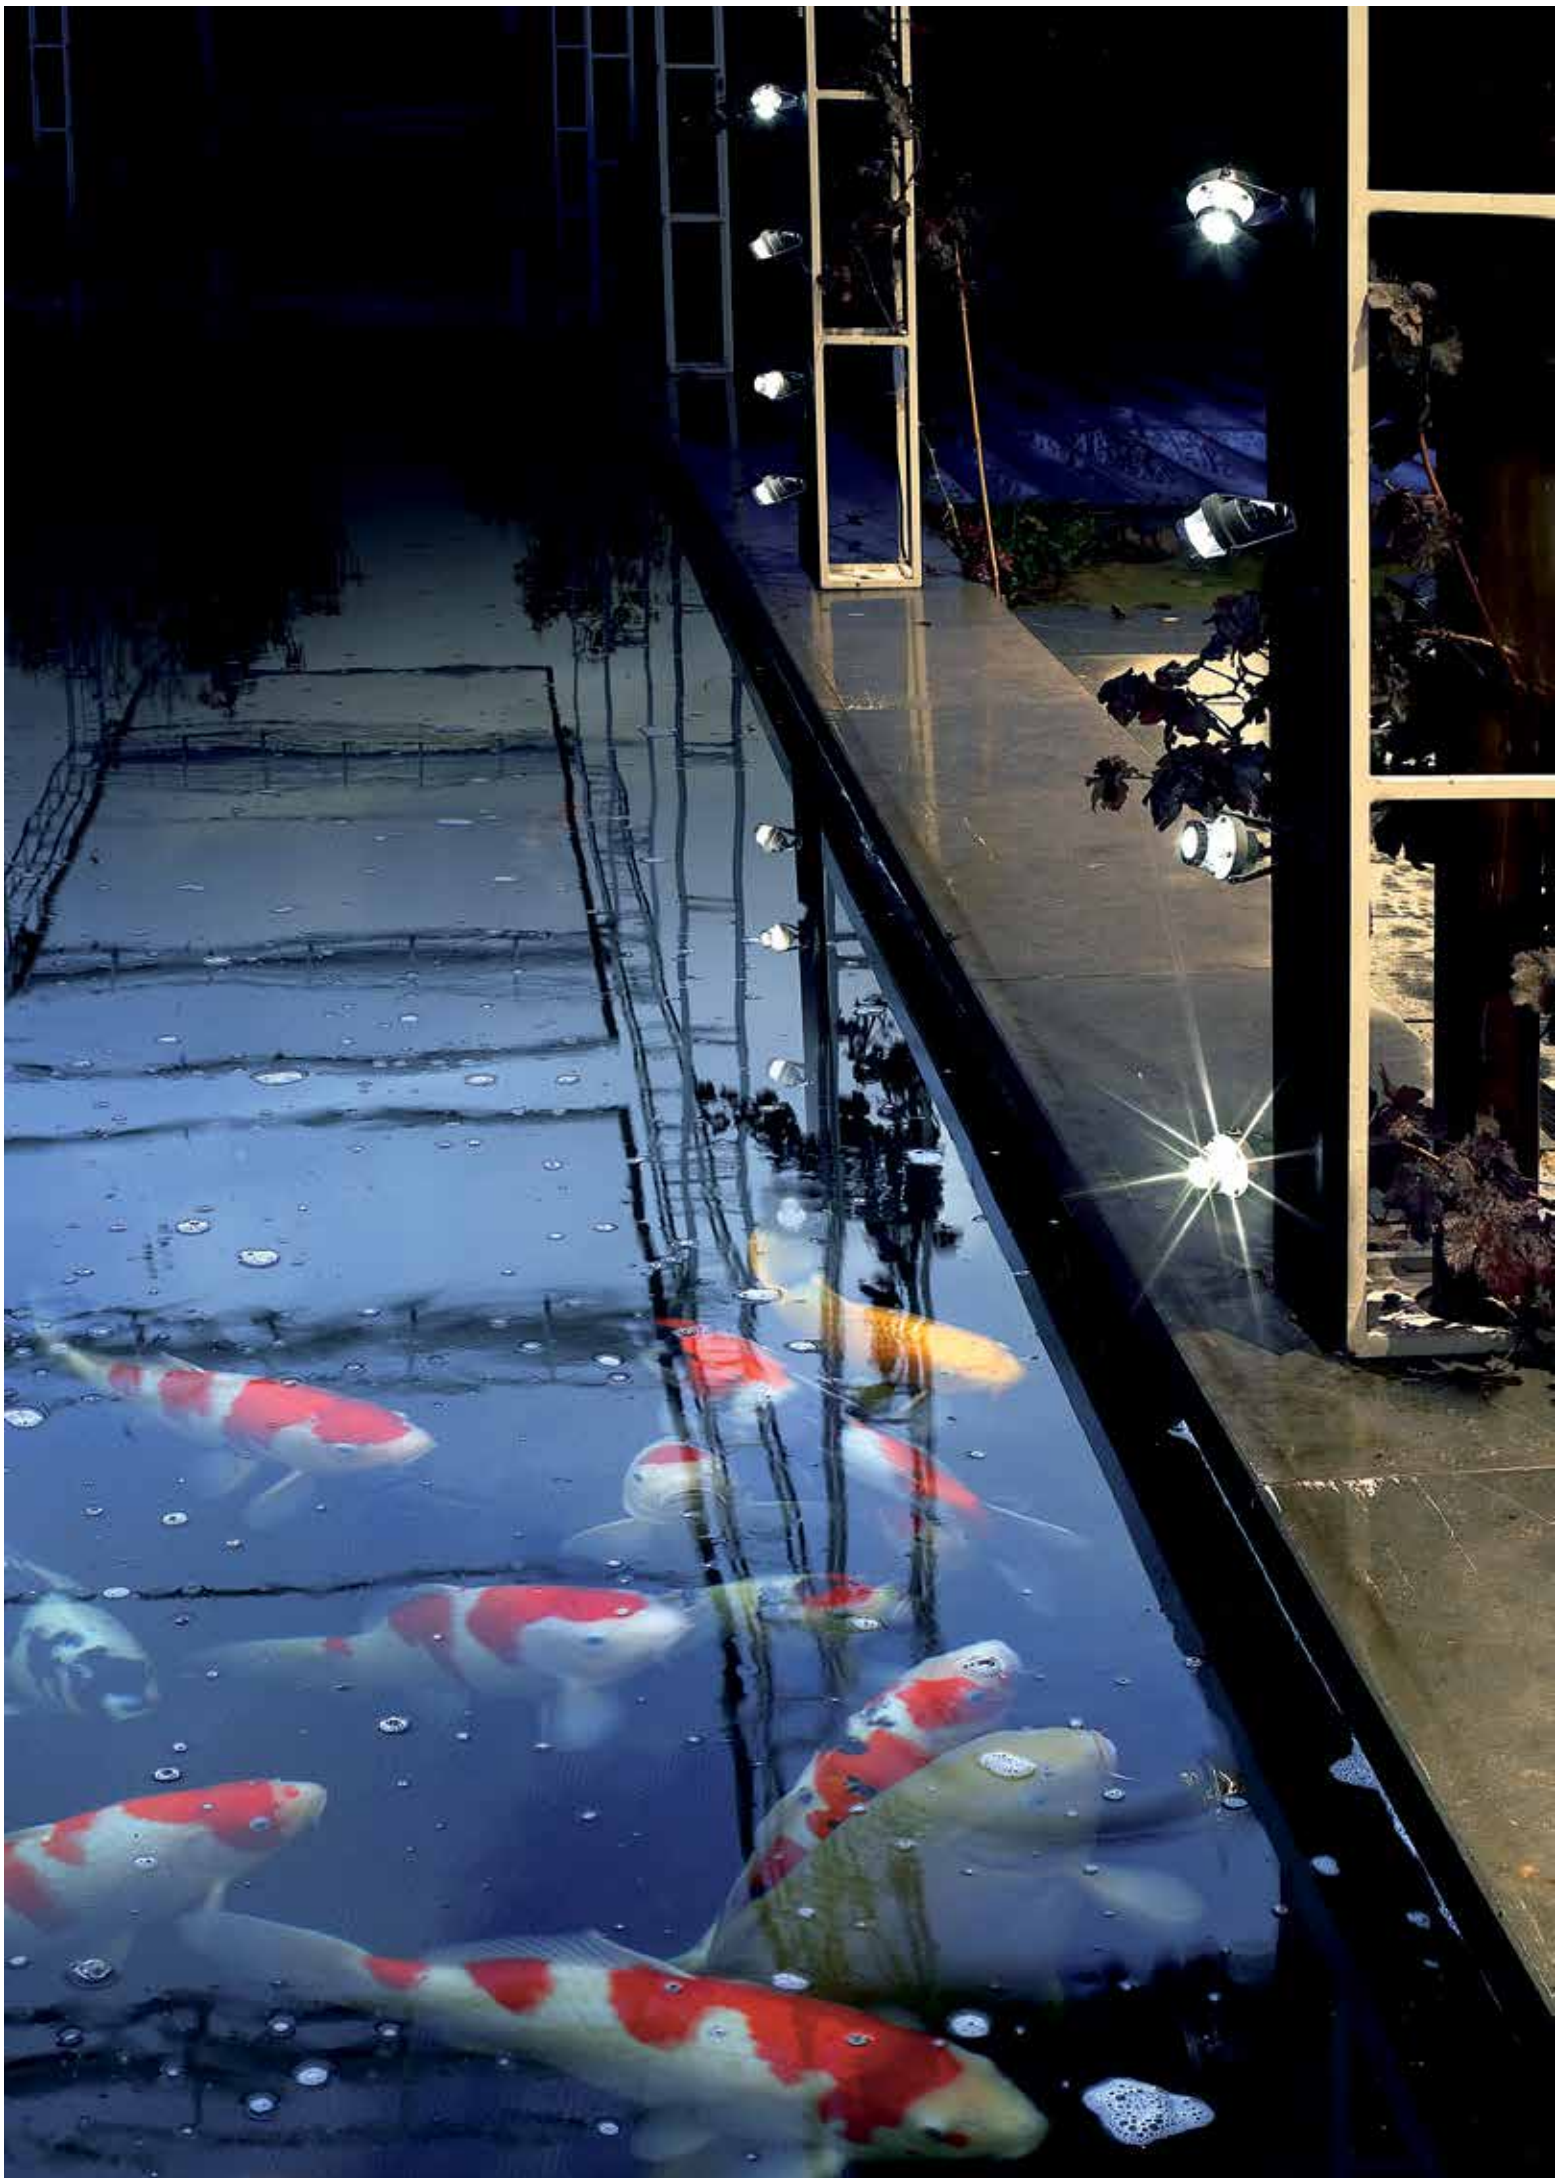

FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Industrial S





IP67

INDUSTRIAL S NW ◇
306 01 04 ◇
◇ = A
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 4000K

INDUSTRIAL S WW ◇
306 01 02 ◇
◇ = A
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K

INCL.1 x LENS 10°
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

0,2 IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX



FULL INFO / PAG TEC

Options


INSTALLATION		
CONCRETE BOX 153 **302 20 21**	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 **302 20 22**	43 x 43 x 60	43 x 43

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

Look Out





41 x 38

LOOK OUT NW ◇
304 13 14 ◇
◇ = A
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LOOK OUT WW ◇
304 13 12 ◇
◇ = A
INCL.1 x POWERLED WHITE 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

0,2 IP54


OPTIONS
CONCRETE BOX 153
CONCRETE BOX TR 154
LED POWER SUPPLY 350mA-DC / DIM





Topix L X





TOPIX L X ◇
304 17 51 ◇
◇ = A / G
INCL.2 x POWERLED WHITE 3,5W / 5000K ○

TOPIX L X WW ◇
304 17 52 ◇
◇ = A / G
INCL.2 x POWERLED WHITE 3,5W / 3000K ●

INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,0 IP55





FULL INFO / PAG TEC


Options


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Yupi X

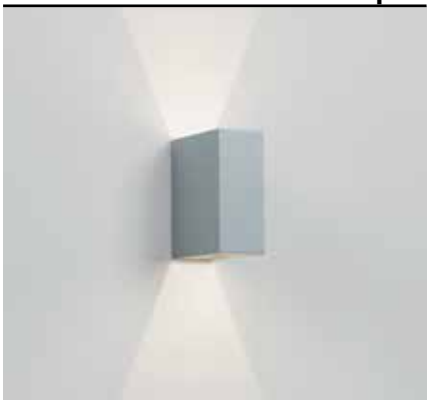



IP65

YUPI X LED WW ◇
279 91 22 ◇
◇ = A
INCL.2 x POWERLED WHITE [A] 1,1-1,6W / 3000K
EXCL.LED POWER SUPPLY 350-500mA-DC

III CE 0,5 IP65

OPTIONS
LED POWER SUPPLY 350-500mA-DC / DIM




new


led

Momba LED SP









IP65

MOMBA LED SP WW ◇
225 20 18112 ◇
◇ = N
INCL.1 x POWERLED WHITE 2,3W / 3000K
INCL.1 x LENS 4°
INCL.LED POWER SUPPLY 700mA-DC
120-240V / 50-60Hz

CE 0,9 IP65

IP65

MOMBA DOWN-UP LED SP WW ◇
225 20 18212 ◇
◇ = N
INCL.2 x POWERLED WHITE 2,3W / 3000K
INCL.2 x LENS 4°
INCL.LED POWER SUPPLY 700mA-DC
120-240V / 50-60Hz

CE 1,3 IP65


CRI>80 162lm (2,3W)


led

Momba LED









IP65

MOMBA LED WW ◇
225 20 18102 ◇
◇ = A / N
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,9 IP65

IP65

MOMBA DOWN-UP LED WW ◇
225 20 18202 ◇
◇ = A / N
INCL.2 x POWERLED WHITE 6,2W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 1,3 IP65

CRI >80 703lm (6,2W)



MOMBA DOWN-UP LED SP




MOMBA DOWN-UP LED



TRIO ARCHITECTURE






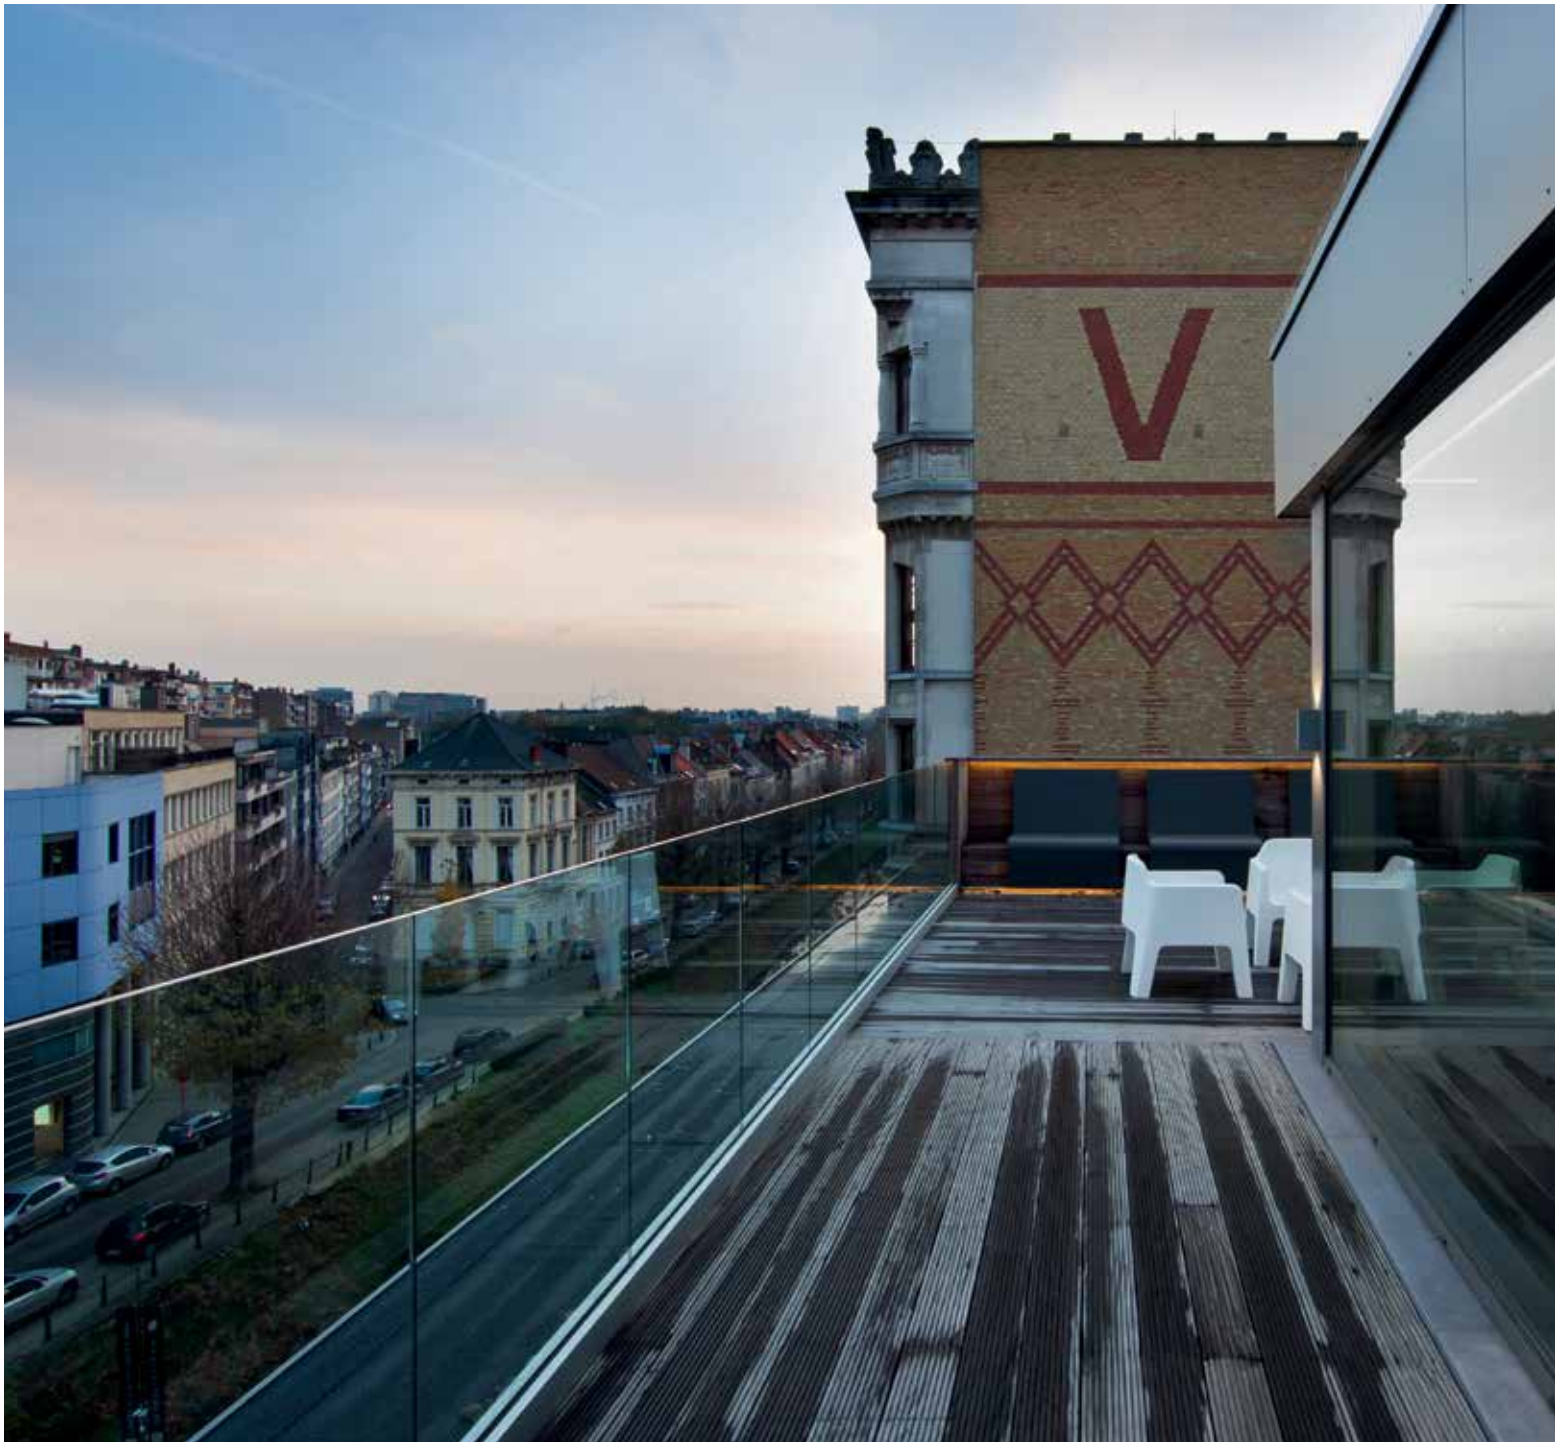






led

Mono LED

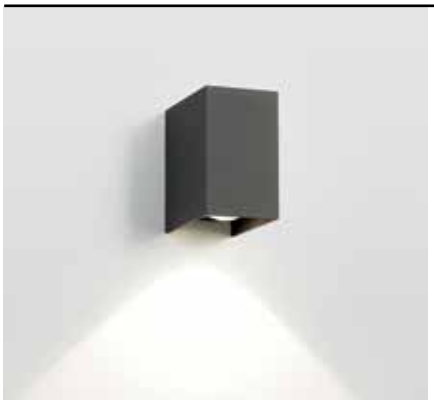

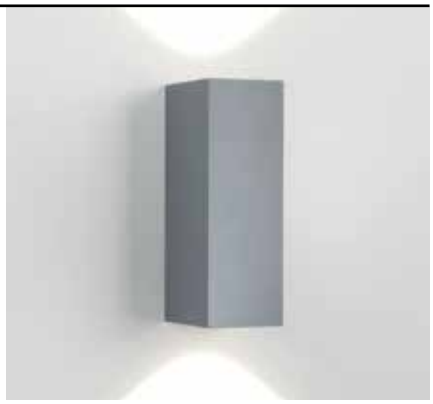






MONO LED WW ◇
223 11 4102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

0,6 IP55

MONO DOWN-UP LED WW ◇
223 51 4102 ◇
◇ = A / G
INCL.2 x POWERLED WHITE 6,2W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz


0,9 IP55

CRI >80 703lm (6,2W)

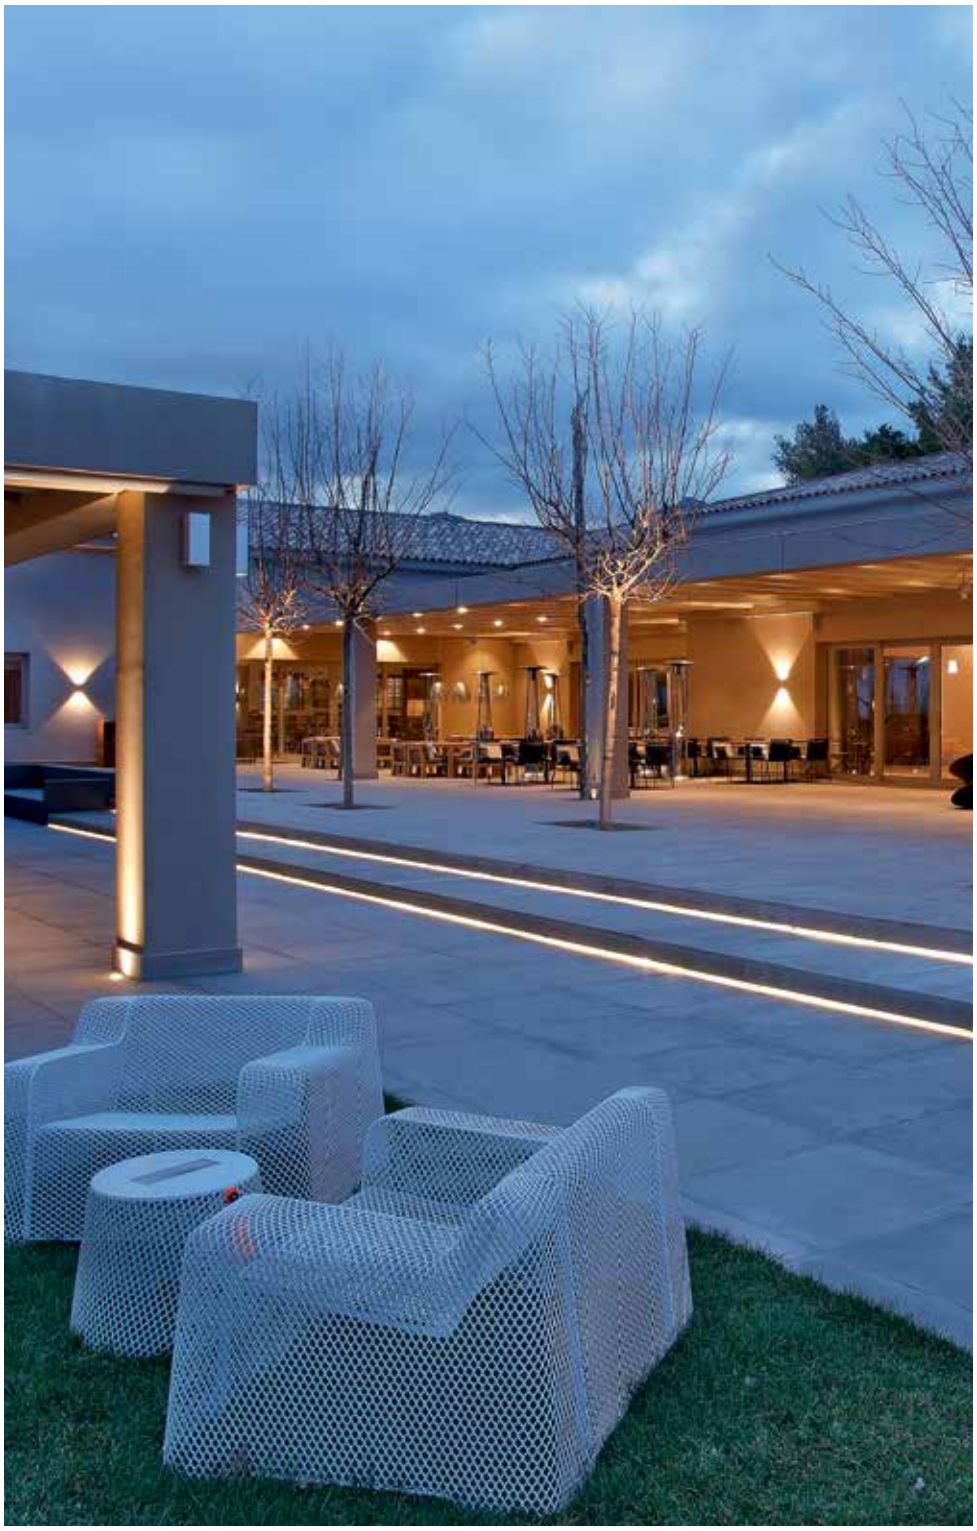


INDOOR
MAX.35W







MONO ◇
223 11 01 ◇
◇ = A / G
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-CBC51 max.50W
CE 0,4 IP54 0,5
OPTIONS
TRANSFO



MONO ◇
223 11 01 ◇
◇ = INOX
INOX 316 L
GX5.3 / 12V / EXCL. TRANSFO
1 x QR-CBC51 max.50W
CE 0,6 IP44 0,5
OPTIONS
TRANSFO


Mono

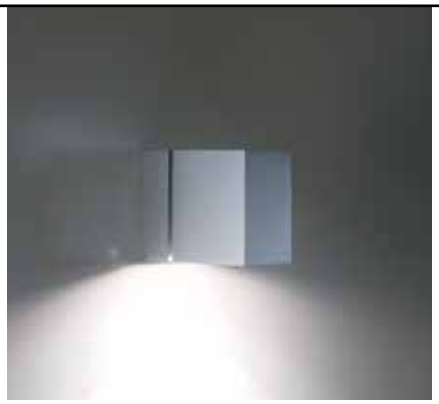




MONO X T50 ◇
223 12 51 ◇
◇ = A / G
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
CE 0,6 IP54 0,5







MONO DOWN-UP ◇
223 51 01 ◇
◇ = A / G
GX5.3 / 12V / EXCL. TRANSFO
2 x QR-CBC51 max.35W
CE 0,8 IP54 0,5

OPTIONS
TRANSFO

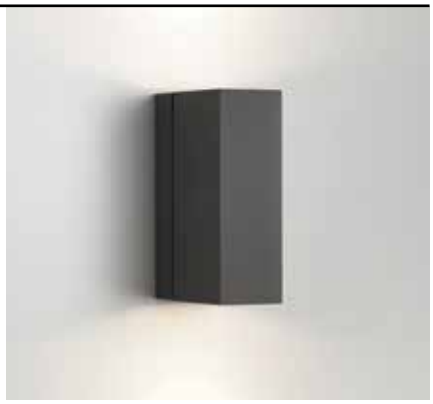




MONO X DOWN-UP T50 ◇
223 52 51 ◇
◇ = A / G
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CBC51 max.35W
CE 1,0 IP54 0,5




MONO X T50 ◇
223 12 51 ◇
◇ = INOX
INOX 316 L
GX5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
CE 1,0 IP44 0,5



MONO DOWN-UP ◇
223 51 01 ◇
◇ = INOX
INOX 316 L
GX5.3 / 12V / EXCL. TRANSFO
2 x QR-CBC51 max.35W
CE 1,2 IP44 0,5

OPTIONS
TRANSFO



MONO X DOWN-UP T50 ◇
223 52 51 ◇
◇ = INOX
INOX 316 L
GX5.3 / 220-240V / 50-60Hz / TE
2 x QR-CBC51 max.35W
CE 1,6 IP44 0,5

FULL INFO / PAG TEC

Options

CONTROL GEAR	C A B
TRANSFO 50W **200 46 06**	86 x 31 x 20
TRANSFO 100W **200 46 10**	107 x 35 x 21









Gala L LED







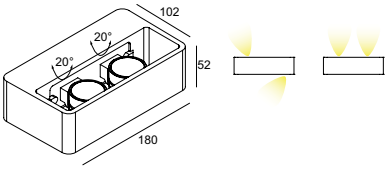

IP65

GALA L LED WW ◇
275 04 52 ◇
◇ = A / N / W
FIXED
INCL.LED CLUSTER 6,3W / 3000K
INCL.LED POWER SUPPLY 350 mA-DC
100-240V / 50-60Hz

◇ CE 0,8 IP65

CRI>80 840lm (6,3W)

GALA L OK LED WW ◇
275 04 18202 ◇
◇ = A / N / W
ADJUSTABLE 20°
INCL.2 x POWERLED WHITE 4,2W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 240 mA-DC
100-240V / 50-60Hz


□ CE 1,0 IP55

CRI>80 472lm (4,2W)



Visa X LED







VISA X LED WW ◇
275 06 24 ◇
◇ = G
INCL.4 x POWERLED WHITE 1,1W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 1,2 IP55

Tiga LED

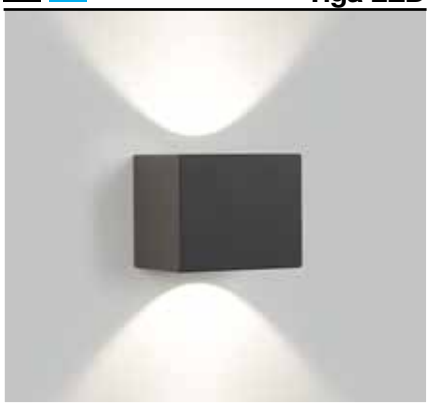



IP65

TIGA LED 3024 ◇
223 751 8102 ◇
◇ = A / G / W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,4 IP65

TIGA LED BS 3024 ◇
223 752 8102 ◇
◇ = A / G / W
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.DIMMABLE LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
110-240V / 50-60Hz

CE 1,4 IP65

CRI >80 680lm (7W)


GOOD DESIGN award






led

Vision Out

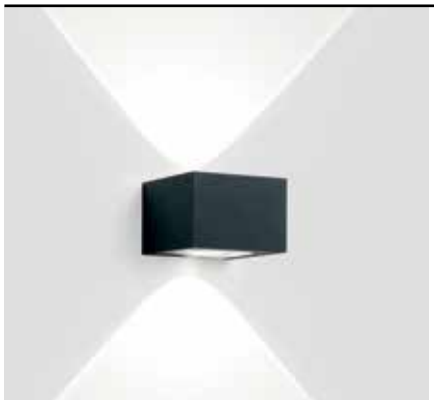




VISION OUT LED NW ◇
278 27 24 ◇
INCL.2 x POWERLED WHITE 1,6W / 4000K

VISION OUT LED WW ◇
278 27 22 ◇
INCL.2 x POWERLED WHITE 1,6W / 3000K

◇ = A / N
INCL.2 x LENS
INCL.LED POWER SUPPLY 500mA-DC
120-240V / 50-60Hz

CE 1,2 IP55







VISION S OUT LED NW ◇
278 26 24 ◇
INCL.2 x POWERLED WHITE 1,6W / 4000K

VISION S OUT LED WW ◇
278 26 22 ◇
INCL.2 x POWERLED WHITE 1,6W / 3000K

◇ = A / N
INCL.1 x LENS
INCL.LED POWER SUPPLY 500mA-DC
120-240V / 50-60Hz

CE 1,1 IP55

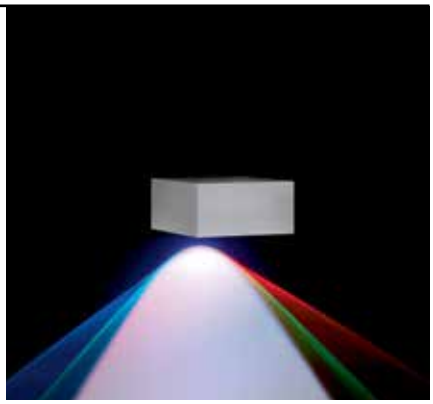




VISION S OUT RGB ◇
278 26 33 ◇
◇ = A
INCL.1 x LENS
INCL.3 x POWERLED 1,6W / R - G - B
INCL.LED POWER SUPPLY 500mA-DC
120-240V / 50-60Hz

CE 1,1 IP55

GOOD DESIGN award



ARCHITECTSLAB

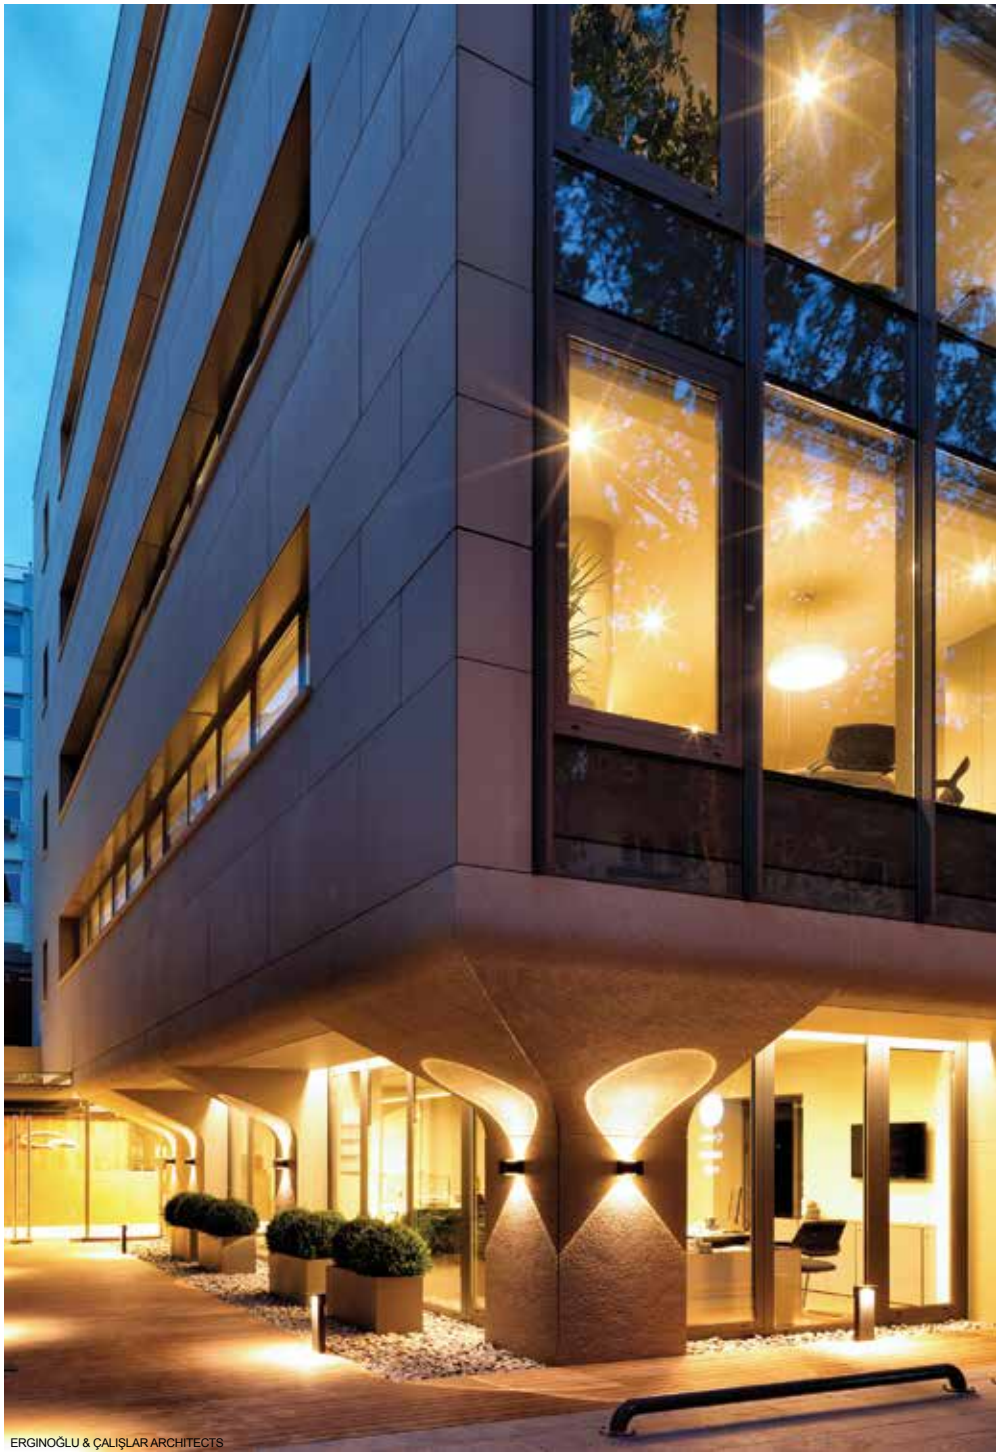


ERGINOĞLU & ÇALIŞLAR ARCHITECTS



INDOOR
MAX.35W

Sonar 101





SONAR 101 HP ◇
223 65 40 ◇
◇ = A-ANO
G9 / 100-240V / 50-60Hz
1 x QT14 max.60W


CE 0,9 IP54 0,1



led

Viktor





IP65

VIKTOR ◇
223 80 12 ◇
◇ = A / N / W
INCL.LED CLUSTER 8,4W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE 0,5 IP65

CRI>80 580lm (8,4W)







led

Tweeter X W







TWEETER X W ◇
206 40 12 ◇
◇ = N
ADJUSTABLE 0-45° / 350°
INCL.GLASS SBL
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE 0,8 IP54

CRI>80 703lm (6,2W)









Nox





NOX Hi ◇
225 11 15 ◇
◇ = G
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W

CE 1,0 IP55 0,5

led

NOX LED WW ◇
225 11 4102 ◇
◇ = G
FIXED
INCL.1 x POWERLED WHITE 4,6W / 3000K
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

CE 1,0 IP55


CRI >80 - 450lm (4,6W)




Ultra X LED









ULTRA X LED WW ◇
279 61 18102 ◇
◇ = A / N / W
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,6 IP55

ULTRA X DOWN-UP LED WW ◇
279 61 18202 ◇
◇ = A / N / W
INCL.2 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz


CE 0,9 IP55


CRI >80 703lm (6,2W)






Aya

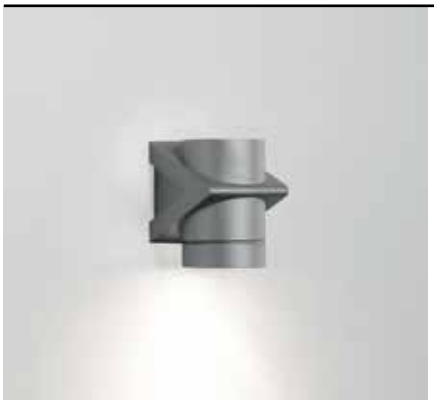




AYA Hi ◇
225 31 15 ◇
◇ = A
FIXED
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.35W

IP55 0,5

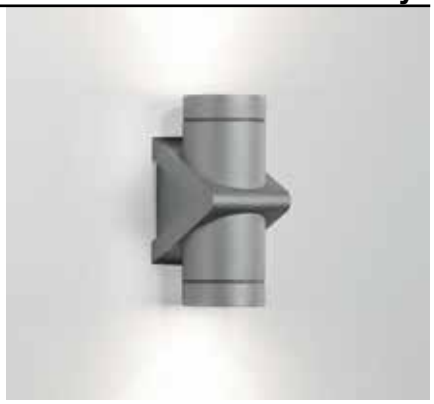



AYA DOWN-UP Hi ◇
225 51 15 ◇
◇ = A
FIXED
GU10 / 100-240V / 50-60Hz
2 x QPAR 51 max.35W

IP55 0,5





ART1ST DESIGN STUDIO

Dox 100 LED









IP65

DOX 100 LED ◇
232 02 09 ◇
◇ = N
INCL.1 x POWERLED WHITE 9W / 3000K
INCL.1 x REFLECTOR FL-35°
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz

CE 0,9 IP65

IP65

DOX 100 DOWN-UP LED ◇
232 03 09 ◇
◇ = N
INCL.2 x POWERLED WHITE 9W / 3000K
INCL.2 x REFLECTOR FL-35°
INCL.LED POWER SUPPLY 500mA-DC
100-240V / 50-60Hz


CE 1,3 IP65


CRI >80 830lm (9W)

Dox 100









DOX 100 ◇
232 02 07 ◇
◇ = A
GX53 / 100-240V / 50-60Hz
1 x TC-FSE max.9W

CE 0,7 IP55 0,1

DOX 100 DOWN-UP ◇
232 03 07 ◇
◇ = A
GX53 / 100-240V / 50-60Hz
2 x TC-FSE max.9W

CE 0,9 IP55 0,1


DOX 100 DOWN-UP LED


DOX 100 DOWN-UP







Be Cool® X









BE COOL® X 114 ◇
274 24 114 ◇
◇ = A
G5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16 14W
CE 2,0 IP54 0,1

BE COOL® X 128 ◇
274 24 128 ◇
◇ = A
G5 / 220-240V / 50-60Hz / 1 x 1~EVG
1 x T16 28W
CE 3,2 IP54 0,1





INDOOR MAX.35W

Grafiti









IP65

GRAFITI 211 T50 ◇
215 02 11 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
2 x QR-LP111 max.50W
CE 2,8 IP65 1,0

IP65

GRAFITI 411 T50 ◇
215 04 11 ◇
◇ = A
G53 / 220-240V / 50-60Hz / TE
4 x QR-LP111 max.50W
CE 5,1 IP65 1,0





EXTERIOR
FLOOR RECESSED

Floor recessed luminaires guarantee a subtle, discrete and powerful light effect. Embedded in a well-planned lighting study, in-ground luminaires are perfect to highlight both buildings, art or natural elements such as trees, hedges or ponds. The new collection offers a variety of lighting options, angles and effects.

www.deltalight.com/EFR

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2134718112 or www.deltalight.com/logic-r

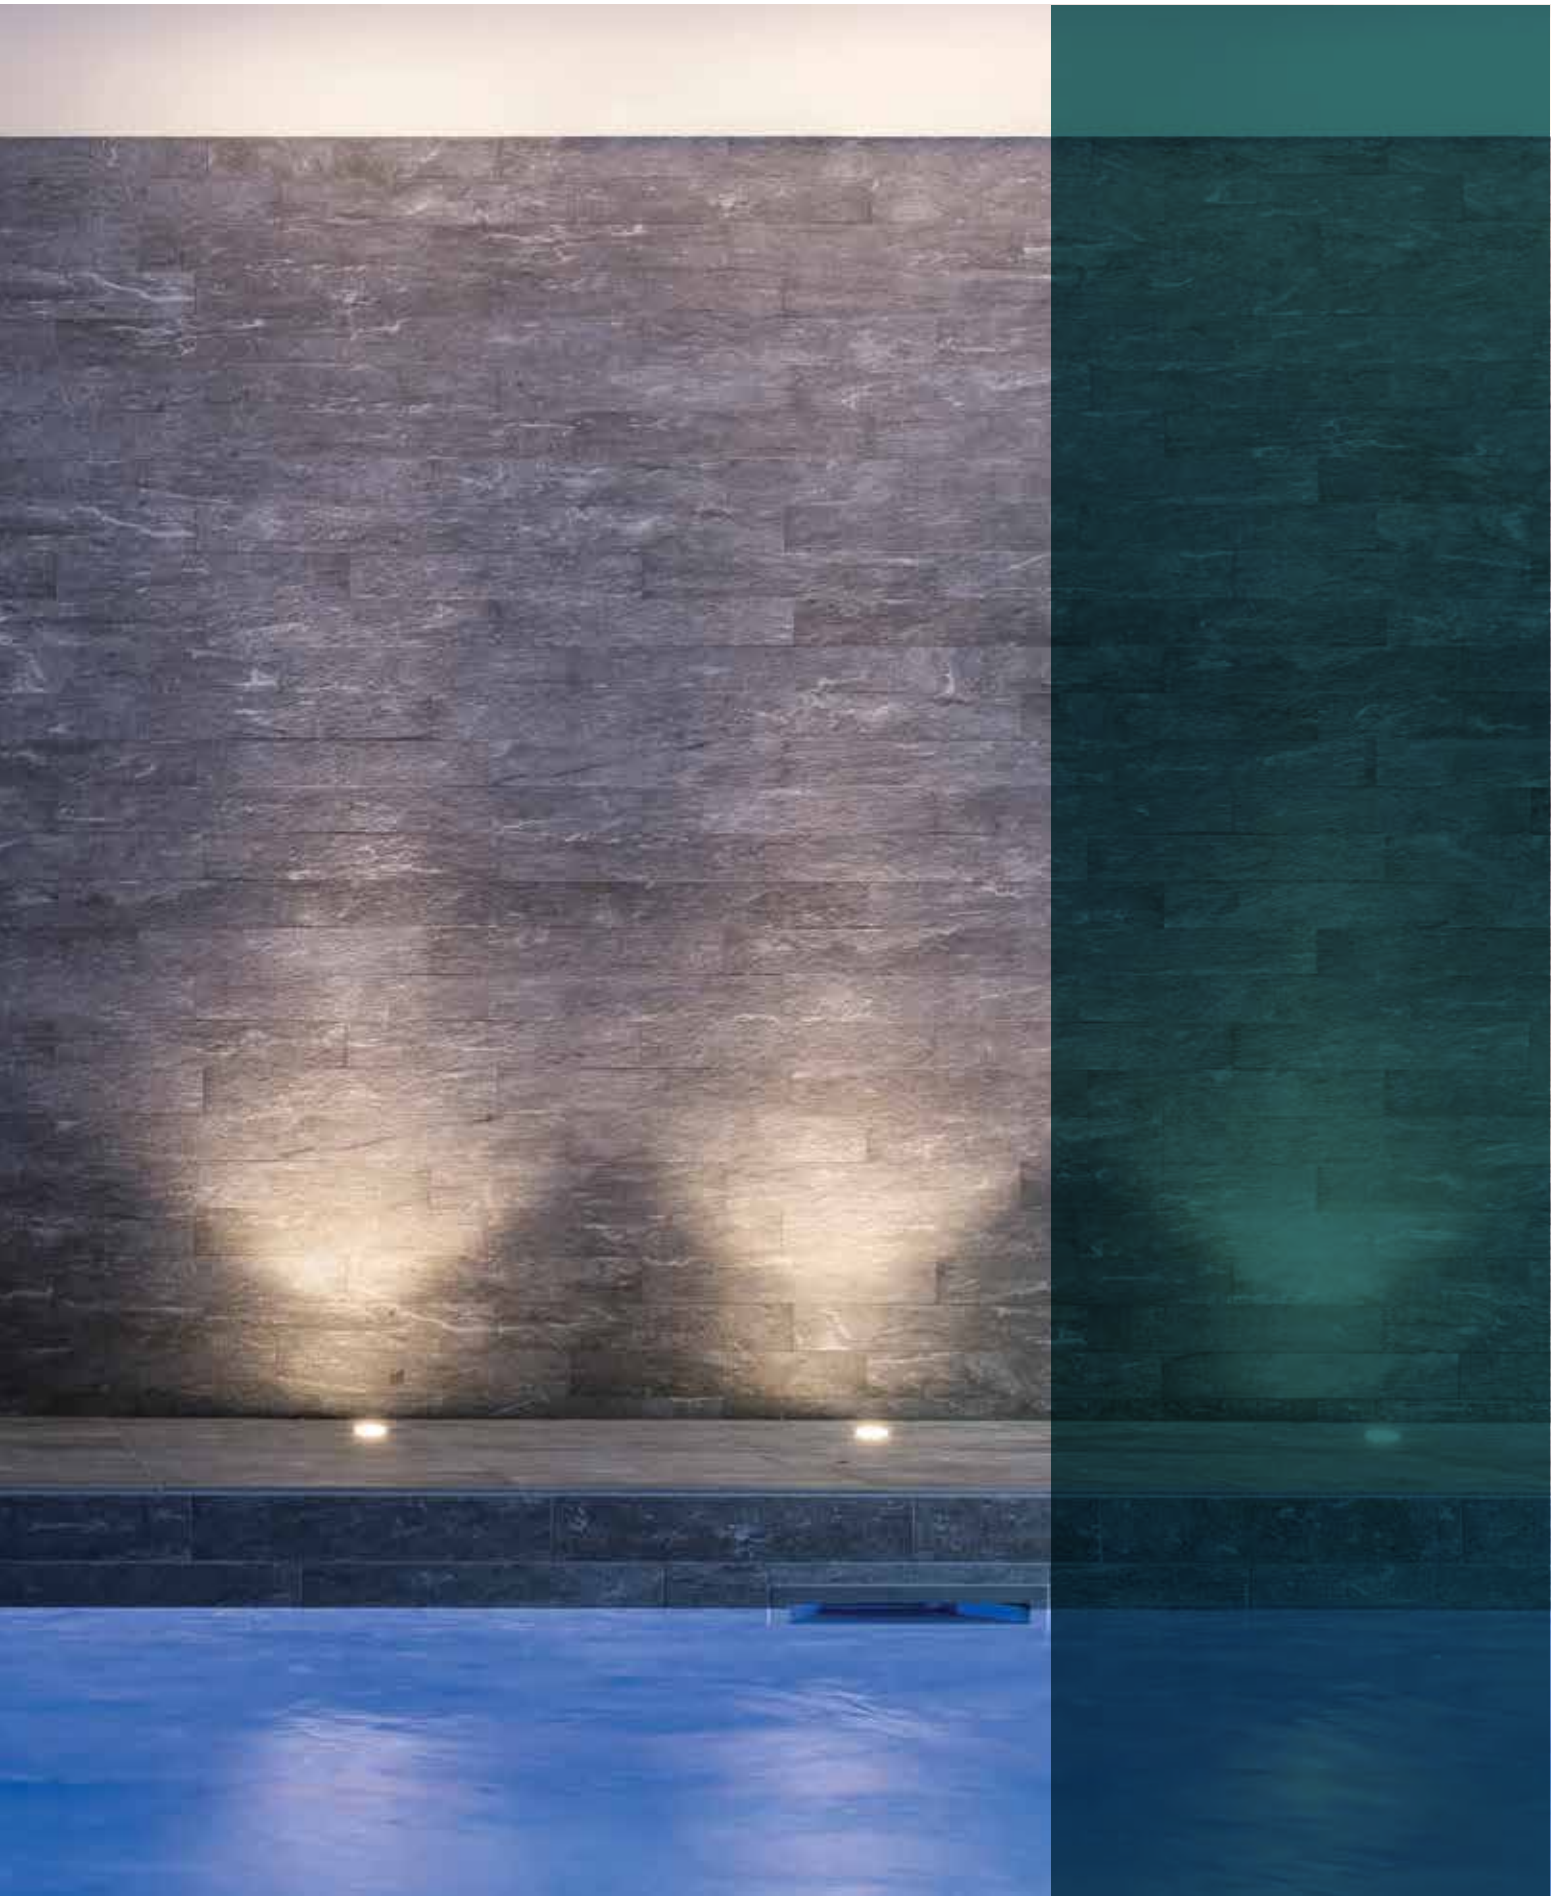

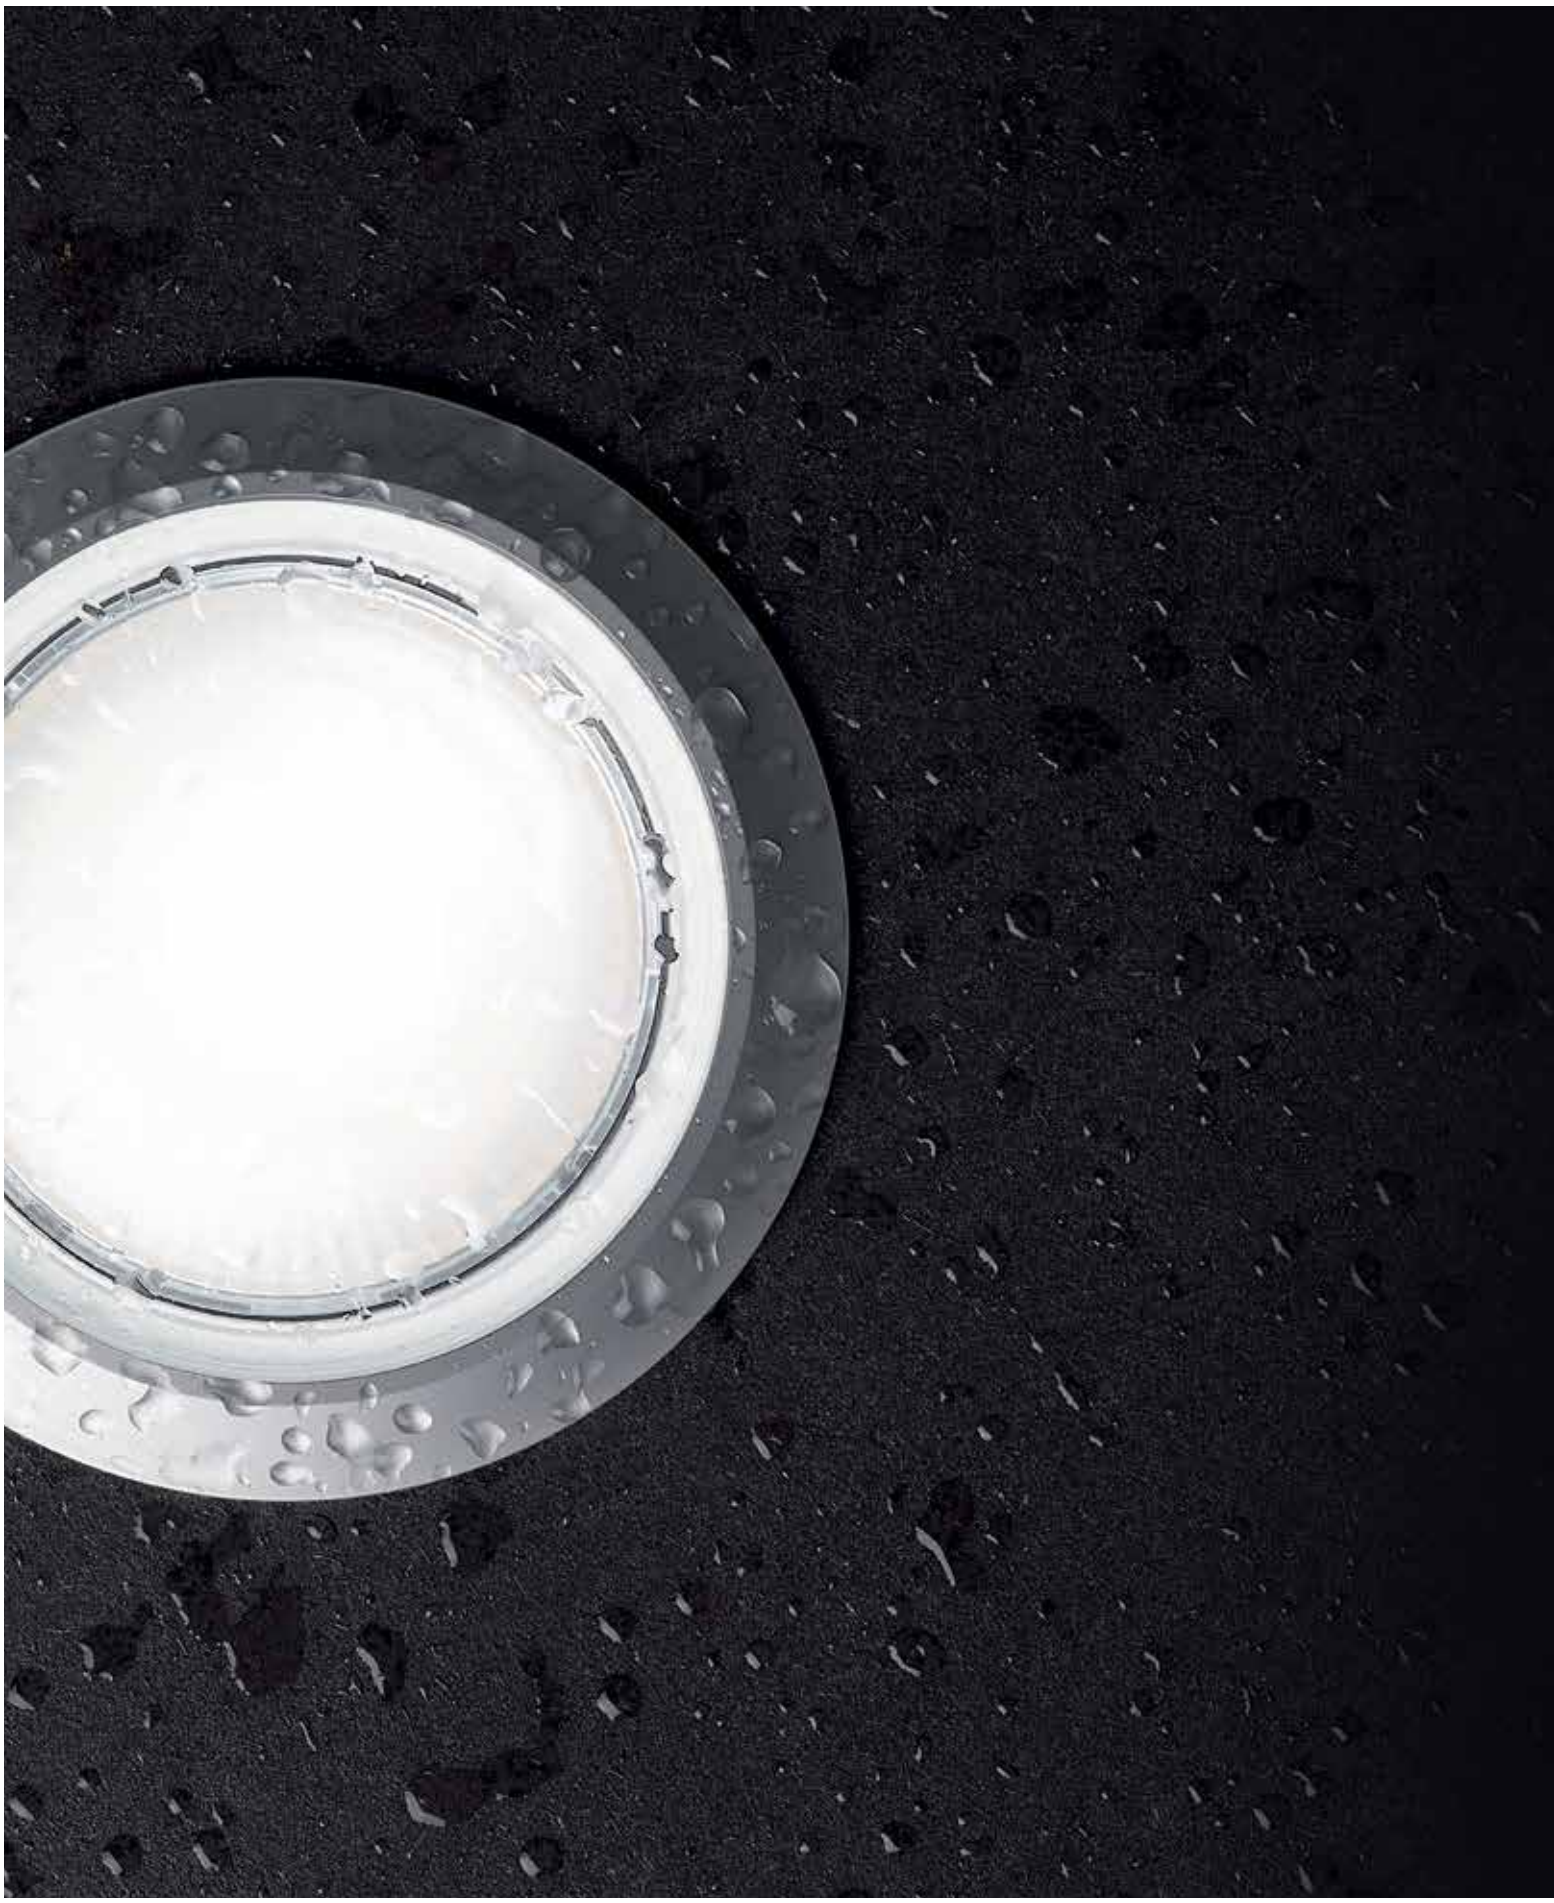


INDEX
EXTERIOR FLOOR RECESSED IP67



LEDS C
EXT 115



LOGIC 60 R STRIPER
EXT 121



GENIE 90 S
EXT 131



LEDS GO IN
EXT 115



LOGIC R WALLWASH
EXT 122



BASIC LR
EXT 133



TACTIC 2
EXT 117



LOGIC R
EXT 123




BASIC LSR
EXT 133



LOGIC 60 R MOON
EXT 119



LOGIC S
EXT 123



BASIC
EXT 133



LOGIC 60 WALLWASH
EXT 119



LOGIC F
EXT 129



FLIP SET
EXT 137




LOGIC 60 R
EXT 120



GENIE 90 R
EXT 131

BASIC	EXT 133
FLIP SET	EXT 137
GENIE 90	EXT 131
LEDS C®	EXT 115
LEDS GO® IN	EXT 115
LOGIC 60 R	EXT 120
LOGIC 60 R MOON	EXT 119
LOGIC 60 R STRIPER	EXT 121
LOGIC 60 WALLWASH	EXT 119
LOGIC F	EXT 129
LOGIC R	EXT 123
LOGIC R WALLWASH	EXT 122
LOGIC S	EXT 123
TACTIC 2	EXT 117

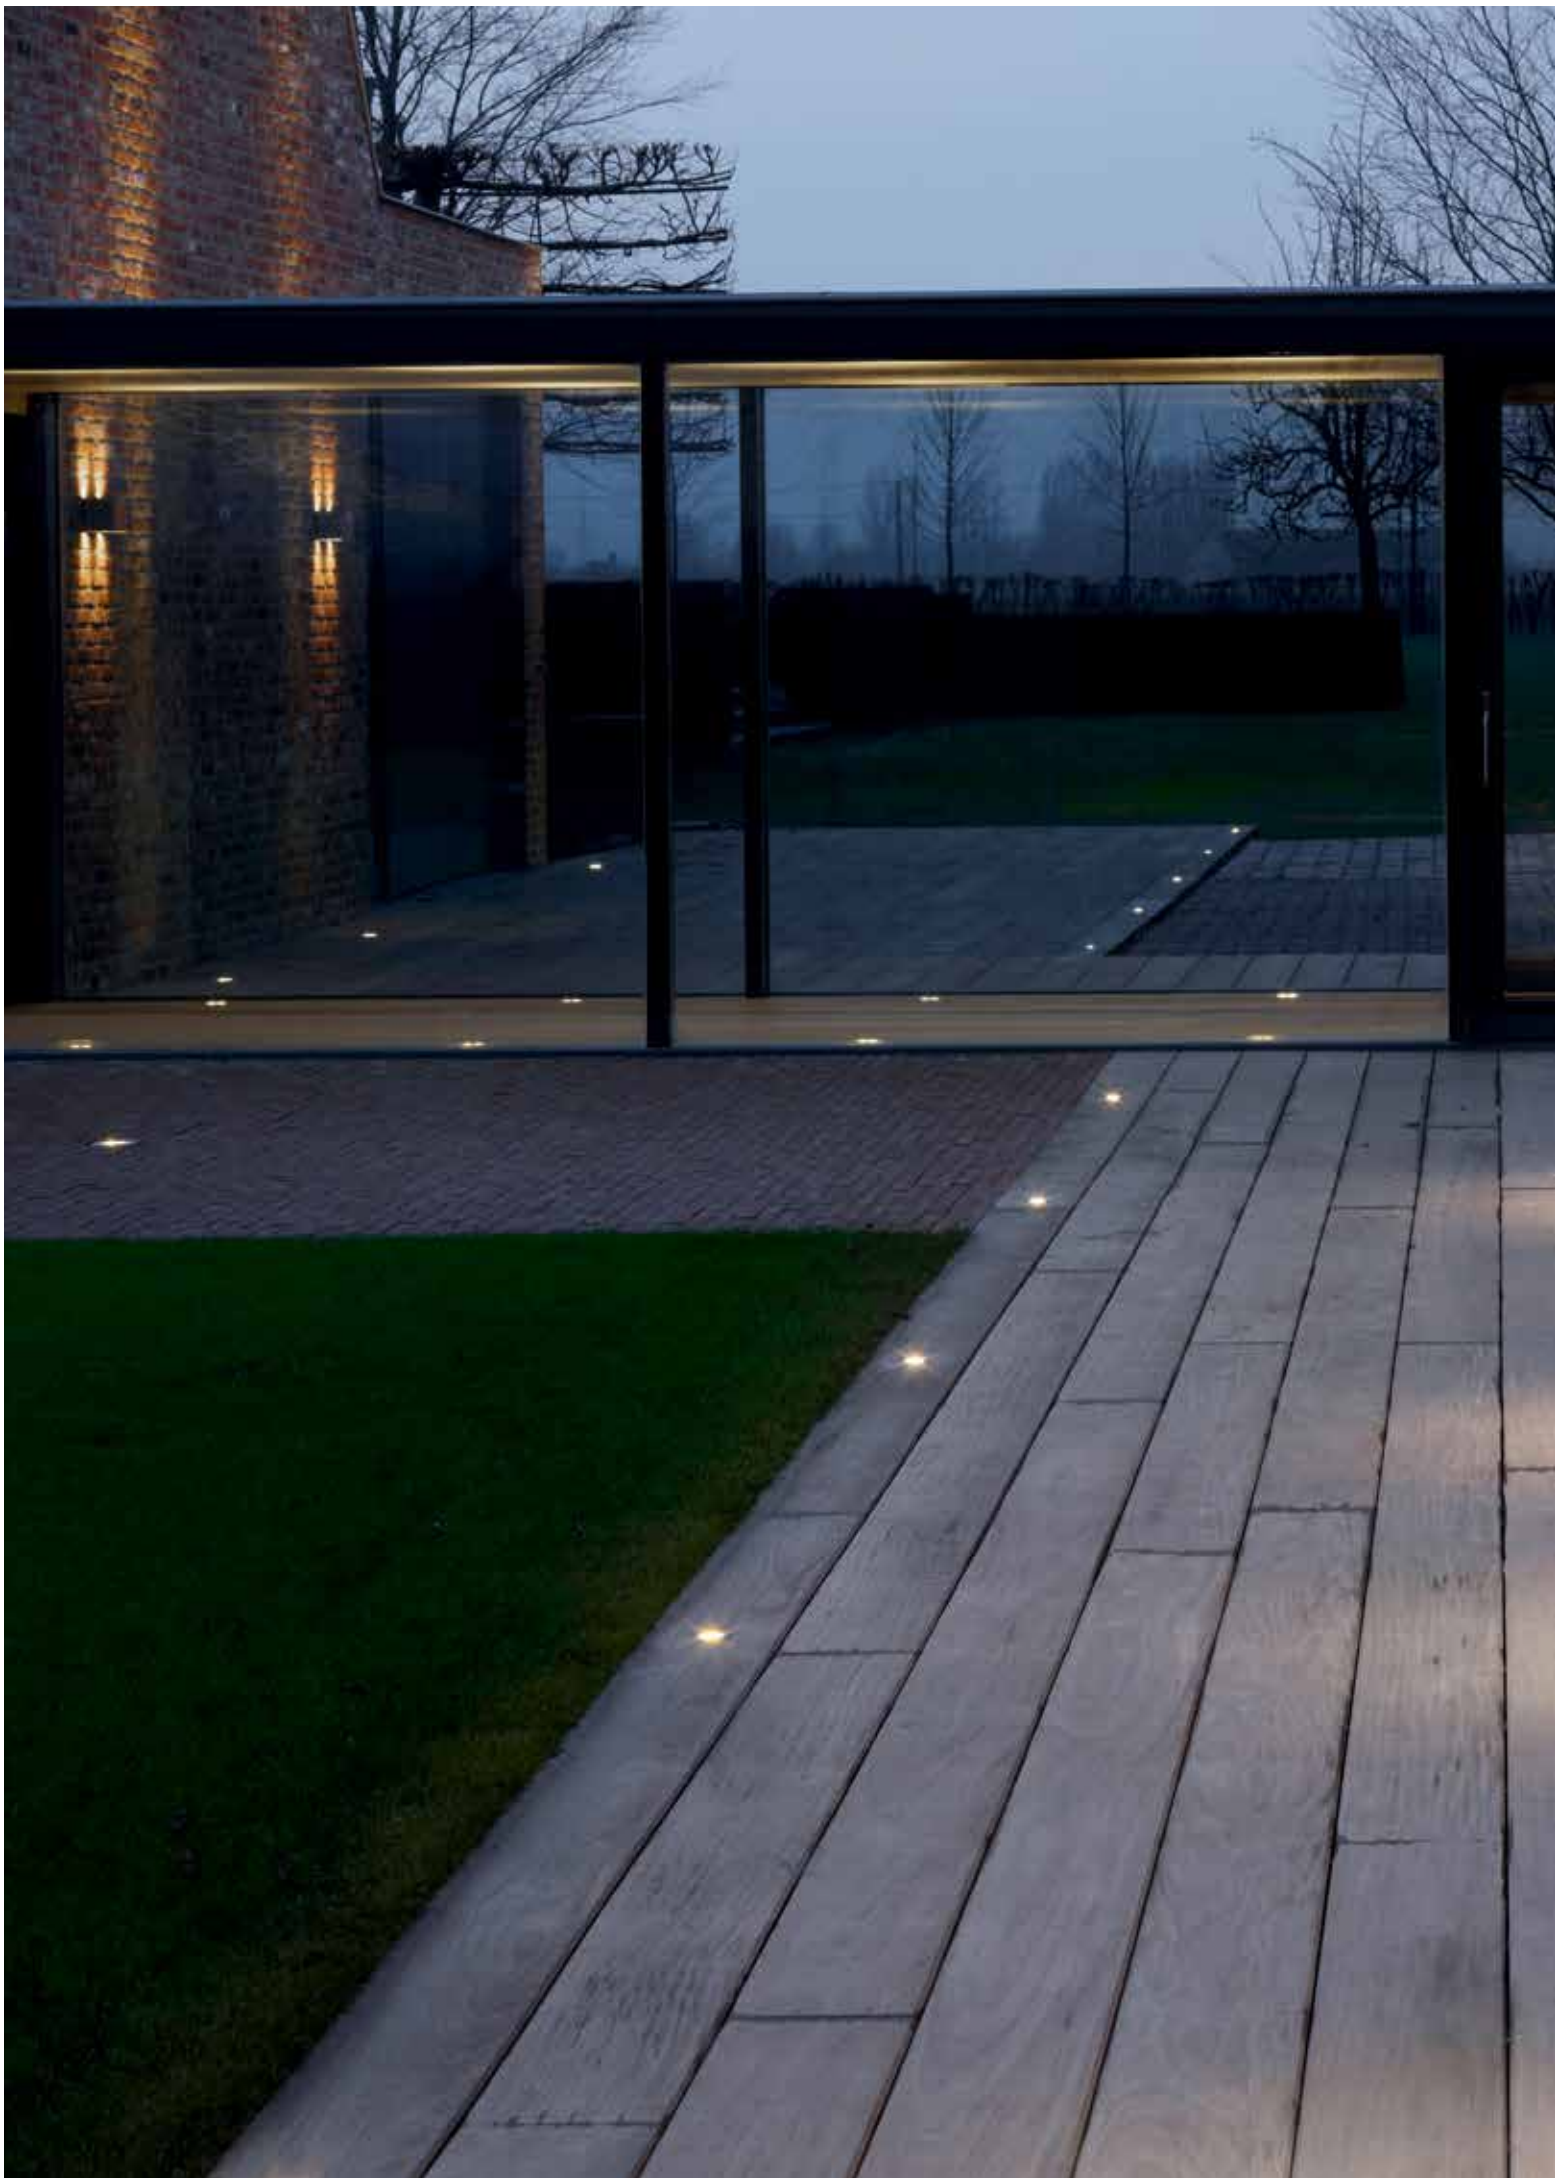

FULL INFO / PAG TEC

Options

INSTALLATION	C / A B	
CONCRETE BOX 151 **302 19 21**	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 **302 19 22**	42 x 42 x 58	43 x 43
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



led

Leds C®





41 x 38

LEDS C R ST NW ◇
302 20 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS C R ST WW ◇
302 20 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K


EXCL.LED POWER SUPPLY 350mA-DC


0,1 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

led

Leds Go® In

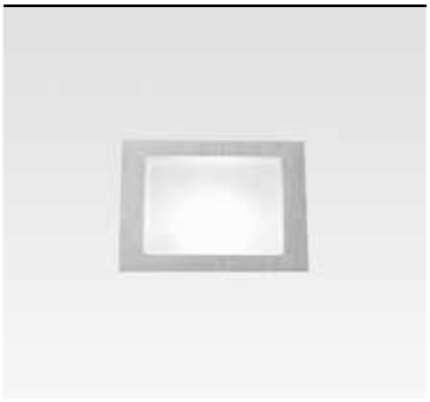



38 x 38 x 45


LEDS GO® IN FORTE NW ◇
302 10 34 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 4000K

LEDS GO® IN FORTE WW ◇
302 10 32 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1W / 3000K

EXCL.LED POWER SUPPLY 350mA-DC

0,1 IP67

OPTIONS
CONCRETE BOX 151
CONCRETE BOX TR 152
LED POWER SUPPLY 350mA-DC / DIM
CBOX / CBOX 350mA

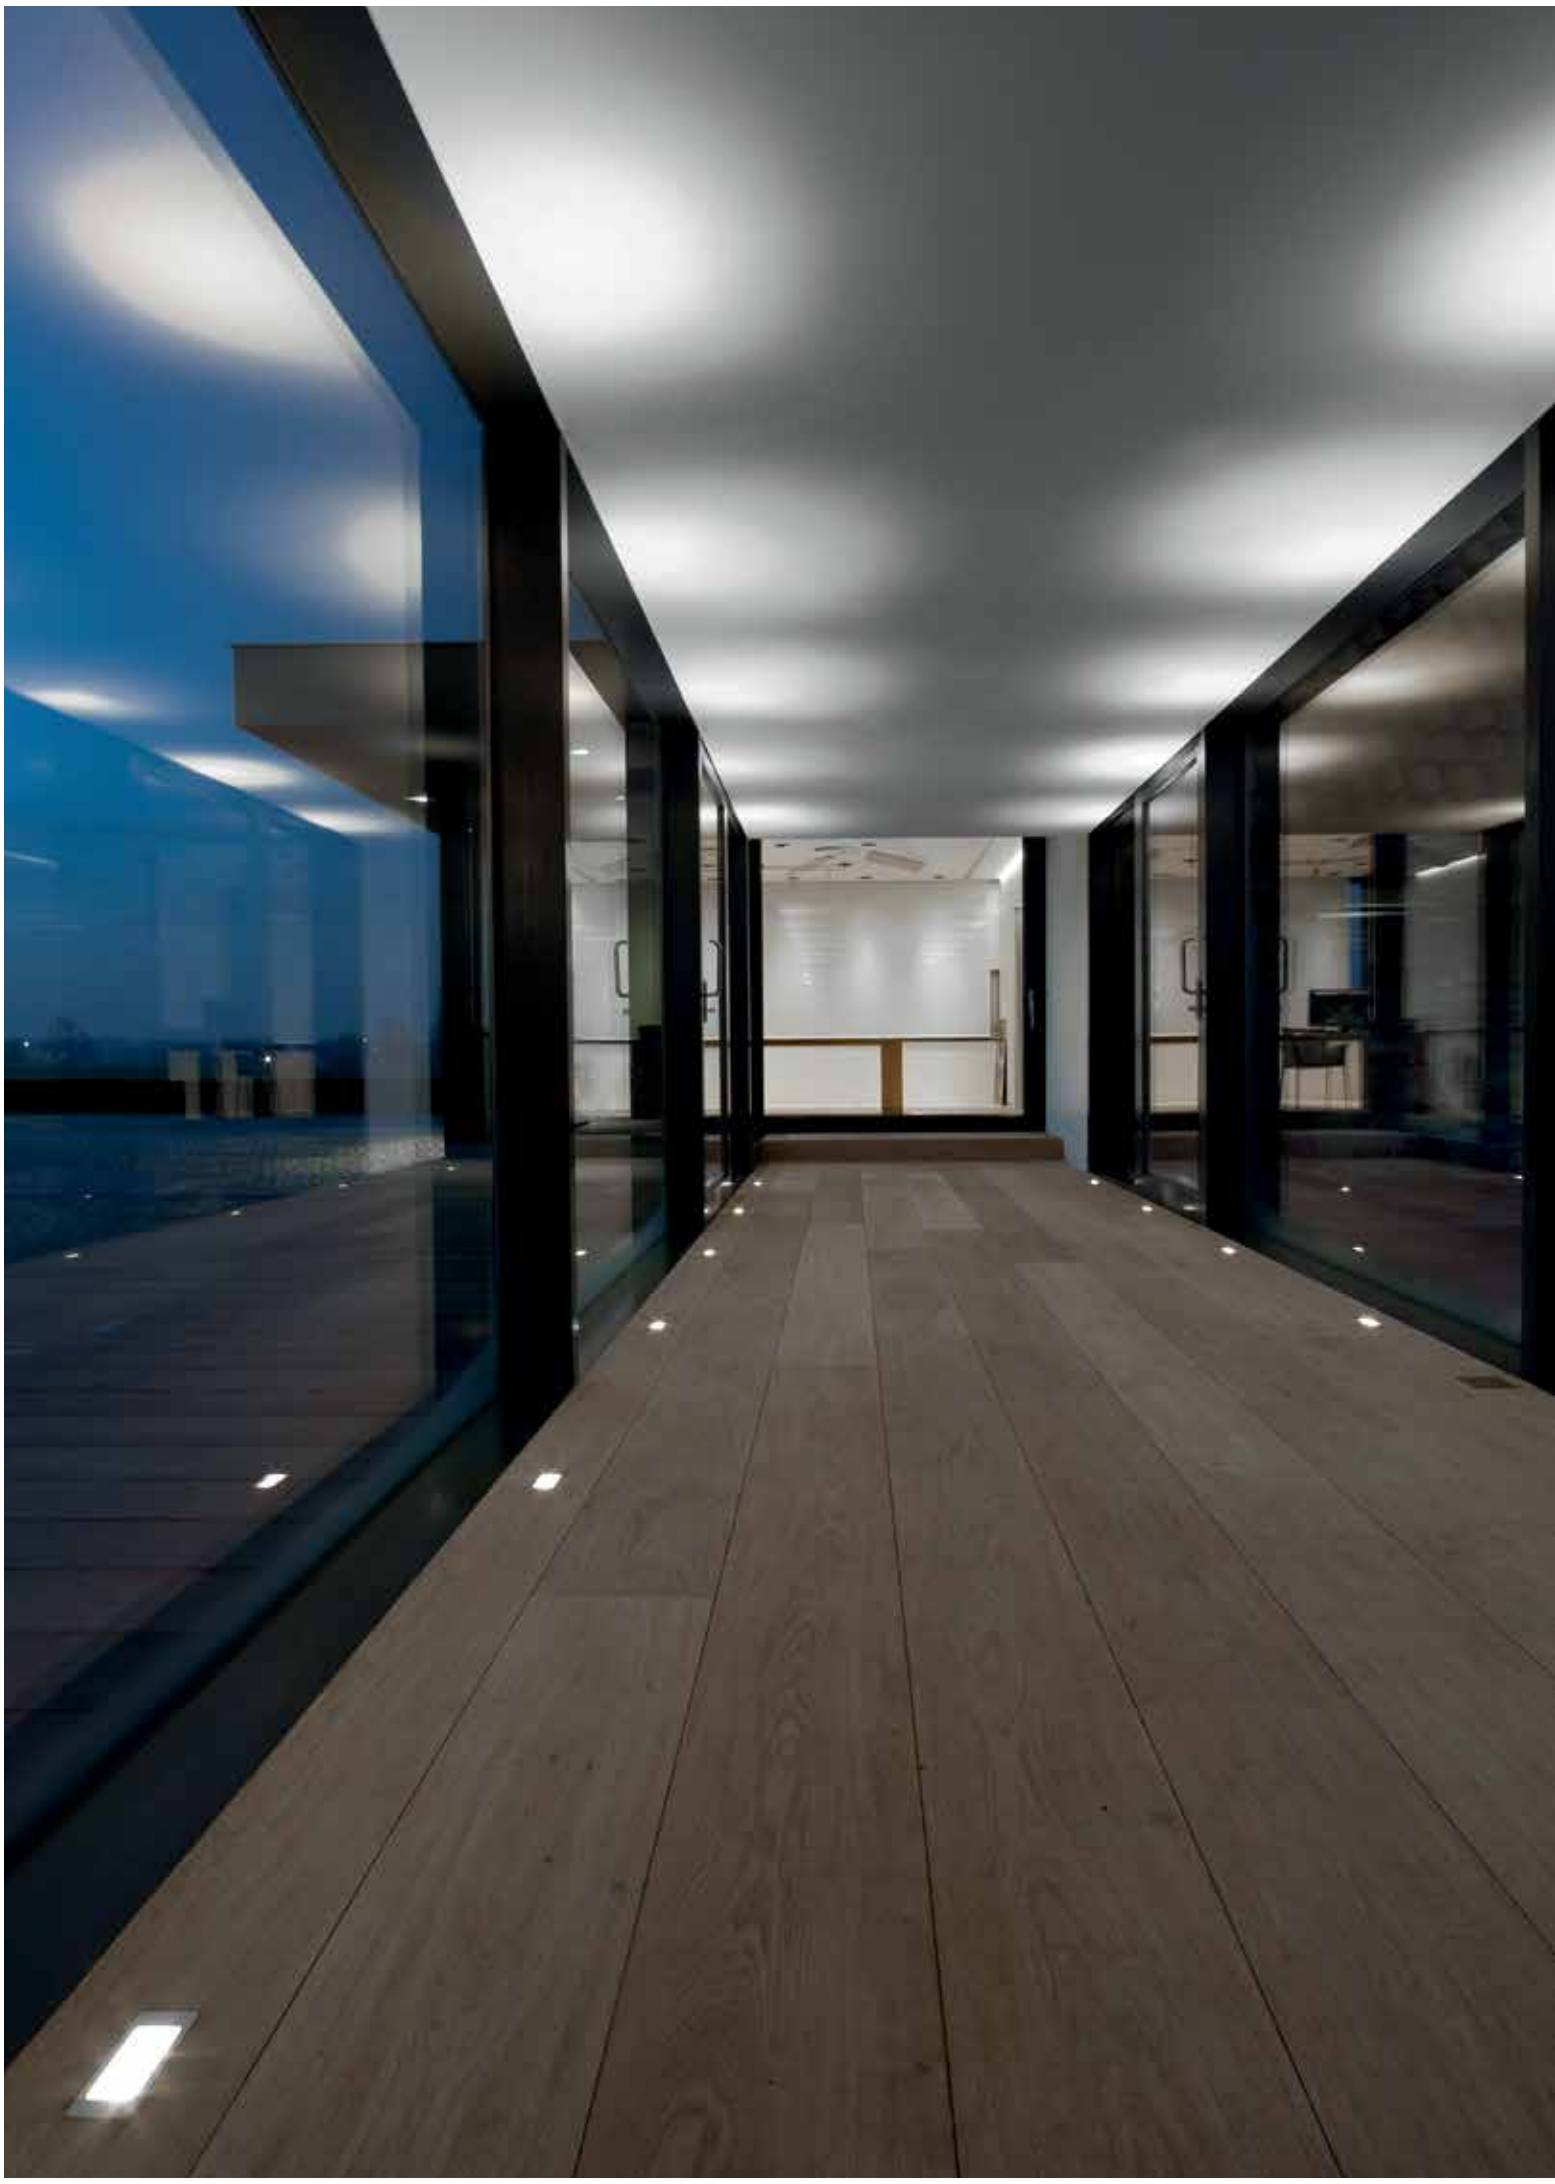

FULL INFO / PAG TEC

Options

INSTALLATION		
CONCRETE BOX 183 **270 11 183**	96 x 45 x 41	98 x 48
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



led

TacTic 2






97 x 47 x 80

TACTIC 2 WW ◇
213 42 22 ◇
◇ = ANO
INCL.2 x POWERLED WHITE [A] 1,1W / 3000K
INCL.2 x LENS 25°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 6mm

0,4 IP67

OPTIONS
CONCRETE BOX 183
LED POWER SUPPLY 350mA-DC / DIM
CBOX / CBOX 350mA
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

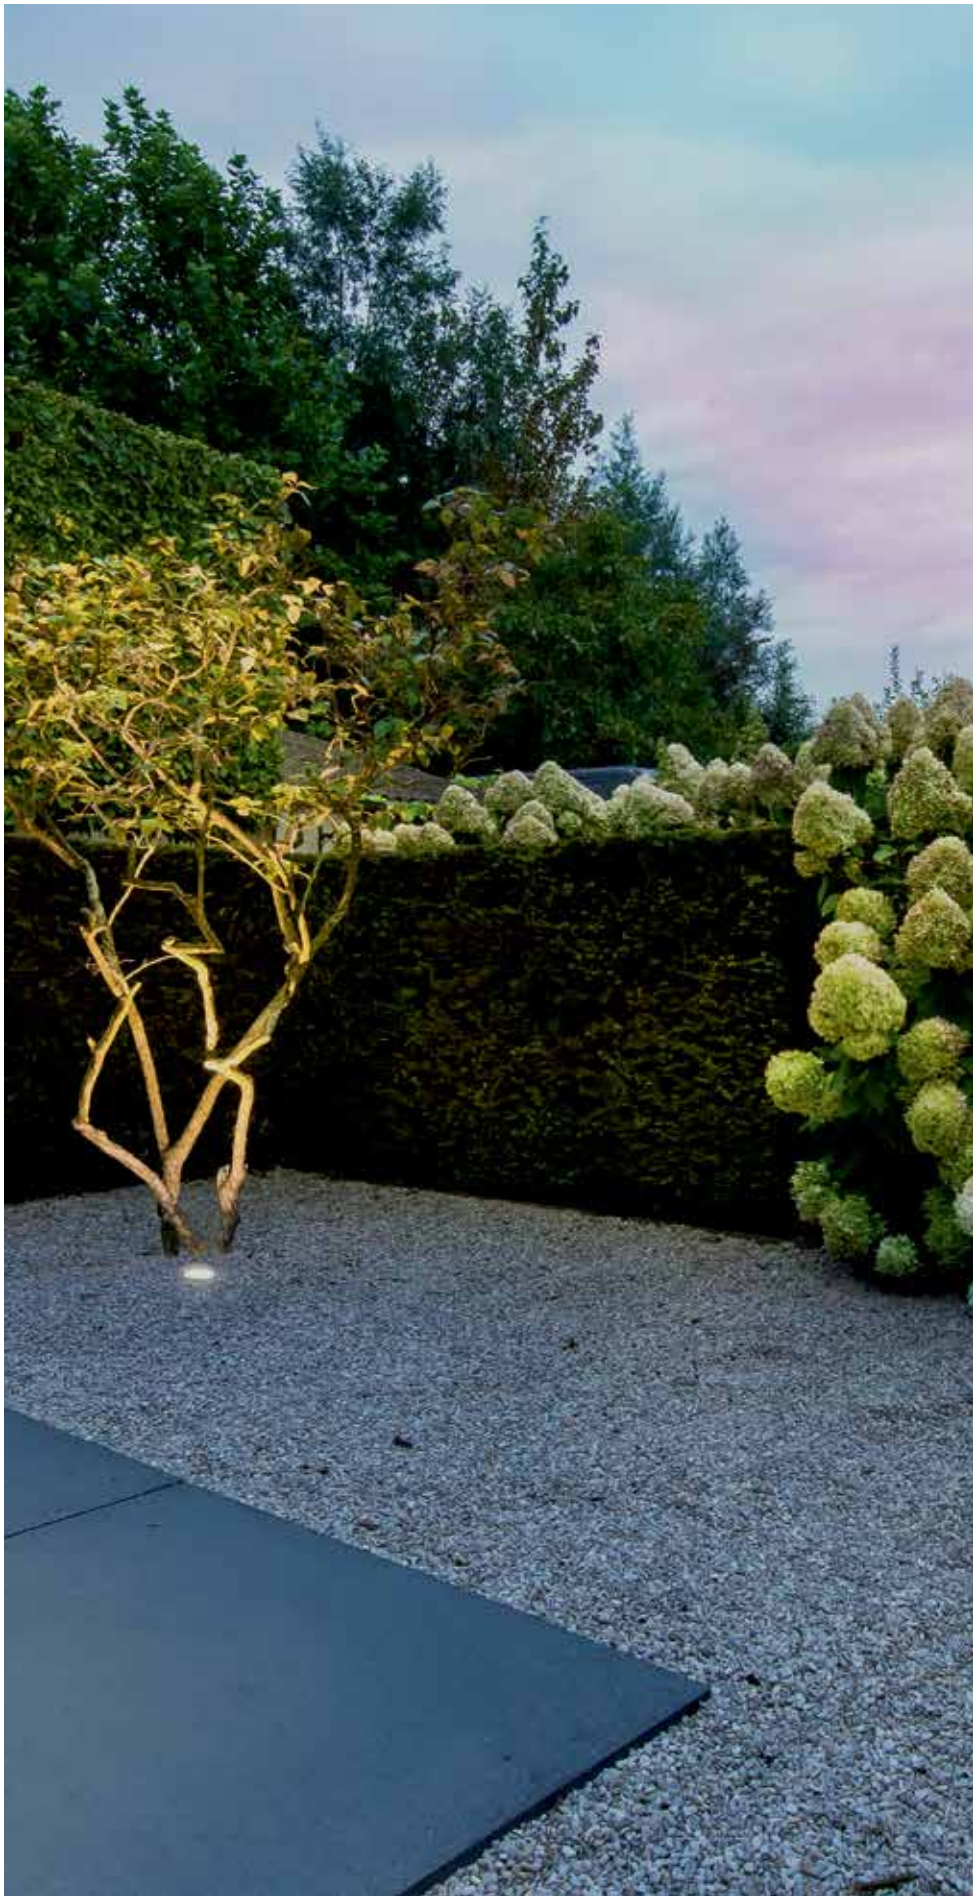

FULL INFO / PAG TEC

Options

INSTALLATION	A B C	
LOGIC 60 BOX R **213 19 10**	170 x 120 x 100	175 x125 x105
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

CONTROL GEAR		
LED POWER SUPPLY **ALL INFO ON FOLD-OUT COVER**		
LED POWER SUPPLY **24V-DC / 20W** **300 89 24 20**	146 x 55 x 19	
LED POWER SUPPLY **24V-DC / 40W** **300 89 24 40**	242 x 46 x 36	
LED POWER SUPPLY **24V-DC / 60W** **300 89 24 60**	211 x 43 x 28	
LED POWER SUPPLY **24V-DC / 150W** **300 89 24 150**	260 x 60 x 49	




LOGIC 60 R MOON



LOGIC 60 BOX R

Logic 60 R Moon





61 x 100

LOGIC 60 R MOON 3020 ◇
213 45 10 18122 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [H] 6,2W / 3000K
INCL.1 x REFLECTOR FL-20°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm


IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

CRI >80 703lm (6,2W)

Logic 60 R A Moon





61 x 100

LOGIC 60 R A MOON 3020 ◇
213 46 10 18122 ◇
◇ = ANO / B*
INCL.1 x POWERLED WHITE [H] 6,2W / 3000K
INCL.1 x REFLECTOR FL-20°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

IP67


OPTIONS
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

*Black Anodised

CRI >80 703lm (6,2W)

Logic 60 R Wallwash






61 x 100

LOGIC 60 R WALLWASH ◇
213 45 212 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 4W / 3000K
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 24V-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

IP67

OPTIONS
LED POWER SUPPLY 24V-DC
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R




61 x 100

LOGIC 60 R WALLWASH SBL ◇
213 45 2125 ◇
◇ = ANO
INCL.1 x GLASS SBL
INCL.1 x POWERLED WHITE 4W / 3000K
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 24V-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

IP67

OPTIONS
LED POWER SUPPLY 24V-DC
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

CRI >80 335lm (4W)

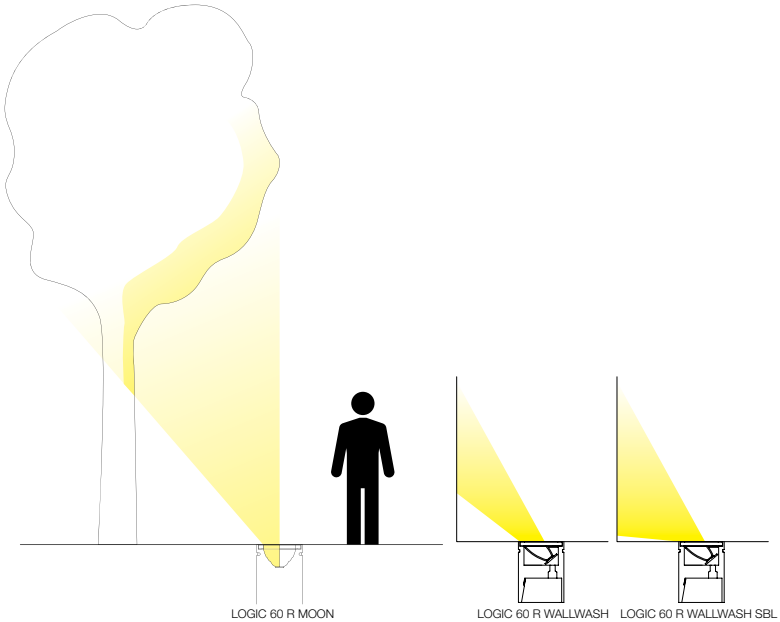

FULL INFO / PAG TEC

Options

INSTALLATION		
LOGIC 60 BOX R **213 19 10**	170 x 120 x 100	175 x125 x105
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER




LOGIC 60 BOX R

new

led

Logic 60 R





61 x 100

LOGIC 60 R 3020 ◇
213 45 18122 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [H] 6,2W / 3000K
INCL.1 x REFLECTOR FL-20°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm


0,6 IP67

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

CRI >80 703lm (6,2W)

Logic 60 R A





61 x 100

LOGIC 60 R A 3020 ◇
213 46 18122 ◇
◇ = ANO / B*
INCL.1 x POWERLED WHITE [H] 6,2W / 3000K
INCL.1 x REFLECTOR FL-20°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

0,6 IP67


OPTIONS
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

*Black Anodised

CRI >80 703lm (6,2W)

Logic 60 R Striper





61 x 100


LOGIC 60 R STRIPER 3004 ◇
213 45 12 ◇
◇ = ANO
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K
INCL.1 x LENS SP-4°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350-700mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

0,6 IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

Logic 60 R A Striper





61 x 100

LOGIC 60 R A STRIPER 3004 ◇
213 46 12 ◇
◇ = ANO / B*
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K
INCL.1 x LENS SP-4°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
EXCL.LED POWER SUPPLY 350-700mA-DC
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm

0,6 IP67

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P
LOGIC 60 BOX R

*Black Anodised

FULL INFO / PAG TEC

Options


INSTALLATION		
GENIE BOX 80 S / 90 S **213 19 08**	220 x 155 x 150	224 x 159 x 155
GENIE BOX 90 R **213 19 09**	220 x 155 x 146	224 x 159 x 150
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300



LOGIC R WALLWASH




LOGIC R WALLWASH SBL



LOGIC R WALLWASH LOGIC R WALLWASH SBL

Logic R Wallwash






93 x 125
LOGIC R WALLWASH ◇
213 47 212 ◇
◇ = ANO
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

1,0 IP67

OPTIONS
CBOX
GENIE BOX 90 R



93 x 125
LOGIC R WALLWASH SBL ◇
213 47 2125 ◇
◇ = ANO
INCL.1 x GLASS SBL
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm


1,0 IP67

OPTIONS
CBOX
GENIE BOX 90 R

CRI>80 703lm (6,2W)

Logic R A Wallwash






93 x 125
LOGIC R A WALLWASH ◇
213 48 212 ◇
◇ = ANO / B*
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

1,0 IP67

OPTIONS
CBOX
GENIE BOX 90 R



93 x 125
LOGIC R A WALLWASH SBL ◇
213 48 2125 ◇
◇ = ANO / B*
INCL.1 x GLASS SBL
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

1,0 IP67


OPTIONS
CBOX
GENIE BOX 90 R

*Black Anodised

CRI>80 703lm (6,2W)

Logic R





93 x 125

LOGIC R 3011 ◇
213 47 18112 ◇
INCL.1 x REFLECTOR SP-11°

LOGIC R 3030 ◇
213 47 18122 ◇
INCL.1 x REFLECTOR FL-30°

LOGIC R 3055 ◇
213 47 18132 ◇
INCL.1 x REFLECTOR WFL-55°


◇ = ANO
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm


CE 1,0 IP67

OPTIONS
CBOX
GENIE BOX 90 R

CRI>80 703lm (6,2W)

Logic R A

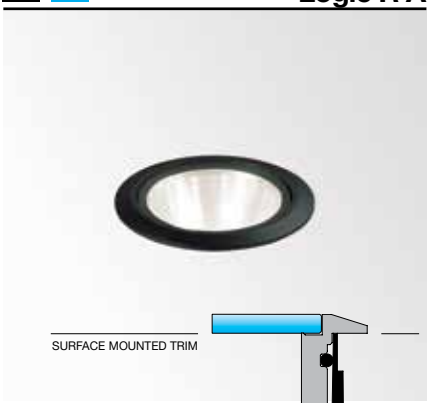



93 x 125

LOGIC R A 3011 ◇
213 48 18112 ◇
INCL.1 x REFLECTOR SP-11°

LOGIC R A 3030 ◇
213 48 18122 ◇
INCL.1 x REFLECTOR FL-30°

LOGIC R A 3055 ◇
213 48 18132 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = ANO / **B***
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

CE 1,0 IP67


OPTIONS
CBOX
GENIE BOX 90 R

*Black Anodised

CRI>80 703lm (6,2W)

Logic S





112 x 112 x 125

LOGIC S 3011 ◇
213 49 18112 ◇
INCL.1 x REFLECTOR SP-11°

LOGIC S 3030 ◇
213 49 18122 ◇
INCL.1 x REFLECTOR FL-30°

LOGIC S 3055 ◇
213 49 18132 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = ANO
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm

CE 1,1 IP67

OPTIONS
CBOX
GENIE BOX 80 S /90 S

CRI>80 703lm (6,2W)





LOGIC S - P68 CONNECTOR 3P




BECKERS NOYEZ ARCHITECTEN


62

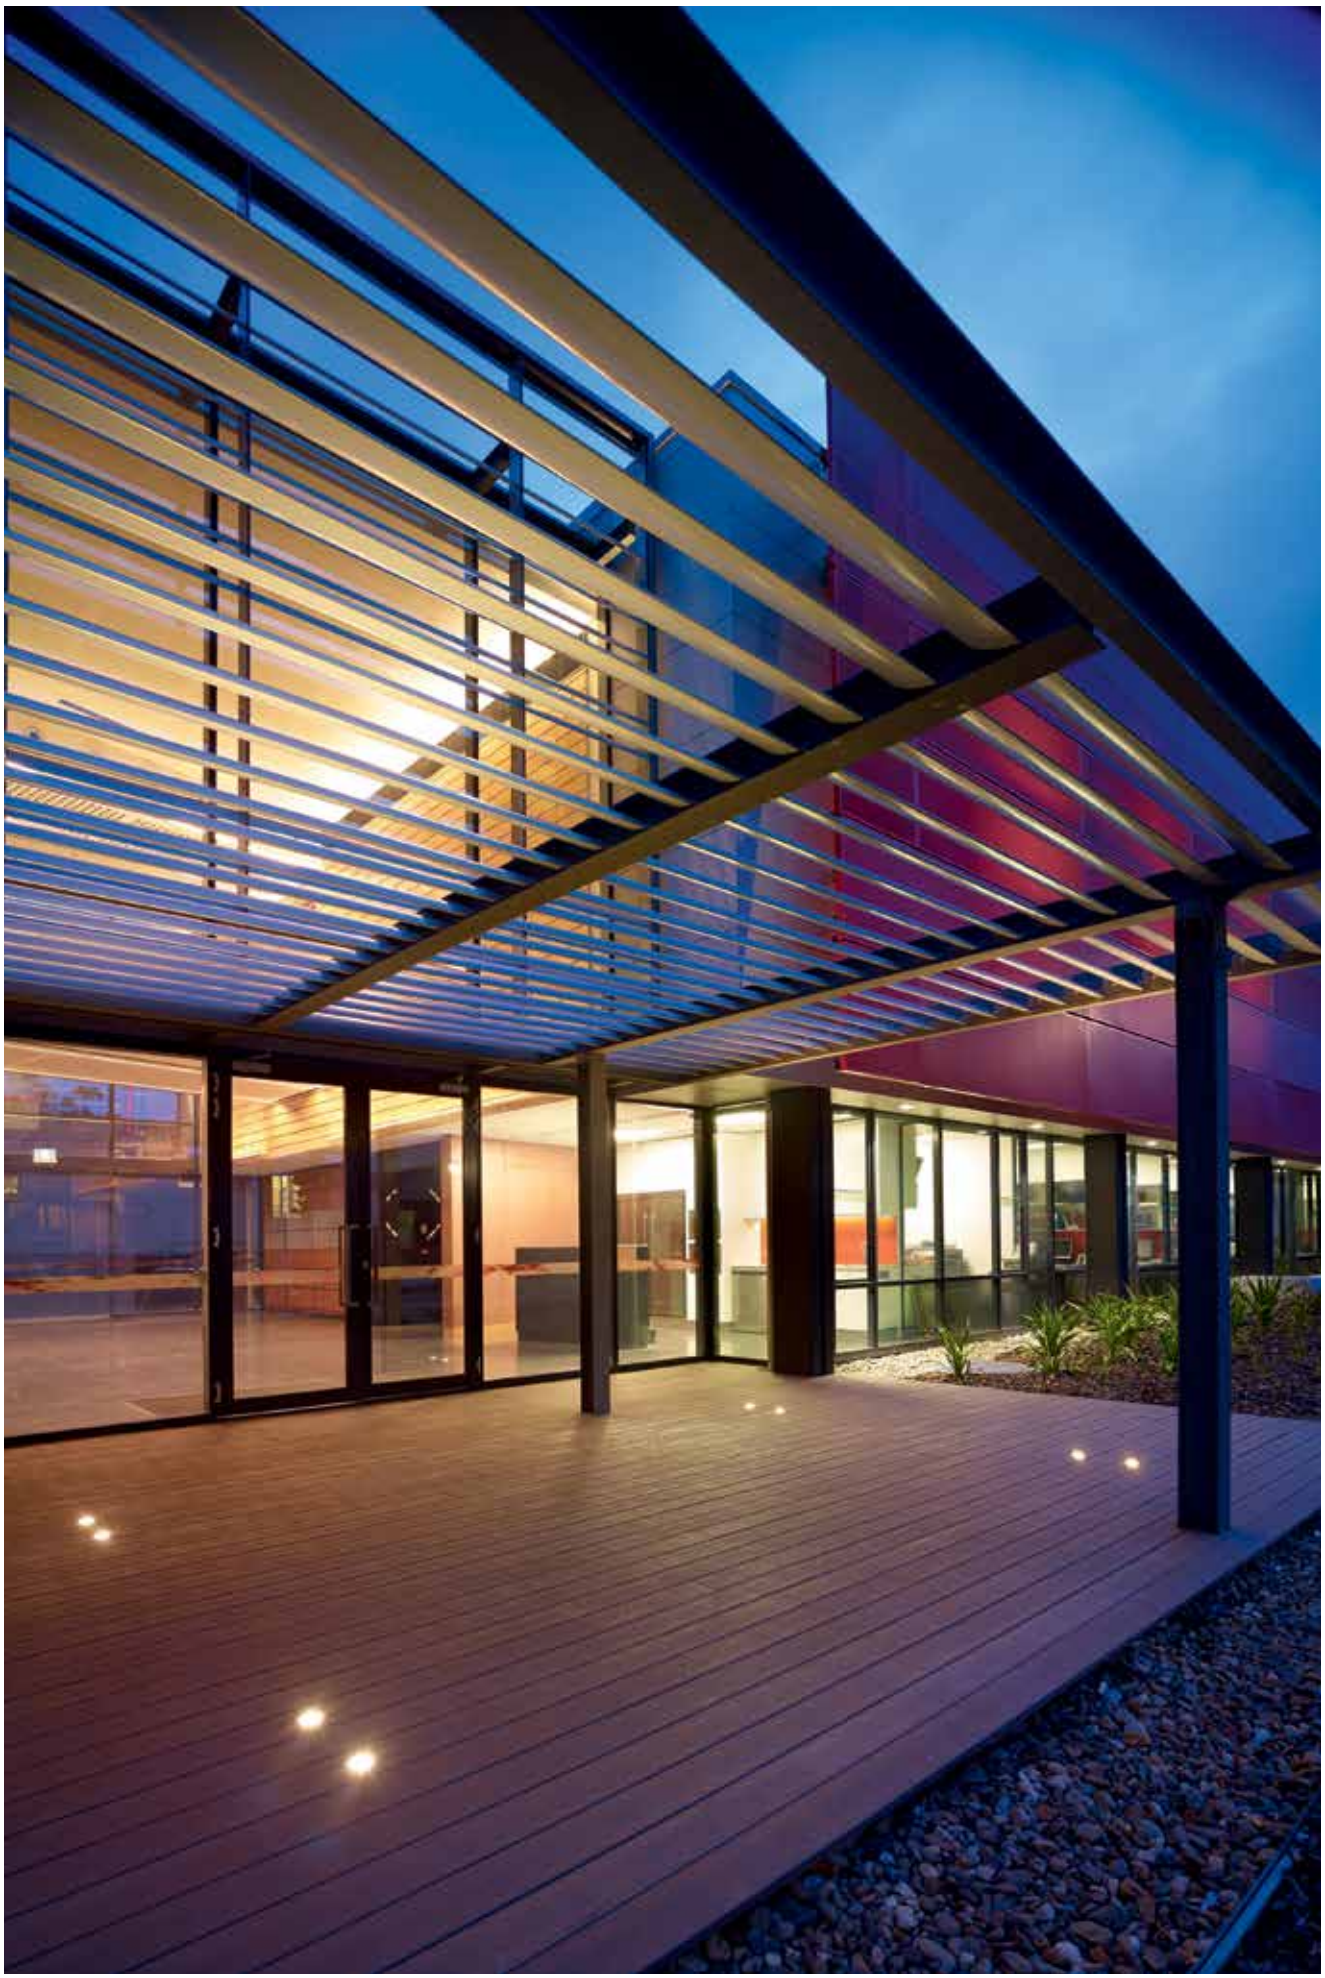

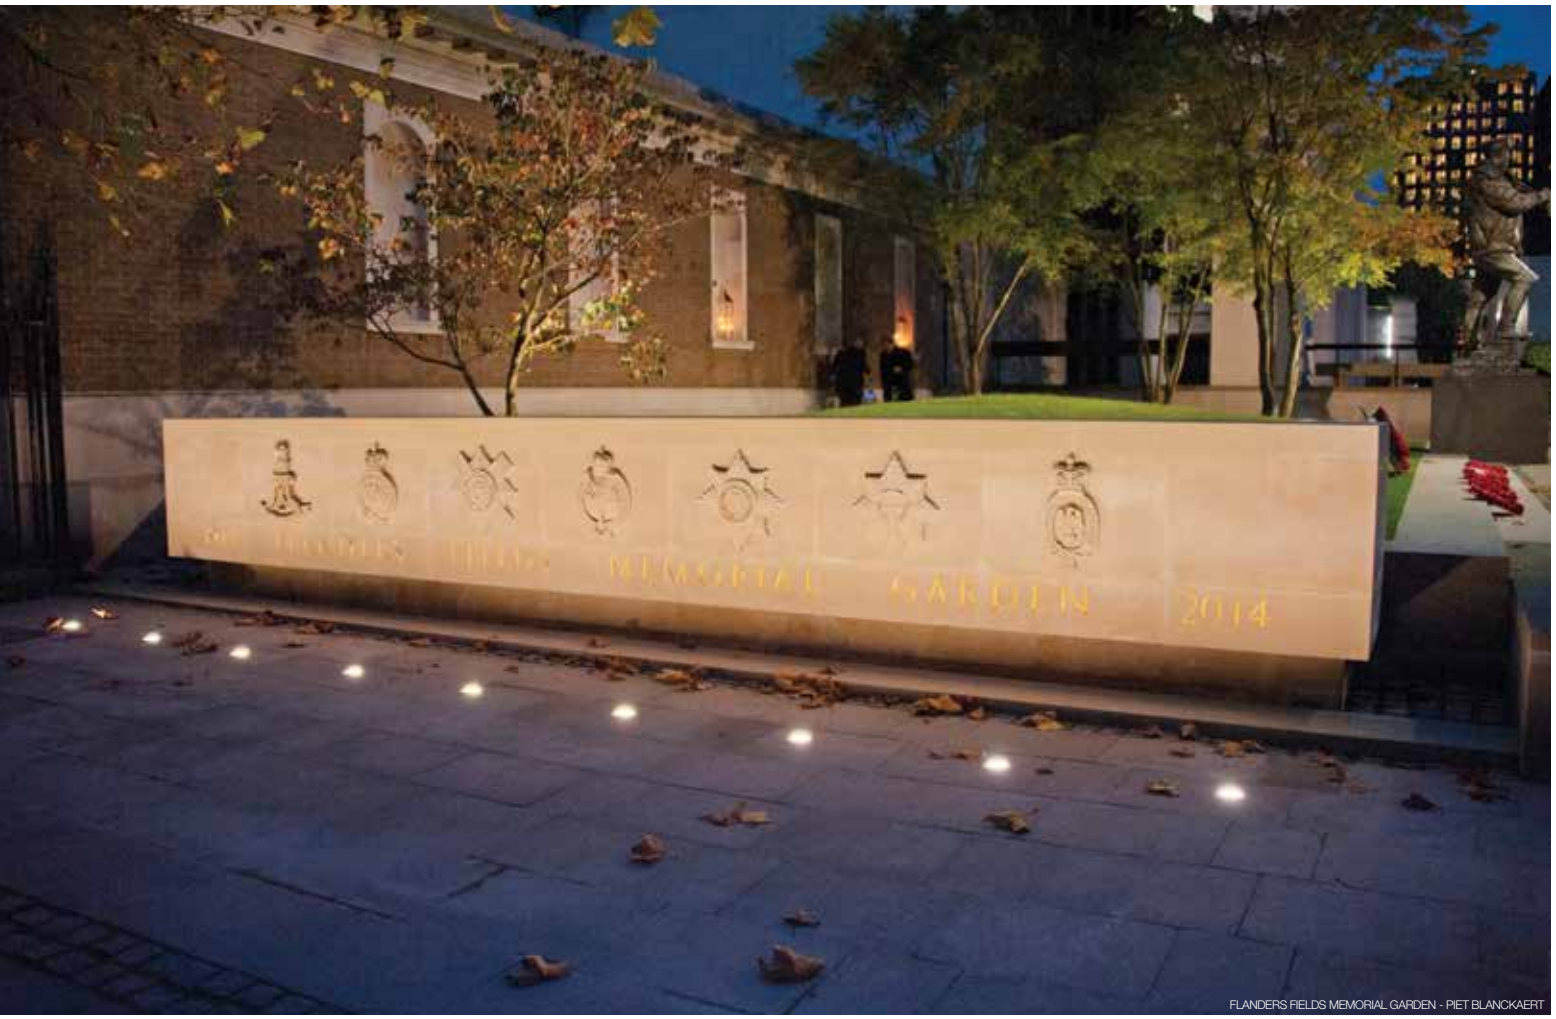

FLANDERS FIELDS MEMORIAL GARDEN - PIET BLANCKAERT

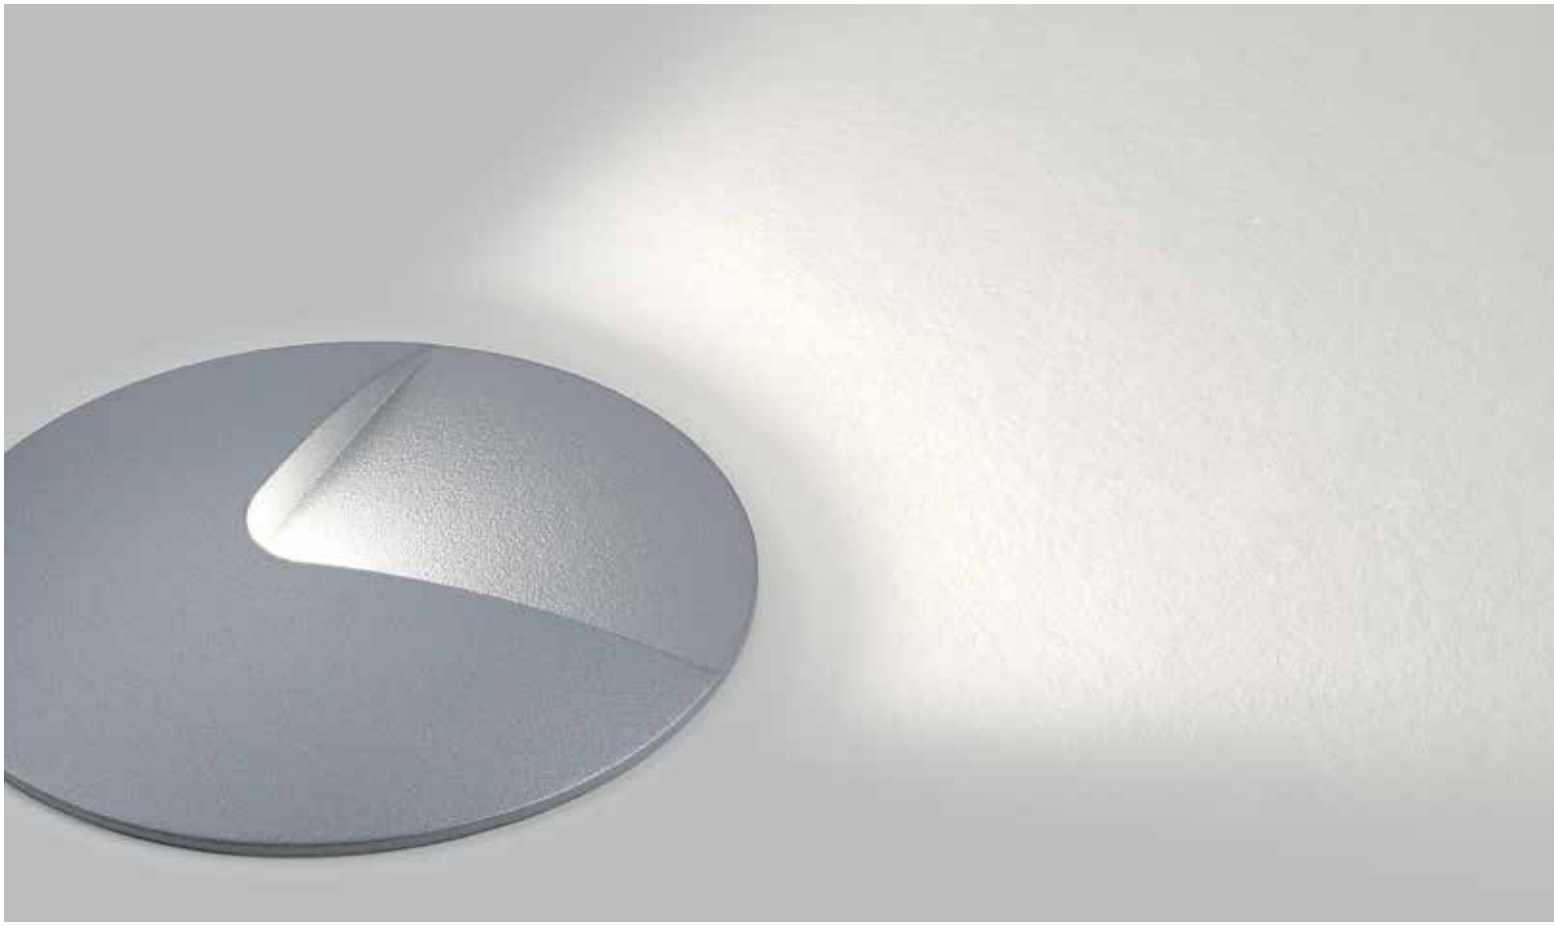

FULL INFO / PAG TEC

Options


INSTALLATION		
GENIE BOX 90 R **213 19 09**	220 x 155 x 146	224 x 159 x 150
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300

CONTROL GEAR	
LED POWER SUPPLY 24V-DC / 20W **300 89 24 20**	146 x 55 x 19

new led

Logic F1





Ø 93 x 40
LOGIC F1 ◇
213 47 112 ◇
◇ = A
INCL.1 x POWERLED WHITE 0,6W / 3000K
EXCL.LED POWER SUPPLY 24V-DC
max.600kg


0,3 IP67


OPTIONS
GENIE BOX 90R
CBOX
LED POWER SUPPLY 24V-DC

CRI>80 40lm

new led

Logic F2

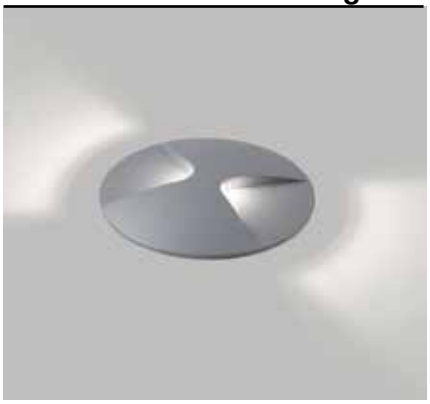




Ø 93 x 40
LOGIC F2 ◇
213 47 122 ◇
◇ = A
INCL.2 x POWERLED WHITE 0,6W / 3000K
EXCL.LED POWER SUPPLY 24V-DC
max.600kg

0,3 IP67

OPTIONS
GENIE BOX 90R
CBOX
LED POWER SUPPLY 24V-DC

CRI>80 40lm



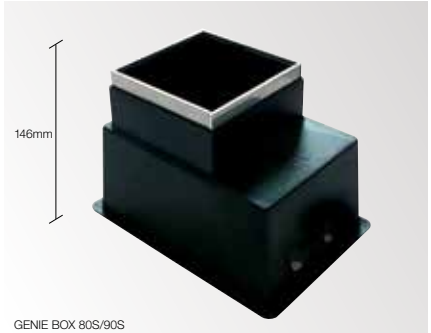

GENIE BOX 80S/90S



GENIE BOX 90R

FULL INFO / PAG TEC

Options

INSTALLATION		
GENIE BOX 80 S / 90 S **213 19 08**	220 x 155 x 150	224 x 159 x 155
GENIE BOX 90 R **213 19 09**	220 x 155 x 146	224 x 159 x 150
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	



GENIE 90 S O

Genie 90










90 x 125

GENIE 90 R P ◇
213 11 21 ◇
◇ = ANO
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,6 IP67 0,5

OPTIONS
GENIE BOX 90 R
CBOX / CBOX T50
IP68 CONNECTION KIT
IP68 CONNECTOR 3P






112 x 112 x 100

GENIE 90 S ◇
213 11 05 ◇
◇ = ANO
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,7 IP67 0,5

OPTIONS
GENIE BOX 80 S / 90 S
CBOX / CBOX T50
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




90 x 125

GENIE 90 R P SBL ◇
213 12 21 ◇
◇ = ANO
ESG SBL 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,6 IP67 0,5

OPTIONS
GENIE BOX 90 R
CBOX / CBOX T50
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




112 x 112 x 100

GENIE 90 S SBL ◇
213 12 05 ◇
◇ = ANO
ESG SBL 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,7 IP67 0,5

OPTIONS
GENIE BOX 80 S / 90 S
CBOX / CBOX T50
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




90 x 125

GENIE 90 R O P ◇
213 15 21 ◇
◇ = ANO
ADJUSTABLE 0°-35°
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,6 IP67 0,5

OPTIONS
GENIE BOX 90 R
CBOX / CBOX T50
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



112 x 112 x 100

GENIE 90 S O ◇
213 15 05 ◇
◇ = ANO
ADJUSTABLE 0°-35°
ESG 6mm / max.1134kg 120N/mm²
GX5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 20W

0,7 IP67 0,5

OPTIONS
GENIE BOX 80 S / 90 S
CBOX / CBOX T50
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300

CONTROL GEAR	
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68

FULL INFO / PAG TEC

Accessories


BASIC R GLASS SBL **228 91 20**	Ø94
BASIC S GLASS SBL **228 90 20**	100 x 100
BASIC S DECORATIVE GLASS **228 90 10**	12 x 140 x 140


Temperature


LAMP	**W**	**°C**
QR-CBC51	20	90
	35	125
	50	140
QPAR16	50	155
	35	135
QR-CBC51	20	90
	35	125
	50	140

INDOOR
MAX.35W

Basic

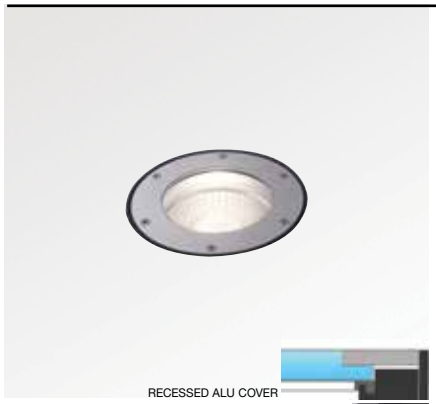





148 x 185

BASIC LRI 50 Hi ◇
228 111 11 11 ◇
◇ = ANO
ADJUSTABLE 0°-30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 50W


1,6 IP67 0,5


ESG 10mm
max.2000kg 120N/mm²
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm² 1m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC R GLASS SBL







148 x 185


BASIC LRA 50 Hi ◇
228 112 11 11 ◇
◇ = ANO
ADJUSTABLE 0°-30°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 50W


1,6 IP67 0,5

ESG 10mm
max.2000kg 120N/mm²
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm² 1m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC R GLASS SBL

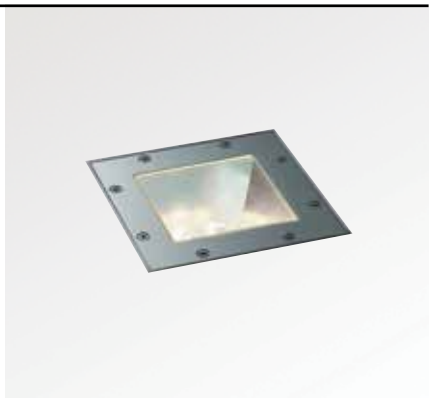



149 x 149 x 203

BASIC LSI 50 Hi ◇
228 171 11 11 ◇
◇ = INOX
INOX 316L
ADJUSTABLE 0°-15°
GU10 / 100-240V / 50-60Hz
1 x QPAR51 max.50W

2,0 IP67 0,5

ESG 10mm
max.1000kg 120N/mm²
INCL.1 x WATERPROOF CONNECTOR
+ CABLE H07 RN-F 3 x 1,5mm² 1m

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
BASIC S DECORATIVE GLASS
BASIC S GLASS SBL



OBUMEX





FULL INFO / PAG TEC

Options

INSTALLATION

IP68 CONNECTION KIT 95 x 45 x 25
216 12 01



IP68 CONNECTOR 3P Ø 23 x 68
216 12 02





led

Flip Set









148 x 225

250 mm **FLIP SET 25** ◇ 1,3
217 61 25 4102 ◇

400 mm **FLIP SET 40** ◇ 1,4
217 61 40 4102 ◇

◇ = A / G
ADJUSTABLE
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE IP54 IP67

OPTIONS
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

148 x 225

250 mm **FLIP TWIN SET 25** ◇ 1,5
217 61 25 4202 ◇

400 mm **FLIP TWIN SET 40** ◇ 1,7
217 61 40 4202 ◇

◇ = A / G
ADJUSTABLE
INCL.2 x POWERLED WHITE 6,2W / 3000K
INCL.2 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE IP54 IP67

OPTIONS
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 703lm (6,2W)





EXTERIOR
FLOOR SURFACE

The range of exterior floor fixtures constitutes the ideal directional or mood lighting. Position the fixtures at regular intervals to light garden paths, or use them throughout your landscape design for additional style and atmosphere. As in the wall surface range several bollards combine led with a lens. The light effect is reinforced, resulting in maximum beam spread and powerful play of light. Outdoor fixtures using a lens provide a unique effect when used on their own, but can also add an attractive and artistic touch when used in a composition or well thought-out set-up. The striking light silhouettes enable you to play with light on wall, floor or ceiling.

www.deltalight.com/EFS

To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/22212312 or www.deltalight.com/bazil



INDEX
EXTERIOR FLOOR SURFACE


TWEETER X P
EXT 143



KIX S PIN
EXT 157


INDUSTRIAL S
EXT 167


OBLIX
EXT 177


LABYRINTH
EXT 193


VISIONAIR
EXT 201


BAZIL
EXT 145



KIX M
EXT 159


TOURNESOL
EXT 169


WALKER
EXT 181


DREVE
EXT 195


SPYKER
EXT 149



KIX M PIN
EXT 159


AULA
EXT 171


STRIPER
EXT 183


MR. JUNIOR X
EXT 197


CITYSCAN
EXT 151



KIX M P
EXT 159



MONTUR S P
EXT 172


MONOPOL
EXT 185


MR. SENIOR
EXT 197


FLIP
EXT 153



KIX
EXT 160



MONTUR M P
EXT 173


MONOSTEP
EXT 189


QUEEN TEAK
EXT 199



KIX S
EXT 157



KIX PIN
EXT 161



MONTUR L P
EXT 173


BOTANIC
EXT 191


KING TEAK
EXT 199

AULA	EXT 171
BAZIL	EXT 145
BOTANIC	EXT 191
CITYSCAN	EXT 151
DREVE	EXT 195
FLIP	EXT 153
INDUSTRIAL S	EXT 167
KING TEAK	EXT 199
KIX	EXT 160
KIX M	EXT 159
KIX M P	EXT 159
KIX M PIN	EXT 159
KIX PIN	EXT 161
KIX S	EXT 157
KIX S PIN	EXT 157
LABYRINTH	EXT 193
MONOPOL LED	EXT 185
MONOSTEP	EXT 189
MONTUR L P	EXT 173
MONTUR M P	EXT 173
MONTUR S P	EXT 172
MR. JUNIOR X	EXT 197
MR. SENIOR	EXT 197
OBLIX	EXT 177
QUEEN TEAK	EXT 199
SPYKER 140	EXT 149
STRIPER	EXT 183
TOURNESOL	EXT 169
TWEETER X P	EXT 143
VISIONAIR	EXT 201
WALKER	EXT 181



FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 11 **229 01 11**	41 x 79 x 403	

led

Tweeter X P



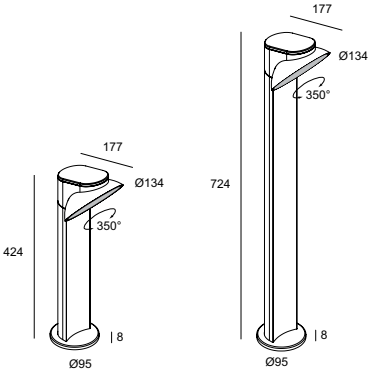

IP65

424 mm — **TWEETER X P 30 ◇** **206 43 12 ◇** — 1,4


724 mm — **TWEETER X P 60 ◇** **206 46 12 ◇** — 2,6

◇ = N
ADJUSTABLE
INCL.1 x POWERLED 6,2W / 3000K
INCL.1 x GLASS SBL
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz

CE IP65

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 703lm (6,2W)

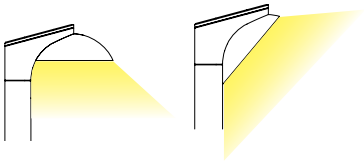





FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION		
PIN 3 **229 01 03**	Ø108 x 404	
PIN 11 **229 01 11**	41 x 79 x 403	

led

Bazil 60





384 mm

BAZIL 63 ◇ 1,3
222 603 62 ◇
◇ = A-ANO / N-ANO / N-GOLD

684 mm

BAZIL 66 ◇ 1,6
222 606 62 ◇
◇ = A-ANO / N-ANO / N-GOLD

INCL.LED CLUSTER 7W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 505lm (7W)


GOOD DESIGN award

German Design Award

led

Bazil 120





215 mm

BAZIL 121 ◇ 3,2
222 121 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

365 mm

BAZIL 123 ◇ 3,7
222 123 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

715 mm

BAZIL 126 ◇ 4,7
222 126 12 ◇
◇ = A-ANO / N-ANO / N-GOLD

INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 1020lm (15W)

GOOD DESIGN award

German Design Award




N-GOLD N-ANO A-ANO



ARTUUR



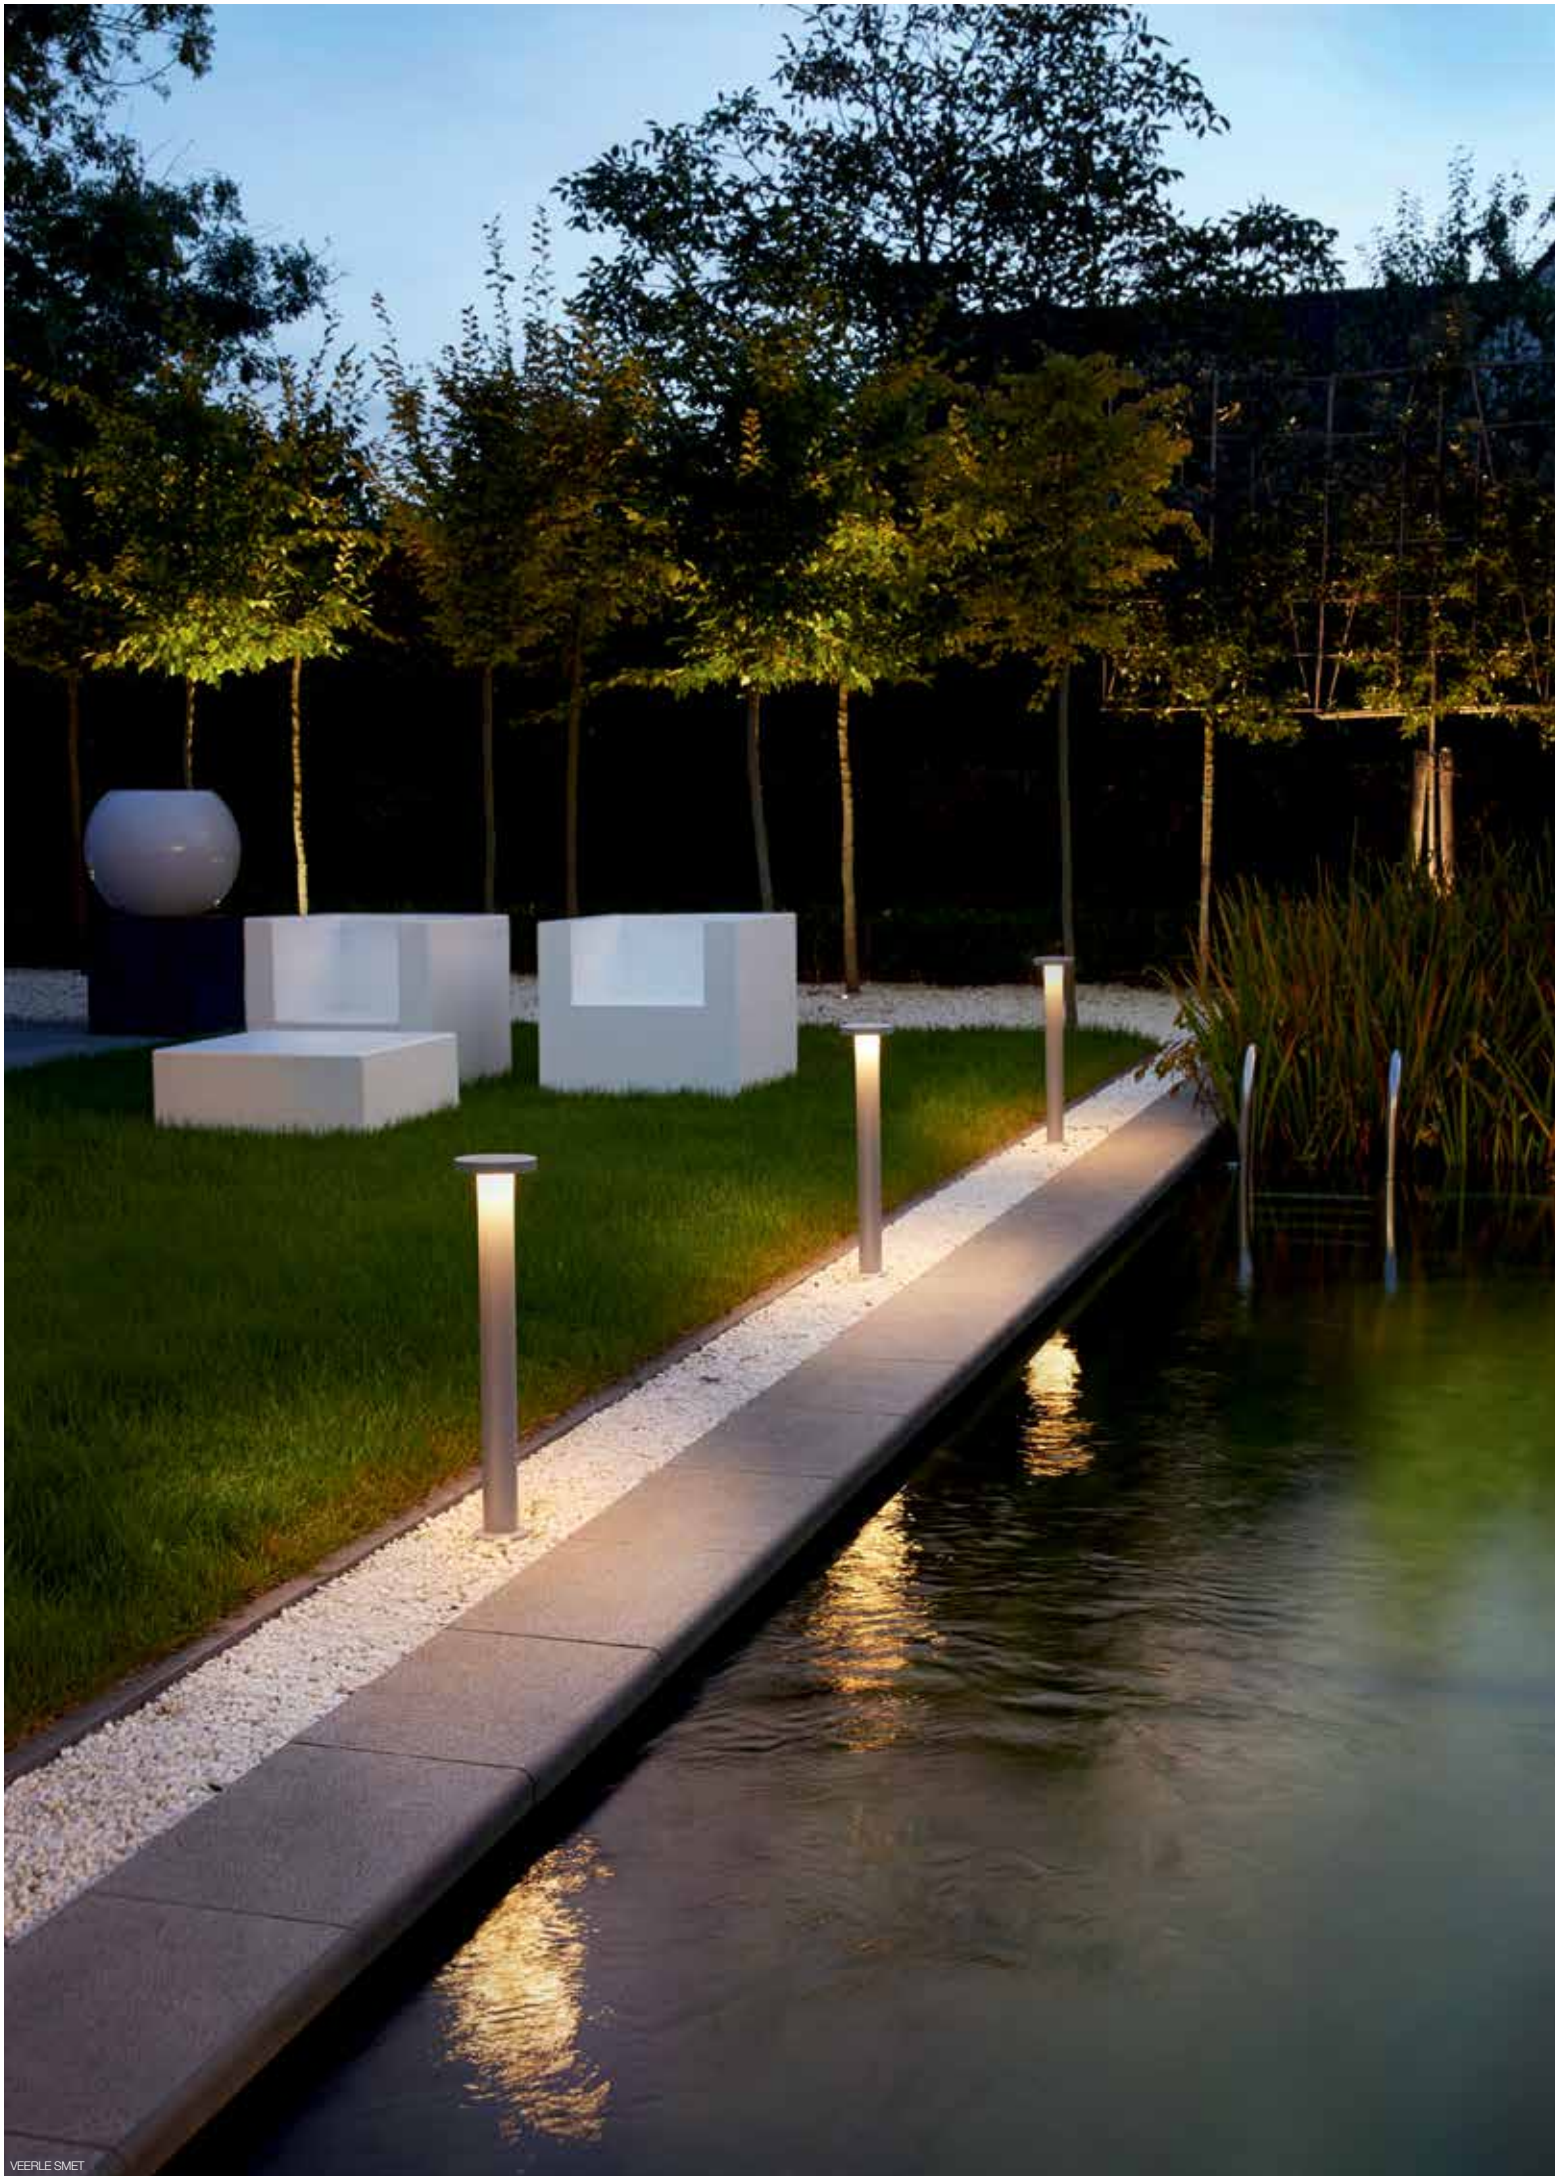

VEERLE SMET

FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 11 **229 01 11**	41 x 79 x 403

led

Spyker 140



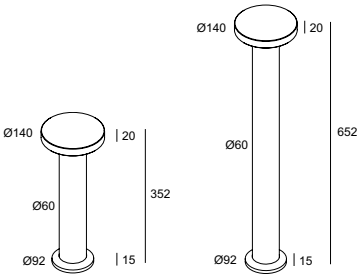

352 mm **SPYKER 143** ◇ 1,7
222 613 12 ◇

652 mm **SPYKER 146** ◇ 2,0
222 616 12 ◇

◇ = A / N
INCL.LED CLUSTER 15W / 3000K
INCL.LED POWER SUPPLY 700mA-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 1020lm (15W)






FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
PIN 3 **229 01 03**	Ø108 x 404	

Cityscan 64





IP67

400 mm **CITYSCAN 643 T18** ◇ 1,4
214 52 83 E ◇

700 mm **CITYSCAN 646 T18** ◇ 2,6
214 52 86 E ◇
◇ = A
GX24q-2 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-TEL 18W
IP65 0,1

OPTIONS
PIN 3
CBOX

400 mm **CITYSCAN 643 QT** ◇ 1,3
214 52 73 ◇

700 mm **CITYSCAN 646 QT** ◇ 2,4
214 52 76 ◇
◇ = A
E27 / 220-240V / 50-60Hz
1 x QT32 70W
IP65 0,1

OPTIONS
PIN 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P





FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
PIN 11 **229 01 11**	41 x 79 x 403	


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Flip



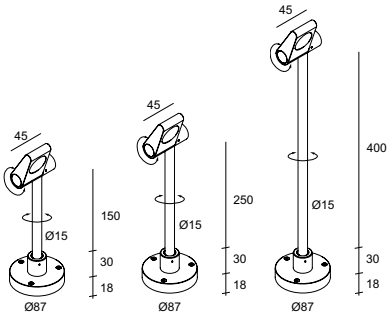

150 mm	**FLIP 15** ◇ **217 60 15 18102** ◇	0,8
250 mm	**FLIP 25** ◇ **217 60 25 18102** ◇	0,8
400 mm	**FLIP 40** ◇ **217 60 40 18102** ◇	1,0

◇ = A / G
ADJUSTABLE
INCL.1 x POWERLED WHITE [H] 6,2W / 3000K
INCL.1 x LENS
EXCL.LED POWER SUPPLY 350mA-DC

IP54

OPTIONS
LED POWER SUPPLY 350mA-DC / DIM

CRI >80 703lm (6,2W)







FULL INFO / PAG TEC

Options

INSTALLATION

CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER




new

led

Kix S





IP65

KIX S ◇
232 08 831 ◇
◇ = A / N

ADJUSTABLE
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K
INCL.1 x LENS SP-10°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

0,3 IP65


OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

new

led

Kix S Pin






IP65

KIX S PIN ◇
232 09 831 ◇
◇ = A / N

ADJUSTABLE
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K
INCL.1 x LENS SP-10°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

0,3 IP65

OPTIONS
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

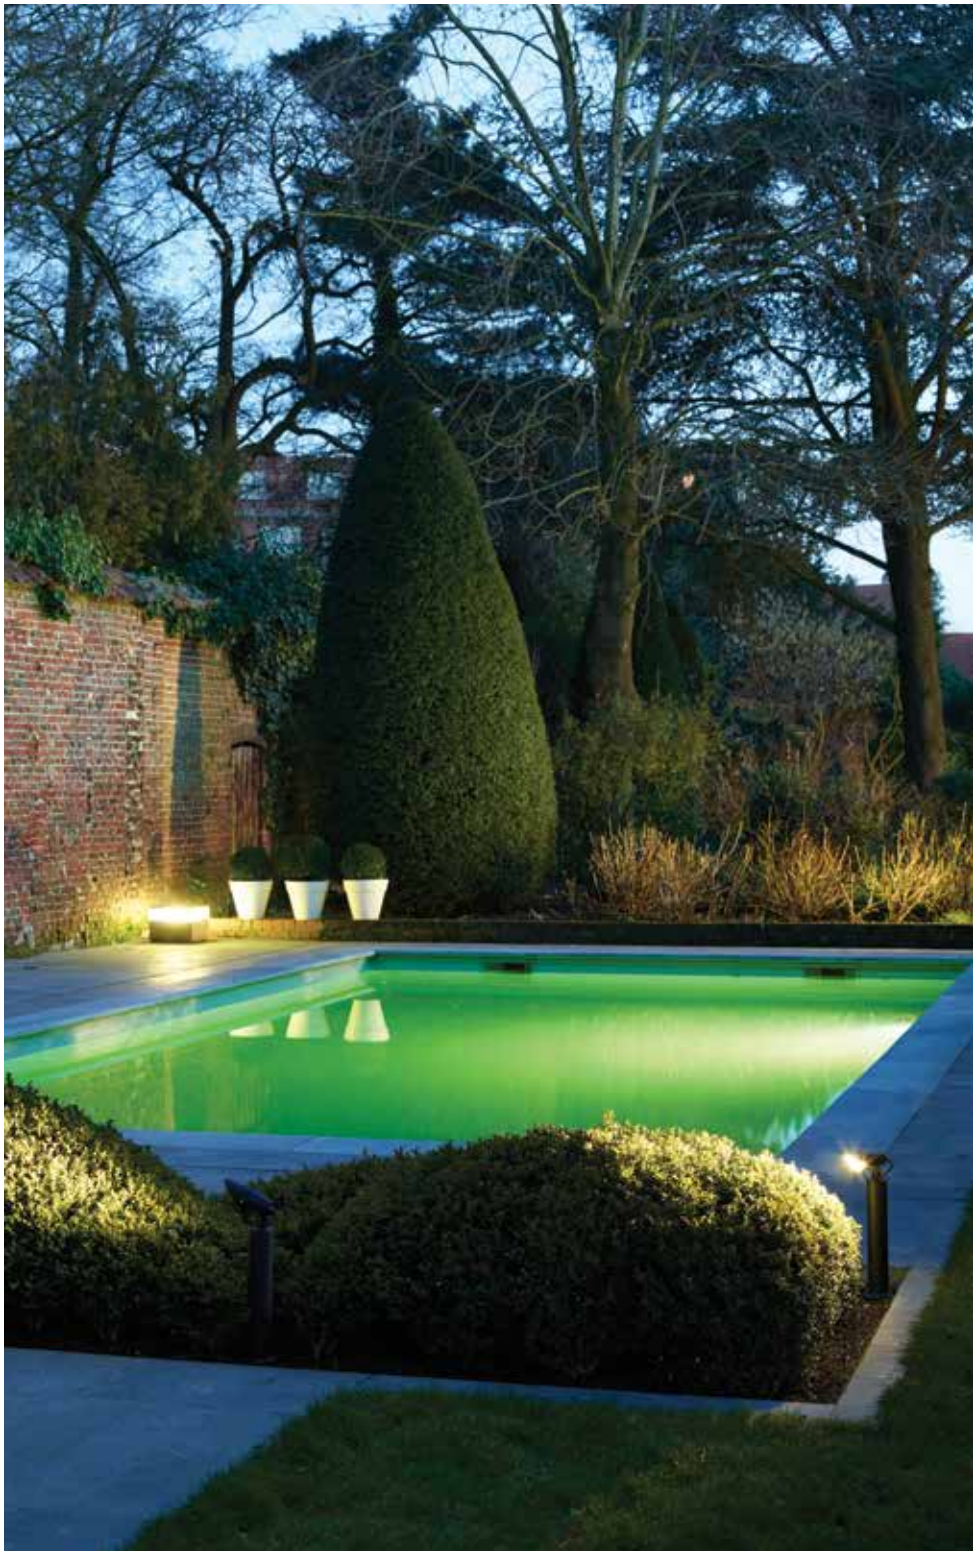

FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
PIN 11 **229 01 11**	41 x 79 x 403	

CONTROL GEAR


LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



KIX M P30 N + KAP STRIPER B

Kix M





KIX M ◇
232 12 833 ◇
◇ = A / N


ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS FL-30°
INCL.1 x KAP STRIPER B (REMOVABLE)
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 0,9 IP55

CRI>80 638lm (7W)

Kix M Pin



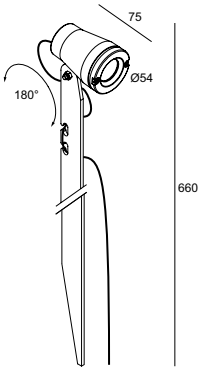

KIX M PIN SP10 ◇
232 13 831 ◇
◇ = A / N

ADJUSTABLE
INCL.1 x POWERLED WHITE [B] 3,3W / 3000K
INCL.1 x LENS SP-10°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL.1 x KAP STRIPER B (REMOVABLE)
EXCL.LED POWER SUPPLY 1050mA-DC

KIX M PIN FL30 ◇
232 13 833 ◇
◇ = A / N

ADJUSTABLE
INCL.1 x POWERLED WHITE [D] 7W / 3000K
INCL.1 x LENS FL-30°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL.1 x KAP STRIPER B (REMOVABLE)
EXCL.LED POWER SUPPLY 350mA-DC


CE 0,6 IP55

OPTIONS
LED POWER SUPPLY 1050mA-DC / DIM
LED POWER SUPPLY 350mA-DC / DIM
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 307lm (3,3W) / 638lm (7W)

Kix M P



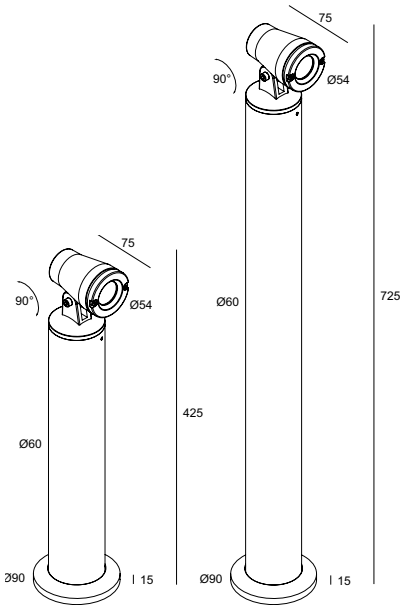

425 mm **KIX M P30** ◇ 1,3
232 143 833 ◇

725 mm **KIX M P60** ◇ 1,6
232 146 833 ◇

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 7W / 3000K
INCL.1 x LENS FL-30°
INCL.1 x KAP STRIPER B (REMOVABLE)
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE IP55

OPTIONS
PIN11
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 638lm (7W)

FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

FULL INFO / PAG 50

Accessories

KAP KIX ◇ **232 10 00** ◇ ◇ = N	Ø102 / Ø81 / H98	
HONEYCOMB KIX ◇ **232 10 03** ◇ ◇ = N	Ø70	




KIX +
HONEYCOMB KIX +
KAP KIX

led

Kix





IP65

KIX 3011 ◇
232 10 18112 ◇
INCL.1 x REFLECTOR SP-11°

KIX 3030 ◇
232 10 18122 ◇
INCL.1 x REFLECTOR FL-30°

KIX 3055 ◇
232 10 18132 ◇
INCL.1 x REFLECTOR WFL-55°

new
KIX 30120 ◇
232 10 81833 ◇
WFL-120°

◇ = A / N

ADJUSTABLE
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz


CE 0,9 IP65

ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI>80 703lm (6,2W)

Kix HP





IP65

KIX HP 3011 ◇
232 10 21 831 ◇
INCL.1 x REFLECTOR SP-11°

KIX HP 3030 ◇
232 10 21 832 ◇
INCL.1 x REFLECTOR FL-30°

KIX HP 3055 ◇
232 10 21 833 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE [J] 18W / 3000K
EXCL. LED POWER SUPPLY 500mA-DC

0,7 IP65


OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI >80 1930lm (18W)

Kix Pin





IP65

KIX PIN 3011 ◇
232 11 18112 ◇
INCL.1 x REFLECTOR SP-11°

KIX PIN 3030 ◇
232 11 18122 ◇
INCL.1 x REFLECTOR FL-30°

KIX PIN 3055 ◇
232 11 18132 ◇
INCL.1 x REFLECTOR WFL-55°

KIX PIN 30120 ◇
232 11 81833 ◇
WFL-120°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

1,2 IP65


OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI>80 703lm (6,2W)

Kix HP Pin





IP65

KIX HP PIN 3011 ◇
232 11 21 831 ◇
INCL.1 x REFLECTOR SP-11°

KIX HP PIN 3030 ◇
232 11 21 832 ◇
INCL.1 x REFLECTOR FL-30°

KIX HP PIN 3055 ◇
232 11 21 833 ◇
INCL.1 x REFLECTOR WFL-55°

◇ = A / N
ADJUSTABLE
INCL.1 x POWERLED WHITE [J] 18W / 3000K
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
EXCL. LED POWER SUPPLY 500mA-DC

1,0 IP65

OPTIONS
LED POWER SUPPLY 500mA-DC / DIM

ACCESSORIES
KAP KIX
HONEYCOMB KIX

CRI >80 1930lm (18W)



BECKERS NOYEZ ARCHITECTEN





BECKERS NOYEZ ARCHITECTEN







FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX 350mA / 10W **216 14 35**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


INSTALLATION	
PIN 7 **229 01 07**	Ø4,5 x 315


CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER

led

Industrial S

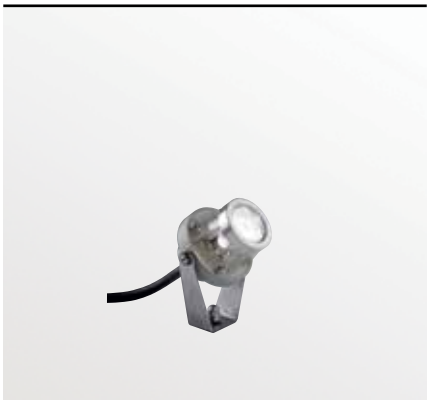



IP67


INDUSTRIAL S NW ◇
306 01 04 ◇
◇ = A
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 4000K

INDUSTRIAL S WW ◇
306 01 02 ◇
◇ = A
INCL.1 x POWERLED WHITE [A] 1,1-2,3W / 3000K

INCL.1 x LENS 10°
INCL.1 x CABLE HO5 RN-F 2 x 0,75mm² 2m
EXCL.LED POWER SUPPLY 350-700mA-DC

0,2 IP67

OPTIONS
PIN 7
LED POWER SUPPLY 350-700mA-DC / DIM
CBOX / CBOX 350mA
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

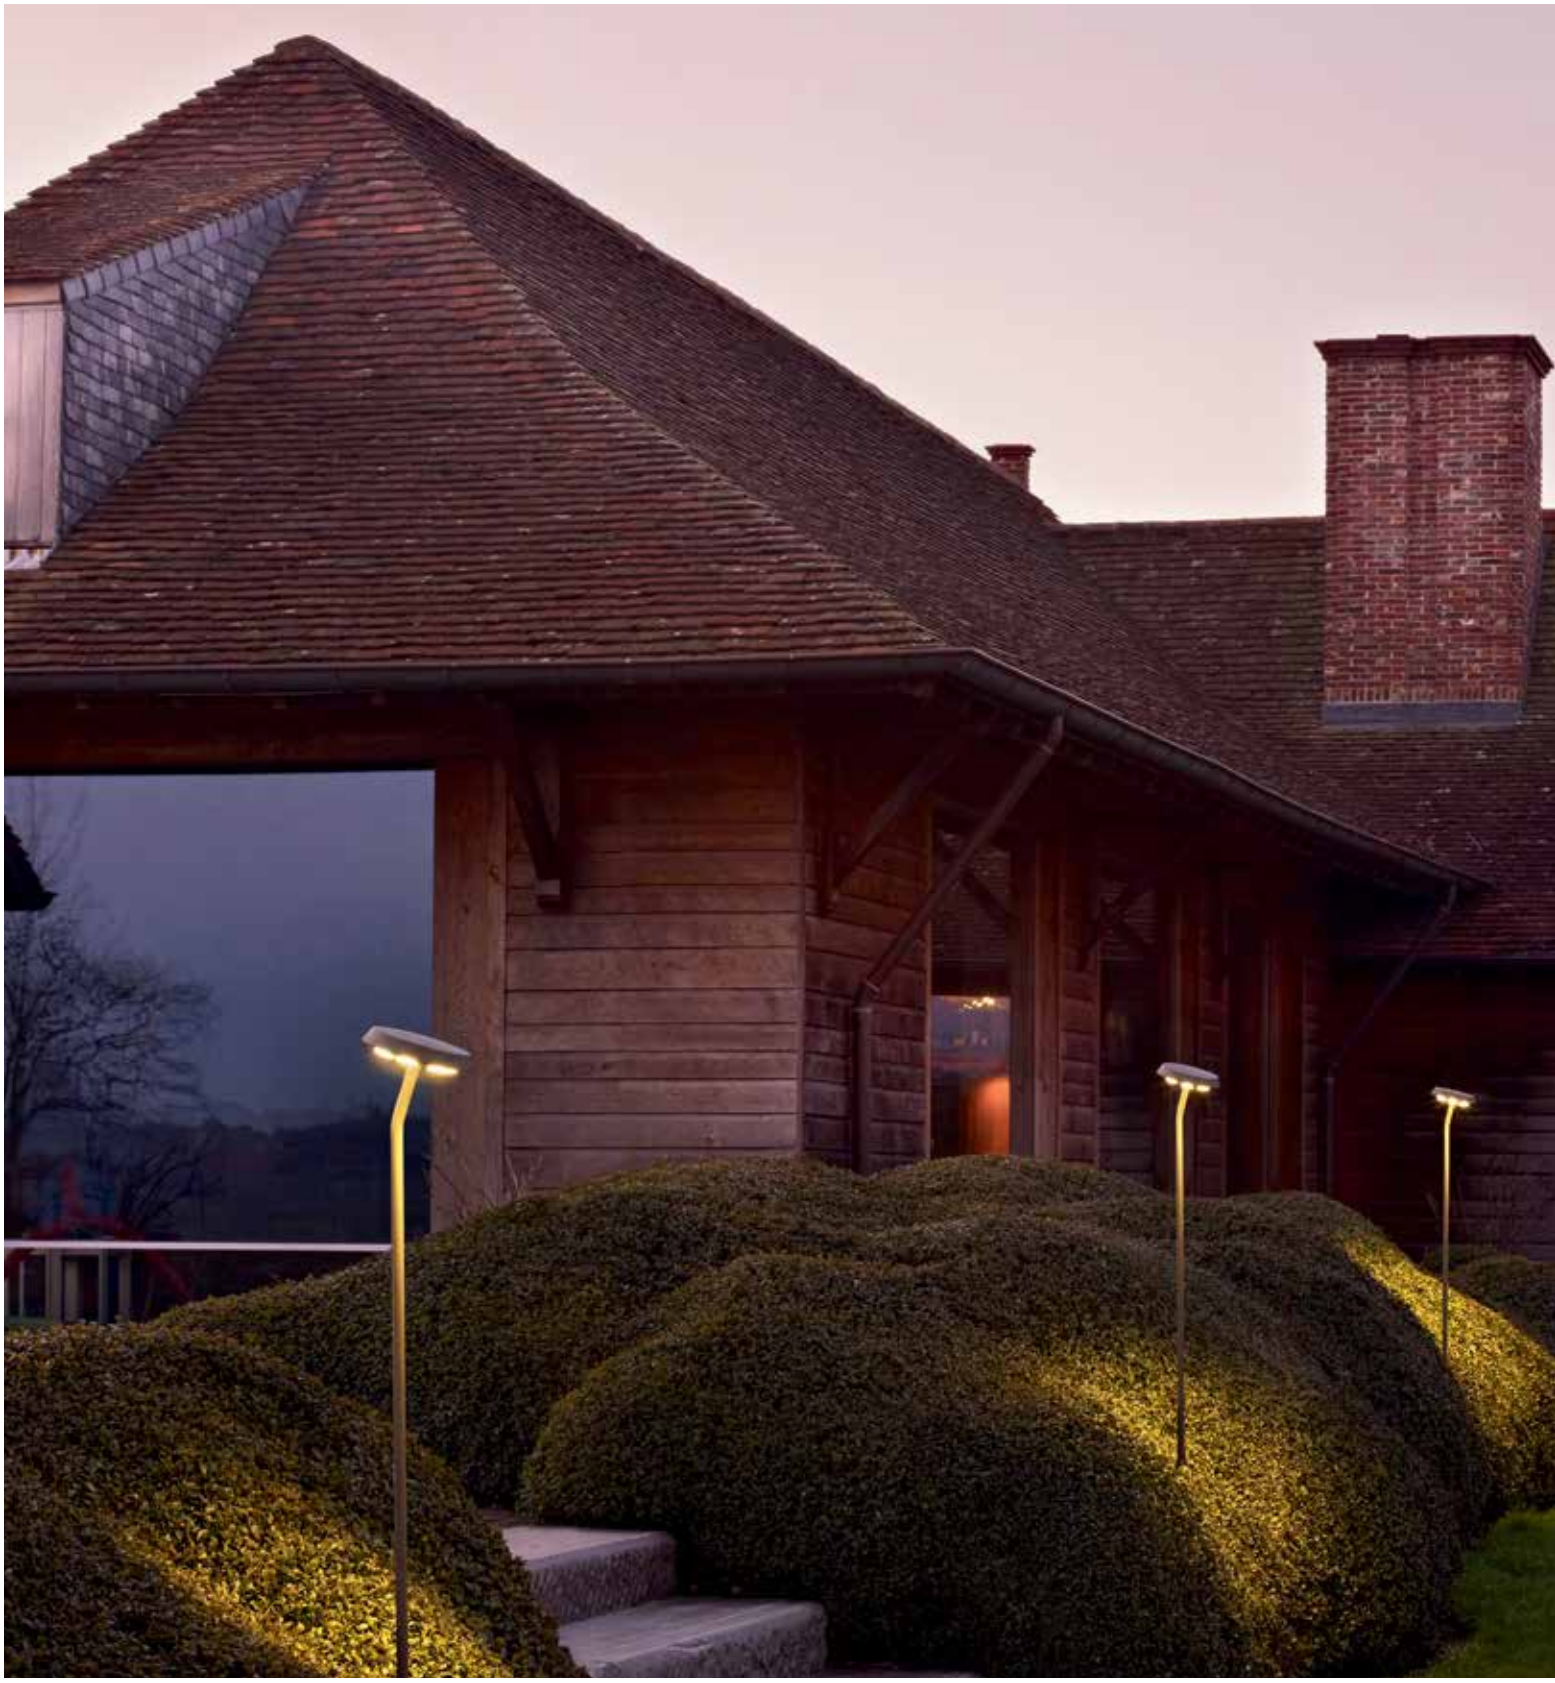



FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	



Tournesol



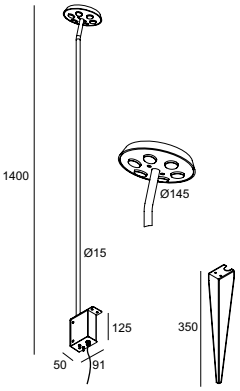

TOURNESOL WW ◇
314 16 26 ◇
◇ = G
INCL.6 x POWERLED WHITE 1,1W / 3000K
INCL.6 x LENS 40°
INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m
INCL.LED POWER SUPPLY 350mA-DC
120-240V / 50-60Hz
INCL.PIN

2,3 IP54

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P


EXTERIOR.BE



FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 15 **229 01 15**	93 x 130 x 403

led

Aula





260 mm **AULA 26** ◇ 1,0
318 14 4102 ◇
600 mm **AULA 60** ◇ 1,8
318 17 4102 ◇
◇ = G-W
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
220-240V / 50-60Hz

CE IP55

OPTIONS
PIN 15
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 703lm (6,2W)





FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PLATE 3 **229 02 03**	85 x 85 x 500	
PLATE 8 **229 02 08**	195 x 267 x 3	
PIN 13 **229 01 13**	57 x 192 x 403	



new


led


Montur S P







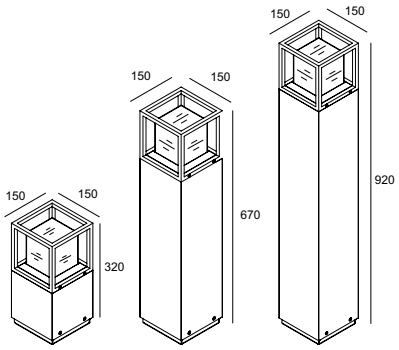

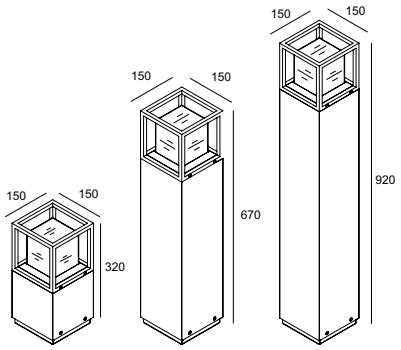

320 mm **MONTUR S P 30 LED** ◇ 3,3
232 432 83 ◇
670 mm **MONTUR S P 65 LED** ◇ 5,0
232 472 83 ◇
920 mm **MONTUR S P 90 LED** ◇ 6,4
232 492 83 ◇
◇ = A / B
INCL.LED CLUSTER 7W / 3000K
INCL.1 x GLASS OPAL
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP54

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

320 mm **MONTUR S P 30 LED TW** ◇ 3,3
232 432 99 ◇
670 mm **MONTUR S P 65 LED TW** ◇ 5,0
232 472 99 ◇
920 mm **MONTUR S P 90 LED TW** ◇ 6,4
232 492 99 ◇
◇ = A / B
INCL.LED CLUSTER 7W / 2200K
INCL.LED CLUSTER 4,2W / 3000K
INCL.1 x GLASS OPAL
INCL.2 x LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz
CABLING 2 CIRCUITS

IP54

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 505lm (7W)

CRI>80 480lm (7W - 2200K)
CRI>80 560lm (4,2W - 3000K)



LED CLUSTER 7W / 2200K OFF
LED CLUSTER 4,2W / 3000K ON



LED CLUSTER 7W / 2200K ON
LED CLUSTER 4,2W / 3000K ON





LED CLUSTER 7W / 2200K ON
LED CLUSTER 4,2W / 3000K OFF

Montur M P





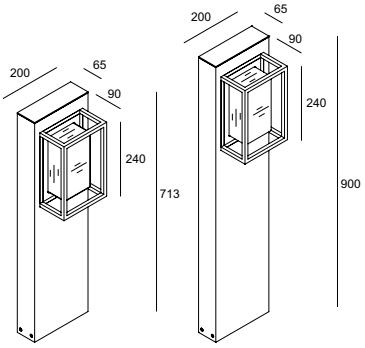

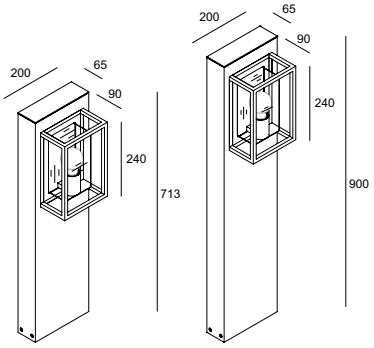

led

713 mm **MONTUR M P 70 LED** ◇ 5,6
232 572 83 ◇
900 mm **MONTUR M P 90 LED** ◇ 7,2
232 592 83 ◇
◇ = A / B
INCL.LED CLUSTER 6,7W / 3000K
INCL.1 x GLASS OPAL
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP54

OPTIONS
PLATE 8
PIN 13
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

713 mm **MONTUR M P 70 E27** ◇ 5,5
232 573 00 ◇
900 mm **MONTUR M P 90 E27** ◇ 7,1
232 593 00 ◇
◇ = A / B
INCL.1 x GLASS CLEAR
E27Ls / 220-240V / 50-60Hz
1 x A60 max.40W


IP54

OPTIONS
led LED SOLUTION - PAG TEC 4-5
PLATE 8
PIN 13
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 840lm (6,7W)

Montur L P





MONTUR L P 45 LED ◇
232 659 83 ◇
◇ = A / B
INCL.LED CLUSTER 13,3W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
MAINS DIMMING (FE)
100-240V / 50-60Hz

1,6 IP54

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 1250lm (13,3W)







BECKERS NOYEZ ARCHITECTEN

FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PIN 12 **229 01 12**	42 x 142 x 403	
PLATE 7 **229 02 07**	150 x 200 x 3	

led

Oblix



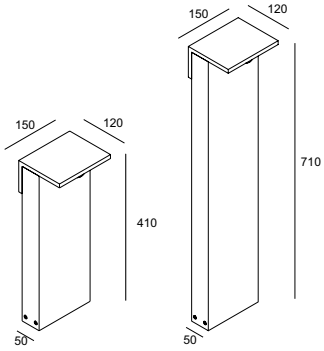

410 mm **OBLIX 40** ◇ 2,2
220 74 12 ◇

710 mm **OBLIX 70** ◇ 3,5
220 77 12 ◇


◇ = A / N
INCL.POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55

OPTIONS
PIN 12
PLATE 7
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 703lm (6,2W)



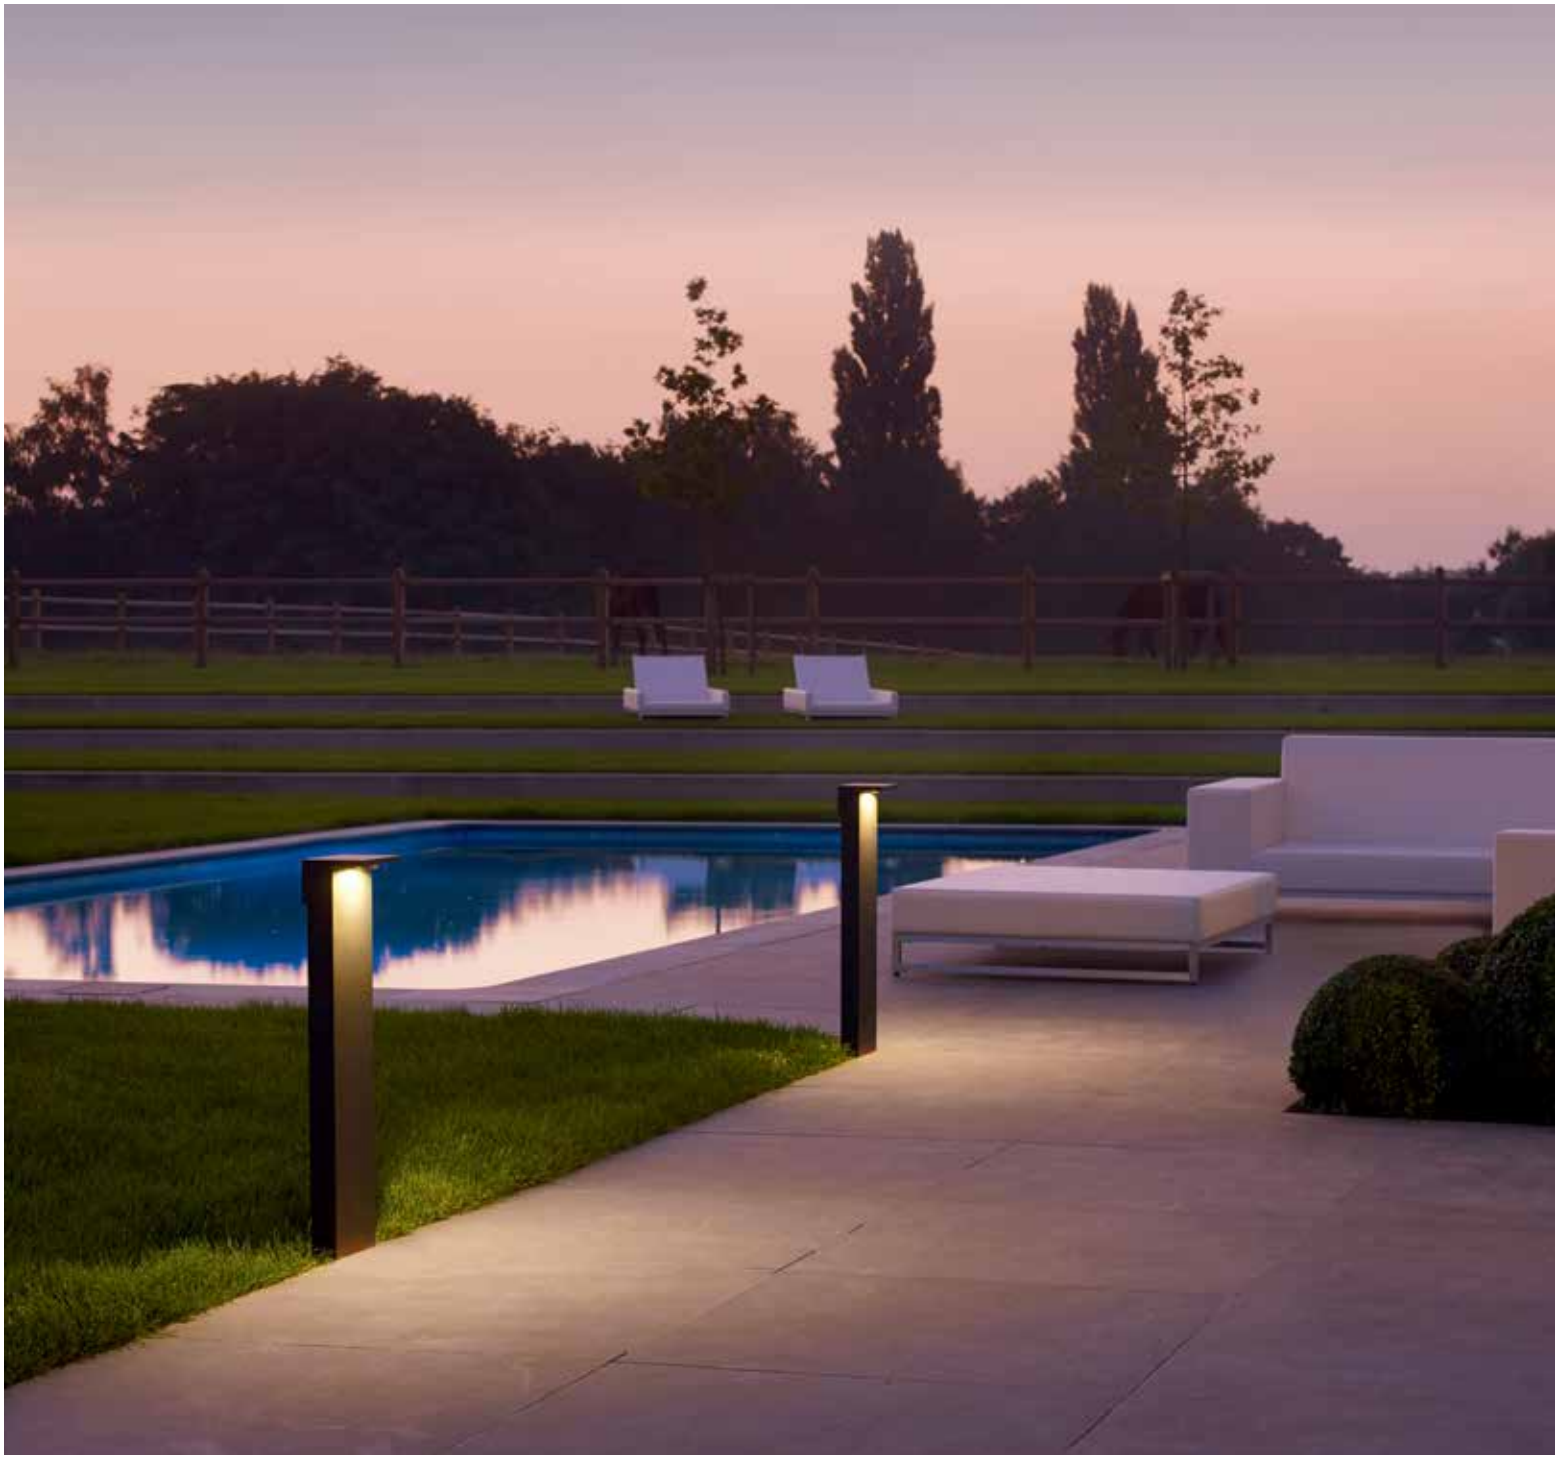





GRAUX & BAYENS



MARTIN'S HOTEL

FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


INSTALLATION		
PIN 13 **229 01 13**	57 x 192 x 403	
PLATE 8 **229 02 08**	195 x 267 x 3	

Walker





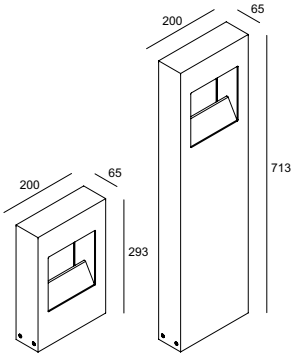

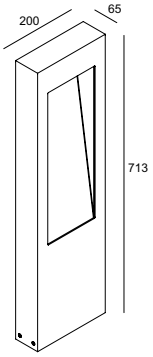

293 mm **WALKER 63 LED** ◇ 2,1
220 63 18102 ◇
713 mm **WALKER 67 LED** ◇ 5,2
220 67 18102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55

OPTIONS
PIN 13
PLATE 8
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

WALKER 67L LED ◇
220 68 18102 ◇
◇ = A / G
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

CE 4,3 IP55

OPTIONS
PIN 13
PLATE 8
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 703lm (6,2W)



FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 1 **229 01 01**	58 x 58 x 280
PLATE 1 **229 02 01**	200 x 200 x 3


FULL INFO / PAG 50


Accessories

KAP STRIPER ◇ **232 00 10 ◇** ◇ = B	Ø58 / Ø53 / H83

led

Striper

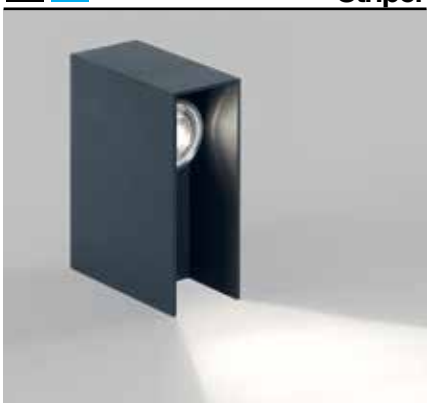



STRIPER ◇
223 00 12 ◇

◇ = A / N
INCL.POWERLED WHITE 2,3W / 3000K
INCL.LENS 4°
INCL.LED POWER SUPPLY 700mA-DC
120-240V / 50-60Hz

CE 1,0 IP55

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

ACCESSORIES
KAP STRIPER


STRIPER + KAP STRIPER



FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 1 **229 01 01**	58 x 58 x 280
PLATE 1 **229 02 01**	200 x 200 x 3

led

Monopol LED





260 mm **MONOPOL 26 LED WW ◇** 1,2
223 16 4102 ◇


700 mm **MONOPOL 70 LED WW ◇** 2,7
223 17 4102 ◇

◇ = A / G
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.1 x LENS
INCL.LED POWER SUPPLY 350mA-DC
100-240V / 50-60Hz

IP55

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI >80 703lm (6,2W)

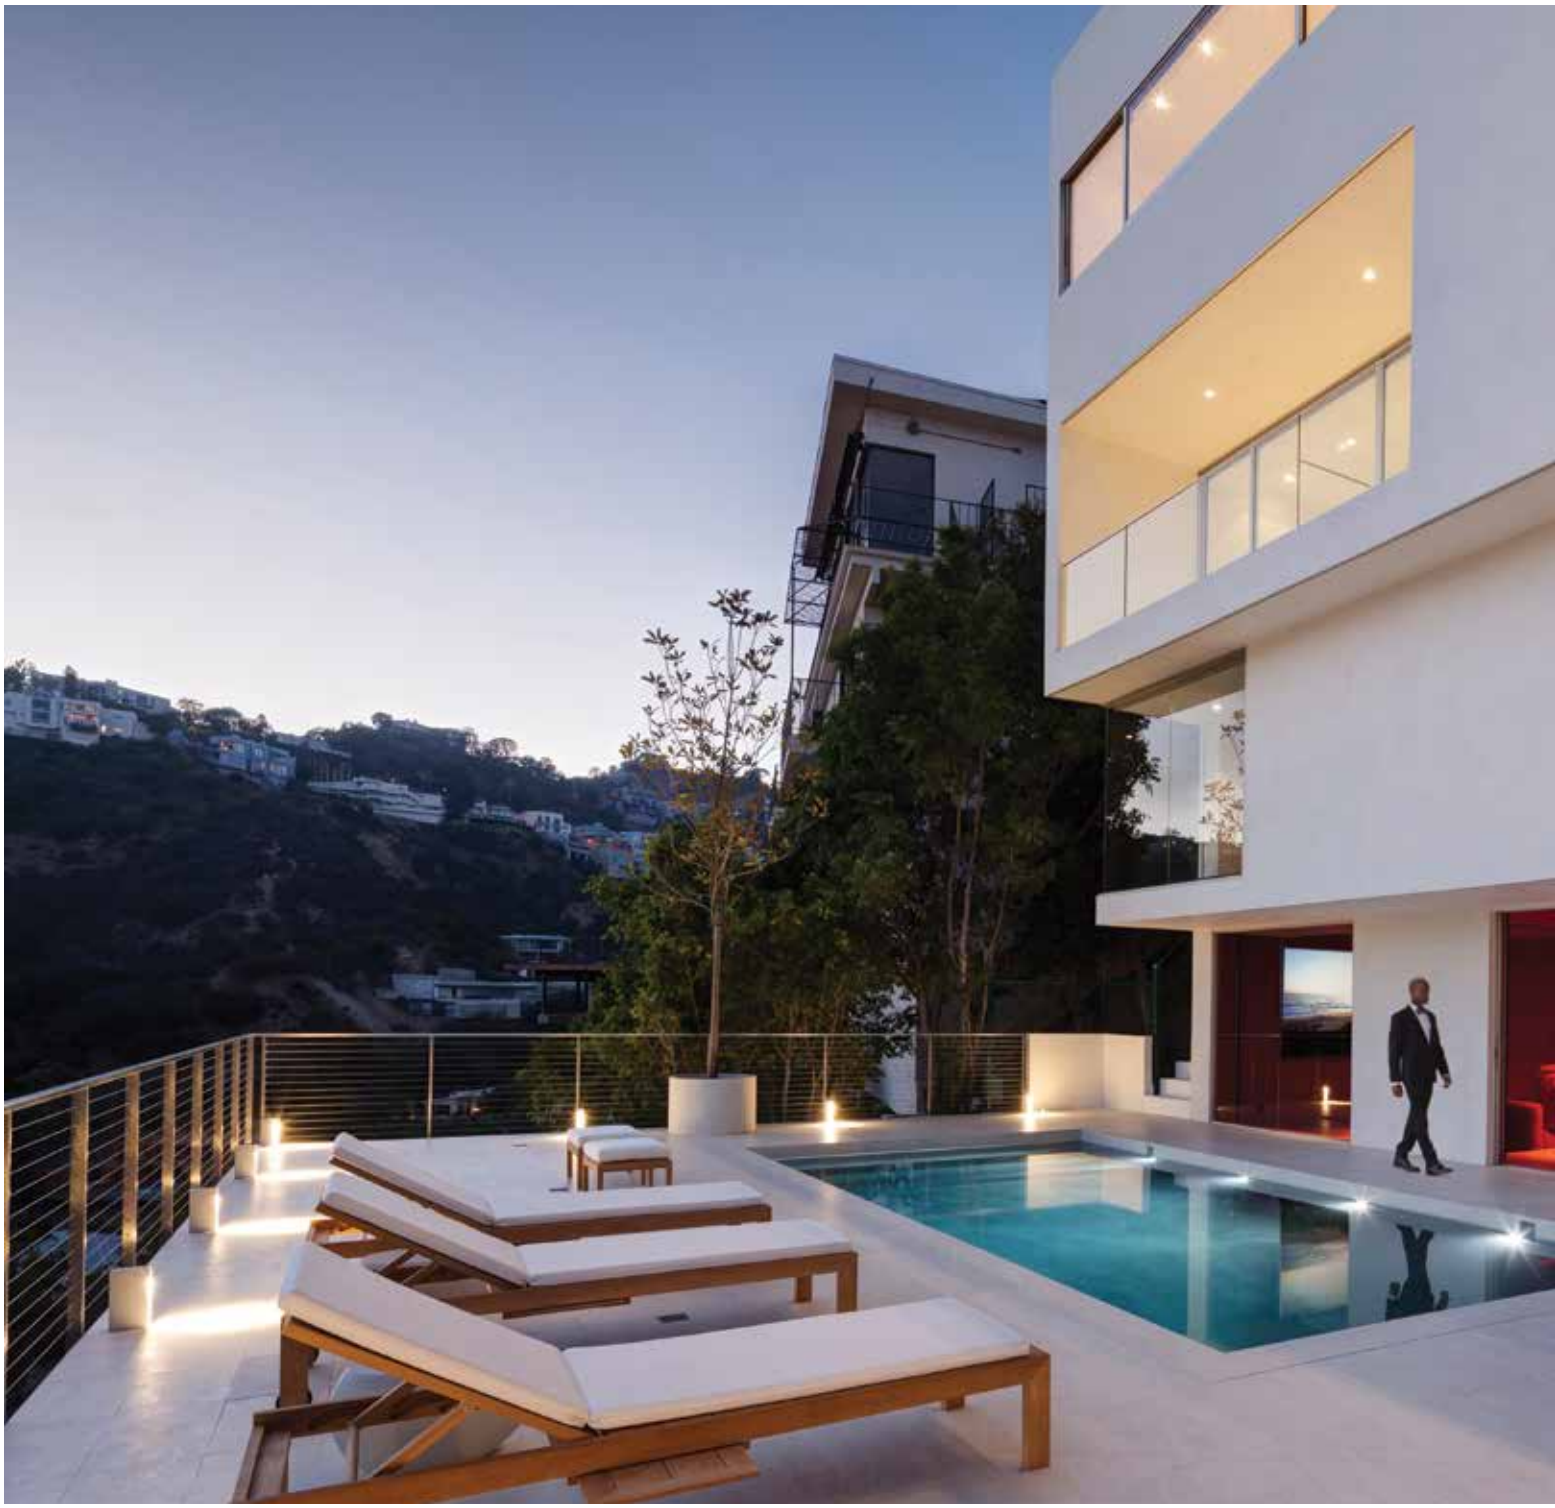



GW DESIGN





FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
CBOX T50 **216 12 50**	140 x 140 x 173	142 x 142 x 300
CBOX T100 **216 12 100**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	


INSTALLATION	
PIN 1 **229 01 01**	58 x 58 x 280
PLATE 1 **229 02 01**	200 x 200 x 3

Monostep









MONOSTEP 26 T50 ◇
223 00 52 ◇
◇ = A / G
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
1,2 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

MONOSTEP 26 ◇
223 00 02 ◇
◇ = INOX
INOX 316 L
GU5.3 / 12V / EXCL.TRANSFO
1 x QR-CBC51 max.50W
2,0 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX / CBOX T50 / CBOX T100
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

MONOSTEP 70 T50 ◇
223 00 57 ◇
◇ = A / G
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
2,6 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

MONOSTEP 70 T50 ◇
223 00 57 ◇
◇ = INOX
INOX 316 L
GU5.3 / 220-240V / 50-60Hz / TE
1 x QR-CBC51 max.50W
4,8 IP43 0,5

OPTIONS
PIN 1
PLATE 1
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P


onasida

FULL INFO / PAG TEC

Options


INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION	
PIN 14 **229 01 14**	120 x 120 x 403

led

Botanic





240 mm **BOTANIC 24** ◇ 1,9
317 12 22 ◇
INCL.2 x LEDSTRIP WHITE 1,25W / 3000K

540 mm **BOTANIC 54** ◇ 3,6
317 15 22 ◇
INCL.2 x LEDSTRIP WHITE 3W / 3000K
◇ = A / G
INCL.2 x PC SBL
INCL.LED POWER SUPPLY 24V-DC
220-240V / 50-60Hz

IP55

OPTIONS
PIN 14
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	
INSTALLATION		
PLATE 5 **229 02 05**	250 x 250 x 475	

Labyrinth



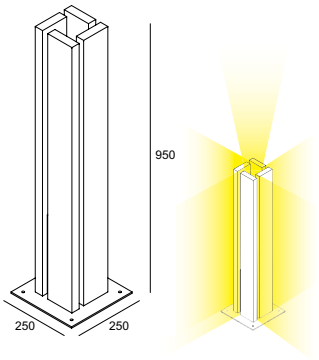

LABYRINTH ◇
220 10 36 ◇
◇ = A / G
2G11 / 220-240V / 0 I 50-60Hz / 1 x 1~EVG
1 x TC-L 36W

IP55 0,1

OPTIONS
PLATE 5
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

GREEN GOOD DESIGN award



FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	




new

led

Dreve






DREVE 3030
220 80 832
GALVANISED
INCL.1 x REFLECTOR FL-30°
INCL.CABLE H05 RN-F 2 x 1mm² 0,5m
INCL.1 x POWERLED WHITE 6,2W / 3000K
INCL.LED POWER SUPPLY 350mA-DC
INCL.IP68 CONNECTOR 3P
100-240V / 50-60Hz
ESG 5mm

CE 15,1 IP54

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

CRI>80 703lm (6,2W)

Design by **Dirk Wynants**

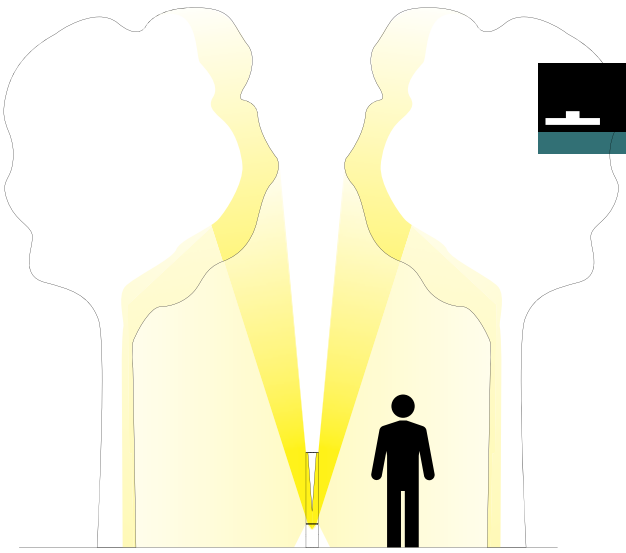




FULL INFO / PAG TEC


Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

INSTALLATION		
PLATE 3 **229 02 03**	85 x 85 x 500	

Mr. Junior X






Mr. JUNIOR X ◇
226 21 17 ◇
◇ = A / G
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.15W
1 x TC-SB max.16W
CE 3,5 IP54 0,1

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

Mr. Senior





615 mm **Mr. SENIOR 155** ◇ 6,3
226 23 57 ◇
◇ = A / G

1000 mm **Mr. SENIOR 159** ◇ 9,7
226 23 97 ◇
◇ = A
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.20W
1 x TC-SB max.16W
CE IP54 0,1

OPTIONS
PLATE 3
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P




FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	

Queen Teak






QUEEN TEAK
226 11 37
E27Ls / 100-240V / 50-60Hz
1 x TCA-SE max.20W
1 x TC-SB max.16W
3,4 IP54 0,1

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

King Teak





KING TEAK
226 12 37
E27Ls / 100-240V / 50-60Hz
2 x TCA-SE max.20W
2 x TC-SB max.16W
11,6 IP54 0,1

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



FULL INFO / PAG TEC

Options

INSTALLATION		
CBOX **216 12 00**	140 x 140 x 173	142 x 142 x 300
IP68 CONNECTION KIT **216 12 01**	95 x 45 x 25	
IP68 CONNECTOR 3P **216 12 02**	Ø 23 x 68	



VISIONAIR + VISION S OUT LED


led


Visionair

VISIONAIR ◇
278 28 00 ◇
◇ = A
INCL.CABLING
EXCL.1 x VISION S OUT LED **278 26 24**
EXCL.1 x VISION S OUT LED RGB **278 26 33**

8,6

OPTIONS
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P



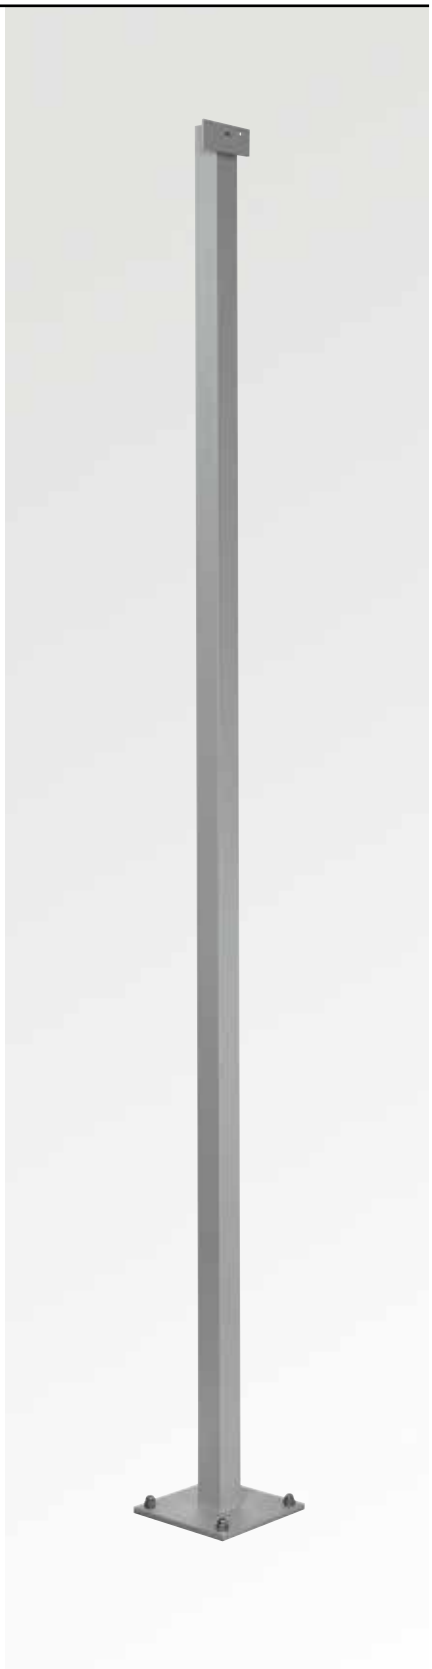





INTERIOR CEILING RECESSED INT 4

INTERIOR CEILING SURFACE INT 294

INTERIOR WALL RECESSED INT 496

INTERIOR WALL SURFACE INT 516

INTERIOR STAND ALONE INT 584

INTERIOR TRACK LIGHTING t INT 594

PROFILES p PRO 4

EXTERIOR CEILING RECESSED EXT 4

EXTERIOR CEILING SURFACE EXT 22

EXTERIOR WALL RECESSED EXT 40

EXTERIOR WALL SURFACE EXT 54

EXTERIOR FLOOR RECESSED EXT 110

EXTERIOR FLOOR SURFACE EXT 138

TECHNICAL INFO tech TEC 2

INDEX index IND 2

TECHNICAL
INFO

The following chapter provides additional led information and more details on options, accessories and requirements.



tech


INDEX
TECHNICAL

ANTI-GLARE TUBE	40
APPLICATION OF MOUNTING OPTIONS	27
BALLASTSET	26
BASIC R GLASS SBL	40
CABLE BASE R/S	36
CBOX	37
CLIP 50 / 100	39
CONCRETE BOX	29
CONCRETE PACK	30
CONE 50 /66 /111	39
CONNECTION TRIMLESS	36
COVERSET R/S	36
LED SPECS	10
CUT-OUT OVERVIEW	42
DALI CONVERTER	26
DECORATIVE GLASS	40
M10 SYSTEM	35
DICROIC FILTER 50 / 100	39
FRONTGLASS	39
GENIE BOX 80 S / 90 S / 90 R	37
GLASS SBL	40
HONEYCOMB KIX	41
IP68 CONNECTION KIT	37
IP68 CONNECTOR 3P	37
JACK SYSTEM	34
KAP KIX / STRIPER	41
LAMP INDEX	44
LED DIMMODULE 24V	24
LEDFLEX	6
LED POWER CONVERTER	20
LED POWER SUPPLY 14V-DC / 12W	24
LED POWER SUPPLY 24V-DC	20
LED POWER SUPPLY 350MA-DC	17
LED POWER SUPPLY 500MA-DC	17
LED POWER SUPPLY 700MA-DC	17
LED POWER SUPPLY MULTI-POWER	18
LED RGB KIT - INSTALLATION SCHEME	25
LED SOLUTION	4
LEDSTRIP	8
LED TRANSFO 12V	26
LEGENDA	45
LIGHT BEAM ACCESSORIES	38
LOGIC 60 BOX R	37
MOUNTING KIT	32
MOUNTING KIT	33
OPTION LEDSTRIP 50 F + 50 RGB	8
OPTION LEDSTRIP 50 FP	8
OPTO CLIP	41
PARALLEL CONNECTION	16
PLASTERKIT	28
RASTER 66 / 109	40
RGB DRIVER	25
RGB TOUCH CONTROLLER DMX	25
RING 66 / 109	39
SERIAL CONNECTION	16
SOFT DIM	9
SPOTNIC	35
SUSPENSION TRIMLESS	36
T16 SEAMLESS	4
TRANSFO	26
TUBE C / R	40
UV-FILTER	39
ZB BOX	31

LAMPS

Led Solution / Led Filament






LED FILAMENT 60 E27 5,5W 2700K
309 109 00 25
IINCL.FILAMENT LED / 2700K / CRI>80
TOTAL POWER 5,5W / 640lm
EQUIVALENT OF 53W INCANDESCENT
NON DIMMABLE
E27Ls / 220-240V / 50-60Hz

CE 0,1 IP20






LED FILAMENT T64 E27 7W 2700K
309 109 01 27
IINCL.FILAMENT LED / 2700K / CRI>80
TOTAL POWER 7W / 810lm
EQUIVALENT OF 60W INCANDESCENT
NON DIMMABLE
E27Ls / 220-240V / 50-60Hz

CE 0,1 IP20






LED FILAMENT GL80 E27 7W 2700K
309 109 02 27
IINCL.FILAMENT LED / 2700K / CRI>80
TOTAL POWER 7W / 810lm
EQUIVALENT OF 60W INCANDESCENT
NON DIMMABLE
E27Ls / 220-240V / 50-60Hz

CE 0,1 IP20







LED FILAMENT GL95 E27 7W 2700K
309 109 03 27
IINCL.FILAMENT LED / 2700K / CRI>80
TOTAL POWER 7W / 810lm
EQUIVALENT OF 60W INCANDESCENT
NON DIMMABLE
E27Ls / 220-240V / 50-60Hz

CE 0,1 IP20

Led Solution / Haloled






HALOLED 51 - 36° (20W) WW
309 106 38 22
INCL.1 x POWERLED WHITE / 3000K
INCL.1 x LENS 36°
TOTAL POWER 5W / 210lm
GX5.3 /12V

CE 0,1 IP20






HALOLED 51 - 36° (35W) WW
309 106 38 32
INCL.1 x POWERLED WHITE / 3000K
INCL.1 x LENS 36°
TOTAL POWER 8W / 470lm
GX5.3 / 12V

CE 0,1 IP20






HALOLED Hi - 36° (35W) WW
309 107 38 32
INCL.3 x POWERLED WHITE / 2700K
INCL.3 x LENS 35°
TOTAL POWER 5,2W / 230lm
GU10 / 220-240V / 50-60Hz

CE 0,1 IP20





HALOLED E27 - 360° (60W) WW
309 108 00 02
INCL.1 x POWERLED WHITE / 2700K
TOTAL POWER 10W
E27 / 220-240V / 50-60Hz

CE 0,1 IP20

T16 Seamless


x 1 / pack	REFERENCE	
T16 SEAMLESS 14W 3000K	300 93 17 3014	0.125
T16 SEAMLESS 21W 3000K	300 93 17 3021	0.18
T16 SEAMLESS 24W 3000K	300 93 17 3024	0.125
T16 SEAMLESS 28W 3000K	300 93 17 3028	0.24
T16 SEAMLESS 39W 3000K	300 93 17 3039	0.18
T16 SEAMLESS 54W 3000K	300 93 17 3054	0.235
x 25 / pack		
T16 SEAMLESS 14W 3000K	300 93 17 3014-25	3,1
T16 SEAMLESS 21W 3000K	300 93 17 3021-25	4,5
T16 SEAMLESS 24W 3000K	300 93 17 3024-25	3,1
T16 SEAMLESS 28W 3000K	300 93 17 3028-25	6,0
T16 SEAMLESS 39W 3000K	300 93 17 3039-25	4,5
T16 SEAMLESS 54W 3000K	300 93 17 3054-25	5,8




led

Led Solution / QR111









HALOLED 111 - 24° HW
309 155 24 12

HALOLED 111 - 45° HW
309 155 45 12

INCL.2 x POWERLED WHITE / 2800K ●
TOTAL POWER 15W
G53 / 12V / NON DIMMABLE

CE 0,2

	CRI > 80	CRI > 90
3000K ●	680lm	566lm
REFLECTOR FL-33°	**REO 111 3033** ◇ **309 111 28122** ◇ ◇ = A / B / W	**REO 111 3033-9** ◇ **309 111 29122** ◇ ◇ = A / B / W
REFLECTOR WFL-50°	**REO 111 3050** ◇ **309 111 28132** ◇ ◇ = A / B / W	**REO 111 3050-9** ◇ **309 111 29132** ◇ ◇ = A / B / W
2700K ●	618lm	525lm
REFLECTOR FL-33°	**REO 111 2733** ◇ **309 111 28123** ◇ ◇ = A / B / W	**REO 111 2733-9** ◇ **309 111 29123** ◇ ◇ = A / B / W
REFLECTOR WFL-50°	**REO 111 2750** ◇ **309 111 28133** ◇ ◇ = A / B / W	**REO 111 2750-9** ◇ **309 111 29133** ◇ ◇ = A / B / W

* provide appropriate ventilation to limit $T_{HEATSINK}$ temperature

INCL.1 x POWERLED [I] WHITE 7W
EXCL.LED POWER SUPPLY 350mA-DC
INCL.2 x WIRE 1 x 0.50mm² 0.5m
$T_{HEATSINK}$ MAX < 65°C*

CE 0,2 IP20

PRODUCT	REFERENCE	REO 111	HALOLED 111
GRAND DIRO ST 111	202 15 62 01	•	
GRAND DIRO TRIMLESS 111	202 15 61 01	•	
GRAND DIRO TRIMLESS D 111	202 15 61 00		
GRID IN 1 QR	202 62 00 01	•	•
GRID IN 2 QR	202 62 00 02	•	•
GRID IN 3 QR	202 62 00 03	•	•
GRID IN 4 QR	202 62 00 04	•	•
GRID IN 4LINE QR	202 62 00 04L	•	•
GRID IN TRIMLESS 1 QR	202 61 00 01	•	•
GRID IN TRIMLESS 2 QR	202 61 00 02	•	•
GRID IN TRIMLESS 3 QR	202 61 00 03	•	•
GRID IN TRIMLESS 4 QR	202 61 00 04	•	•
GRID IN ZB 1 QR	202 60 00 01	•	•
GRID IN ZB 2 QR	202 60 00 02	•	•
GRID IN ZB 3 QR	202 60 00 03	•	•
GRID IN ZB 4 QR	202 60 00 04	•	•
PUT 111 CENTER	202 91 01 11	•	•
PUT 111 CLICK	202 91 02 11	•	
RODI 111 S1	202 37 12	•	•

tech

LED POWER SUPPLY	REFERENCE	PAGE	REO 111	HALOLED 111
LED POWER SUPPLY 350mA-DC / 15W	300 90 91	TEC 17	1	-
LED POWER SUPPLY 350mA-DC / 16W DIM8	300 90 3112	TEC 17	2	-
LED POWER SUPPLY 350mA-DC / 17W	300 90 913	TEC 17	2	-
LED TRANSFO 12V-70W	300 89 12 71	TEC 26	-	2

LED

Ledflex 5m



LEDFLEX IN NW 5m
300 92 52 04
60 x SMD LED/m - 4000K

LEDFLEX IN WW 5m
300 92 52 02
60 x SMD LED/m - 3000K

LEDFLEX IN HW 5m
300 92 53 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
5W/m - 360lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

OPTIONS
LEDFLEX IN CONNECTION SET
LEDFLEX IN SUPPLY CABLE SET
LEDFLEX IN CONNECTION CLIP SET

LEDFLEX OUT NW 5m
300 92 62 04
60 x SMD LED/m - 4000K

LEDFLEX OUT WW 5m
300 92 62 02
60 x SMD LED/m - 3000K

LEDFLEX OUT HW 5m
300 92 62 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
5W/m - 360lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
INCL.8 ENDCAPS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,3 IP65

Ledflex FP 5m



LEDFLEX IN FP NW 5m
300 92 53 04
60 x SMD LED/m - 4000K

LEDFLEX IN FP WW 5m
300 92 53 02
60 x SMD LED/m - 3000K

LEDFLEX IN FP HW 5m
300 92 53 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
15W/m - 1000lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

OPTIONS
LEDFLEX IN FP CONNECTION SET
LEDFLEX IN FP SUPPLY CABLE SET
LEDFLEX IN FP CONNECTION CLIP SET

LEDFLEX OUT FP NW 5m
300 92 63 04
60 x SMD LED/m - 4000K

LEDFLEX OUT FP WW 5m
300 92 63 02
60 x SMD LED/m - 3000K

LEDFLEX OUT FP HW 5m
300 92 63 03
60 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 100mm
15W/m - 1000lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
INCL.8 ENDCAPS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,3 IP65

Ledflex HP 5m



LEDFLEX IN HP WW 5m
300 92 54 02
180 x SMD LED/m - 3000K

LEDFLEX IN HP HW 5m
300 92 54 03
180 x SMD LED/m - 2700K

L : 5m / DIVIDABLE PER 33,3mm
21,6W/m - 1800lm/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

Ledflex RGB 5m



LEDFLEX IN RGB 5m
300 92 52 33
30 x SMD LED/m - RGB

L : 5m / DIVIDABLE PER 167mm
8W/m
24V-DC
INCL.20 MOUNTING BRACKETS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,2 IP20

OPTIONS
LEDFLEX IN RGB CONNECTION SET
LEDFLEX IN RGB SUPPLY CABLE SET
LEDFLEX IN RGB CONNECTION CLIP SET


LEDFLEX OUT RGB 5m
300 92 62 33
30 x SMD LED/m - RGB

L : 5m / DIVIDABLE PER 167mm
8W/m
24V-DC
INCL.20 MOUNTING BRACKETS
INCL.8 ENDCAPS
EXCL.LED POWER SUPPLY 24V-DC

CE 0,3 IP65

tech


Ledflex In

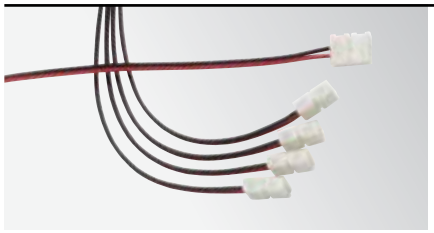



LEDFLEX IN SUPPLY CABLE SET
300 92 93 07
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1

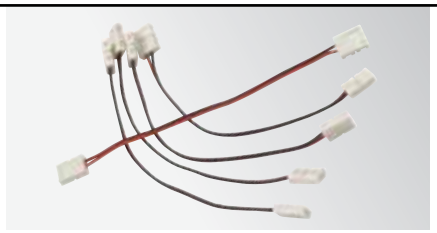



LEDFLEX IN CONNECTION SET
300 92 93 08
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1






LEDFLEX IN CONNECTION CLIP SET
300 92 93 09
SET OF 10 pcs

CE 0,1


Ledflex In FP

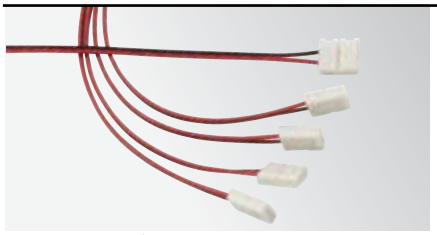



LEDFLEX IN FP SUPPLY CABLE SET
300 92 93 01
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1

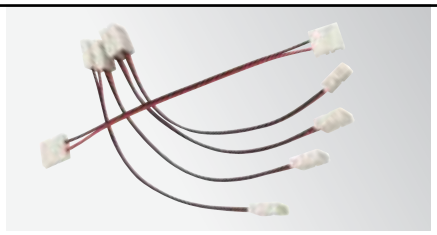



LEDFLEX IN FP CONNECTION SET
300 92 93 02
2 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1






LEDFLEX IN FP CONNECTION CLIP SET
300 92 93 03
SET OF 10 pcs

CE 0,1


Ledflex In RGB

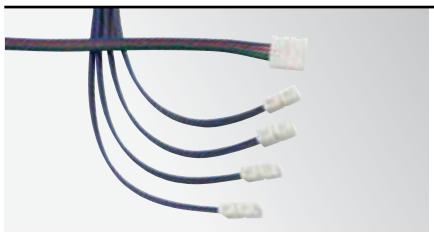



LEDFLEX IN RGB SUPPLY CABLE SET
300 92 93 04
4 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1

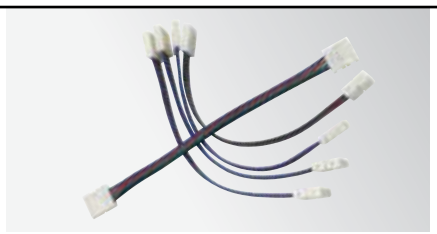



LEDFLEX IN RGB CONNECTION SET
300 92 93 05
4 x 0.35mm² / 150 mm
SET OF 10 pcs

CE 0,1







LEDFLEX IN RGB CONNECTION CLIP SET
300 92 93 06
SET OF 10 pcs

CE 0,1

LED

Ledstrip 50 F





LEDSTRIP 50 F NW
300 92 00 14 F
L : 500mm
30 x SMD LED - 4000K - ±50K

LEDSTRIP 50 F WW
300 92 00 12 F
L : 500mm
30 x SMD LED - 3000K - ±50K

LEDSTRIP 50 F HW
300 92 00 13 F
L : 500mm
30 x SMD LED - 2700K - ±50K

3W / LEDSTRIP (6W/m)
240lm / LEDSTRIP (480lm/m)
DIVIDABLE PER 100mm
24V-DC
EXCL.LED POWER SUPPLY 24V-DC


CE 0,1 IP20

OPTIONS
LEDSTRIP CONNECTION SET 300 92 91 01
LEDSTRIP SUPPLY CABLE SET 300 92 91 02

Ledstrip 50 FP

new





LEDSTRIP 50 FP NW
300 92 00 14 FP
L : 500mm
30 x SMD LED - 4000K - ±50K

LEDSTRIP 50 FP WW
300 92 00 12 FP
L : 500mm
30 x SMD LED - 3000K - ±50K


LEDSTRIP 50 FP HW
300 92 00 13 FP
L : 500mm
30 x SMD LED - 2700K - ±50K


10W / LEDSTRIP (20W/m)
970lm / LEDSTRIP (1940lm/m)
DIVIDABLE PER 100mm
24V-DC
EXCL.LED POWER SUPPLY 24V-DC

CE 0,1 IP20

OPTIONS
LEDSTRIP FP CONNECTION SET 300 92 92 01
LEDSTRIP FP SUPPLY CABLE SET 300 92 92 02

Ledstrip 50 RGB





LEDSTRIP 50 RGB
300 92 00 33
L : 500mm
30 x SMD LED - RGB

7,5W / LEDSTRIP
DIVIDABLE PER 100mm
24V-DC
EXCL.LED POWER SUPPLY 24V-DC

CE 0,1 IP20

OPTIONS
LEDSTRIP CONNECTION SET 300 92 91 01
LEDSTRIP SUPPLY CABLE SET 300 92 91 02

Option LEDSTRIP 50 F + 50 RGB





LEDSTRIP CONNECTION SET
300 92 91 01
4 x 0.35mm² / 48 mm
SET OF 10 pcs

CE 0,1






LEDSTRIP SUPPLY CABLE SET
300 92 91 02
4 x 0.35mm² / 500 mm
SET OF 10 pcs

CE 0,1

Option LEDSTRIP 50 FP





LEDSTRIP FP CONNECTION SET
300 92 92 01
2 x 0.35mm² / 48 mm
SET OF 5 pcs

CE 0,1





LEDSTRIP FP SUPPLY CABLE SET
300 92 92 02
2 x 0.35mm² / 500 mm
SET OF 5 pcs


CE 0,1

tech

led

Soft Dim


DIMMING CURVE

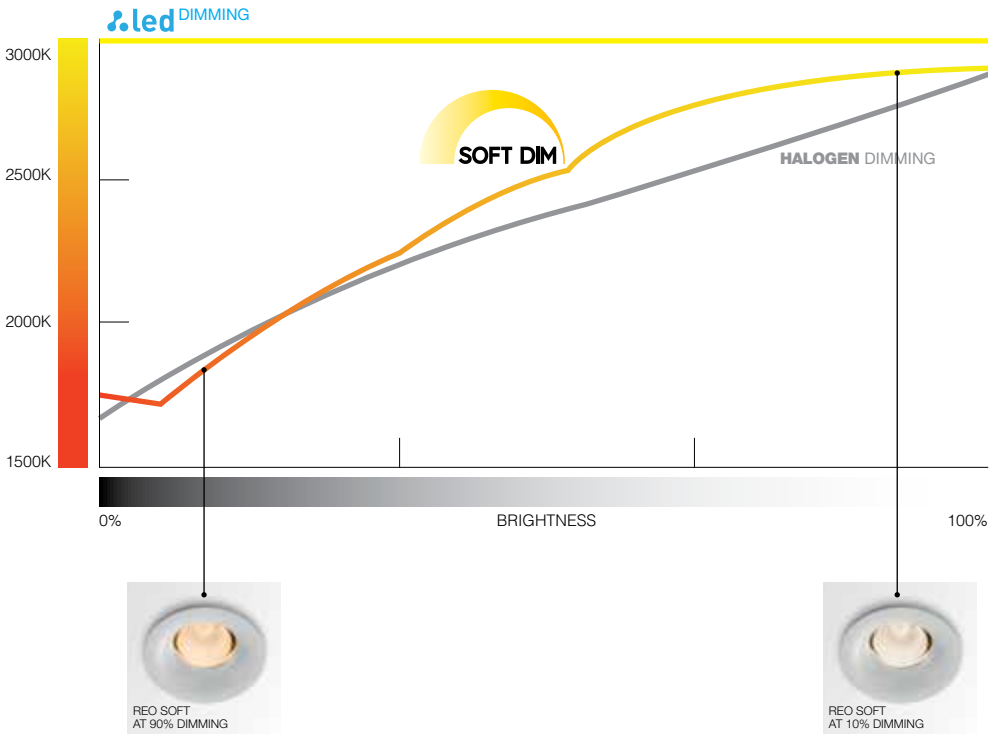



2700-1800K
CRI > 80 / 850lm (10W)
REFLECTOR 40°

LED Power Supply 650mA DIM8

Type	
LED POWER SUPPLY 650mA DIM8	
	300 90 915 ED8
	IP20
Dimensions (L x W x H)	125 x 45 x 35
Input	220-240V / 50-60Hz
Output	**650mA / 10W / 12-16V-DC**
λ	
DIM	Falling Edge Dimming

tech

LED
SPECIFICATIONS

CRI 80

				2700K 3	3000K	4000K	Typical values	
CRI	LED		1 Power	Luminous flux @ 70°	Luminous flux @ 70°	Luminous flux @ 70°	Forw.Cur.	Forw.Volt.
CRI > 80 2								
		[A]	1,1W	115lm - 117lm/W	120lm - 122lm/W	130lm - 133lm/W	350mA	2,8V *
			1,6W	160lm - 113lm/W	168lm - 117lm/W	181lm - 127lm/W	500mA	2,9V *
			2,3W	214lm - 105lm/W	223lm - 110lm/W	242lm - 119lm/W	700mA	2,9V *
		[B]	3,3W	294lm - 90lm/W	307lm - 94lm/W	ON REQUEST	1050mA	3,1V *
		[C]	4,1W	360lm - 89lm/W	380lm - 94lm/W	ON REQUEST	350mA	11,6V *
			6W	450lm - 76lm/W	475lm - 80lm/W	ON REQUEST	500mA	11,9V *
		[D]	7W	595lm - 85lm/W	638lm - 92lm/W	ON REQUEST	350mA	19,9V *
		[E]	6W	530lm - 90lm/W	570lm - 96lm/W	613lm - 104lm/W	350mA	16,9V *
			9W	726lm - 84lm/W	780lm - 90lm/W	840lm - 97lm/W	500mA	17,3V *
		[F]	2W	195lm - 96lm/W	208lm - 102lm/W	ON REQUEST	700mA	2,9V *
			3,2W	276lm - 88lm/W	295lm - 93lm/W	ON REQUEST	1050mA	3,0V *
		[G]	7W	550lm - 84lm/W	584lm - 89lm/W	615lm - 94lm/W	700mA	9,4V *
		[H]	6,2W	665lm - 107lm/W	703lm - 113lm/W	739lm - 119lm/W	350mA	17V *
			9,3W	893lm - 96lm/W	945lm - 102lm/W	993lm - 107lm/W	500mA	18,4V *
		[I]	7W	618lm - 87lm/W 4	680lm - 95lm/W	762lm - 107lm/W	350mA	19,8V *
			10W	876lm - 83lm/W	958lm - 91lm/W	1071lm - 101lm/W	500mA	20,5V *
		[J]	18W	1787lm - 104lm/W	1930lm - 112lm/W	2085lm - 121lm/W	500mA	34,4V *
			19,2W	1966lm - 102lm/W	2123lm - 110lm/W	2294lm - 120lm/W	550mA	34,9V *
			25W	2399lm - 97lm/W	2592lm - 104lm/W	2799lm - 113lm/W	700mA	35,5V *
			31,5	2759lm - 88lm/W	2981lm - 95lm/W	3219lm - 102lm/W	850mA	37V *
		[K]	26W	-	3000lm - 115lm/W	-	600mA	SYSTEM
		[L]	12W	1300lm - 108lm/W	1300lm - 108lm/W	-	700mA	17,2V *

tech

CRI 90

			2700K	3000K	4000K	Typical values	
CRI	**LED**	**Power**	**Luminous flux @ 70°**	**Luminous flux @ 70°**	**Luminous flux @ 70°**	**Forw.Cur.**	**Forw.Volt.**
CRI > 90							
	[A]	**1,1W**	-				
		1,6W	-				
		2,3W	-				
	[B]	**3,3W**	ON REQUEST	ON REQUEST	-	**1050mA**	**3,1V ***
	[C]	**4,1W**	-	-	-	**350mA**	**11,6V***
		6W	ON REQUEST	ON REQUEST	-	**500mA**	**11,9V ***
	[D]	**7W**	**420lm - 60lm/W**	**479lm - 69lm/W**	-	**350mA**	**19,9V ***
	[E]	**6W**	**400lm - 68lm/W**	**427lm - 72lm/W**	-	**350mA**	**16,9V ***
		9W	**548lm - 63lm/W**	**585lm - 68lm/W**	-	**500mA**	**17,3V ***
	[F]	**2W**	**160lm - 79lm/W**	**172lm - 85lm/W**	-	**700mA**	**2,9V ***
		3,2W	**226lm - 72lm/W**	**243lm - 77lm/W**	-	**1050mA**	**3,0V ***
	[G]	**7W**	**453lm - 69lm/W**	**502lm - 76lm/W**	-	**700mA**	**9,4V ***
	[H]	**6,2W**	**519lm - 83lm/W**	**550lm - 89lm/W**	-	**350mA**	**17,4V ***
		9,3W	**698lm - 75lm/W**	**739lm - 79lm/W**	-	**500mA**	**18V ***
	[I]	**7W**	**525lm - 74lm/W**	**566lm - 79lm/W**	-	**350mA**	**19,8V ***
		10W	**742lm - 71lm/W**	**803lm - 76lm/W**	-	**500mA**	**20,5V ***
	[J]	**18W**	**1453lm - 84lm/W**	**1639lm - 95lm/W**	**1804lm - 105lm/W**	**500mA**	**34,4V ***
		19,2W	**1598lm - 83lm/W**	**1803lm - 94lm/W**	**1985lm - 103lm/W**	**550mA**	**34,9V ***
		25W	**1951lm - 79lm/W**	**2200lm - 89lm/W**	**2422lm - 97lm/W**	**700mA**	**35,5V ***
		31,5	**2244lm - 71lm/W**	**2530lm - 80lm/W**	**2785lm - 88lm/W**	**850mA**	**37V ***
	[K]	**33W**	-	**3000lm - 91lm/W**	-	**700mA**	**SYSTEM**
	[L]	**11W**	**965lm - 88lm/W**	**965lm - 88lm/W**	-	**500mA**	**22V ***

*** +/- 8%**

All the technical parameters for LED-apply to the entire module. In view of the complex manufacturing process for light emitting diodes (LED), the typical values given in this **Lighting Bible® 11** are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.
For most accurate info, please consult: **www.deltalight.com/ledspecs.pdf**

PHOTOMETRICS

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 7W	iMAX (ADJUSTABLE) BL4	10	2700 -3000	80-90	700
LED 7W	iMAX ADJUSTABLE TRIMLESS BL4	10	2700 -3000	80-90	700
LED 7W	iMAX+ BL4	10	2700 -3000	80-90	700
LED 7-10W	iMAX (ADJUSTABLE) BR8	29-43	2700 -3000	80-90	350-700
LED 7-10W	iMAX ADJUSTABLE TRIMLESS BR8	29-43	2700 -3000	80-90	350-700
LED 7-10W	iMAX WALLWASH BR8	29-43	2700 -3000	80-90	350-700
LED 7-10W	iMAX+ BR8	29-43	2700 -3000	80-90	350-700
LED 18W	iMAX (ADJUSTABLE) BR20	29-43	2700 -3000	80-90	500
LED 18W	iMAX ADJUSTABLE TRIMLESS BR20	29-43	2700 -3000	80-90	500
LED 2-3,2W	iMAX (ADJUSTABLE) CL	6	2700 -3000	80-90	750-1050
LED 2-3,2W	iMAX ADJUSTABLE TRIMLESS CL	6	2700 -3000	80-90	750-1050
LED 2-3,2W	iMAX+ CL	6	2700 -3000	80-90	750-1050
LED 11-12W	iMAX ADJUSTABLE TRIMLESS XR13	29-43	2700 -3000	80-95	500-700
LED 11-12W	iMAX (ADJUSTABLE) XR13	29-43	2700 -3000	80-95	500-700
LED 11-12W	iMAX WALLWASH XR13	29-43	2700 -3000	80-95	500-700

iMAX (ADJUSTABLE)

LUX		CL6				BR8				BR20				XR13			
		CRI 80		CRI 90		CRI 80		CRI 90		CRI 80		CRI 90		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K
0.5m	6°	73534	78314	66849	71195												
	29°					5304	5729	4534	4896	12844	13743	10670	11951				
	43°					2637	2848	2254	2434	7716	8256	6410	7179	15687	15687		
1.0m	6°	18384	19579	16713	17799												
	29°					1326	1432	1133	1224	3211	3436	2667	2987				
	43°					659	712	563	608	1929	2064	1603	1795	3923	3923		
1.5m	6°	8171	8702	7428	7911												
	29°					589	636	504	544	1428	1527	1186	1328				
	43°					293	316	250	270	857	917	712	798	1743	1743		
2.0m	6°	4596	4895	4178	4450												
	29°					332	358	283	306	803	859	667	747				
	43°					165	179	141	153	482	516	401	449	980	980		

iMAX TRIMLESS

LUX		CL6				BR8				BR20				XR13			
		CRI 80		CRI 90		CRI 80		CRI 90		CRI 80		CRI 90		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K
0.5m	6°	74950	79822	68137	72565												
	29°					5568	6013	4759	5104	14395	15403	11958	13393				
	43°					3147	3399	2690	2905	8971	9599	7453	8347	16682	16682		
1.0m	6°	18737	19955	17034	18141												
	29°					1392	1504	1190	1285	3598	3850	2989	3348				
	43°					787	849	672	726	2243	2400	1863	2087	4170	4170		
1.5m	6°	8328	8869	7571	8063												
	29°					618	668	528	571	1600	1712	1329	1488				
	43°					350	378	299	323	997	1066	828	927	1854	1854		
2.0m	6°	4685	4989	4259	4535												
	29°					348	376	297	321	896	959	745	834				
	43°					196	212	168	181	561	600	466	522	1043	1043		

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 3,3-6-7W	MINI CARREE ST 83040 S1	10-20-40	2700-3000	80-90	350-500-1050
LED 3,3-6-7W	MINI DEEP RINGO 83040	10-20-40	2700-3000	80-90	350-500-1050
LED 3,3-6-7W	MINI DEEP RINGO TRIMLESS 83040	10-20-40	2700-3000	80-90	350-500-1050
LED 3,3-6-7W	MINI REO 83040	10-20-40	2700-3000	80-90	350-500-1050
LED 3,3-6-7W	MINI REO OK 83040	10-20-40	2700-3000	80-90	350-500-1050
LED 3,3-6-7W	MINI REO OK1 83040	10-20-40	2700-3000	80-90	350-500-1050
LED 3,3-6-7W	MINI REO X 83040	10-20-40	2700-3000	80-90	350-500-1050

LUX		1050mA		500mA		350mA	
		CRI 80		CRI 80		CRI 80	
		2700K	3000K	2700K	3000K	2700K	3000K
0.5m	10°	26027	27068	13164	13822	3908	4143
	20°						
	40°						
1.0m	10°	6507	6767	3290	3455	977	1036
	20°						
	40°						
1.5m	10°	2892	3008	1463	1536	434	460
	20°						
	40°						
2.0m	10°	1627	1692	823	864	244	259
	20°						
	40°						

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	STREAMER M	---	3000	80	500
LED 10W	STREAMER TRIMLESS M	---	3000	80	500

LUX		CRI 80
		3000K
0.5m	60°	2284
1.0m	60°	572
1.5m	60°	254
2.0m	60°	142

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
SMD LED	STREAMER L	---	3000	80	1000
SMD LED	STREAMER TRIMLESS L	---	3000	80	1000

LUX		CRI 80
		3000K
0.5m	90°	3572
1.0m	90°	893
1.5m	90°	397
2.0m	90°	223

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 7W	BOXTER LED	33-50	3000 - 2700	80-90	350
LED 7W	BOXY L+ LED	33-50	3000 - 2700	80-90	350
LED 7W	BOXY WL+ LED	33-50	3000 - 2700	80-90	350
LED 7-10W	CARREE GT LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE RS LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE SC OK	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE ST L LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE ST LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE ST OK LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE TRIMLESS LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	CARREE TRIMLESS OK LED	33-50	3000 - 2700	80-90	350-500
LED 7W	CARREE X LED	33-50	3000 - 2700	80-90	350
LED 7-10W	CREDO REO JAC	33-50	3000 - 2700	80-90	350-500
LED 7-10W	DEEP RINGO LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	DEEP RINGO S LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	DIRO DUO ST OK LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	DIRO GT LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	DIRO ST OK LED	33-50	3000 - 2700	80-90	350-500
LED 7-10W	DIRO TRIMLESS LED	33-50	3000 - 2700	80-90	350-500
LED 7W	HDL - REO	33-50	3000 - 2700	80-90	350
LED 7W	LINK REO	33-50	3000 - 2700	80-90	350
LED 7W	MCDELTA	33-50	3000 - 2700	80-90	350
LED 7W	NB200 - REO OK	33-50	3000 - 2700	80-90	350
LED 7-10W	OREO	33-50	3000 - 2700	80-90	350-500
LED 7W	RAND REO	33-50	3000 - 2700	80-90	350
LED 7W	REO 111	33-50	3000 - 2700	80-90	350
LED 7W	REO 111	33-50	3000 - 2700	80-90	350
LED 7-10W	REO 2 S OK	33-50	3000 - 2700	80-90	350-500
LED 7-10W	REO OK	33-50	3000 - 2700	80-90	350-500
LED 7-10W	REO S	33-50	3000 - 2700	80-90	350-500
LED 7-10W	REO S OK	33-50	3000 - 2700	80-90	350-500
LED 7-10W	REO X	33-50	3000 - 2700	80-90	350-500
LED 7W	SPATIO REO	33-50	3000 - 2700	80-90	350
LED 7W	SPATIO REO AD	33-50	3000 - 2700	80-90	350
LED 7W	SPL51 - LED	33-50	3000 - 2700	80-90	350
LED 7W	SPOTNIC	33-50	3000 - 2700	80-90	350
LED 7-10W	YOU-TURN REO	33-50	3000 - 2700	80-90	350-500
LED 7W	SPOTNIC X LED	33	3000	80	350
LED 7W	TWEETER ST D REO	33-50	2700-3000	80-90	350
LED 7W	TWEETER TRIMLESS REO	33-50	2700-3000	80-90	350
LED 7W	ULTRA C D	33	2700-3000	80-90	350
LED 7W	ULTRA S D	33	2700-3000	80-90	350
LED 7W	ULTRA S REO	33	2700-3000	80-90	350
LED 7W	ULTRA TWIN LED	33-50	2700-3000	80-90	350
LED 7W	YOU-TURN REO	33-50	2700-3000	80-90	350

350mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	4174	4442	3534	3905
	50°	2827	3010	2395	2645
1.0m	33°	1043	1111	884	976
	50°	708	753	599	662
1.5m	33°	465	493	392	434
	50°	314	335	266	295
2.0m	33°	261	278	220	244
	50°	176	188	149	166

500mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	5599	5955	4758	5244
	50°	3793	4034	3224	3553
1.0m	33°	1400	1490	1190	1311
	50°	948	1009	807	889
1.5m	33°	623	661	528	582
	50°	421	448	358	395
2.0m	33°	349	372	297	329
	50°	236	253	201	223

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	YOU-TURN ON REO (AD)	33-50	2700-3000	80-90	500
LED 10W	TWEETER ON X REO	33-50	2700-3000	80-90	500
LED 10W	TWEETER ST D REO	33-50	2700-3000	80-90	500
LED 10W	TWEETER TRIMLESS REO	33-50	2700-3000	80-90	500

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	5599	5955	4758	5244
	50°	3793	4034	3224	3553
1.0m	33°	1400	1490	1190	1311
	50°	948	1009	807	889
1.5m	33°	623	661	528	582
	50°	421	448	358	395
2.0m	33°	349	372	297	329
	50°	236	253	201	223

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 10W	MOHOW LED AD	15-33-45	2700 - 3000	80	500

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15°	55005	58502	46738	51507
	33°	19437	20672	16515	18200
	45°	9260	9849	7869	8672
1.0m	15°	13751	14626	11684	12877
	33°	4859	5168	4129	4550
	45°	2315	2463	1968	2168
1.5m	15°	6111	6500	5193	5723
	33°	2160	2297	1836	2023
	45°	1029	1094	874	963
2.0m	15°	3438	3657	2921	3220
	33°	1215	1292	1032	1138
	45°	579	616	492	542

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18W	MINIGRID IN TRIMLESS X HP	17-37-60	2700-3000	80-90	500
LED 18W	MINIGRID IN X HP	17-37-60	2700-3000	80-90	500

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	17°	32136	34206	27975	28215
	37°	13916	14813	12114	12219
	60°	6507	6926	5664	5713
1.0m	17°	8034	8552	6994	7054
	37°	3480	3704	3028	3055
	60°	1627	1732	1417	1428
1.5m	17°	3571	3801	3108	3135
	37°	1546	1646	1346	1358
	60°	723	770	630	635
2.0m	17°	2009	2138	1748	1764
	37°	870	926	758	764
	60°	407	433	354	357

PHOTOMETRICS

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 6,2-9,3W	MINIGRID IN SI	18-33	2700-3000	80-90	350-500
LED 6,2-9,3W	MINIGRID IN TRIMLESS SI	18-33	2700-3000	80-90	350-500
LED 6,2-9,3W	MINIGRID IN ZB REO	18-33	2700-3000	80-90	350-500
LED 6,2-9,3W	MINIGRID ON	18-33	2700-3000	80-90	350-500

350mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	18°	8149	8556	6734	7071
	30°	5531	5808	4571	4800
1.0m	18°	2037	2139	1684	1768
	30°	1383	1452	1143	1200
1.5m	18°	906	951	749	786
	30°	614	645	508	533
2.0m	18°	510	535	421	442
	30°	346	363	286	300

500mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	18°	10919	11465	9024	9475
	30°	7412	7783	6126	6432
1.0m	18°	2730	2866	2256	2369
	30°	1853	1946	1531	1608
1.5m	18°	1214	1274	1003	1053
	30°	823	864	680	714
2.0m	18°	683	717	564	592
	30°	463	486	383	402

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18-19,2W	GRID IN TRIMLESS X OPTO	15-33-55	2700-3000	80-90	500-550
LED 18-19,2W	GRID IN X OPTO	15-33-55	2700-3000	80-90	500-550
LED 25-31,5W	YOU-TURN ON OPTO 20 (AD)	15-33-55	2700-3000	80-90	700-850
LED 18-25W	YOU-TURN OPTO 20	15-33-55	2700-3000	80-90	500-700
LED 25W	YOU-TURN SPL OPTO 20	15-33-55	2700-3000	80-90	700
LED 25W	YOU-TURN SPL REO 20	15-33-55	2700-3000	80-90	700

500mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15°	23396	24883	19879	21908
	33°	8272	8798	7029	7747
	55°	3782	4023	3214	3542
1.0m	15°	5850	6221	4970	5477
	33°	2068	2199	1756	1936
	55°	946	1006	804	886
1.5m	15°	2600	2765	2209	2434
	33°	919	978	781	861
	55°	419	446	357	394
2.0m	15°	1461	1555	1242	1369
	33°	517	550	439	485
	55°	236	251	200	221

550mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15°	25735	27371	21867	24098
	33°	9099	9678	7732	8521
	55°	4160	4426	3535	3897
1.0m	15°	6435	6843	5467	6025
	33°	2274	2419	1932	2130
	55°	1040	1107	885	974
1.5m	15°	2860	3042	2430	2678
	33°	1011	1076	859	947
	55°	461	491	392	433
2.0m	15°	1607	1710	1367	1506
	33°	568	605	483	533
	55°	260	276	221	244

700mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15°	53285	56673	45277	49897
	33°	18841	20039	16010	17643
	55°	8615	9163	7321	8068
1.0m	15°	13322	14169	11321	12475
	33°	4709	5009	4001	4410
	55°	2155	2292	1831	2017
1.5m	15°	5921	6298	5031	5544
	33°	2095	2228	1779	1961
	55°	956	1016	812	895
2.0m	15°	3329	3540	2829	3118
	33°	1177	1252	1001	1102
	55°	537	571	456	503

850mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	15°	61277	65174	52069	57381
	33°	21667	23045	18411	20289
	55°	9907	10538	8419	9279
1.0m	15°	15320	16294	13019	14346
	33°	5416	5761	4602	5072
	55°	2478	2636	2105	2320
1.5m	15°	6809	7243	5786	6376
	33°	2409	2562	2046	2256
	55°	1099	1169	934	1030
2.0m	15°	3828	4072	3253	3586
	33°	1354	1440	1151	1268
	55°	618	657	525	579

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 18-19,2W	GRID IN TRIMLESS X REO	33	2700-3000	80-90	500-550
LED 18-19,2W	GRID IN X REO	33	2700-3000	80-90	500-550
LED 18-19,2W	GRID IN ZB X REO	33	2700-3000	80-90	500-550
LED 25-31,5W	YOU-TURN ON REO 20 (AD)	33-50	2700-3000	80-90	700-850
LED 18-25W	YOU-TURN REO 20	33-50	2700-3000	80-90	500-700

500mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	6996	7946	6348	7471
	50°	4032	4289	3427	3776
1.0m	33°	1749	1986	1587	1867
	50°	1009	1073	857	945
1.5m	33°	777	883	705	830
	50°	448	476	380	419
2.0m	33°	438	497	397	467
	50°	252	268	214	236

550mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	7696	8740	6983	8218
	50°	4435	4718	3769	4154
1.0m	33°	1924	2185	1745	2054
	50°	1109	1180	943	1039
1.5m	33°	855	971	775	913
	50°	492	524	418	461
2.0m	33°	482	547	437	514
	50°	277	295	235	260


700mA

LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	15934	18098	14458	17016
	50°	9184	9768	7803	8599
1.0m	33°	3982	4523	3613	4253
	50°	2298	2443	1952	2151
1.5m	33°	1770	2010	1606	1890
	50°	1020	1085	866	956
2.0m	33°	996	1131	904	1064
	50°	575	611	488	537

850mA


LUX		CRI 80		CRI 90	
		2700K	3000K	2700K	3000K
0.5m	33°	18325	20813	16627	19569
	50°	10561	11234	8974	9889
1.0m	33°	4579	5201	4155	4891
	50°	2642	2809	2244	2474
1.5m	33°	2036	2311	1847	2174
	50°	1173	1248	996	1099
2.0m	33°	1145	1301	1039	1223
	50°	661	703	561	618

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 29-33W	GRID IN TRIMLESS X HP	27-50	3000	80-90	700
LED 29-33W	GRID IN X HP	27-50	3000	80-90	700




		CRI 80	CRI 90
		3000K	3000K
0.5m	27	31643	31643
	50	12355	12355
1.0m	27	7911	7911
	50	3089	3089
1.5m	27	3516	3516
	50	1373	1373
2.0m	27	1978	1978
	50	772	772

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	WATT
HIT-TC	GRID IN TRIMLESS X HIC	15-24-43	---	---	35-70
HIT-TC	GRID IN X HIC	15-24-43	---	---	35-70
HIT-TC	RODI HIC	15-24-43	---	---	35-70
HIT	YOU-TURN ON HIT (AD)	15-24-43	---	---	35-70




		35W	70W
0.5m	15	188914	383075
	24	45204	91665
	43	19682	39911
1.0m	15	47228	95769
	24	11301	22916
	43	4920	9987
1.5m	15	20990	42564
	24	5023	10185
	43	2187	4435
2.0m	15	11807	23942
	24	2825	5729
	43	1230	2494

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 17W	BOOSTER HP (AD)	20-40	3000	80	700
LED 26W	BOOSTER HP (AD)	27-50	3000	80	700
LED 32W	BOOSTER HP (AD)	27-50	3000	80	750




		CRI 80		
		1500lm	3000lm	4000lm
0.5m	20°	32508	31643	42085
	27°			
	40°	12692		
	50°		12355	16432
1.0m	20°	8127	7911	10522
	27°			
	40°	3173		
	50°		3089	4108
1.5m	20°	3612	3516	4676
	27°			
	40°	1410		
	50°		1373	1826
2.0m	20°	2031	1978	2631
	27°			
	40°	793		
	50°		772	1027

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	WATT
HIT-TC	BOOSTER HIC (AD)	18-28-52	---	---	35-50-70




		35W	50W	70W
0.5m	18	65423	78750	127968
	28	41006	49359	80208
	52	15845	19073	30993
1.0m	18	16356	19687	31992
	28	10251	12340	20052
	52	3961	4768	7748
1.5m	18	7269	8750	14219
	28	4556	5484	8912
	52	1761	2119	3444
2.0m	18	4089	4922	7998
	28	2563	3085	5013
	52	990	1192	1937

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 7W	KIX (PIN)	11 - 30 - 55	3000	80	350
LED 7W	LOGIC R / R A / S	11 - 30 - 55	3000	80	350



		CRI 80
		3000K
0.5m	11	19532
	30	4068
	55	1882
1.0m	11	4883
	30	1042
	55	470
1.5m	11	2170
	30	463
	55	209
2.0m	11	1221
	30	261
	55	118

LIGHTSOURCE	NAME	ANGLES	LIGHTCOLOUR	CRI	mA
LED 6,2W	LOGIC 60	20	3000	80	350




		CRI 80
		3000K
0.5m	20°	2685
1.0m	20°	672
1.5m	20°	299
2.0m	20°	167

DO'S & DON'TS


play.deltalight.com/connectleds


CORRECT CONNECTION: serial connection

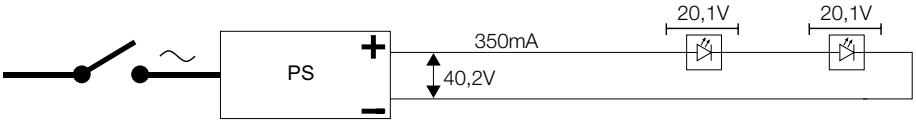

WRONG CONNECTION: parallel connection


Depending on the number of fixtures the LED modules will function at half (2 LED's), one third (3 LED's) the luminous intensity. Moreover, due to different forward voltages the current will not split in equal part.

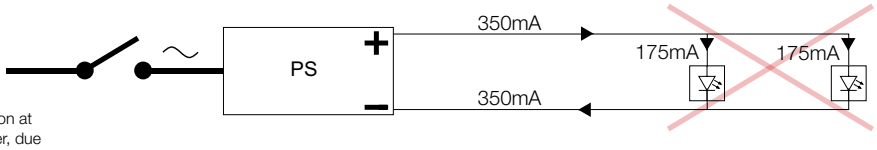


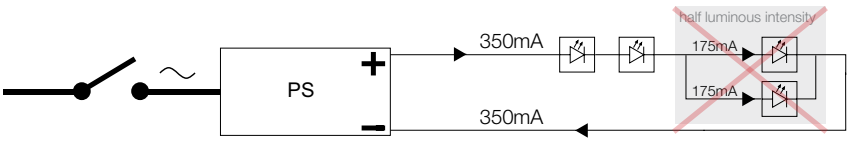

WRONG CONNECTION: testing of led modules on switched on power supply

Risk for an output voltage that exceeds the max for the LED.
A power supply that is switched on has max output on the secundary side (eg. 49V).
The LED in eg. a Reo 3030 is 7W works at 350mA and 20,1V.
49V is far too high for the Reo 3030 >> LED will be damaged.

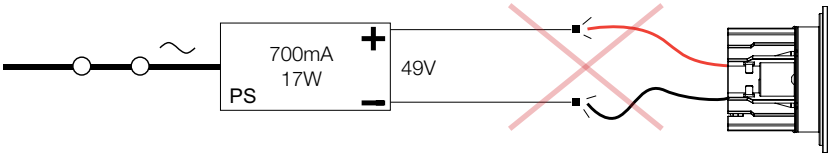

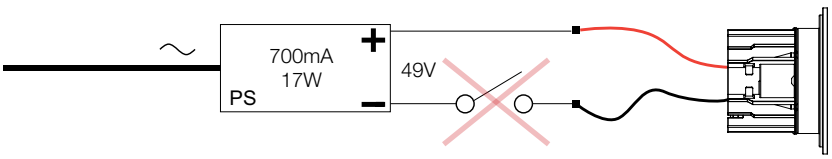


WRONG POWER SUPPLY:

Question:
How many Reo (7W) luminaires can be connected to power supply 300 90 914?
7W x 4 = 28W >>> max **power** of 300 90 914 = 35W >>> **OK**
4 x 20,1V = 80,4V >>> max **voltage** of 300 90 914 = 72V >>> **NOT OK**

Answer:
3 x Reo (7W) luminaires can be connected to power supply 300 90 914

Therefore: **always consult the matrix on PAGE TEC 17-24!**







300 90 914
CE 0,1 IP20
124,5 x 79 x 22
110-240V / 50-60Hz
500mA / 35W / 72V
> 0,9
-

REO	3




OPTIONS

led



LED Power Supply 350mA-DC

Type					
LED POWER SUPPLY...	**350mA / 8W**	**350mA / 15W (110-120V: 10W)**	**350mA / 16W DIM8**	**350mA / 17W (110-127V: 12W)**	**350mA / 18W DIM8**
	300 90 108	**300 90 91**	**300 90 3112**	**300 90 913**	**300 90 116**
	CE 0,1 IP54	CE 0,1 IP20	FE CE 0,3 IP65	CE 0,1 IP20	FE CE 0,2 IP20
Dimensions (L x W x H)	54 x 21 x 32 (min. 40)	115 x 34 x 19 (min. 38)	76 x 34 x 24 (min. 43)	111 x 38 x 28 (min. 46)	118 x 52 x 22 (min. 55)
Input	100-240V / 50-60Hz	100-240V / 50-60Hz	100-240V / 50-60Hz	110-240V / 50-60Hz	220-240V / 0|50/60Hz
Output	0-25V-DC	0-43V-DC	17-46V-DC	0-49V-DC	25-51V-DC
λ	0,6	0,54 (240V) - 0,64 (100V)	> 0,9	0,55	> 0,9
DIM	-	-	DIM8 (10-100%)	-	DIM8 (10-100%)

LED Power Supply 500mA-DC

Type				
LED POWER SUPPLY...	**500mA / 6W**	**500mA / 20W (110V: 12W)**	**500mA / 32W DIM8**	**500mA / 20W DIM8**
	300 90 22 U	**300 90 92**	**300 90 5120**	**300 90 117**
	CE 0,1 IP67	CE 0,1 IP20	FE CE 0,3 IP65	FE CE 0,3 IP20
Dimensions (L x W x H)	45 x 45 x 25 (min. 52)	111 x 38 x 28 (min. 46)	86 x 56 x 24 (min. 61)	118 x 52 x 22 (min. 55)
Input	120-240V / 50-60Hz	110-240V / 50-60Hz	110-240V / 0|50/60Hz	220-240V / 0|50/60Hz
Output	2-14V-DC	3,5-45V-DC	24-45V-DC	16-40V-DC
λ	0,5	0,57	> 0,9	> 0,9
DIM	-	-	DIM8 (10-100%)	DIM8 (10-100%)


LED Power Supply 700mA-DC

Type			
LED POWER SUPPLY...	**700mA / 17W**	**700mA / 36W DIM8**	**700mA / 20W DIM8**
	300 90 93	**300 90 123**	**300 90 118**
	CE 0,1 IP20	FE CE 0,3 IP54	FE CE 0,2 IP20
Dimensions (L x W x H)	111 x 38 x 28 (min. 46)	133 x 40 x 30,5 (min. 50)	118 x 52 x 22 (min. 55)
Input	230-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Output	3,5-26V-DC	4-52V-DC	16-28V-DC
λ	0,6	0,97	> 0,9
DIM	-	DIM8 (10-100%)	DIM8 (10-100%)


tech

OPTIONS


LED Power Supply Multi-Power

Type				
LED POWER SUPPLY MULTI-POWER				
	300 90 914			
	CE 0,1 IP20			
Dimensions (L x W x H)	124,5 x 79 x 22 (min. 82)			
Input	110-240V / 50-60Hz			
Output	**350mA / 25W / 74V-DC**	**500mA / 35W / 72V-DC**	**550mA / 39W / 72V-DC**	**700mA / 50W / 70V-DC**
λ	> 0,9			
DIM	-			


LED Power Supply Multi-Power DIM1

Type			
LED POWER SUPPLY MULTI-POWER DIM1			
	300 90 64		
	CE 0,1 IP20		
Dimensions (L x W x H)	103 x 67 x 21 (min. 70)		
Input	120-240V / 50-60Hz		
Output	**350mA / 20W / 60V-DC**	**500mA / 25W / 50V-DC (120V / 15W / 30V-DC)**	**550mA / 25W / 50V-DC**
λ	> 0,9		
DIM	1-10V		


LED Power Supply Multi-Power DIM5

Type	new 			
LED POWER SUPPLY MULTI-POWER DIM5				
	300 90 68			
	CE 0,2 IP20			
Dimensions (L x W x H)	103 x 67 x 21 (min. 70)			
Input	120-240V / 50-60Hz (110V: 15W)			
Output	**350mA / 15W / 47V-DC**	**500mA / 24W / 47V-DC**	**550mA / 25W / 47V-DC**	**700mA / 32W / 46V-DC**
λ	> 0,9			
DIM	Dali			


LED Power Supply Multi-Power DIM6

Type			
LED POWER SUPPLY MULTI-POWER DIM6			
	300 90 61		
	□ CE 0,1 IP20		
Dimensions (L x W x H)	165 x 47 x 35 (min. 55)		
Input	220-240V / 50-60Hz (110V: 15W)		
Output	**350mA / 17W / 43V-DC**	**500mA / 24W / 43V-DC**	**700mA / 32W / 36V-DC**
λ	> 0,9		
DIM	Switch DIM / Falling edge DIMming (10-100%)		

LED Power Supply Multi-Power DIM7


Type			
LED POWER SUPPLY MULTI-POWER DIM7			
	300 90 60		
	□ CE 0,1 IP20		
Dimensions (L x W x H)	103 x 67 x 21 (min. 70)		
Input	110-240V / 50-60Hz (110V: 15W)		
Output	**350mA / 15W / 43V-DC**	**500mA / 20W / 43V-DC**	**700mA / 25W / 36V-DC**
λ	> 0,9		
DIM	Switch DIM / 1-10V		

LED Power Supply Multi-Power DIM9


Type					
LED POWER SUPPLY MULTI-POWER DIM9					
	300 90 63				
	□ CE 0,1 IP20				
Dimensions (L x W x H)	111 x 79 x 22 (min. 82)				
Input	120-240V / 50-60Hz				
Output	**350mA / 25W / 74V-DC**	**500mA / 35W / 72V-DC**	**550mA / 39W / 72V-DC**	**700mA / 50W / 70V-DC**	**1050mA / 50W / 48V-DC**
λ	> 0,9				
DIM	Switch DIM / 1-10V / Dali				


OPTIONS

LED Power Supply 24V-DC

Type	
LED POWER SUPPLY 24V-DC	**24V-DC / 60W**
	300 89 24 61
	IP20
Dimensions (L x W x H)	93 x 78 x 56
Input	100-240V / 50-60Hz
Output	24V-DC / 60W
λ	> 0,8
DIM	-


LED Power Converter 24V-DC → Multi Current / 48W DIM9


Type			
LED POWER CONVERTER 24V-DC → MULTI CURRENT / 48W DIM9			
	300 90 67		
	IP20		
Dimensions (L x W x H)	93 x 55 x 56		
Input	24V-DC		
Output	**350mA / 48W**	**700mA / 32W**	**1050mA / 48W**
λ			
Dim	Switch Dim / 1-10V / Dali		

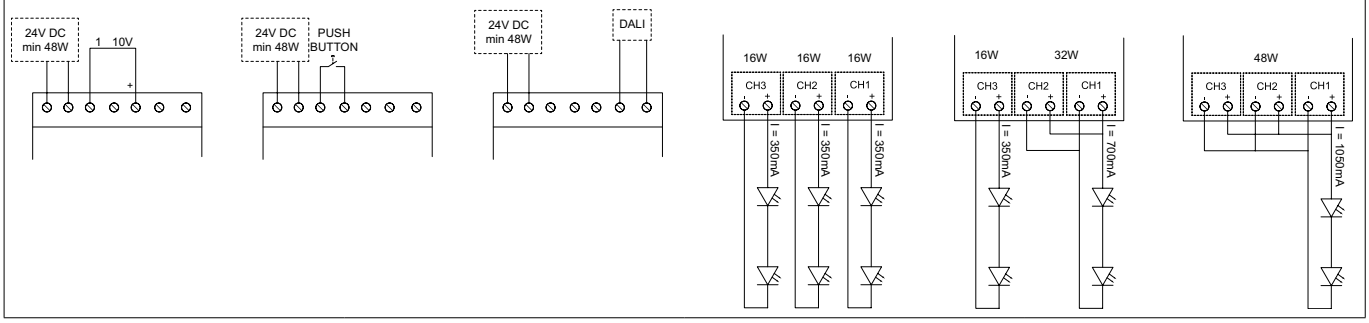

new

LED Power Convertor 24V-DC > 350mA / 15W

Type	
LED POWER CONVERTOR 24V-DC > 350mA / 15W	**24V-DC / 15W**
	300 2415 350
	IP20
Dimensions (L x W x H)	80 x 21 x 17 (min. 30)
Input	24V-DC (min.15W)
Output	350mA-DC / 15W

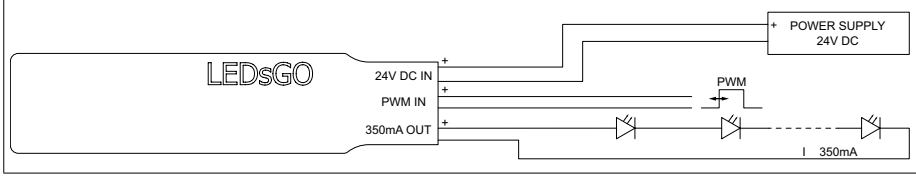



tech


play.deltalight.com/dimleds


DIMmable LED Power Supply - Installation Scheme

DIM1: 1-10V
DIM6: SWITCH DIM
DIM7: 1-10V + SWITCH DIM
DIM8: FALLING EDGE DIMMING
DIM9: 1-10V + SWITCH DIM + DALI

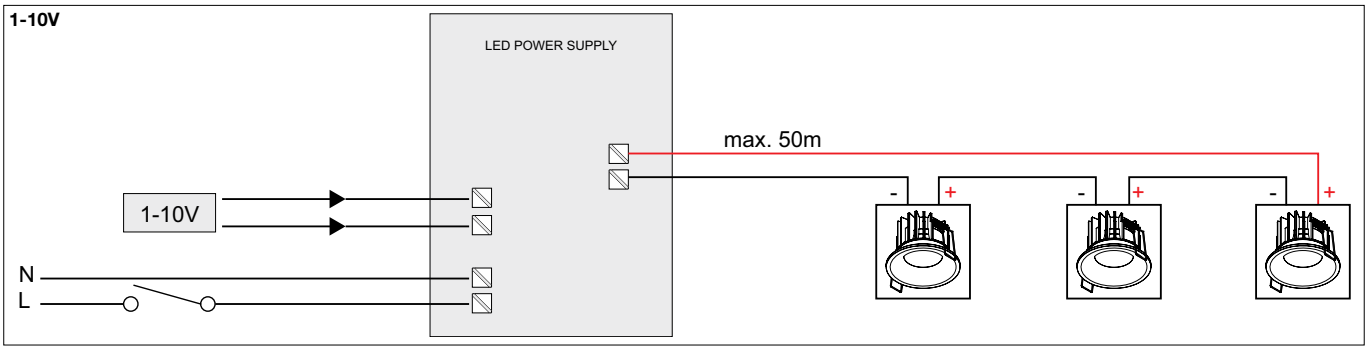

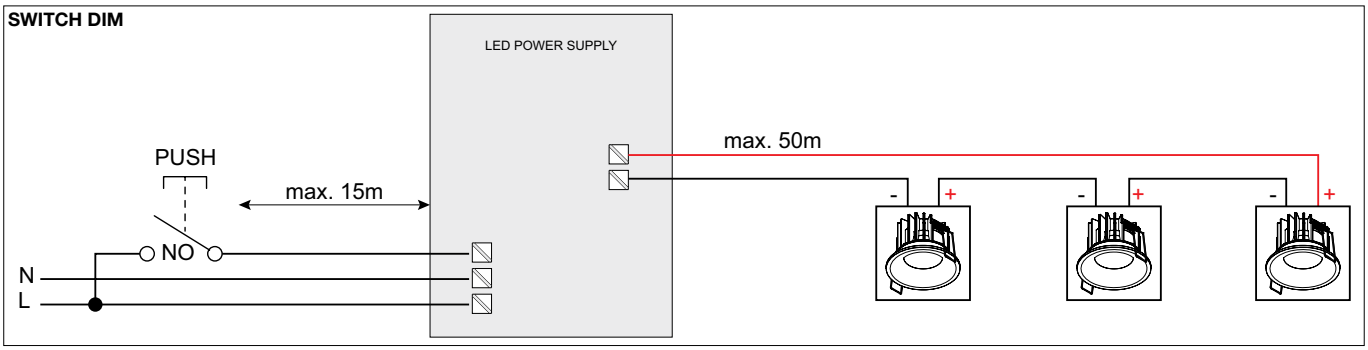

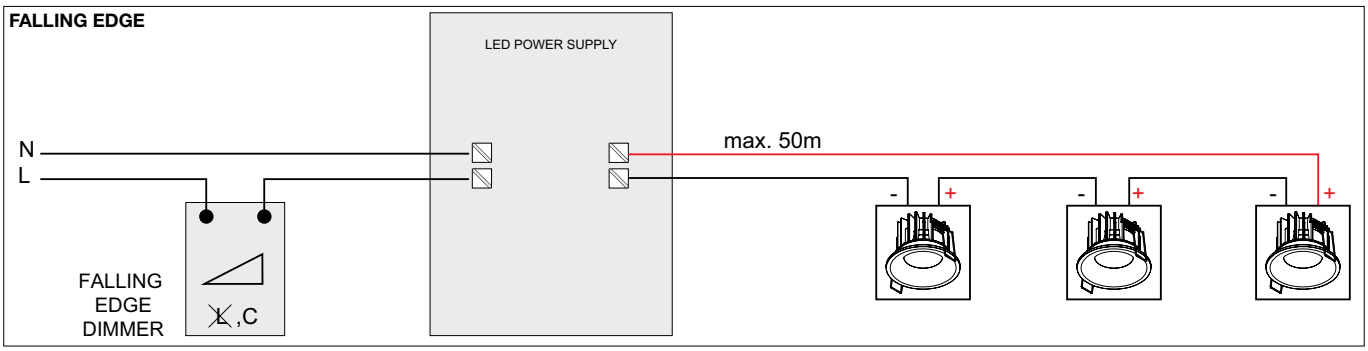





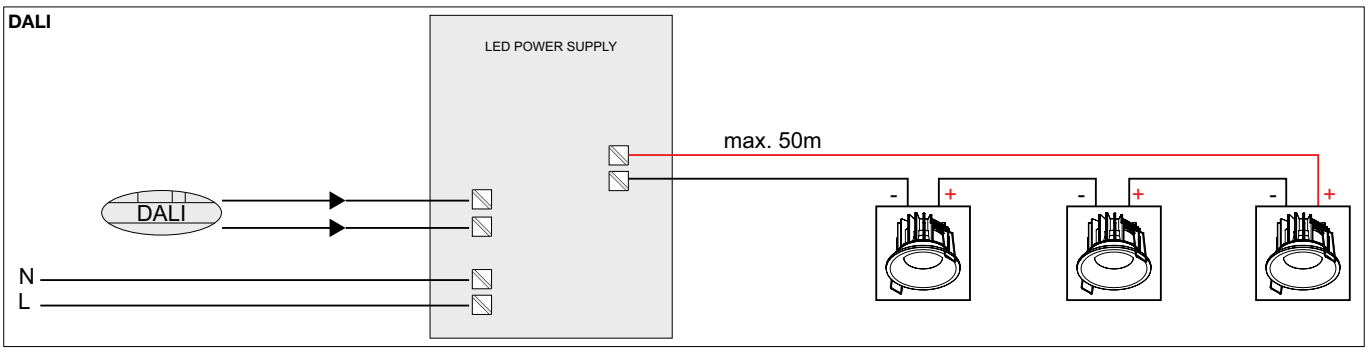


tech

OPTIONS

led


LED Power Supply 24V-DC

Type					
LED POWER SUPPLY...	**24V-DC / 20W**	**24V-DC / 40W**	**24V-DC / 60W**	**24V-DC / 80W**	**24V-DC / 150W**
	300 89 24 20	**300 89 24 40**	**300 89 24 60**	**300 89 24 80**	**300 89 24 150**
	□ CE 0,1 IP20	□ CE 0,1 IP67	□ CE 0,1 IP67	□ CE 0,3 IP67	□ CE 0,1 IP20
Dimensions (L x W x H)	146 x 55 x 19	242 x 46 x 36	215 x 44 x 31	250 x 50 x 34	260 x 60 x 49
Input	110-240V / 50-60Hz	100-240V / 50-60Hz	120-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Output	24V-DC / 20W (110V: 10W)	24V-DC / 40W	24V-DC / 60W	24V-DC / 80W	24V-DC / 150W
λ	0,55	> 0,95	0,99	> 0,90	0,98
DIM	-	-	-	DIM 1	-
LEDSTRIP					
LEDSTRIP xx F NW	max. 6 (3)	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP xx F WW	max. 6 (3)	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP xx F HW	max. 6 (3)	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP xx FP NW	max. 2 (1)	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP xx FP WW	max. 2 (1)	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP xx FP HW	max. 2 (1)	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP xx RGB	max. 2 * (1)	max. 5 *	max. 7 *	-	max. 18 *
LEDSTRIP 50 F NW	max. 6 (3)	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP 50 F WW	max. 6 (3)	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP 50 F HW	max. 6 (3)	max. 13	max. 20	max. 26 (max. 20/powerline)	max. 50 (max. 20/powerline)
LEDSTRIP 50 FP NW	max. 2 (1)	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP 50 FP WW	max. 2 (1)	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP 50 FP HW	max. 2 (1)	max. 4	max. 6	max. 8 (max. 6/powerline)	max. 15 (max. 6/powerline)
LEDSTRIP 50 RGB	max. 2 * (1)	max. 5 *	max. 7 *	-	max. 18
LEDFLEX					
LEDFLEX IN NW	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN WW	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN HW	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN FP NW	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP WW	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP HW	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN RGB	max. 2,4m * (1,2m)	max. 5m *	max. 7,36m *	-	max. 18,72m *
LEDFLEX OUT NW	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT WW	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT HW	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT FP NW	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP WW	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP HW	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT RGB	max. 2,4m * (1,2m)	max. 5m *	max. 7,36m *	-	max. 18,72m *
LEDFLEX IN NW 5m	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN WW 5m	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN HW 5m	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX IN FP NW 5m	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP WW 5m	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN FP HW 5m	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX IN HP WW 5m	max. 0,9m (0,4m)	max. 1,8m	max. 2,7m	max. 3,6m (max. 3m/powerline)	max. 6,9m (max. 3m/powerline)
LEDFLEX IN HP HW 5m	max. 0,9m (0,4m)	max. 1,8m	max. 2,7m	max. 3,6m (max. 3m/powerline)	max. 6,9m (max. 3m/powerline)
LEDFLEX IN RGB 5m	max. 2,4m * (1,2m)	max. 5m *	max. 7,36m *	-	max. 18,72m *
LEDFLEX OUT NW 5m	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT WW 5m	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT HW 5m	max. 4m (2m)	max. 8m (max. 5m/powerline)	max. 12m (max. 5m/powerline)	max. 16m (max. 5m/powerline)	max. 30m (max. 5m/powerline)
LEDFLEX OUT FP NW 5m	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP WW 5m	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT FP HW 5m	max. 1m (0,5m)	max. 2,5m	max. 4m (max. 3m/powerline)	max. 5m (max. 3m/powerline)	max. 10m (max. 3m/powerline)
LEDFLEX OUT RGB 5m	max. 2,4m * (1,2m)	max. 5m *	max. 7,36m *	-	max. 18,72m *


* Use in combination with RGB Driver

LED Power Supply 24V-DC - Installation Scheme


LED STRIP WHITE

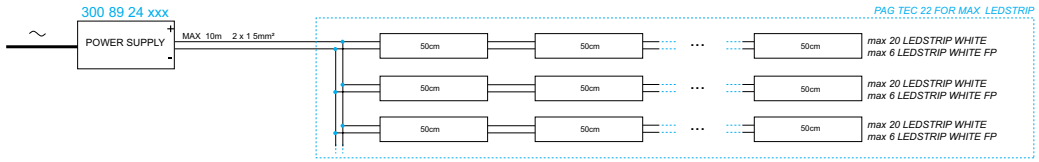


LED FLEX WHITE

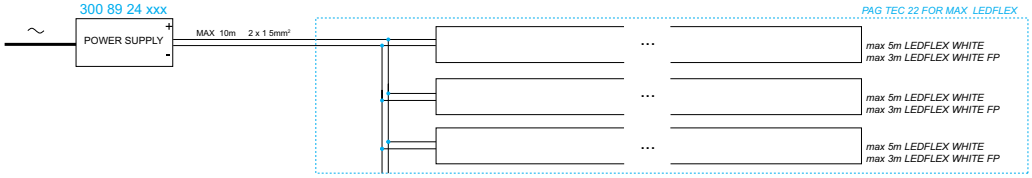


LED STRIP WHITE DIMMABLE

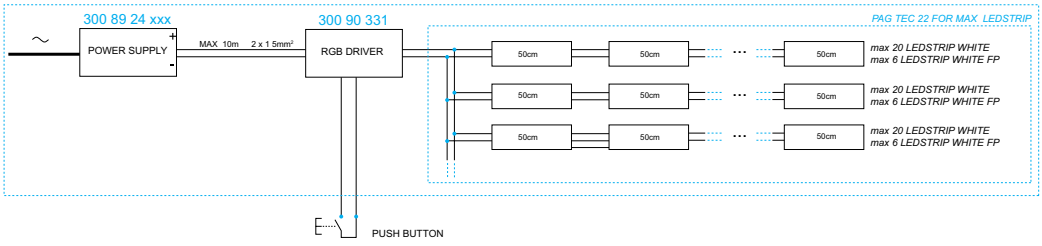


LED FLEX WHITE DIMMABLE

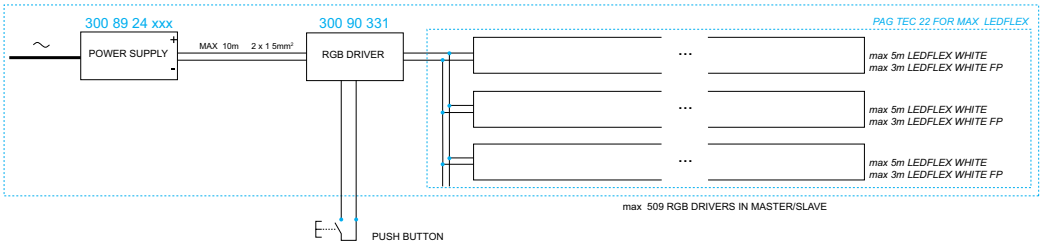


LED STRIP RGB

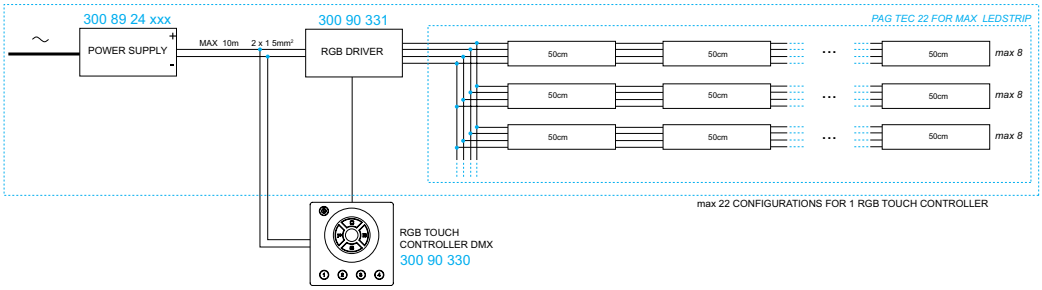

LED FLEX RGB

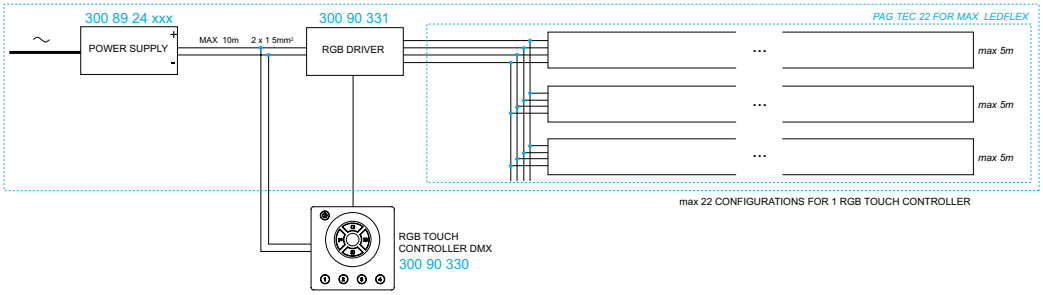

new **LED STRIP / FLEX WHITE DIMMABLE**

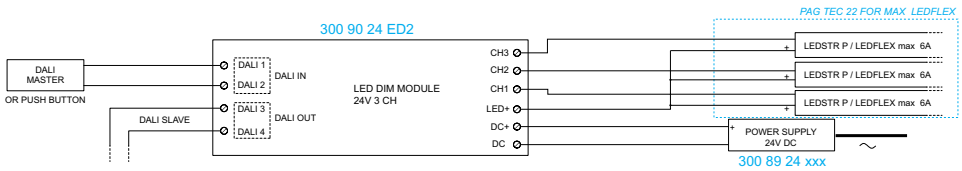

tech


OPTIONS

LED Dimmodule 24V

LED DIMMODULE 24V / 3CH / 6A DIM2
300 90 24 ED2
EXCL.POWER SUPPLY 12V-DC / 24V-DC
INPUT 12/24V-DC - OUTPUT MAX 432W / 18A (3 CHANNELS OF 6A)
FOR LEDSTRIP / LEDFLEX W
DIMMING BY DALI / SWITCH DIM

CE 0,1 IP20

INSTALLATION SCHEME: TEC23





LED Power Supply 24V-DC / 480W


Type	
LED POWER SUPPLY 24V-DC	**24V-DC / 480W**
	300 89 24 480
	CE 1,6 IP20
Dimensions (L x W x H)	86 x 125 x 128
Input	100-240V / 50-60Hz
Output	24V-DC / 480W
λ	0,9
DIM	-

LED Power Supply 14V-DC / 12W


LED POWER SUPPLY 14V-DC / 12W
300 90 90
MAX.20 x PRODUCTS WITH
SMD LED / LED Ø5mm
220-240V / 50-60Hz

CE 0,2 IP20

OPTIONS
LED PWM DIMMER 25W



	QUANTITY
HELI 1 LED	20
LEDS GO® 4Q ON	20
LEDS GO® IN	20
LEDS GO® IN R	20
PUK 4	20




tech

RGB Touch Controller DMX

RGB TOUCH CONTROLLER DMX
300 90 330
EXCL.POWER SUPPLY 12V-DC / 24V-DC
DUAL MODE STATIC / DYNAMIC
INPUT 12V-DC / 24V-DC - DMX OUT

IP20






RGB Driver

RGB DRIVER
300 90 331
EXCL.POWER SUPPLY 12V-DC / 24V-DC
INPUT 12V-DC - OUTPUT RGB 75W
INPUT 24V-DC - OUTPUT RGB 150W
FOR COMMON CATHODE RGB LEDSTRIP / LEDFLEX
DUAL MODE DMX / STAND ALONE

IP20






LED RGB Kit 60 - Installation Scheme

LED RGB KIT 60
300 90 206
INCL.1 x LED POWER SUPPLY 24V-DC / 60W
INCL.1 x RGB DRIVER
EXCL.1 x RGB TOUCH CONTROLLER DMX
120-277V / 50-60Hz

IP20

OPTIONS
RGB TOUCH CONTROLLER

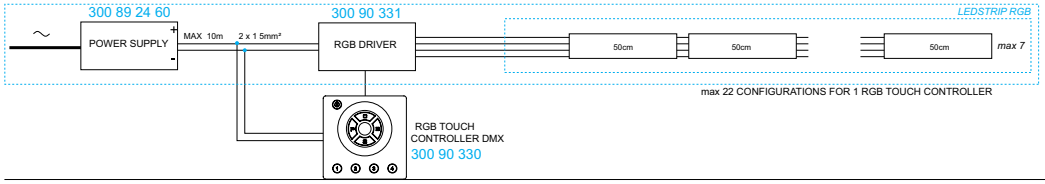


LED RGB Kit 150 - Installation Scheme

LED RGB KIT 150
300 90 215
INCL.1 x LED POWER SUPPLY 24V-DC / 150W
INCL.1 x RGB DRIVER
EXCL.1 x RGB TOUCH CONTROLLER DMX
220-240V / 50-60Hz

IP20


OPTIONS
RGB TOUCH CONTROLLER

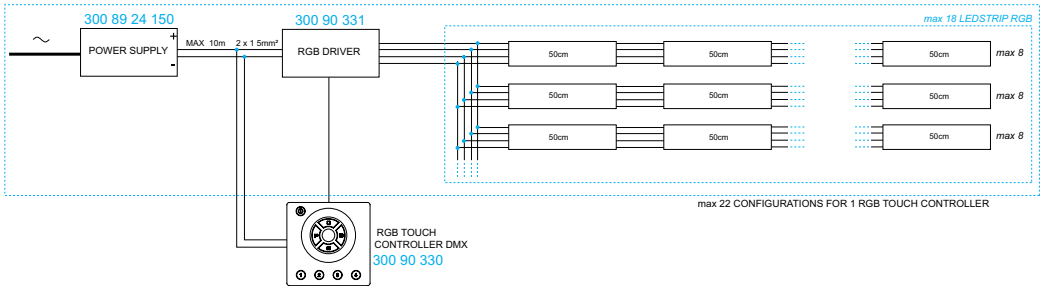

tech

OPTIONS

Transfo 50W




TRANSFO 50W
200 46 06

220-240V / 50-60Hz

CE 0,1 IP20

Transfo 100W




TRANSFO 100W
200 46 10

220-240V / 50-60Hz

CE 0,1 IP20

Transfo 100W IP67




TRANSFO 100W IP67
200 47 60

220-240V / 50-60Hz

CE 0,2 IP67

Transfo 100W IP67




TRANSFO 100W IP67
200 47 10

220-240V / 50-60Hz

CE 0,1 IP67

Ballastset C50 20




BALLASTSET C50 20 4,0 kV
200 44 21

IGNITION TENSION 4,0 kV
220-240V / 50-60Hz / 1 x 1~EVG

CE 0,3 IP20

Ballastset C50 35




BALLASTSET C50 35 4,0 kV
200 44 36

IGNITION TENSION 4,0 kV
220-240V / 50-60Hz / 1 x 1~EVG

CE 0,3 IP20

Ballastset HID 135




BALLASTSET HID 135
200 45 135

220-240V / 50-60Hz / 1 x 1~EVG

CE 0,5 IP20

Ballastset HID 170




BALLASTSET HID 170
200 45 170

220-240V / 50-60Hz / 1 x 1~EVG

CE 0,5 IP20

Dali To 1-10V Converter




DALI CONVERTER
385 611 ED5

220-240V / 50-60Hz
DALI TO 1-10V CONVERTER
max. 10 x POWER SUPPLY DIM1

CE 0,2 IP20

LED Transfo 12V



LED TRANSFO 12V-70W
300 89 12 71

220-240V / 50-60Hz
1-70W FALLING EDGE DIMMABLE TRANSFO
OUTPUT 12V-AC

CE 0,1 IP20

tech

Application of Mounting Options

SUSPENDED T-BAR
& CEILING TILES (MIN. 8 MM)



APPLY: (replace tile by MDF)
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

MF (METAL FRAME)
CEILING DRY LINED / GYPROC / MDF



APPLY:
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

STUCANET



APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
ZB BOX

EXPOSED CONCRETE




APPLY:
EXPOSED CONCRETE PACK

CONCRETE + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

CONCRETE BEAM & BLOCK + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

PREFABRICATED CONCRETE PLATE



APPLY:
EXPOSED CONCRETE PACK

PREFABRICATED
CONCRETE PLATE + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

BRICK + PLASTER




APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX


Consult where used list
of mounting options per luminaire:
www.deltalight.com/mountingoptions

tech

OPTIONS

Plasterkit

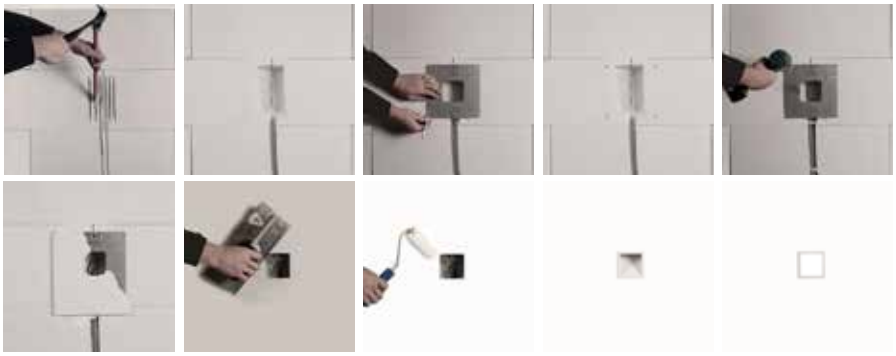




PLASTERKIT	REFERENCE	A x B	□	○	KG		S1 min. - max.	S2 min. - max.		TYPE
PLASTERKIT 101	202 11 19	205 x 205		77	0.1	80 x 180	195 - 205			3
PLASTERKIT 104	202 14 29	219 x 225		75 - 79 - 75	0.1	160 x 190				4
PLASTERKIT 108	202 20 19	185 x 185	63,5 x 70		0.1	75 x 80	120 - 150	100 - 150		1
PLASTERKIT 109	202 21 29	140 x 260	78 x 145		0.1	85 x 230				2
PLASTERKIT 110	202 21 59	140 x 260	78 x 110		0.1	85 x 120				2
PLASTERKIT 111	202 25 19	185 x 185	83 x 83		0.1	90 x 180	185	120 - 185		1
PLASTERKIT 115	202 31 99	150 x 150	64 x 70		0.1	75 x 75		100 - 150		1
PLASTERKIT 118	202 56 99 01	280 x 280		163	0.3	220 x 220				3
PLASTERKIT 120	202 62 99 01	260 x 230	166 x 161		0.2	190 x 170				2
PLASTERKIT 121	202 62 99 02	260 x 399	166 x 298		0.4	190 x 310				2
PLASTERKIT 122	202 62 99 03	260 x 537	166 x 440		0.5	190 x 450				2
PLASTERKIT 123	202 62 99 04	399 x 399	305 x 305		0.5	310 x 310				1
PLASTERKIT 124	202 62 99 04L	260 x 680	166 x 585		0.6	190 x 610				2
PLASTERKIT 126	202 72 99 01	215 x 215	112 x 112		0.3	120 x 120				1
PLASTERKIT 127	202 72 99 02	215 x 250	112 x 215		0.3	120 x 225				2
PLASTERKIT 128	202 72 99 03	215 x 350	112 x 313		0.4	120 x 330				2
PLASTERKIT 145	304 05 99	140 x 235	24 x 170		0.1	110 x 180				2
PLASTERKIT 161	207 01 161	200 x 200	75 x 75		0.2	175 x 175	185 - 200	110 - 200		1
PLASTERKIT 162	207 01 162	200 x 200	64 x 64		0.1	155 x 155	165 - 200	90 - 200		1
PLASTERKIT 163	207 01 163	165 x 165	55 x 55		0.1	145 x 145	160 - 165	78 - 165		1
PLASTERKIT 164	207 01 164	230 x 230		105	0.2	200 x 200				3
PLASTERKIT 167	207 01 167	200 x 200	142 x 142		0.2	150 x 150				1
PLASTERKIT 169	207 01 169	270 x 270		156	0.3	230 x 270	270			3
PLASTERKIT 170	207 01 170	230 x 230		98	0.3	100 x 220	220 - 230			3
PLASTERKIT 171	207 01 171	230 x 230		146	0.2	220 x 220	230			3
PLASTERKIT 172	207 01 172	390 x 390		260	0.7	275 x 275	275 - 390			3
PLASTERKIT 173	207 01 173	350 x 350	260 x 260		0.5	275 x 275				1
PLASTERKIT 174	207 01 174	280 x 280		216	0.5	220 x 260	270 x 280			3
PLASTERKIT 180	207 01 180	190 x 355	130 x 169		0.6	155 x 325				2
PLASTERKIT 181	207 01 181	250 x 250		152	0.2	170 x 170				3
PLASTERKIT 184	207 01 184	304 x 85	219 x 33		0.3	222 x 54				2
PLASTERKIT 185	207 01 185	200 x 200		121	0.2	170 x 170	133 - 152	133 - 152		3
PLASTERKIT 186	207 01 186	190 x 150	75 x 75		0.2	150 x 110		105 - 140		1
PLASTERKIT 188	207 01 188	230 x 256	64 x 110		0.2	80 x 115		170		2
PLASTERKIT 189	207 01 189	247 x 160	77 x 105		0.2	110 x 190				2
PLASTERKIT 190	207 01 190	180 x 180	61 x 61		0.3	140 x 140		190 - 200		2
PLASTERKIT 193	207 01 193	230 x 230		102	0.3	180 x 180	160 - 220			3
PLASTERKIT 194	207 01 194	275 x 409	166 x 305		0.4	190 x 317				2

Concrete Box




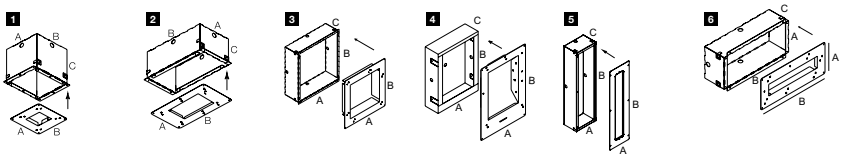


CONCRETE BOX	REFERENCE	A x B x C	KG			TYPE
CONCRETE BOX 108	202 20 18	185 x 185 x 160	0.4	190 x 190	170	1
CONCRETE BOX 109	202 21 28	140 x 260 x 120	0.5	145 x 265	130	2
CONCRETE BOX 110	202 21 58	140 x 260 x 120	0.5	145 x 265	130	2
CONCRETE BOX 111	202 25 18	185 x 185 x 160	0.4	190 x 190	170	1
CONCRETE BOX 115	202 31 98	150 x 150 x 80	0.1	155 x 155	90	3
CONCRETE BOX 120	202 62 98 01	230 x 260 x 120	1.3	235 x 265	130	1
CONCRETE BOX 121	202 62 98 02	260 x 399 x 120	2.2	265 x 405	130	2
CONCRETE BOX 122	202 62 98 03	260 x 537 x 120	3.0	265 x 538	130	2
CONCRETE BOX 123	202 62 98 04	399 x 399 x 120	3.7	405 x 405	130	1
CONCRETE BOX 124	202 62 98 04L	260 x 680 x 120	4.3	265 x 685	130	2
CONCRETE BOX 145	304 05 98	150 x 210 x 75	0.9	155 x 215	80	5
CONCRETE BOX 151	302 19 21	42 x 42 x 58	0.1	43 x 43	65	8
CONCRETE BOX TR 152	302 19 22	42 x 42 x 58	0.1	43 x 43	65	7
CONCRETE BOX 153	302 20 21	43 x 43 x 60	0.1	43 x 43	65	10
CONCRETE BOX TR 154	302 20 22	43 x 43 x 60	0.1	43 x 43	65	9
CONCRETE BOX 161	270 11 161	202 x 202 x 186	0.6	207 x 207	196	1
CONCRETE BOX 162	270 11 162	202 x 202 x 186	0.6	207 x 207	196	1
CONCRETE BOX 163	270 11 163	167 x 167 x 155	0.5	172 x 172	165	1
CONCRETE BOX 165	270 11 165	62 x 97 x 50	0.1	45 x 75	60	12
CONCRETE BOX 180	270 11 180	266 x 355 x 101	1.4	185 x 350	100	4
CONCRETE BOX 183	270 11 183	96 x 45 x 41	0.1	98 x 48	80	15
CONCRETE BOX 184	270 11 184	270 x 91 x 65	0.4	273 x 94	75	2
CONCRETE BOX 185	270 11 185	219 x 41 x 65	0.5	222 x 45	75	2
CONCRETE BOX 186	270 11 186	145 x 105 x 70	0.4	150 x 110	75	3
CONCRETE BOX 187	270 11 187	80 x 95 x 70	0.5	85 x 100	75	11
CONCRETE BOX 188	270 11 188	Ø60 x 65	0.5	Ø67	65	13
CONCRETE BOX 189	270 11 189	160 x 247 x 76	0.5	165 x 255	85	2
CONCRETE BOX 191	270 11 191	310 x 75 x 100	0.4	315 x 80	110	2
CONCRETE BOX 192	270 11 192	130 x 120 x 105	0.4	135 x 125	115	2
CONCRETE BOX 194	270 11 194	260 x 399 x 120	2.2	265 x 405	130	2

OPTIONS


Concrete Pack

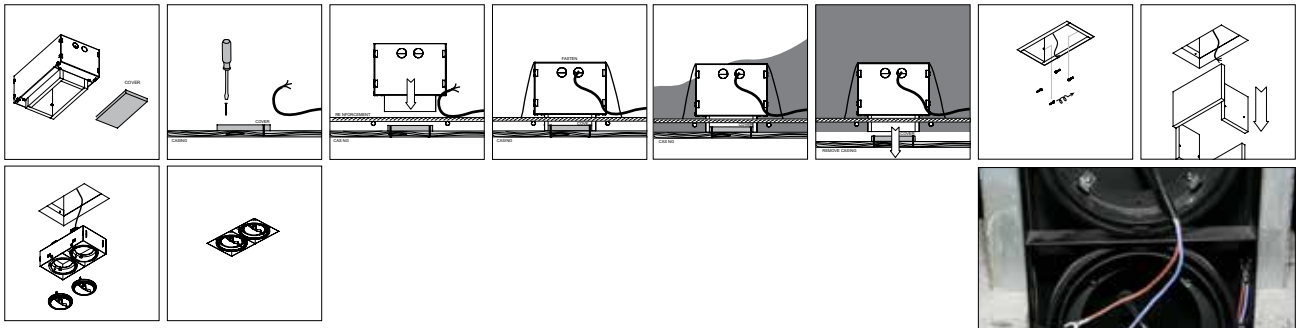

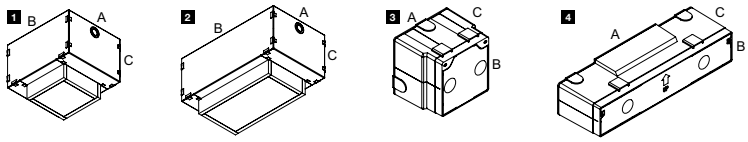



CONCRETE PACK	REFERENCE	A x B x C	KG			TYPE
EXPOSED CONCRETE PACK GIT 1	202 61 96 01	220 x 262 x 210	3.1	220 x 262	210	1
EXPOSED CONCRETE PACK GIT 2	202 61 96 02	220 x 401 x 210	6.5	220 x 401	210	2
EXPOSED CONCRETE PACK GIT 3	202 61 96 03	220 x 544 x 210	10.0	220 x 544	210	2
EXPOSED CONCRETE PACK GIT 4LINE	202 61 96 04L	220 x 684 x 210	13.0	220 x 684	210	2
CONCRETE PACK LOGIC W L	304 32 96	310 x 75 x 100	0.4	315 x 80	135	4
CONCRETE PACK LOGIC W S	304 33 96	130 x 120 x 105	0.4	135 x 125	140	3
CONCRETE PACK MGIT 1	202 71 96 01	133 x 160 x 133	1.5	160 x 160	140	1
CONCRETE PACK MGIT 2	202 71 96 02	234 x 160 x 133	2.1	260 x 160	140	2

CONCRETE PACK

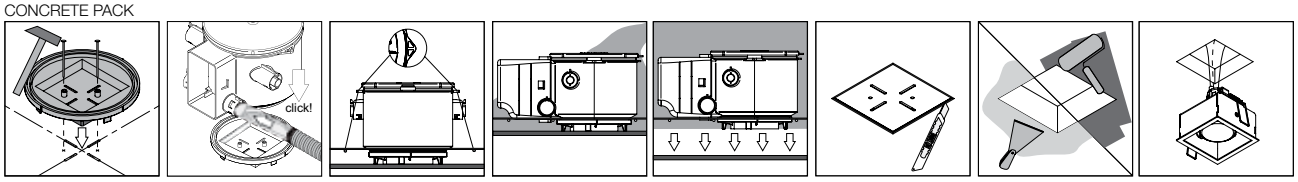

EXPOSED CONCRETE PACK

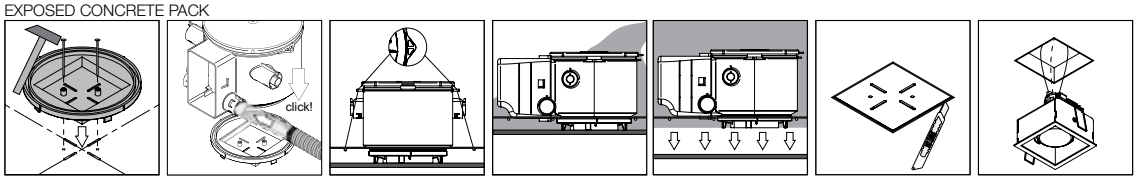


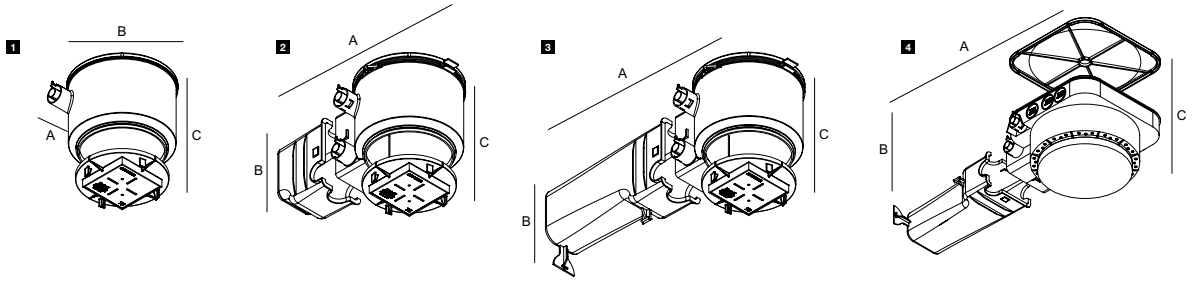

CONCRETE PACK	REFERENCE	A x B x C	KG			TYPE
CONCRETE PACK S75	207 02 9071	250 x 200 x 150	0.3	250 x 200	150	1
CONCRETE PACK C S75	207 02 9071 C	310 x 250 x 150	0.4	310 x 250	150	2
CONCRETE PACK T S75	207 02 9071 T	450 x 250 x 150	0.5	450 x 250	150	3
CONCRETE PACK T R76	207 02 9123 T	500 x 250 x 150	0.9	500 x 250	150	4
CONCRETE PACK TMK R82	207 02 9123 TMK	500 x 250 x 150	1	500 x 250	150	4
EXPOSED CONCRETE PACK S75	207 02 9093	250 x 200 x 150	0.3	250 x 200	150	1
EXPOSED CONCRETE PACK C S75	207 02 9093 C	310 x 250 x 150	0.4	310 x 250	150	2
EXPOSED CONCRETE PACK T S75	207 02 9093 T	450 x 250 x 150	0.5	450 x 250	150	3

ZB Box






DEPTH ↕ MAY VARY ACCORDING TO THE LUMINAIRE USED
ALWAYS CHECK THE CORRECT DEPTH OF THE LUMINAIRE

ZB BOX	REFERENCE	A x B x C	KG		↕		TYPE
GRID IN ZB 1 BOX L	202 60 98 01	183 x 183 x 128	1.7	184 x 184	148		1
GRID IN ZB 1 LED BOX	202 601 98 01	183 x 183 x 100	1.5	184 x 184	120		1
GRID IN ZB 2 BOX L	202 60 98 02	183 x 336 x 128	2.4	184 x 337	148		2
GRID IN ZB 2 LED BOX	202 601 98 02	183 x 336 x 100	2.2	184 x 337	120		2
GRID IN ZB 3 BOX L	202 60 98 03	183 x 483 x 128	3.1	184 x 484	148		2
GRID IN ZB 4 BOX L	202 60 98 04	336 x 336 x 128	3.1	337 x 337	148 / 180		2
MINIGRID IN ZB 1 BOX L	202 70 98 01	140 x 140 x 128	1.2	141 x 141	148		1
MINIGRID IN ZB 2 BOX L	202 70 98 02	140 x 250 x 128	1.8	141 x 251	148		2
MINIGRID IN ZB 3 BOX L	202 70 98 03	140 x 357 x 128	2.4	141 x 358	148		2

OPTIONS


Mounting Kit



MOUNTING KIT	REFERENCE	A x B x C	KG	Hollow material			Solid material	Option/ Requirement	TYPE
							min. - max.	O/R	
GRID IN TRIMLESS 1 MOUNTING KIT	202 61 95 01	171 x 171 x 55	0.4	173 x 173		max.25		O/R	1
GRID IN TRIMLESS 1 MOUNTING KIT HP	202 61 95 01 HP	171 x 171 x 55	0.4	173 x 173		max.25		R	1
GRID IN TRIMLESS 1 MOUNTING KIT LARGE	202 61 95 01L	293 x 293 x 55	0.7				Ø250	O/R	8
GRID IN TRIMLESS 2 MOUNTING KIT	202 61 95 02	171 x 310 x 55	0.7	312 x 173		max.25		O	2
GRID IN TRIMLESS 2 MOUNTING KIT HP	202 61 95 02 HP	171 x 310 x 55	0.7	312 x 173		max.25		R	2
GRID IN TRIMLESS 2 MOUNTING KIT LARGE	202 61 95 02L	432 x 293 x 55	0.9				Ø250 - 150 - Ø250 *	O	8
GRID IN TRIMLESS 3 MOUNTING KIT	202 61 95 03	453 x 171 x 55	0.9	455 x 173		max.20		O	2
GRID IN TRIMLESS 4 MOUNTING KIT	202 61 95 04	308 x 308 x 54	0.8	309 x 309		max.40		O	1
GRID IN TRIMLESS 4LINE MOUNTING KIT	202 61 95 04L	593 x 171 x 55	1.4	595 x 173		max.20		O	2
MINIGRID IN 1 MOUNTING KIT	202 71 95 01	129 x 129 x 100	0.5	130 x 130		max.25		O/R	5
MINIGRID IN 1 MOUNTING KIT HP	202 71 95 01 HP	129 x 129 x 100	0.5	130 x 130		max.25		R	5
MINIGRID IN 1 MOUNTING KIT LARGE	202 71 95 01L	245 x 245 x 100	0.9				Ø202	O/R	8
MINIGRID IN 2 MOUNTING KIT	202 71 95 02	129 x 232 x 100	0.8	130 x 233		max.25		O	6
MINIGRID IN 2 MOUNTING KIT HP	202 71 95 02 HP	129 x 232 x 100	0.8	130 x 233		max.25		R	6
MINIGRID IN 2 MOUNTING KIT LARGE	202 71 95 02L	342 x 245 x 100	1.0				Ø202 - 100 - Ø202 *	O	8
MINIGRID IN TRIMLESS 3 KIT	202 71 97 03	112 x 314 x 54	0.5	315 x 113		max.40		O	2
MOUNTING KIT 55	202 00 55	93 x 93 x 30	0.1		89	9 or 12		O	7
MOUNTING KIT 64	202 00 64	97 x 97 x 30	0.1		105	9 or 12		O	7
MOUNTING KIT 75	202 00 75	117 x 117 x 30	0.1		121	9 or 12		O	7
MOUNTING KIT 75 TRIMLESS	202 01 75	117 x 117 x 30	0.1		121	9 or 12		R	7
MOUNTING KIT 75 TRIMLESS O.F.A.	202 01 75 OFA	240 x 240 x 40	0.2				Ø182	R	10
MOUNTING KIT FLUSH	400 90 01	118 x 118 x 35	0.1		121	12		R	7
MOUNTING KIT FLUSH SPY	414 90 01	82 x 140 x 22	0.2		83	9 or 12	Ø82	O	10
MOUNTING KIT MIDISPY TRIMLESS	414 90 02	82 x 140 x 108	0.4		83	9 or 12	Ø82	R	10
MOUNTING KIT MINI DIRO II 12	202 41 58 12	65 x 120 x 57	0.1		66	12 or 24		R	9
MOUNTING KIT MINI DIRO II 15	202 41 58 15	65 x 120 x 57	0.1		66	max.15		R	9
MOUNTING KIT R143 TRIMLESS	202 15 61 97	91 x 214 x 125	0.4		152	max.25	Ø182	R	9
MOUNTING KIT R30 TRIMLESS	202 41 30 00	121 x 98 x 90	0.1		50		Ø52	R	9
MOUNTING KIT R60 TRIMLESS O.F.A.	415 91 60	155 x 155 x 60	0.4		92	max.25	Ø92 - 125	R	10
MOUNTING KIT R82 TRIMLESS	202 11 82	95 x 168 x 43	0.1		105	max.22		R	9
MOUNTING KIT R82 TRIMLESS O.F.A.	202 11 82 OFA	200 x 200 x 44	0.2		122	max.25	Ø122	R	10
MOUNTING KIT R102 TRIMLESS O.F.A.	400 91 02 OFA	195 x 195 x 55	0.4		133			R	10
MOUNTING KIT SKELP TRIMLESS	202 15 61 972	214 x 125 x 70	0.4		152	max.25	Ø182	R	9
MOUNTING KIT TWEETER TRIMLESS	202 15 61 971	214 x 125 x 70	0.6		152	max.25	Ø182	R	9
SUPERNOVA 125 RECESSED KIT	274 94 1310	Ø1325 x 115	4.6		1335	max.25		R	3
SUPERNOVA 65 RECESSED KIT	274 94 0710	Ø725 x 115	3.1		735	max.25		R	3
SUPERNOVA 95 RECESSED KIT	274 94 1010	Ø1025 x 115	3.1		1035	max.25		R	3
SUPERNOVA XS RECESSED KIT 260	274 88 029	Ø299 x 126	1.1		301	max.25		R	3
SUPERNOVA XS RECESSED KIT 330	274 88 036	Ø369 x 126	1.4		371	max.25		R	3

tech

* Ø250 - 150 - Ø250




Mounting Kit



TYPE 6



TYPE 8

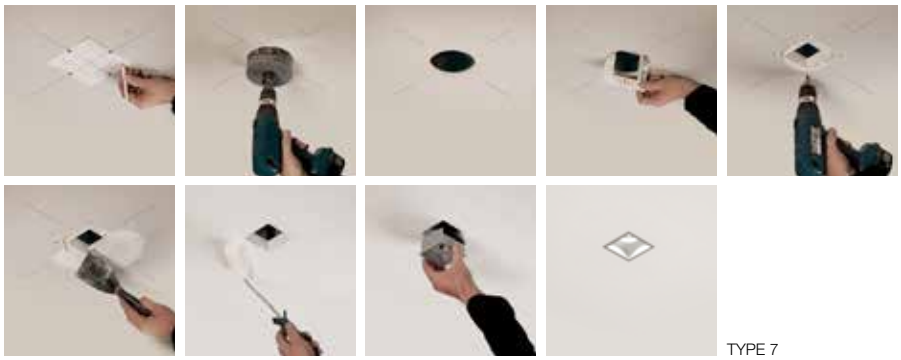


TYPE 7

OPTIONS

Carreepoint






16 x 60

CARREEPOINT ◇
203 10 02 ◇
◇ = A / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Daxpoint





58 x 45 max.12

DAXPOINT ◇
203 10 03 ◇
◇ = A / B / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Deltapoint Single




68 x 50 max.35

DELTAPOINT SINGLE ◇
203 20 01 ◇
◇ = A / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Flatpoint






16 x 60

FLATPOINT ◇
203 10 06 ◇
◇ = ALU / **W**
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

Jackpoint






16 x 60

JACKPOINT ◇
203 10 01 ◇
◇ = A / B / W
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,1 IP20

new Jackpoint trimless






62 x 80 9 or 12
102 x 80 (CONCRETE)

JACKPOINT TRIMLESS O.F.A.
328 10 04
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,3 IP20

Sax 1






SAX 1 ◇
203 10 15 ◇
◇ = A / W
EXCL.1 x JAC ** ** *

0,1 IP20

Setpoint





105 x 75 max.22


SETPOINT ◇
203 10 27 ◇
◇ = PRIM
EXCL.1 x JAC ** ** *
12V / EXCL.TRANSFO

0,3 IP20

tech

Dax Clip






58 x 45 max.12

DAX CLIP ◇
203 05 06 ◇
◇ = A / B / W

0,1

Delta Clip + Rosas






DELTA CLIP + ROSAS ◇
203 05 04 ◇
◇ = A / B / W

0,1

OPTIONS
COVERSET R 90-100

Delta Fix





18


DELTA FIX ◇
203 05 10 ◇
◇ = A / B / W

0,1

OPTIONS
COVERSET R 62-90-100

new Spotnic M10 trimless






62 x 80 9 or 12
102 x 80 (CONCRETE)

SPOTNIC M10 TRIMLESS O.F.A.
328 10 05
EXCL.1 x SPOTNIC M10
EXCL.LED POWER SUPPLY 350mA/DC

0,3 IP20

new Spotnic clip + rosas






SPOTNIC CLIP + ROSAS ◇
203 05 041 ◇
◇ = W
EXCL.1 x SPOTNIC M10
EXCL.LED POWER SUPPLY 350mA/DC

0,3 IP20

new Spotnic S1 clip





58 max.25

SPOTNIC S1 CLIP ◇
203 05 061 ◇
◇ = W
EXCL.1 x SPOTNIC M10
EXCL.LED POWER SUPPLY 350mA/DC


0,3 IP20

tech

OPTIONS

Suspension trimless





62 x 80 9 or 12
102 x 80 (CONCRETE)

SUSPENSION TRIMLESS O.F.A.
328 10 01


INCL.1 x AUTOMATIC ADJUSTMENT

0,2

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

Suspension + Connection Trimless





62 x 80 9 or 12
102 x 80 (CONCRETE)

SUSPENSION + CONNECTION TRIMLESS O.F.A.
328 10 02


INCL.1 x CONNECTOR max. 3x 2,5 mm²
INCL.1 x AUTOMATIC ADJUSTMENT
4A / 250V

0,2

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

Connection trimless





62 x 80 9 or 12
102 x 80 (CONCRETE)

CONNECTION TRIMLESS O.F.A.
328 10 03

INCL.1 x CONNECTOR max. 3x 2,5 mm²
4A / 250V

0,2

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

Cable Base R






CABLE BASE R ◇
203 99 55 ◇
◇ = ANO / B / W

0,1

OPTIONS
COVERSET R 62-90-100

Cable Base S





CABLE BASE S ◇
203 99 56 ◇
◇ = ANO / B / W

0,1

OPTIONS
COVERSET S 62-80-90

Coverset R





COVERSET R 100 ◇
204 00 100 ◇

COVERSET R 62 ◇
204 00 62 ◇

COVERSET R 90 ◇
204 00 90 ◇

◇ = ANO / B / W

0,1

Coverset S





COVERSET S 62 ◇
204 62 62 ◇

COVERSET S 80 ◇
204 80 80 ◇


COVERSET S 90 ◇
204 90 90 ◇


◇ = ANO / B / W

0,1

tech

CBox

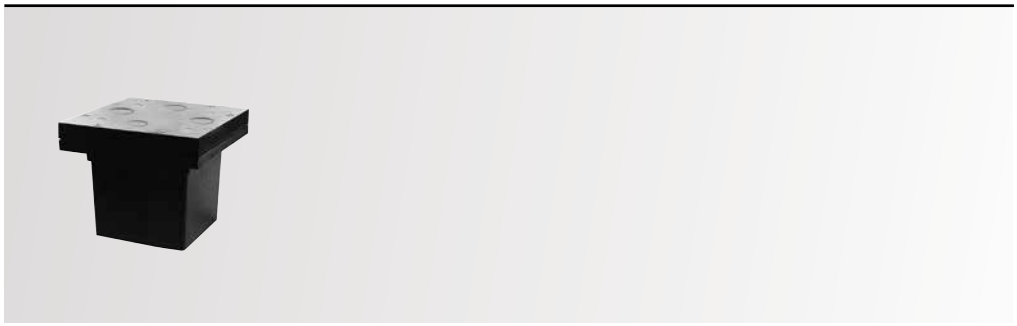



142 x 142 x 300

CBOX
216 12 00

INCL.2 x PG13,5 / 1 x PG11

0,5 IP67

142 x 142 x 300

CBOX 350 mA / 10W
216 14 35

INCL.2 x PG13,5 / 2 x PG11
INCL.LED POWER SUPPLY 350mA-DC / 10W
CURRENT CONTROLLED
220-240V / 50-60Hz

0,7 IP67

142 x 142 x 300

CBOX T50
216 12 50

INCL.2 x PG13,5 / 1 x PG11
220-240V / 50-60Hz / TE
1 x 12V / max.50W

0,7 IP67

142 x 142 x 300


CBOX T100
216 12 100

INCL.2 x PG13,5 / 2 x PG11
220-240V / 50-60Hz / TE
2 x 12V / 2 x max.50W

0,8 IP67

Logic 60 Box R





175 x 125 x 105


LOGIC 60 BOX R
213 19 10

INCL.1 x BASE PLATE
EXCL.TRANSFO
max.500kg

0,6

Genie Box 80 S / 90 S





224 x 159 x 155


GENIE BOX 80 S / 90 S
213 19 08

INCL.1 x BASE PLATE
EXCL.TRANSFO
max.500kg

0,6

Genie Box 90 R





224 x 159 x 150


GENIE BOX 90 R
213 19 09

INCL.1 x BASE PLATE
EXCL.TRANSFO
max.500kg

0,6

IP68 Connection Kit






IP68 CONNECTION KIT
216 12 01

CABLE Ø7,5-10 mm
MAX.3 x 4mm²
4A 250V

0,1 IP68

IP68 Connector 3P





IP68 CONNECTOR 3P
216 12 02

CABLE Ø7,5-12 mm
MAX.3 x 1,5mm²
4A 250V


0,1 IP68

play.de talight.com/ip68connector

tech

ACCESSORIES

Light Beam Accessories

ACCESSORIE	 HONEYCOMB	 LINEAR SPREAD LENS	 SPREAD LENS	 SOFTENING LENS	 GLASS SBL
LIGHT BEAM					
Ø32	**MINI REO HONEYCOMB ◇** **415 03 01 ◇** ◇ = B / W			**MINI REO SOFTENING LENS ◇** **415 03 04 ◇** ◇ = B / W	**MINI REO GLASS SBL ◇** **415 03 05 ◇** ◇ = B / W
Ø40	**HONEYCOMB 40 ◇** **201 03 01 ◇** ◇ = ALU / B	**LINEAR SPREAD LENS 40** **201 03 02**	**SPREAD LENS 40** **201 03 03**	**SOFTENING LENS 40** **201 03 04**	**GLASS SBL 40** **201 03 05**
	BOXY HONEYCOMB ◇ **251 70 03 01 ◇** ◇ = B / W			**BOXY SOFTENING LENS ◇** **251 70 03 04 ◇** ◇ = B / W	**BOXY GLASS SBL ◇** **251 70 03 05 ◇** ◇ = B / W
Ø50	**iMAX HONEYCOMB ◇** **400 03 01 ◇** ◇ = B	**iMAX LINEAR SPREAD LENS** **400 03 02**	**iMAX SPREAD LENS** **400 03 03**	**iMAX SOFTENING LENS** **400 03 04**	**iMAX GLASS SBL** **400 03 05**
	HONEYCOMB 50 ◇ **413 03 01 ◇** ◇ = B	**LINEAR SPREAD LENS 50** **413 03 02**	**SPREAD LENS 50** **413 03 03**	**SOFTENING LENS 50** **413 03 04**	**GLASS SBL 50** **413 03 05**
					GLASS SBL 50 **201 30 05**
Ø70	**HONEYCOMB 70 ◇** **201 04 01 ◇** ◇ = B	**LINEAR SPREAD LENS 70** **201 04 02**	**SPREAD LENS 70** **201 04 03**	**SOFTENING LENS 70** **201 04 04**	**GLASS SBL 70** **201 04 05**
	HONEYCOMB KIX ◇ **232 10 03 ◇** ◇ = N				
Ø78	**HONEYCOMB 78 ◇** **201 02 01 ◇** ◇ = B			**SOFTENING LENS 78** **201 02 04**	**GLASS SBL 78** **201 02 05**
Ø87	**HONEYCOMB 87 ◇** **201 01 01 ◇** ◇ = B	**LINEAR SPREAD LENS 87** **201 01 02**	**SPREAD LENS 87** **201 01 03**	**SOFTENING LENS 87** **201 01 04**	**GLASS SBL 87** **201 01 05**

0,1

Find out what products these accessories can be used with, by adding its reference number without color to our website URL to visit the detailpage: for example: **www.deltalight.com/2010301**

tech

Cone 50






CONE 50 ◇
201 31 50 ◇
◇ = ALU / W

ANGLE LIGHTSOURCE < 24°
◇ W = MAX. 20W

0,1

Cone 111






CONE 111 ◇
201 28 00 ◇
◇ = ALU / B / C / W

ANGLE LIGHTSOURCE < 24°

0,1

Clip 50






CLIP 50 ◇
201 30 98 ◇
◇ = A / B / W

0,1

Clip 111





CLIP 111 ◇
201 27 99 ◇
◇ = A / B / W

0,1

Cone 66






CONE 66 ◇
201 32 52 ◇
◇ = B

0,1

Ring 66





RING 66 ◇
201 32 50 ◇
◇ = A / W

0,1

Ring 109






RING 109 ◇
201 28 01 ◇
◇ = A / B / W

0,1

Frontglass 109






FRONTGLASS 109
201 18 00

0,1

Frontglass 111





FRONTGLASS 111
201 17 00

0,1

Glass SBL 50






GLASS SBL 50
201 30 05
MAX.20W

0,1

UV-Filter







UV-FILTER C30
201 37 00

0,1

Lens 109







LENS 109
201 48 01

0,1

Lens 111





LENS 111
201 47 11

0,1

Dicroic Filter 50






DICROIC FILTER 50 BLUE
201 30 11
DICROIC FILTER 50 GREEN
201 30 12
DICROIC FILTER 50 RED
201 30 13
DICROIC FILTER 50 YELLOW
201 30 14

0,1 max. 20W

Dicroic Filter 100





DICROIC FILTER 100 BLUE
201 38 11

0,1

tech

ACCESSORIES

Tube C





TUBE C ◇
202 02 05 ◇
◇ = B

0,1

Tube R






TUBE R ◇
202 02 08 ◇
◇ = B

0,1

Anti-Glare Tube







ANTI-GLARE TUBE ◇
201 34 00 ◇
◇ = B / W
max.20W

0,1

Raster 109






RASTER 109 ◇
201 28 02 ◇
◇ = B

0,1

Raster 66







RASTER 66 ◇
201 32 51 ◇
◇ = B

0,1

Basic S Decorative Glass





BASIC S DECORATIVE GLASS
228 90 10

INCL.4 x DISTANCER FOR BASIC S
INCL.RUBBER SEAL

0,5

Basic S Glass SBL






BASIC S GLASS SBL
228 90 20

0,1

Basic R Glass SBL






BASIC R GLASS SBL
228 91 20

0,1

tech

Opto Clip






OPTO CLIP
201 02 00 ◇
◇ = B

0,1

Kap Kix






KAP KIX ◇
232 10 00 ◇
◇ = N

0,1

Honeycomb Kix






HONEYCOMB KIX ◇
232 10 03 ◇
◇ = N

0,1

Kap Striper






KAP STRIPER ◇
223 00 10 ◇
◇ = N

0,1

Midispy Tube






MIDISPY TUBE ◇
414 03 00 ◇
◇ = B / MMAT / W

0,1

Spy Tube






SPY TUBE ◇
414 01 00 ◇
◇ = B / MMAT / W

0,1

Spy Tube S






SPY TUBE S ◇
414 02 00 ◇
◇ = B / W

0,1

Maxispy Tube





MAXISPY TUBE ◇
414 04 00 ◇
◇ = B / MMAT / W

0,1

tech

CUT-OUT

PRODUCT	PAGE		38	46	53	67	70	76	82	89	98	102	105	114	121	122	140	146	152	156	160	216	222	260	652	685	952	985	1252	1285
MICRO DEEP RINGO	INT 115	38	•																											
MINI SPY	INT 143	46		•																										
LEDS SWING	INT 115	53			•																									
MINI DIRO R / S	INT 89	67				•																								
MINI DIRO R TRIMLESS	INT 85	67				•																								
MINI REO	INT 67	67				•																								
MINI REO OK	INT 63	67				•																								
MINI REO X	EXT 9	67				•																								
REO S	INT 73	67				•																								
MINI DEEP RINGO	INT 119	67				•																								
RINGO	INT 130	70					•																							
DEEP RINGO	INT 123	76						•																						
DIRO 130	INT 98	76						•																						
DIRO GT	INT 101, EXT 15	76						•																						
DIRO OK	INT 99	76						•																						
DIRO OK X	EXT 15	76						•																						
DIRO ST OK	INT 95	76						•																						
MINI REO OK1	INT 65	76						•																						
REO	INT 71	76						•																						
REO X	EXT 9	76						•																						
CIRCLE	INT 131	82							•																					
C-MAX	INT 113	82							•																					
CARREE RS	INT 184	89								•																				
iMAX	INT 23	98									•																			
iMAX ADJUSTABLE	INT 29	98									•																			
iMAX WALLWASH	INT 37	98									•																			
OREO	INT 57	98									•																			
REO OK	INT 69	98									•																			
REO S OK	INT 73	98									•																			
GRAND REO	INT 77	102										•																		
iMAX+	INT 43	105											•																	
SPY ST	INT 147	114												•																
GRAND REO OK S1	INT 79	121													•															
YOU-TURN	INT 137	121													•															
GRAND REO OK S2	INT 79	122														•														
RODI SI	INT 109	140															•													
RODI 111	INT 109	146																•												
GRAND DIRO ST	INT 107	152																	•											
DIRO 126	INT 105	156																		•										
DIRO LED	INT 105	156																		•										
TWEETER ST D	INT 49	160																			•									
DIRO 226 SBL	INT 105	216																				•								
HOLE IN ONE R15	INT 157	222																					•							
DOWNFORCE R	INT 265	260																						•						
SUPERNOVA SEMI 65	INT 277	652																							•					
SUPERNOVA TRIMLESS 65	INT 275	685																								•				
SUPERNOVA SEMI 95	INT 277	952																									•			
SUPERNOVA TRIMLESS 95	INT 275	985																										•		
SUPERNOVA SEMI 125	INT 277	1252																											•	
SUPERNOVA TRIMLESS 125	INT 275	1285																												•





Lamp Index

LIGHTSOURCE	LAMP	FITTING	VOLTAGE	OUTPUT (W)
	A60	E27Ls	100-240V / 50-60Hz	15-25-40-60
	QR-CBC35	G4	12V	20-35
	QR-51 ALU	GX5.3	12V	20-35-50
	QR-C51	GX5.3	12V	20-35-50
	QR-CBC51	GX5.3	12V	20-35-50
	QR-CB51	GX5.3	12V	20-35-50
	QR-LP70	BA15d	12V	20-50
	QR-LP111	G53	12V	35-50-75-100
	QT9	G4	12V	5-10-20
	QT14	G9	100-240V / 50-60Hz	25-40-60
	QT32	E27Ls	100-240V / 50-60Hz	70
	QT-DE12	R7s	100-240V / 50-60Hz	150
	QT-DE12s	R7s	100-240V / 50-60Hz	100-150
	QPAR51	GU10	100-240V / 50-60Hz	35-50
	HIT-TC	G8.5	220-240V / 50-60Hz	35-50-70
	HIT-TC CE	PGJ5	220-240V / 50-60Hz	20
	HIT	G12	220-240V / 50-60Hz	35-70-150
	HIPAR51	GX10	220-240V / 50-60Hz	20-35
	HIPAR20	E27Hs	220-240V / 50-60Hz	35
	HIPAR30	E27Hs	220-240V / 50-60Hz	35-70
	HIR- CE111	GX8.5	220-240V / 50-60Hz	35-70
	T16	G5	220-240V / 50-60Hz	8 14-21-28-35 24-39-49-54-80
	T16-S	G5	220-240V / 50-60Hz	14-21-28 24-39-54
	T16-R	2GX13	220-240V / 50-60Hz	55-60
	TC-DEL	G24q-1 G24q-2 G24q-3	220-240V / 50-60Hz	18 26
	TC-TEL	GX24q-2 GX24q-3 GX24q-4	220-240V / 50-60Hz	18 32
	TC-L	2G11	220-240V / 50-60Hz	24-36-55
	T2-MLF	GX53	220-240V / 50-60Hz	9
	TC-TSE	E27Ls	100-240V / 50-60Hz	15-20-23
	TCA-SE	E27Ls	100-240V / 50-60Hz	5-7-10-15-20-23
	TC-SB	E27Ls	100-240V / 50-60Hz	9-12-16

Legenda

◇	KLEUR	COULEUR	COLOUR	FARBE	COLOR	COLORE
A	ALU GRIJS	ALU GRIS	ALU GREY	ALU GRAU	ALU GRIS	ALU GRIGIO
ALU	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIO	ALUMINIO
ANO	GEANODISEERD ALU	ALU ANODISE	ALU ANODISED	ALU ELOXIERT	ALU ANODIZADO	ALU ANODIZZATO
B	ZWART RAL 9005	NOIR RAL 9005	BLACK RAL 9005	SCHWARZ RAL 9005	NEGRO RAL 9005	NERO RAL 9005
C	CHROOM	CHROMÉ	CHROMED	CHROM	CROMO	CROMATO
G	GRIJS BRUIN	GRIS BRUN	GREY BROWN	GRAU BRAUN	GRIS MARRON	GRIGIO BRUNO
GALVANISED	GEGALVANISEERD	GALVANISÉ	GALVANISED	GALVANISIERT	GALVANIZADO	GALVANIZZATO
INOX	ROESTVRIJ STAAL	ACIER INOXYDABLE	STAINLESS STEEL	ROSTFREIER STAHL	ACERO NOXIDABLE	ACCIAIO INOSSIDABILE
M	VERGULD	DORE	GOLD	VERGOLDET	ORO	ORO
N	DONKERGRIJS	GRIS FONCE	DARK GREY	DUNKELGRAU	GRIS OSCURO	GRIGIO SCURO
MMAT	VERGULD MAT	LAITON DEPOLI	GOLD MAT	VERGOLDET MAT	ORO MATE	ORO OPACO
PRIM	GRONDLAAG	APPRET	PRIMER	GRUNDIERUNG	PINTURA DE FONDO	MESTICA
RAL	KLEUR RAL	COULEUR RAL	COLOUR RAL	FARBE RAL	COLOR RAL	COLORE RAL
W	WIT RAL 9003	BLANC RAL 9003	WHITE RAL 9003	WEIß RAL 9003	BLANCO RAL 9003	BIANCO RAL 9003
	TOESTEL KLASSE 1	APPAREIL CLASSE 1	FIXTURE CLASS 1	GERÄT KLASSE 1	APARATO CLASE 1	APPARECCHIO CLASSE 1
	TOESTEL KLASSE 2	APPAREIL CLASSE 2	FIXTURE CLASS 2	GERÄT KLASSE 2	APARATO CLASE 2	APPARECCHIO CLASSE 2
	TOESTEL KLASSE 3	APPAREIL CLASSE 3	FIXTURE CLASS 3	GERÄT KLASSE 3	APARATO CLASE 3	APPARECCHIO CLASSE 3
CE	NORM 01.96 EMC 89 / 336 / EEC	NORM 01.97. LV 73 / 23 / EEC				
0,5	NETTO GEWICHT KG	POIDS NET KG	NET WEIGHT KG	NETTO GEWICHT KG	PESO NETO KG	PESO NETTO KG
IP..	BESCHERMINGSINDICATIE	INDICE DE PROTECTION	PROTECTION LEVEL	SCHUTZKLASSE	CLASE DE PROTECCIÓN	CLASSE DI PROTEZIONE
	RONDE OPENING DIAMETER x MIN. INBOUWDIEPTE	DECOUPE RONDE DIAMETRE x PROFONDEUR NECESSAIRE POUR ENCASTREMENT	ROUND OPENING DIAMETER x MIN. DEPTH FOR RECESSING	RUNDE ÖFFNUNG DIAMETER x MIN. TIEFE FÜR EINBAU	ABERTURA REDONDA DIAMETRO x DISTANCIA MINIMA DE EMPOTRAMIENTO	FORO TONDO DIAMETRO x SPESSORE MINIMO RICHIESTO PER L' NCASSO
	RECHTHOEKIGE OPENING LENGTE x BREEDTE x MIN. INBOUWDIEPTE	DECOUPE RECTANGULAIRE LO.x LA.x PRO. NECESSAIRE POUR ENCASTREMENT	RECTANGULAR OPENING LENGTH x WIDTH x MINIMUM DEPTH FOR RECESSING	RECHTECKIGE ÖFFNUNG LÄNGE x BREITE x MINIMUM TIEFE EINBAU	ABERTURA RECTANGULAR LARGO x ANCHO x DISTANCIA MINIMA DE EMPOTRAMIENTO	FORO RETTANGOLARE LUNGHEZZA x LARGHEZZA x SPESSORE MINIMO RICHIESTO PER L'INCASSO
	MAX. DIKTE MONTAGEOPPERVLAK	EPAISSEUR MAX.DE LA SURFACE DE MONTAGE	MAX.THICKNESS OF THE MOUNTING SURFACE	MAXIMALE STÄRKE DER BEFESTIGUNGSFLÄCHE	ESPESOR MÁXIMO DE LA SUPERFICIE DE MONTAJE	SPESSORE MASSIMO DELLA SUPERFICIE DI MONTAGGIO
0,5	MIN. AFSTAND (M) LAMP - OBJECT	DISTANCE MIN. (M) AMPOULE - OBJET	MIN. DISTANCE (M) LAMP - OBJECT	MIN. DISTANZ (M) LAMPE - OBJEKT	DISTANCIA MINIMA (M) LÁMPARA - OBJETO	DISTANZA MIN. (M) LAMPADA - OGGETTO
	BEVESTIGING VLOER - WAND - PLAFOND OPBOUW	MONTAGE SOL - MUR - PLAFOND APPLIQUE	FIXATION FLOOR - WALL - CEILING SURFACE MOUNTED	MONTAGE BODEN - WAND - DECKE AUFGEBAUT	MONTAJE SUELO - PARED-TECHO MONTADO AL SUPERFICIE	MONTAGGIO PAVIMENTO-PARETE - SOFFITTO MONTATO A SUPERFIC E
	BEVESTIGING VLOER - WAND - PLAFOND INBOUW	MONTAGE SOL - MUR - PLAFOND ENCASTRE	FIXATION FLOOR - WALL - CEILING RECESSED	MONTAGE BODEN - WAND - DECKE EINGEBAUT	MONTAJE SUELO - PARED-TECHO EMPOTRADO	MONTAGGIO PAVIMENTO-PARETE - SOFFITTO-INCASSO
	BEVESTIGING PLAFOND GEPENDELD	MONTAGE PLAFOND SUSPENDU	FIXATION CEILING SUSPENDED	MONTAGE DECKE GEPENDELT	MONTAJE TECHO SUSPENDIDO	MONTAGGIO SOFFITTO SOSPESO
	STAND ALONE	STAND ALONE	STAND ALONE	STAND ALONE	STAND ALONE	STAND ALONE
	GESCHIKT VOOR BINNEN- EN BUITENGEBRUIK	CONVIENT A USAGE INTERIEUR ET EXTERIEUR	SUITABLE FOR INDOOR AND OUTDOOR USE	EIGNET SICH FUR INNEN- UND AUßENBEREICH	APTO PARA USO INTERIOR Y EXTERIOR	PER UTILIZZO SIA IN IN INTERNI CHE DA ESTERNI
S1	VEREN VOOR HOLLE WAND	RESSORTS PRECONISES POUR FAUX-PLAFONDS	SPRINGS FOR HOLLOW SURFACES	FEDERN F'ÜR HOHL RAUMDECKE	MUELLES PARA UTILIZAR EN FALSOS TECHOS DE ESCAYOLA Y PLADUR	SISTEMA DI FISSAGGIO PER CONTRO-SOFFITTI IN LASTRE O PANNELLI
S2	VEREN VOOR VOLLE WAND	RESSORTS PRECONISES POUR PLAFONDS STANDARDS	SPRINGS FOR SOLID SURFACES	FEDERN FÜR VOLL MATERIAL	MUELLES PARA UTILIZAR EN HORMIGON	SISTEMA DI FISSAGGIO PER VANI CHIUSI REALIZZATI NELLA MURATURA
BAP	LAAGLUMINANTIERASTER	DIFFUSEUR ANTI - REFLETS SPECIAL INFORMATIQUE	CATEGORY II LOUVER	BAP RASTER	REFLECTOR DE BAJA LUMINANCIA	RIFLETTORE A BASSA LUMINENZA
TE	ELEKTRONISCHE TRANSFORMATOR	TRANSFORMATEUR ELECTRONIQUE	ELECTRONIC TRANSFORMER	ELEKTRONISCHER TRANSFORMATOR	TRANSFORMADOR ELECTRÓNICO	TRASFORMATOR E ELETTRONICO
EXCL.TRANSFO	EXCL.TRANSFORMATOR	EXCL.TRANSFORMATEUR	EXCL.TRANSFORMER	EXKL.TRANSFORMATOR	EXCL.TRANSFORMADOR	ESCL.TRASFORMATORE
EVG	ELEKTRONISCHE VOORSCHAKELAPPARATUUR	BALLAST ELECTRONIQUE	ELECTRONIC BALLAST	ELEKTRONISCHES VORSCHALTGERÄT	BALASTRO ELECTRONICO	REATTORE ELETTRONICO
EVG **DIMMABLE**	DIMBAAR ELEKTRONISCHE VOORSCHAKELAPPARATUUR	BALLAST ELECTRONIQUE DIMMABLE	ELECTRONIC D MMABLE BALLAST	ELEKTRONISCHES DIMBARES VORSCHALTGERÄT	BALASTRO ELECTRONICO REGULABLE	REATTORE ELETTRONICO DIMMERABILE
λ	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9	LAMBDA = 0,9
FE	D MBAAR FASE AFSNIJDING	COUPE PHASE DESCENDANTE	FALLING EDGE DIMMABLE	PHASENABSCHNITT DIMMUNG	REGULACION DE CORTE DESCENDENTE	REGOLAZIONE CON DIMMER A TAGLIO DI FASE
SBL	GEZANDSTRAALD	SABLE	SANDBLASTED	GESANDSTRAHLTES	SATINADO	SATINATO
ESG	VEILIGHEIDSGLAS	VERRE DE SECURITE	SAFETY GLASS	EINSCHEIBEN SICHERHEITSGLAS	CRISTAL DE SEGURIDAD	VETRO DI SICUREZZA
95	AFMETINGEN IN MM	DIMENSIONS EN MM	DIMENSIONS IN MM	ABMESSUNGEN IN MM	DIMENSIONES EN MM	DIMENSIONI IN MM
TOL. DIN	TOLERANTIE VOLGENS DIN-NORMEN	TOLERANCE CONFORME AUX NORMES DIN	TOLERANCE ACCORDING TO DIN-SPECIFICATIONS	TOLERANZ NACH DIN-NORMEN	TOLERANCIA SEGUN LAS NORMAS DIN	TOLLERANZE A NORME DIN
DIN EN12020-2	TOLERANTIES EXTRUSIE	TOLERANCES EXTRUSION	TOLERANCES EXTRUSION	TOLERANZEN EXTRUSION	TOLERANCIA EXTRUSION	TOLLERANZA ESTRUSIONE
DIN 17.611	TOLERANTIES ANODISATIE	TOLERANCES ANODISATION	TOLERANCES ANODISATION	TOLERANZEN ELOXIERUNG	TOLERANCIA ANODIZADO	TOLLERANZA ANODIZZATO
DIN 55.928	TOLERANTIES LAKWERK	TOLERANCES LAQUAGE	TOLERANCES COATING	TOLERANZEN LACKIERUNG	TOLERANCIA LACA	TOLLERANZA LACCA
®	GEREGISTREERD DESIGN	MODÈLE DÉPOSÉ	REGISTERED DESIGN	REGISTRIERTES DESIGN	DISEÑO REGISTRADO	MODELLO DEPOSITATO
led	LED TOESTEL	LUMINAIRE À LED	LED LUMINAIRE	LED LEUCHTE	FUENTE LED	APPARECCHIO ALIMENTATO A LED
	GESCHIKT VOOR TOEPASSING IN BADKAMERS (*)	APPLICABLE POUR SALLES DE BAINS (*)	SUITABLE FOR USE IN BATHROOM (*)	GEEIGNET FÜR INSTALLATION IM BADEZIMMER (*)	ILUMINACIÓN APTO PARA USO EN BAÑOS (*)	ILLUMINAZIONE ADATTA PER L'AMBIENTE BAGNO (**)
SOFT DIM	PAG TEC 9	PAG TEC 9	PAG TEC 9	PAG TEC 9	PAG TEC 9	PAG TEC 9

PRODUCT DESIGN AWARD NDUSTRIE FORUM HANNOVER MESSE

PRODUCT DESIGN PLUS AWARD FRANKFURT

L GHTS OF THE FUTURE AWARD

BEST PRODUCT AWARD DESIGN BRUSSELS

DES GNPREIS NOMINEE

RED DOT DESIGN AWARD

Interior Innovation Award

Good Design Award

Green Good Design Award

German Des gn Award

tech

) CEBEC IS THE BELGIAN CERTIFICATION BODY N THE FIELD OF ELECTRICAL EQUIPMENT
T IS PARTICIPATING IN THE CB SCHEME SINCE T IS ACCREDITED AS A CERT FICAT ON BODY FOR THE CERTIF CATION OF PRODUCTS ACCORDING TO EN 45011 AND THE CERTIFICATION OF QUALITY SYSTEMS ACCORDING TO THE STANDARD EN 45012

) CHECK COMPLIANCE WITH LOCAL REGULATIONS

?PRODUCTS MANUFACTURED ACCORDING TO IEC/EN 60598 1 AND THE APPLICABLE SECTIONS OF EC/EN 60598 2



INDEX
BY NAME

A

ANTI-GLARE TUBE	TEC 40
AULA 26 WW	EXT 171
AULA 60 WW	EXT 171
AYA DOWN-UP Hi	EXT 103
AYA Hi	EXT 103

B

BACKSPACE 26 EVG	INT 573
BACKSPACE 36 EVG	INT 573
BACKSPACE 38 LED	INT 573
BACKSPACE 66 LED	INT 573
BALLASTSET C50 20 4,0 kV	TEC 26
BALLASTSET C50 35 4,0 kV	TEC 26
BALLASTSET HID 135	TEC 26
BALLASTSET HID 170	TEC 26
BASIC LRA 50 Hi	EXT 133
BASIC LRI 50 Hi	EXT 133
BASIC LSI 50 Hi	EXT 133
BASIC R GLASS SBL	EXT 132, TEC 40
BASIC S DECORATIVE GLASS	EXT 132, TEC 40
BASIC S GLASS SBL	EXT 132, TEC 40
BAZIL 121	EXT 145
BAZIL 123	EXT 145
BAZIL 126	EXT 145
BAZIL 63	EXT 145
BAZIL 66	EXT 145
BE COOL 130	INT 475, INT 583
BE COOL 154	INT 475, INT 583
BE COOL 155	INT 583
BE COOL 230	INT 475, INT 583
BE COOL 254	INT 475, INT 583
BE COOL C 230	INT 475
BE COOL C 254	INT 475
BE COOL X 114	EXT 107
BE COOL X 128	EXT 107
B-FLEX H2 NW	INT 521
B-FLEX H2 WW	INT 521
B-FLEX V2 NW	INT 521
B-FLEX V2 WW	INT 521
BL - PROFILE	PRO 56
B-LINER 65 P630 EVG DIM1	INT 487
B-LINER 6522 IP	EXT 33
B-LINER 6532 IP	EXT 33
B-LINER 6542 IP	EXT 33
BLN 65 - PROFILE	PRO 138
BLN 70 - PROFILE	PRO 138
BOOSTER HIC-35 FL28	INT 373
BOOSTER HIC-35 FL28 AD	INT 641
BOOSTER HIC-35 SP18	INT 373
BOOSTER HIC-35 SP18 AD	INT 641
BOOSTER HIC-35 WFL52	INT 373
BOOSTER HIC-35 WFL52 AD	INT 641
BOOSTER HIC-70 FL28	INT 373
BOOSTER HIC-70 FL28 AD	INT 641
BOOSTER HIC-70 SP18	INT 373
BOOSTER HIC-70 SP18 AD	INT 641
BOOSTER HIC-70 WFL52	INT 373
BOOSTER HIC-70 WFL52 AD	INT 641
BOOSTER HP 3020	INT 372
BOOSTER HP 3020 AD	INT 638
BOOSTER HP 3027	INT 373
BOOSTER HP 3027 AD	INT 639
BOOSTER HP 3027 AD DIM5	INT 639
BOOSTER HP 3040	INT 372
BOOSTER HP 3040 AD	INT 638
BOOSTER HP 3050	INT 373
BOOSTER HP 3050 AD	INT 639
BOOSTER HP 3050 AD DIM5	INT 639
BOOSTER HP 4 3027 AD	INT 639
BOOSTER HP 4 3027 AD DIM5	INT 639
BOOSTER HP 4 3027 DIM5	INT 373
BOOSTER HP 4 3050 AD	INT 639
BOOSTER HP 4 3050 AD DIM5	INT 639
BOOSTER HP 4 3050 DIM5	INT 373
BOTANIC 24 WW	EXT 191
BOTANIC 54 WW	EXT 191
BOWL GLASS AMBER	INT 307, INT 445, INT 541
BOWL GLASS CLEAR	INT 307, INT 445, INT 541
BOWL GLASS OPAL WHITE	INT 307, INT 445, INT 541
BOXTER 1 50	INT 333
BOXTER 1 LED 2733	INT 332
BOXTER 1 LED 2733-9	INT 332
BOXTER 1 LED 3033	INT 332
BOXTER 1 LED 3033-9	INT 332
BOXTER 2 50	INT 333
BOXTER 2 LED 2733	INT 332
BOXTER 2 LED 2733-9	INT 332
BOXTER 2 LED 3033	INT 332
BOXTER 2 LED 3033-9	INT 332
BOXY	INT 327
BOXY +	INT 327, EXT 37
BOXY + 12V	INT 327, EXT 37
BOXY 2 L+ LED 2733	INT 325
BOXY 2 L+ LED 2733-9	INT 325
BOXY 2 L+ LED 3033	INT 325, EXT 37
BOXY 2 L+ LED 3033-9	INT 325
BOXY GLASS SBL	TEC 38
BOXY HONEYCOMB	TEC 38
BOXY L+ LED 2733	INT 325
BOXY L+ LED 2733-9	INT 325
BOXY L+ LED 3033	INT 325
BOXY L+ LED 3033	INT 325, EXT 37
BOXY L+ LED 3033-9	INT 325
BOXY R 82733	INT 318
BOXY R 82733 DIM8	INT 319
BOXY R 82733 DIM8	INT 319, EXT 27
BOXY R 82733 DIM8 AD	INT 605
BOXY R 83033	INT 318
BOXY R 83033 DIM8	INT 319
BOXY R 83033 DIM8	INT 319, EXT 27
BOXY R 83033 DIM8 AD	INT 605
BOXY R 92733	INT 318
BOXY R 92733 DIM8	INT 319
BOXY R 92733 DIM8	INT 319, EXT 27
BOXY R 92733 DIM8 AD	INT 605
BOXY R 93033	INT 318
BOXY R 93033 DIM8	INT 319
BOXY R 93033 DIM8	INT 319, EXT 27
BOXY R 93033 DIM8 AD	INT 605
BOXY R C 82733 DIM8	INT 319
BOXY R C 83033 DIM8	INT 319
BOXY R C 92733 DIM8	INT 319
BOXY R C 93033 DIM8	INT 319
BOXY RB 82733 DIM8	INT 319
BOXY RB 83033 DIM8	INT 319
BOXY RB 92733 DIM8	INT 319
BOXY RB 93033 DIM8	INT 319
BOXY SOFTENING LENS	TEC 38
BOXY WL+ LED 2733	INT 569
BOXY WL+ LED 3033	INT 569
BOXY XL R 82720	INT 323
BOXY XL R 82737	INT 323
BOXY XL R 83020	INT 323
BOXY XL R 83037	INT 323
BOXY XL R 92720	INT 323
BOXY XL R 92737	INT 323
BOXY XL R 93020	INT 323
BOXY XL R 93037	INT 323
BOXY XL R C 82720	INT 323
BOXY XL R C 82737	INT 323
BOXY XL R C 83020	INT 323
BOXY XL R C 83037	INT 323
BOXY XL R C 92720	INT 323
BOXY XL R C 92737	INT 323
BOXY XL R C 93020	INT 323
BOXY XL R C 93037	INT 323
BOXY XL S 82720	INT 331
BOXY XL S 82737	INT 331
BOXY XL S 83020	INT 331
BOXY XL S 83037	INT 331
BOXY XL S 92720	INT 331
BOXY XL S 92737	INT 331
BOXY XL S 93020	INT 331
BOXY XL S 93037	INT 331
B-SIDE LED NW	INT 521
B-SIDE LED WW	INT 521

C

CABLE BASE R	TEC 36
CABLE BASE S	TEC 36
CAMUS 10 LED WW	INT 565
CARREE 145 S1	INT 189
CARREE 150 LED S1	INT 189
CARREE 235 S1	INT 189
CARREE GT Hi S1	INT 183
CARREE GT LED 2733 S1	INT 182
CARREE GT LED 3033 S1	INT 182
CARREE GT LED SOFT S1	INT 182
CARREE GT S1	INT 183
CARREE II Hi S1	INT 179
CARREE II OK Hi S1	INT 179
CARREE II OK Hi S2	INT 179
CARREE II OK S1	INT 179
CARREE II OK S2	INT 179
CARREE II S1	INT 179
CARREE II S2	INT 179
CARREE II X S1	EXT 17
CARREE II X S2	EXT 17
CARREE MAX Hi S1	INT 183
CARREE MAX Hi S2	INT 183
CARREE MAX S1	INT 183
CARREE MAX S2	INT 183
CARREE RS LED 2733	INT 184
CARREE RS LED 2733-9	INT 184
CARREE RS LED 3033	INT 184
CARREE RS LED 3033-9	INT 184
CARREE Rs50 Hi S1	INT 185
CARREE Rs50 Hi S2	INT 185
CARREE Rs50 OK	INT 185
CARREE Rs50 OK Hi	INT 185
CARREE Rs50 S1	INT 185
CARREE Rs50 S2	INT 185
CARREE SC OK 2733 S1	INT 175
CARREE SC OK 2733 S2	INT 175
CARREE SC OK 2733-9 S1	INT 175
CARREE SC OK 2733-9 S2	INT 175
CARREE SC OK 3033 S1	INT 175
CARREE SC OK 3033 S2	INT 175
CARREE SC OK 3033-9 S1	INT 175
CARREE SC OK 3033-9 S2	INT 175
CARREE SC OK SOFT S1	INT 175
CARREE SC OK SOFT S2	INT 175
CARREE ST L LED 2733 S1	INT 174
CARREE ST L LED 2733-9 S1	INT 174
CARREE ST L LED 3033 S1	INT 174
CARREE ST L LED 3033-9 S1	INT 174
CARREE ST L LED SOFT S1	INT 174
CARREE ST LED 2733 S1	INT 170
CARREE ST LED 2733-9 S1	INT 170
CARREE ST LED 3033 S1	INT 170
CARREE ST LED 3033-9 S1	INT 170
CARREE ST OK LED 2733 S1	INT 171
CARREE ST OK LED 2733 S2	INT 171
CARREE ST OK LED 2733-9 S1	INT 171
CARREE ST OK LED 2733-9 S2	INT 171

CARREE ST OK LED 3033 S1 INT 171
CARREE ST OK LED 3033 S2 INT 171
CARREE ST OK LED 3033-9 S1 INT 171
CARREE ST OK LED 3033-9 S2 INT 171
CARREE ST OK LED SOFT S1 INT 171
CARREE ST OK LED SOFT S2 INT 171
CARREE ST OK S1 INT 178
CARREE ST OK S2 INT 178
CARREE ST S1 INT 178
CARREE TRIMLESS LED 2733 S1 INT 166
CARREE TRIMLESS LED 2733-9 S1 INT 166
CARREE TRIMLESS LED 3033 S1 INT 166
CARREE TRIMLESS LED 3033-9 S1 INT 166
CARREE TRIMLESS OK LED 2733 INT 167
CARREE TRIMLESS OK LED 2733-9 INT 167
CARREE TRIMLESS OK LED 3033 INT 167
CARREE TRIMLESS OK LED 3033-9 INT 167
CARREE TRIMLESS OK LED SOFT INT 167
CARREE TRIMLESS OK S1 INT 167
CARREE X LED 3033 S1 EXT 17
CARREE X LED 3033-65 S1 EXT 17
CARREE X LED 3033-65 S2 EXT 17
CARREEPOINT TEC 34
CBOX TEC 37
CBOX 350 mA / 10W TEC 37
CBOX T100 TEC 37
CBOX T50 TEC 37
CIRCLE Hi S1 INT 131
CIRCLE Hi S2 INT 131
CIRCLE S Hi S1 INT 131
CIRCLE S Hi S2 INT 131
CIRCLE S S1 INT 131
CIRCLE S S2 INT 131
CIRCLE S1 INT 131
CIRCLE S2 INT 131
CITYSCAN 643 QT EXT 151
CITYSCAN 643 T18 EXT 151
CITYSCAN 646 QT EXT 151
CITYSCAN 646 T18 EXT 151
CLIP 111 TEC 39
CLIP 50 TEC 39
C-MAX Hi S1 INT 113
C-MAX Hi S2 INT 113
C-MAX S1 INT 113
C-MAX S2 INT 113
CONCRETE BOX 108 TEC 29
CONCRETE BOX 109 TEC 29
CONCRETE BOX 110 TEC 29
CONCRETE BOX 111 TEC 29
CONCRETE BOX 115 TEC 29
CONCRETE BOX 120 TEC 29
CONCRETE BOX 121 TEC 29
CONCRETE BOX 122 TEC 29
CONCRETE BOX 123 TEC 29
CONCRETE BOX 124 TEC 29
CONCRETE BOX 145 TEC 29
CONCRETE BOX 151 TEC 29
CONCRETE BOX 153 TEC 29
CONCRETE BOX 161 TEC 29
CONCRETE BOX 162 TEC 29
CONCRETE BOX 163 TEC 29
CONCRETE BOX 165 TEC 29
CONCRETE BOX 180 TEC 29
CONCRETE BOX 183 TEC 29
CONCRETE BOX 184 TEC 29
CONCRETE BOX 185 TEC 29
CONCRETE BOX 186 TEC 29
CONCRETE BOX 187 TEC 29
CONCRETE BOX 188 TEC 29
CONCRETE BOX 189 TEC 29
CONCRETE BOX 191 TEC 29
CONCRETE BOX 192 TEC 29
CONCRETE BOX 194 TEC 29
CONCRETE BOX TR 152 TEC 29
CONCRETE BOX TR 154 TEC 29
CONCRETE PACK C S75 TEC 30
CONCRETE PACK LOGIC W L TEC 30
CONCRETE PACK LOGIC W S TEC 30
CONCRETE PACK MGIT 1 TEC 30
CONCRETE PACK MGIT 2 TEC 30
CONCRETE PACK S75 TEC 30
CONCRETE PACK T R76 TEC 30
CONCRETE PACK T S75 TEC 30
CONCRETE PACK TMK R82 TEC 30
CONE 111 TEC 39
CONE 50 TEC 39
CONE 66 TEC 39
CONNECTION TRIMLESS O.F.A. PRO 14, TEC 36
COVERSET R 100 TEC 36
COVERSET R 62 TEC 36
COVERSET R 90 TEC 36
COVERSET S 62 TEC 36
COVERSET S 80 TEC 36
COVERSET S 90 TEC 36
CREDO 111 JAC INT 423
CREDO 50 JAC INT 423
CREDO 70 JAC INT 423
CREDO REO 2733 JAC INT 422
CREDO REO 2733-9 JAC INT 422
CREDO REO 3033 JAC INT 422
CREDO REO 3033-9 JAC INT 422
CUMULUS 155-111 C INT 481
CUMULUS 255 C INT 481
CUMULUS 255 C EVG DIM6 INT 481
CUMULUS RGB C INT 481

D

DALI TO 1-10V CONVERTER TEC 26
DAX CLIP TEC 35
DAXPOINT TEC 34
DEEP RINGO Hi S1 INT 123
DEEP RINGO LED 2733 INT 123
DEEP RINGO LED 2733-9 INT 123
DEEP RINGO LED 3033 INT 123
DEEP RINGO LED 3033-9 INT 123
DEEP RINGO LED SOFT INT 123
DEEP RINGO S LED 2733 S1 INT 127
DEEP RINGO S LED 2733 S2 INT 127
DEEP RINGO S LED 2733-9 S1 INT 127
DEEP RINGO S LED 2733-9 S2 INT 127
DEEP RINGO S LED 3033 S1 INT 127
DEEP RINGO S LED 3033 S2 INT 127
DEEP RINGO S LED 3033-9 S1 INT 127
DEEP RINGO S LED 3033-9 S2 INT 127
DEEP RINGO S LED SOFT S1 INT 127
DEEP RINGO S LED SOFT S2 INT 127
DEEP RINGO S1 INT 123
DELTA CLIP + ROSAS TEC 35
DELTA FIX TEC 35
DELTAPOINT SINGLE TEC 34
DICROIC FILTER 100 BLUE TEC 39
DICROIC FILTER 50 BLUE TEC 39
DICROIC FILTER 50 GREEN TEC 39
DICROIC FILTER 50 RED TEC 39
DICROIC FILTER 50 YELLOW TEC 39
DIRO 126 SBL INT 105
DIRO 130 S1 INT 98
DIRO 226 SBL INT 105
DIRO DUO S1 INT 99
DIRO DUO ST OK LED 2733 S1 INT 97
DIRO DUO ST OK LED 2733-9 S1 INT 97
DIRO DUO ST OK LED 3033 S1 INT 97
DIRO DUO ST OK LED 3033-9 S1 INT 97
DIRO DUO ST S1 INT 97
DIRO GT INT 101, EXT 15
DIRO GT LED 2733 INT 101
DIRO GT LED 3033 INT 101, EXT 15
DIRO GT LED SOFT INT 101
DIRO LED + S1 HW INT 105
DIRO LED + S1 WW INT 105
DIRO OK Hi S2 INT 99
DIRO OK S1 INT 99
DIRO OK S2 INT 99
DIRO OK X S1 EXT 15
DIRO ST OK LED 2733 INT 95
DIRO ST OK LED 2733-9 INT 95
DIRO ST OK LED 3033 INT 95
DIRO ST OK LED 3033-9 INT 95
DIRO ST OK S1 INT 95
DIRO TRIMLESS LED 2733 INT 91
DIRO TRIMLESS LED 2733-9 INT 91
DIRO TRIMLESS LED 3033 INT 91
DIRO TRIMLESS LED 3033-9 INT 91
DIRO TRIMLESS LED SOFT INT 91
DIRO TRIMLESS OK S1 INT 91
DIRO TRIMLESS S1 INT 91
DOWNFORCE R INT 265
DOWNFORCE R COVER INT 265
DOWNFORCE R EVG DIM2 INT 265
DOWNFORCE R GLASS INT 265
DOWNFORCE S INT 267
DOWNFORCE S COVER INT 267
DOWNFORCE S EVG DIM2 INT 267
DOWNFORCE S GLASS INT 267
DOWNFORCE S GLASS SBL INT 267
DOWNFORCE S RASTER INT 267
DOX 100 EXT 105
DOX 100 DOWN-UP EXT 105
DOX 100 DOWN-UP LED EXT 105
DOX 100 LED EXT 105
DOX 100 S EXT 29
DOX 100 S LED EXT 29
DREVE 3030 EXT 195

E

END30 - PROFILE PRO 96
END30+ - PROFILE PRO 102
ENDLESS 124 INT 490
ENDLESS 154 INT 490
ENDLESS 30 LED WW INT 491
ENDLESS 30 P1154 INT 491
ENDLESS 30+ P1154 INT 491
ENDLESS 30+ P2154 INT 491
EXPOSED CONCRETE PACK C S75 TEC 30
EXPOSED CONCRETE PACK GIT 1 TEC 30
EXPOSED CONCRETE PACK GIT 2 TEC 30
EXPOSED CONCRETE PACK GIT 3 TEC 30
EXPOSED CONCRETE PACK GIT 4LINE TEC 30
EXPOSED CONCRETE PACK S75 TEC 30
EXPOSED CONCRETE PACK T S75 TEC 30

F

FEMTOLINE 145 NW INT 511
FEMTOLINE 145 WW INT 511
FIFTY-0 827 INT 535
FIFTY-0 830 INT 535
FIFTY-5 827 INT 535
FIFTY-5 830 INT 535
FLAC 83015 INT 439
FLAC 83030 INT 439
FLATPOINT TEC 34
FLIP 15 EXT 153
FLIP 25 EXT 153
FLIP 40 EXT 153
FLIP SET 25 EXT 137
FLIP SET 40 EXT 137
FLIP TWIN SET 25 EXT 137
FLIP TWIN SET 40 EXT 137
FNL - PROFILE PRO 174
FORTY-5 L INT 531
FORTY-5 R INT 531
FRONTGLASS 109 TEC 39
FRONTGLASS 111 TEC 39
FTL25 - PROFILE PRO 78
FTL25 F - PROFILE PRO 79
FTL25 T - PROFILE PRO 78
FTL35 - PROFILE PRO 70
FTL35 F - PROFILE PRO 70

FTL35 TR - PROFILE PRO 70
FTL45 - PROFILE PRO 78

G

GABOO C INT 447
GABOO W INT 539
GALA INT 557
GALA L LED WW INT 557, EXT 85
GALA L OK LED WW INT 556, EXT 85
GALA LED WW INT 557
GALA S LED INT 556
GENIE 90 R O P EXT 131
GENIE 90 R P EXT 131
GENIE 90 R P SBL EXT 131
GENIE 90 S EXT 131
GENIE 90 S O EXT 131
GENIE 90 S SBL EXT 131
GENIE BOX 80 S / 90 S EXT 130, TEC 37
GENIE BOX 90 R EXT 130, TEC 37
GIBBO 827 INT 445
GIBBO 830 INT 445
GLASS SBL 40 TEC 38
GLASS SBL 50 TEC 38
GLASS SBL 50 TEC 39
GLASS SBL 70 TEC 38
GLASS SBL 78 TEC 38
GLASS SBL 87 TEC 38
GRAFITI 211 T50 EXT 109
GRAFITI 411 T50 EXT 109
GRAND CARREE 126 SBL INT 191
GRAND CARREE LED INT 191
GRAND DIRO ST 111 INT 107
GRAND DIRO TRIMLESS 111 INT 107
GRAND DIRO TRIMLESS D 111 INT 107
GRAND PRIX RC 211 T50 INT 443
GRAND PRIX RC 411 T50 INT 443
GRAND PRIX SC 411 T50 INT 443
GRAND REO 82720 S1 INT 77
GRAND REO 82720 S2 INT 77
GRAND REO 82735 S1 INT 77
GRAND REO 82735 S2 INT 77
GRAND REO 83020 S1 INT 77
GRAND REO 83020 S2 INT 77
GRAND REO 83035 S1 INT 77
GRAND REO 83035 S2 INT 77
GRAND REO 92720 S1 INT 77
GRAND REO 92720 S2 INT 77
GRAND REO 92735 S1 INT 77
GRAND REO 92735 S2 INT 77
GRAND REO 93020 S1 INT 77
GRAND REO 93020 S2 INT 77
GRAND REO 93035 S1 INT 77
GRAND REO 93035 S2 INT 77
GRAND REO OK 82720 S1 INT 79
GRAND REO OK 82720 S2 INT 79
GRAND REO OK 82735 S1 INT 79
GRAND REO OK 82735 S2 INT 79
GRAND REO OK 83020 S1 INT 79
GRAND REO OK 83020 S2 INT 79
GRAND REO OK 83035 S1 INT 79
GRAND REO OK 83035 S2 INT 79
GRAND REO OK 92720 S1 INT 79
GRAND REO OK 92720 S2 INT 79
GRAND REO OK 92735 S1 INT 79
GRAND REO OK 92735 S2 INT 79
GRAND REO OK 93020 S1 INT 79
GRAND REO OK 93020 S2 INT 79
GRAND REO OK 93035 S1 INT 79
GRAND REO OK 93035 S2 INT 79
GRID IN 1 FRAME INT 241
GRID IN 1 H111 INT 248
GRID IN 1 HIC FL24 INT 248
GRID IN 1 HIC SP15 INT 248
GRID IN 1 HIC WFL43 INT 248
GRID IN 1 HP 303027 INT 247
GRID IN 1 HP 303027-9 INT 247
GRID IN 1 HP 303050 INT 247
GRID IN 1 HP 303050-9 INT 247
GRID IN 1 OPTO 20 82715 INT 245
GRID IN 1 OPTO 20 82733 INT 245
GRID IN 1 OPTO 20 82755 INT 245
GRID IN 1 OPTO 20 83015 INT 245
GRID IN 1 OPTO 20 83033 INT 245
GRID IN 1 OPTO 20 83055 INT 245
GRID IN 1 OPTO 20 92715 INT 245
GRID IN 1 OPTO 20 92733 INT 245
GRID IN 1 OPTO 20 92755 INT 245
GRID IN 1 OPTO 20 93015 INT 245
GRID IN 1 OPTO 20 93033 INT 245
GRID IN 1 OPTO 20 93055 INT 245
GRID IN 1 QR INT 248
GRID IN 1 REO 20 82733 INT 243
GRID IN 1 REO 20 83033 INT 243
GRID IN 1 REO 20 92733 INT 243
GRID IN 1 REO 20 93033 INT 243
GRID IN 2 CR FL24 INT 249
GRID IN 2 CR SP15 INT 249
GRID IN 2 CR WFL43 INT 249
GRID IN 2 FRAME INT 241
GRID IN 2 H111 INT 249
GRID IN 2 HIC FL24 INT 249
GRID IN 2 HIC SP15 INT 249
GRID IN 2 HIC WFL43 INT 249
GRID IN 2 HP 303027 INT 247
GRID IN 2 HP 303027-9 INT 247
GRID IN 2 HP 303050 INT 247
GRID IN 2 HP 303050-9 INT 247
GRID IN 2 OPTO 20 82715 INT 245
GRID IN 2 OPTO 20 82733 INT 245
GRID IN 2 OPTO 20 82755 INT 245
GRID IN 2 OPTO 20 83015 INT 245
GRID IN 2 OPTO 20 83033 INT 245
GRID IN 2 OPTO 20 83055 INT 245
GRID IN 2 OPTO 20 92715 INT 245
GRID IN 2 OPTO 20 92733 INT 245
GRID IN 2 OPTO 20 92755 INT 245
GRID IN 2 OPTO 20 93015 INT 245
GRID IN 2 OPTO 20 93033 INT 245
GRID IN 2 OPTO 20 93055 INT 245
GRID IN 2 QR INT 249
GRID IN 2 REO 20 82733 INT 243
GRID IN 2 REO 20 83033 INT 243
GRID IN 2 REO 20 92733 INT 243
GRID IN 2 REO 20 93033 INT 243
GRID IN 3 CR FL24 INT 251
GRID IN 3 CR SP15 INT 251
GRID IN 3 CR WFL43 INT 251
GRID IN 3 HIC FL24 INT 250
GRID IN 3 HIC SP15 INT 250
GRID IN 3 HIC WFL43 INT 250
GRID IN 3 QR INT 250
GRID IN 4 QR INT 251
GRID IN 4LINE QR INT 251
GRID IN TRIMLESS 1 FRAME INT 225
GRID IN TRIMLESS 1 H111 INT 233
GRID IN TRIMLESS 1 HP 303027 INT 231
GRID IN TRIMLESS 1 HP 303027-9 INT 231
GRID IN TRIMLESS 1 HP 303050 INT 231
GRID IN TRIMLESS 1 HP 303050-9 INT 231
GRID IN TRIMLESS 1 MOUNTING KIT TEC 32
GRID IN TRIMLESS 1 MOUNTING KIT HP TEC 32
GRID IN TRIMLESS 1 MOUNTING KIT LARGE TEC 32
GRID IN TRIMLESS 1 OPTO 20 82715 INT 229
GRID IN TRIMLESS 1 OPTO 20 82733 INT 229
GRID IN TRIMLESS 1 OPTO 20 82755 INT 229
GRID IN TRIMLESS 1 OPTO 20 83015 INT 229
GRID IN TRIMLESS 1 OPTO 20 83033 INT 229
GRID IN TRIMLESS 1 OPTO 20 83055 INT 229
GRID IN TRIMLESS 1 OPTO 20 92715 INT 229
GRID IN TRIMLESS 1 OPTO 20 92733 INT 229
GRID IN TRIMLESS 1 OPTO 20 92755 INT 229
GRID IN TRIMLESS 1 OPTO 20 93015 INT 229
GRID IN TRIMLESS 1 OPTO 20 93033 INT 229
GRID IN TRIMLESS 1 OPTO 20 93055 INT 229
GRID IN TRIMLESS 1 QR INT 233
GRID IN TRIMLESS 1 REO 20 82733 INT 227
GRID IN TRIMLESS 1 REO 20 83033 INT 227
GRID IN TRIMLESS 1 REO 20 92733 INT 227
GRID IN TRIMLESS 1 REO 20 93033 INT 227
GRID IN TRIMLESS 2 FRAME INT 225
GRID IN TRIMLESS 2 H111 INT 233
GRID IN TRIMLESS 2 HP 303027 INT 231
GRID IN TRIMLESS 2 HP 303027-9 INT 231
GRID IN TRIMLESS 2 HP 303050 INT 231
GRID IN TRIMLESS 2 HP 303050-9 INT 231
GRID IN TRIMLESS 2 MOUNTING KIT TEC 32
GRID IN TRIMLESS 2 MOUNTING KIT HP TEC 32
GRID IN TRIMLESS 2 MOUNTING KIT LARGE TEC 32
GRID IN TRIMLESS 2 OPTO 20 82715 INT 229
GRID IN TRIMLESS 2 OPTO 20 82733 INT 229
GRID IN TRIMLESS 2 OPTO 20 82755 INT 229
GRID IN TRIMLESS 2 OPTO 20 83015 INT 229
GRID IN TRIMLESS 2 OPTO 20 83033 INT 229
GRID IN TRIMLESS 2 OPTO 20 83055 INT 229
GRID IN TRIMLESS 2 OPTO 20 92715 INT 229
GRID IN TRIMLESS 2 OPTO 20 92733 INT 229
GRID IN TRIMLESS 2 OPTO 20 92755 INT 229
GRID IN TRIMLESS 2 OPTO 20 93015 INT 229
GRID IN TRIMLESS 2 OPTO 20 93033 INT 229
GRID IN TRIMLESS 2 OPTO 20 93055 INT 229
GRID IN TRIMLESS 2 QR INT 233
GRID IN TRIMLESS 2 REO 20 82733 INT 227
GRID IN TRIMLESS 2 REO 20 83033 INT 227
GRID IN TRIMLESS 2 REO 20 92733 INT 227
GRID IN TRIMLESS 2 REO 20 93033 INT 227
GRID IN TRIMLESS 3 MOUNTING KIT TEC 32
GRID IN TRIMLESS 3 QR INT 235
GRID IN TRIMLESS 4 MOUNTING KIT TEC 32
GRID IN TRIMLESS 4 QR INT 235
GRID IN TRIMLESS 4LINE MOUNTING KIT TEC 32
GRID IN TRIMLESS 4LINE QR INT 235
GRID IN ZB 1 BOX L TEC 31
GRID IN ZB 1 LED BOX TEC 31
GRID IN ZB 1 QR INT 220
GRID IN ZB 1 REO 20 82733 INT 219
GRID IN ZB 1 REO 20 83033 INT 219
GRID IN ZB 1 REO 20 92733 INT 219
GRID IN ZB 1 REO 20 93033 INT 219
GRID IN ZB 2 BOX L TEC 31
GRID IN ZB 2 LED BOX TEC 31
GRID IN ZB 2 QR INT 221
GRID IN ZB 2 REO 20 82733 INT 219
GRID IN ZB 2 REO 20 83033 INT 219
GRID IN ZB 2 REO 20 92733 INT 219
GRID IN ZB 2 REO 20 93033 INT 219
GRID IN ZB 3 BOX L TEC 31
GRID IN ZB 3 QR INT 221
GRID IN ZB 4 BOX L TEC 31
GRID IN ZB 4 QR INT 221
GRID ON 1 BOX INT 339
GRID ON 1 BOX 350mA INT 339
GRID ON 111 INT 343
GRID ON 111 LED INT 343
GRID ON 2 BOX INT 339
GRID ON 2 BOX 350mA INT 339
GRID ON 211 INT 343
GRID ON 211 LED INT 343
GRID SNAP-IN 82733 INT 241
GRID SNAP-IN 82733 INT 225
GRID SNAP-IN 82733 INT 339
GRID SNAP-IN 82733 INT 109
GRID SNAP-IN 83033 INT 241
GRID SNAP-IN 83033 INT 225
GRID SNAP-IN 83033 INT 339
GRID SNAP-IN 83033 INT 109
GRID SNAP-IN 92733 INT 241
GRID SNAP-IN 92733 INT 225
GRID SNAP-IN 92733 INT 339
GRID SNAP-IN 92733 INT 109
GRID SNAP-IN 93033 INT 241
GRID SNAP-IN 93033 INT 225
GRID SNAP-IN 93033 INT 339
GRID SNAP-IN 93033 INT 109

H

HALOLED 111 - 24° HW TEC 5
HALOLED 111 - 45° HW TEC 5
HALOLED 51 - 36° (20W) WW TEC 4
HALOLED 51 - 36° (35W) WW TEC 4
HALOLED E27 - 360° (60W) WW TEC 4
HALOLED Hi - 36° (35W) WW TEC 4
HDL75 - PROFILE PRO 144
HDL95 - PROFILE PRO 144
HEADLINER 75 P1154 INT 487
HELI 1 LED NW INT 500
HELI 1 LED WW INT 500
HELI 1 SCREEN INT 501
HELI 1 SCREEN LED NW INT 500
HELI 1 SCREEN LED WW INT 500
HELI 1 WHITE INT 501
HELI X SCREEN LED NW EXT 53
HELI X SCREEN LED WW EXT 53
HOLE IN ONE R15 INT 157
HOLE IN ONE R15 PLATE INT 156
HONEYCOMB 40 TEC 38
HONEYCOMB 50 TEC 38
HONEYCOMB 70 TEC 38
HONEYCOMB 78 TEC 38
HONEYCOMB 87 TEC 38
HONEYCOMB KIX TEC 41
HUSK INT 451

I

-BEAM 124 INT 575
i-LINER 124 INT 575
iMAX 50 INT 23
iMAX 50Hi INT 23
iMAX ADJUSTABLE 50 INT 29
iMAX ADJUSTABLE 50Hi INT 29
iMAX ADJUSTABLE BL4 82710 INT 25
iMAX ADJUSTABLE BL4 83010 INT 25
iMAX ADJUSTABLE BL4 92710 INT 25
iMAX ADJUSTABLE BL4 93010 INT 25
iMAX ADJUSTABLE BR20 82729 INT 27
iMAX ADJUSTABLE BR20 82743 INT 27
iMAX ADJUSTABLE BR20 83029 INT 27
iMAX ADJUSTABLE BR20 83043 INT 27
iMAX ADJUSTABLE BR20 92729 INT 27
iMAX ADJUSTABLE BR20 92743 INT 27
iMAX ADJUSTABLE BR20 93029 INT 27
iMAX ADJUSTABLE BR20 93043 INT 27
iMAX ADJUSTABLE BR8 82729 INT 26
iMAX ADJUSTABLE BR8 82743 INT 26
iMAX ADJUSTABLE BR8 83029 INT 26
iMAX ADJUSTABLE BR8 83043 INT 26
iMAX ADJUSTABLE BR8 92729 INT 26
iMAX ADJUSTABLE BR8 92743 INT 26
iMAX ADJUSTABLE BR8 93029 INT 26
iMAX ADJUSTABLE BR8 93043 INT 26
iMAX ADJUSTABLE C50 INT 29
iMAX ADJUSTABLE CL 82706 INT 25
iMAX ADJUSTABLE CL 83006 INT 25
iMAX ADJUSTABLE CL 92706 INT 25
iMAX ADJUSTABLE CL 93006 INT 25
iMAX ADJUSTABLE SOFT INT 26
iMAX ADJUSTABLE TRIMLESS 50 INT 35
iMAX ADJUSTABLE TRIMLESS 50Hi INT 35
iMAX ADJUSTABLE TRIMLESS BL4 82710 INT 31
iMAX ADJUSTABLE TRIMLESS BL4 83010 INT 31
iMAX ADJUSTABLE TRIMLESS BL4 92710 INT 31
iMAX ADJUSTABLE TRIMLESS BL4 93010 INT 31
iMAX ADJUSTABLE TRIMLESS BR20 82729 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 82743 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 83029 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 83043 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 92729 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 92743 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 93029 INT 33
iMAX ADJUSTABLE TRIMLESS BR20 93043 INT 33
iMAX ADJUSTABLE TRIMLESS BR8 82729 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 82743 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 83029 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 83043 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 92729 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 92743 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 93029 INT 32
iMAX ADJUSTABLE TRIMLESS BR8 93043 INT 32
iMAX ADJUSTABLE TRIMLESS C50 INT 35
iMAX ADJUSTABLE TRIMLESS CL 82706 INT 31
iMAX ADJUSTABLE TRIMLESS CL 83006 INT 31
iMAX ADJUSTABLE TRIMLESS CL 92706 INT 31
iMAX ADJUSTABLE TRIMLESS CL 93006 INT 31
iMAX ADJUSTABLE TRIMLESS SOFT INT 32
iMAX ADJUSTABLE TRIMLESS XR13 82743 INT 33
iMAX ADJUSTABLE TRIMLESS XR13 83043 INT 33
iMAX ADJUSTABLE TRIMLESS XR13 92743 INT 33
iMAX ADJUSTABLE TRIMLESS XR13 93043 INT 33
iMAX ADJUSTABLE XR13 82743 INT 27
iMAX ADJUSTABLE XR13 83043 INT 27
iMAX ADJUSTABLE XR13 92743 INT 27
iMAX ADJUSTABLE XR13 93043 INT 27
iMAX BL4 82710 INT 19
iMAX BL4 83010 INT 19
iMAX BL4 92710 INT 19
iMAX BL4 93010 INT 19
iMAX BR20 82729 INT 21
iMAX BR20 82743 INT 21
iMAX BR20 83029 INT 21
iiMAX BR20 83043 INT 21
iMAX BR20 92729 INT 21
iMAX BR20 92743 INT 21
iMAX BR20 93029 INT 21
iMAX BR20 93043 INT 21
iMAX BR8 82729 INT 20
iMAX BR8 82743 INT 20
iMAX BR8 83029 INT 20
iMAX BR8 83043 INT 20
iMAX BR8 92729 INT 20
iMAX BR8 92743 INT 20
iMAX BR8 93029 INT 20
iMAX BR8 93043 INT 20
iMAX C50 INT 23
iMAX CL 82706 INT 19
iMAX CL 83006 INT 19
iMAX CL 92706 INT 19
iMAX CL 93006 INT 19
iMAX COVER ROUND INT 17
iMAX COVER ROUND FLUSH INT 17
iMAX COVER ROUND IP INT 17
iMAX COVER ROUND TRIMLESS INT 17
iMAX COVER ROUND WALLWASH INT 17
iMAX COVER SQUARE INT 17
iMAX GLASS SBL INT 16, TEC 38
iMAX HONEYCOMB INT 16, TEC 38
iMAX LINEAR SPREAD LENS INT 16, TEC 38
iMAX SOFT INT 20
iMAX SOFTENING LENS INT 16, TEC 38
iMAX SPREAD LENS INT 16, TEC 38
iMAX TUBE INT 20
iMAX WALLWASH BR8 82729 INT 37
iMAX WALLWASH BR8 82743 INT 37
iMAX WALLWASH BR8 83029 INT 37
iMAX WALLWASH BR8 83043 INT 37
iMAX WALLWASH BR8 92729 INT 37
iMAX WALLWASH BR8 92743 INT 37
iMAX WALLWASH BR8 93029 INT 37
iMAX WALLWASH BR8 93043 INT 37
iMAX WALLWASH SOFT INT 37
iMAX WALLWASH XR13 82743 INT 37
iMAX WALLWASH XR13 83043 INT 37
iMAX WALLWASH XR13 92743 INT 37
iMAX WALLWASH XR13 93043 INT 37
iMAX XR13 82743 INT 21
iMAX XR13 83043 INT 21
iMAX XR13 92743 INT 21
iMAX XR13 93043 INT 21
iMAX+ BL4 82710 INT 43
iMAX+ BL4 83010 INT 43
iMAX+ BL4 92710 INT 43
iMAX+ BL4 93010 INT 43
iMAX+ BR8 82729 INT 43
iMAX+ BR8 82743 INT 43
iMAX+ BR8 83029 INT 43
iMAX+ BR8 83043 INT 43
iMAX+ BR8 92729 INT 43
iMAX+ BR8 92743 INT 43
iMAX+ BR8 93029 INT 43
iMAX+ BR8 93043 INT 43
iMAX+ CL 82706 INT 43
iMAX+ CL 83006 INT 43
iMAX+ CL 92706 INT 43
iMAX+ CL 93006 INT 43
INDUSTRIAL S NW EXT 39, EXT 67, EXT 167
INDUSTRIAL S WW EXT 39, EXT 67, EXT 167
INLET S BLUE INT 509
INLET S HW INT 509
INLET S NW INT 509
INLET S WW INT 509
IP68 CONNECTION KIT TEC 37
IP68 CONNECTOR 3P TEC 37

J

JACKPOINT TEC 34
JACKPOINT TRIMLESS O.F.A. TEC 34
JETI L 115 INT 469, INT 581
JETI L 124 INT 469, INT 581
JETI LUSTER INT 473
JETI LUSTER EVG DIM2 INT 473
JETI PLANO H 260 C INT 468
JETI PLANO L 110 INT 469, INT 581
JETI PLANO L 160 INT 469, INT 581
JETI PLANO L 218 INT 469, INT 581
JETI PLANO L 415 DIM1 INT 469, INT 581
JETI PLANO L 424 INT 469, INT 581
JETI S INT 468

K

KAP KIX TEC 41
KAP STRIPER TEC 41
KING TEAK EXT 199
KIX 3011 EXT 63, EXT 160
KIX 30120 EXT 63, EXT 160
KIX 3030 EXT 63, EXT 160
KIX 3055 EXT 63, EXT 160
KIX HP 3011 EXT 63, EXT 161
KIX HP 3030 EXT 63, EXT 161
KIX HP 3055 EXT 63, EXT 161
KIX HP PIN 3011 EXT 161
KIX HP PIN 3030 EXT 161
KIX HP PIN 3055 EXT 161
KIX M EXT 63, EXT 159
KIX M P30 EXT 159
KIX M P60 EXT 159
KIX M PIN FL30 EXT 159
KIX M PIN SP10 EXT 159
KIX PIN 3011 EXT 161
KIX PIN 30120 EXT 161
KIX PIN 3030 EXT 161
KIX PIN 3055 EXT 161
KIX S EXT 39, EXT 62, EXT 157
KIX S PIN EXT 157

L

LABYRINTH EXT 193
LAY OUT 124 INT 495
LAY OUT 154 INT 495

LAY OUT 254 INT 495
LED DIMMODULE 24V / 3CH / 6A DIM2 TEC 24
LED FILAMENT 60 E27 5,5W 2700K TEC 4
LED FILAMENT GL80 E27 7W 2700K TEC 4
LED FILAMENT GL95 E27 7W 2700K TEC 4
LED FILAMENT T64 E27 7W 2700K TEC 4
LED POWER CONVERTOR 24V -> 350mA / 15W TEC 20
LED POWER CONVERTOR 24V-DC TO MULTI CURRENT 48W DIM9 TEC 20
LED POWER SUPPLY 14V-DC / 12W TEC 24
LED POWER SUPPLY 240mA-DC / 10W INT 83
LED POWER SUPPLY 24V-DC / 150W TEC 22
LED POWER SUPPLY 24V-DC / 20W TEC 22
LED POWER SUPPLY 24V-DC / 40W TEC 22
LED POWER SUPPLY 24V-DC / 480W DIN TEC 24
LED POWER SUPPLY 24V-DC / 60W TEC 22
LED POWER SUPPLY 24V-DC / 60W DIN TEC 20
LED POWER SUPPLY 24V-DC / 80W DIM 1 TEC 22
LED POWER SUPPLY 350mA-DC / 15W TEC 17
LED POWER SUPPLY 350mA-DC / 16W DIM8 TEC 17
LED POWER SUPPLY 350mA-DC / 17W TEC 17
LED POWER SUPPLY 350mA-DC / 18W TEC 17
LED POWER SUPPLY 350mA-DC / 8W TEC 17
LED POWER SUPPLY 48V-DC / 100W DIN INT 603
LED POWER SUPPLY 48V-DC / 240W DIN INT 603
LED POWER SUPPLY 500mA-DC / 20W TEC 17
LED POWER SUPPLY 500mA-DC / 32W DIM8 TEC 17
LED POWER SUPPLY 500mA-DC / 6W TEC 17
LED POWER SUPPLY 600-700mA-DC / 35W DIM2 INT 230, INT 246
LED POWER SUPPLY 600-700mA-DC / 38W INT 230, INT 246
LED POWER SUPPLY 650mA-DC DIM8 TEC 9
LED POWER SUPPLY 700mA-DC / 17W TEC 17
LED POWER SUPPLY 700mA-DC / 20W TEC 17
LED POWER SUPPLY 700mA-DC / 36W DIM8 TEC 17
LED POWER SUPPLY MULTI-POWER TEC 18
LED POWER SUPPLY MULTI-POWER DIM1 TEC 18
LED POWER SUPPLY MULTI-POWER DIM5 TEC 18
LED POWER SUPPLY MULTI-POWER DIM6 TEC 19
LED POWER SUPPLY MULTI-POWER DIM7 TEC 19
LED POWER SUPPLY MULTI-POWER DIM9 TEC 19
LED RGB KIT 150 TEC 25
LED RGB KIT 60 TEC 25
LED TRANSFO 12V / 1-70W TEC 26
LEDFLEX IN CONNECTION CLIP SET TEC 7
LEDFLEX IN CONNECTION SET TEC 7
LEDFLEX IN FP CONNECTION CLIP SET TEC 7
LEDFLEX IN FP CONNECTION SET TEC 7
LEDFLEX IN FP HW 5m TEC 6
LEDFLEX IN FP NW 5m TEC 6
LEDFLEX IN FP SUPPLY CABLE SET TEC 7
LEDFLEX IN FP WW 5m TEC 6
LEDFLEX IN HP HW PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
LEDFLEX IN HP HW 5m TEC 6
LEDFLEX IN HP WW PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
LEDFLEX IN HP WW 5m TEC 6
LEDFLEX IN HW 5m TEC 6
LEDFLEX IN NW 5m TEC 6
LEDFLEX IN RGB 5m TEC 6
LEDFLEX IN RGB CONNECTION CLIP SET TEC 7
LEDFLEX IN RGB CONNECTION SET TEC 7
LEDFLEX IN RGB SUPPLY CABLE SET TEC 7
LEDFLEX IN SUPPLY CABLE SET TEC 7
LEDFLEX IN WW 5m TEC 6
LEDFLEX OUT FP HW 5m TEC 6
LEDFLEX OUT FP NW 5m TEC 6
LEDFLEX OUT FP WW 5m TEC 6
LEDFLEX OUT HW 5m TEC 6
LEDFLEX OUT NW 5m TEC 6
LEDFLEX OUT RGB 5m TEC 6
LEDFLEX OUT WW 5m TEC 6
LEDS C R BLUE INT 507, EXT 51
LEDS C R NW INT 507, EXT 51
LEDS C R ST NW INT 507, EXT 51, EXT 115
LEDS C R ST WW INT 507, EXT 51, EXT 115
LEDS C R WW INT 507, EXT 51
LEDS C S BLUE INT 507, EXT 51
LEDS C S NW INT 507, EXT 51
LEDS C S WW INT 507, EXT 51
LEDS GO IN FORTE NW EXT 49, EXT 115
LEDS GO IN FORTE WW EXT 49, EXT 115
LEDS SWING S1 NW INT 115
LEDS SWING S1 WW INT 115
LEDSTRIP 11 F HW PRO 65
LEDSTRIP 11 F NW PRO 65
LEDSTRIP 11 F WW PRO 65
LEDSTRIP 11 FP HW PRO 65
LEDSTRIP 11 FP NW PRO 65
LEDSTRIP 11 FP WW PRO 65
LEDSTRIP 11 RGB PRO 65
LEDSTRIP 12 F HW PRO 89
LEDSTRIP 12 F NW PRO 89
LEDSTRIP 12 F WW PRO 89
LEDSTRIP 12 FP HW PRO 89
LEDSTRIP 12 FP NW PRO 89
LEDSTRIP 12 FP WW PRO 89
LEDSTRIP 12 RGB PRO 89
LEDSTRIP 14 RGB TEC 8
LEDSTRIP 15 F HW PRO 109
LEDSTRIP 15 F NW PRO 109
LEDSTRIP 15 F WW PRO 109
LEDSTRIP 15 FP HW PRO 109
LEDSTRIP 15 FP NW PRO 109
LEDSTRIP 15 FP WW PRO 109
LEDSTRIP 15 RGB PRO 109
LEDSTRIP 50 F HW TEC 8
LEDSTRIP 50 F NW TEC 8
LEDSTRIP 50 F WW TEC 8
LEDSTRIP 50 FP HW TEC 8
LEDSTRIP 50 FP NW TEC 8
LEDSTRIP 50 FP WW TEC 8
LEDSTRIP 50 RGB TEC 8
LEDSTRIP CONNECTION SET TEC 8
LEDSTRIP FP CONNECTION SET TEC 8
LEDSTRIP FP SUPPLY CABLE SET TEC 8
LEDSTRIP SUPPLY CABLE SET TEC 8
LENS 109 TEC 39
LENS 111 TEC 39
LINEAR SPREAD LENS 40 TEC 38
LINEAR SPREAD LENS 50 TEC 38
LINEAR SPREAD LENS 70 TEC 38
LINEAR SPREAD LENS 87 TEC 38
LINK 1 REO 2733 INT 345
LINK 1 REO 2733-9 INT 345
LINK 1 REO 3033 INT 345
LINK 1 REO 3033-9 INT 345
LINK 111 INT 345
LINK 2 REO 2733 INT 347
LINK 2 REO 2733-9 INT 347
LINK 2 REO 3033 INT 347
LINK 2 REO 3033-9 INT 347
LINK 211 INT 347
LINK 3 REO 2733 INT 349
LINK 3 REO 2733-9 INT 349
LINK 3 REO 3033 INT 349
LINK 3 REO 3033-9 INT 349
LINK 311 INT 349
LOGIC 60 BOX R EXT 120, TEC 37
LOGIC 60 R 3020 EXT 120
LOGIC 60 R A 3020 EXT 121
LOGIC 60 R A MOON 3020 EXT 119
LOGIC 60 R A STRIPER 3004 EXT 121
LOGIC 60 R MOON 3020 EXT 119
LOGIC 60 R STRIPER 3004 EXT 121
LOGIC 60 R WALLWASH EXT 119
LOGIC 60 R WALLWASH SBL EXT 119
LOGIC F1 EXT 129
LOGIC F2 EXT 129
LOGIC MINI W R INT 502, EXT 44
LOGIC MINI W S INT 502, EXT 44
LOGIC R 3011 EXT 123
LOGIC R 3030 EXT 123
LOGIC R 3055 EXT 123
LOGIC R A 3011 EXT 123
LOGIC R A 3030 EXT 123
LOGIC R A 3055 EXT 123
LOGIC R A WALLWASH EXT 122
LOGIC R A WALLWASH SBL EXT 122
LOGIC R WALLWASH EXT 122
LOGIC R WALLWASH SBL EXT 122
LOGIC S 3011 EXT 123
LOGIC S 3030 EXT 123
LOGIC S 3055 EXT 123
LOGIC W L INT 503, EXT 45
LOGIC W L F INT 503, EXT 45
LOGIC W S INT 503, EXT 45
LOOK IN NW INT 527
LOOK IN WW INT 527
LOOK OUT NW EXT 69
LOOK OUT WW EXT 69

M

MAESTRO S LED 155 INT 257
MAESTRO S LED 295 INT 257
MAESTRO S LED 575 INT 257
MAXISPY ON 82720 AD INT 613
MAXISPY ON 82720 AD DIM1 INT 613
MAXISPY ON 82720 DIM1 INT 371
MAXISPY ON 82735 AD INT 613
MAXISPY ON 82735 AD DIM1 INT 613
MAXISPY ON 82735 DIM1 INT 371
MAXISPY ON 83020 AD INT 613
MAXISPY ON 83020 AD DIM1 INT 613
MAXISPY ON 83020 DIM1 INT 371
MAXISPY ON 83035 AD INT 613
MAXISPY ON 83035 AD DIM1 INT 613
MAXISPY ON 83035 DIM1 INT 371
MAXISPY ON 92720 AD INT 613
MAXISPY ON 92720 AD DIM1 INT 613
MAXISPY ON 92720 DIM1 INT 371
MAXISPY ON 92735 AD INT 613
MAXISPY ON 92735 AD DIM1 INT 613
MAXISPY ON 92735 DIM1 INT 371
MAXISPY ON 93020 AD INT 613
MAXISPY ON 93020 AD DIM1 INT 613
MAXISPY ON 93020 DIM1 INT 371
MAXISPY ON 93035 AD INT 613
MAXISPY ON 93035 AD DIM1 INT 613
MAXISPY ON 93035 DIM1 INT 371
MAXISPY TUBE TEC 41
McDelta INT 449
METRONOME INT 455
METRONOME H INT 455
METRONOME L INT 459
METRONOME XXL INT 463
MIC TR - PROFILE PRO 108
MIC TRH - PROFILE PRO 110
MIC TRW - PROFILE PRO 108
MIC30 - PROFILE PRO 120
MIC30+ - PROFILE PRO 132
MIC50 - PROFILE PRO 114
MICRO DEEP RINGO S1 WW INT 115
MICROLINE 30+ P1124 INT 485
MICROLINE 30+ P1154 INT 485
MICROLINE 30+ P2154 INT 485
MICROLINE 30+ P4283 DIM1 INT 485
MICROLINE 30+ WALL 124 INT 577
MICROLINE 30+ WALL 154 INT 577
MID 100L - PROFILE PRO 166
MID 80L - PROFILE PRO 166
MIDISPY CLIP 82720 INT 153
MIDISPY CLIP 82740 INT 153
MIDISPY CLIP 83020 INT 153
MIDISPY CLIP 83040 INT 153
MIDISPY CLIP 92740 INT 153
MIDISPY CLIP 93040 INT 153
MIDISPY ON 1 82740 INT 363
MIDISPY ON 1 82740 DIM8 INT 363
MIDISPY ON 1 83040 INT 363
MIDISPY ON 1 83040 DIM8 INT 363
MIDISPY ON 1 92740 INT 363
MIDISPY ON 1 92740 DIM8 INT 363

MIDISPY ON 1 93040	INT 363
MIDISPY ON 1 93040 DIM8	INT 363
MIDISPY ON 2 82740	INT 363
MIDISPY ON 2 82740 DIM8	INT 363
MIDISPY ON 2 83040	INT 363
MIDISPY ON 2 83040 DIM8	INT 363
MIDISPY ON 2 92740	INT 363
MIDISPY ON 2 92740 DIM8	INT 363
MIDISPY ON 2 93040	INT 363
MIDISPY ON 2 93040 DIM8	INT 363
MIDISPY ON 3 82740	INT 363
MIDISPY ON 3 82740 DIM8	INT 363
MIDISPY ON 3 83040	INT 363
MIDISPY ON 3 83040 DIM8	INT 363
MIDISPY ON 3 92740	INT 363
MIDISPY ON 3 92740 DIM8	INT 363
MIDISPY ON 3 93040	INT 363
MIDISPY ON 3 93040 DIM8	INT 363
MIDISPY ON 82720	INT 361
MIDISPY ON 82720 ADL	INT 607
MIDISPY ON 82740	INT 361
MIDISPY ON 82740 ADL	INT 607
MIDISPY ON 83020	INT 361
MIDISPY ON 83020 ADL	INT 607
MIDISPY ON 83040	INT 361
MIDISPY ON 83040 ADL	INT 607
MIDISPY ON 92740	INT 361
MIDISPY ON 92740 ADL	INT 607
MIDISPY ON 93040	INT 361
MIDISPY ON 93040 ADL	INT 607
MIDISPY TRIMLESS 82720	INT 145
MIDISPY TRIMLESS 82740	INT 145
MIDISPY TRIMLESS 83020	INT 145
MIDISPY TRIMLESS 83040	INT 145
MIDISPY TRIMLESS 92740	INT 145
MIDISPY TRIMLESS 93040	INT 145
MIDISPY TUBE	TEC 41
MINI CARREE ST 82710 S1	INT 163
MINI CARREE ST 82720 S1	INT 163
MINI CARREE ST 82740 S1	INT 163
MINI CARREE ST 83010 S1	INT 163
MINI CARREE ST 83020 S1	INT 163
MINI CARREE ST 83040 S1	INT 163
MINI CARREE ST OK S1	INT 162
MINI DEEP RINGO 82710	INT 119
MINI DEEP RINGO 82720	INT 119
MINI DEEP RINGO 82740	INT 119
MINI DEEP RINGO 83010	INT 119
MINI DEEP RINGO 83020	INT 119
MINI DEEP RINGO 83040	INT 119
MINI DEEP RINGO TRIMLESS 82710	INT 117
MINI DEEP RINGO TRIMLESS 82720	INT 117
MINI DEEP RINGO TRIMLESS 82740	INT 117
MINI DEEP RINGO TRIMLESS 83010	INT 117
MINI DEEP RINGO TRIMLESS 83020	INT 117
MINI DEEP RINGO TRIMLESS 83040	INT 117
MINI DIRO II	INT 83
MINI DIRO LED	INT 83
MINI DIRO R 82720	INT 89
MINI DIRO R 83020	INT 89
MINI DIRO R TRIMLESS 82720	INT 85
MINI DIRO R TRIMLESS 83020	INT 85
MINI DIRO RL TRIMLESS 82720	INT 85
MINI DIRO RL TRIMLESS 83020	INT 85
MINI DIRO S 82720	INT 89
MINI DIRO S 83020	INT 89
MINI REO 82710	INT 67
MINI REO 82720	INT 67
MINI REO 82740	INT 67
MINI REO 83010	INT 67
MINI REO 83020	INT 67
MINI REO 83040	INT 67
MINI REO GLASS SBL	INT 62, TEC 38
MINI REO HONEYCOMB	INT 62, TEC 38
MINI REO OK 82710	INT 63
MINI REO OK 82720	INT 63
MINI REO OK 82740	INT 63
MINI REO OK 83010	INT 63
MINI REO OK 83020	INT 63
MINI REO OK 83040	INT 63
MINI REO OK1 82710	INT 65
MINI REO OK1 82720	INT 65
MINI REO OK1 82740	INT 65
MINI REO OK1 83010	INT 65
MINI REO OK1 83020	INT 65
MINI REO OK1 83040	INT 65
MINI REO SOFTENING LENS	INT 62, TEC 38
MINI REO X 82740	EXT 9
MINI REO X 83040	EXT 9
MINI SPY	INT 143
MINIGRID IN 1 50	INT 215
MINIGRID IN 1 50 Hi	INT 215
MINIGRID IN 1 FRAME	INT 211
MINIGRID IN 1 HP 82717	INT 213
MINIGRID IN 1 HP 82737	INT 213
MINIGRID IN 1 HP 82760	INT 213
MINIGRID IN 1 HP 83017	INT 213
MINIGRID IN 1 HP 83037	INT 213
MINIGRID IN 1 HP 83060	INT 213
MINIGRID IN 1 HP 92717	INT 213
MINIGRID IN 1 HP 92737	INT 213
MINIGRID IN 1 HP 92760	INT 213
MINIGRID IN 1 HP 93017	INT 213
MINIGRID IN 1 HP 93037	INT 213
MINIGRID IN 1 HP 93060	INT 213
MINIGRID IN 1 MOUNTING KIT	TEC 32
MINIGRID IN 1 MOUNTING KIT HP	TEC 32
MINIGRID IN 1 MOUNTING KIT LARGE	TEC 32
MINIGRID IN 1 QR	INT 215
MINIGRID IN 2 50	INT 215
MINIGRID IN 2 50 Hi	INT 215
MINIGRID IN 2 FRAME	INT 211
MINIGRID IN 2 HP 82717	INT 213
MINIGRID IN 2 HP 82737	INT 213
MINIGRID IN 2 HP 82760	INT 213
MINIGRID IN 2 HP 83017	INT 213
MINIGRID IN 2 HP 83037	INT 213
MINIGRID IN 2 HP 83060	INT 213
MINIGRID IN 2 HP 92717	INT 213
MINIGRID IN 2 HP 92737	INT 213
MINIGRID IN 2 HP 92760	INT 213
MINIGRID IN 2 HP 93017	INT 213
MINIGRID IN 2 HP 93037	INT 213
MINIGRID IN 2 HP 93060	INT 213
MINIGRID IN 2 MOUNTING KIT	TEC 32
MINIGRID IN 2 MOUNTING KIT HP	TEC 32
MINIGRID IN 2 MOUNTING KIT LARGE	TEC 32
MINIGRID IN 2 QR	INT 215
MINIGRID IN 3 50	INT 215
MINIGRID IN 3 QR	INT 215
MINIGRID IN TRIMLESS 1 50	INT 207
MINIGRID IN TRIMLESS 1 50 Hi	INT 207
MINIGRID IN TRIMLESS 1 FRAME	INT 199
MINIGRID IN TRIMLESS 1 HP 82717	INT 203
MINIGRID IN TRIMLESS 1 HP 82737	INT 203
MINIGRID IN TRIMLESS 1 HP 82760	INT 203
MINIGRID IN TRIMLESS 1 HP 83017	INT 203
MINIGRID IN TRIMLESS 1 HP 83037	INT 203
MINIGRID IN TRIMLESS 1 HP 83060	INT 203
MINIGRID IN TRIMLESS 1 HP 92717	INT 203
MINIGRID IN TRIMLESS 1 HP 92737	INT 203
MINIGRID IN TRIMLESS 1 HP 92760	INT 203
MINIGRID IN TRIMLESS 1 HP 93017	INT 203
MINIGRID IN TRIMLESS 1 HP 93037	INT 203
MINIGRID IN TRIMLESS 1 HP 93060	INT 203
MINIGRID IN TRIMLESS 1 QR	INT 207
MINIGRID IN TRIMLESS 2 50	INT 207
MINIGRID IN TRIMLESS 2 50 Hi	INT 207
MINIGRID IN TRIMLESS 2 FRAME	INT 199
MINIGRID IN TRIMLESS 2 HP 82717	INT 203
MINIGRID IN TRIMLESS 2 HP 82737	INT 203
MINIGRID IN TRIMLESS 2 HP 82760	INT 203
MINIGRID IN TRIMLESS 2 HP 83017	INT 203
MINIGRID IN TRIMLESS 2 HP 83037	INT 203
MINIGRID IN TRIMLESS 2 HP 83060	INT 203
MINIGRID IN TRIMLESS 2 HP 92717	INT 203
MINIGRID IN TRIMLESS 2 HP 92737	INT 203
MINIGRID IN TRIMLESS 2 HP 92760	INT 203
MINIGRID IN TRIMLESS 2 HP 93017	INT 203
MINIGRID IN TRIMLESS 2 HP 93037	INT 203
MINIGRID IN TRIMLESS 2 HP 93060	INT 203
MINIGRID IN TRIMLESS 2 QR	INT 207
MINIGRID IN TRIMLESS 3 50	INT 207
MINIGRID IN TRIMLESS 3 KIT	TEC 32
MINIGRID IN TRIMLESS 3 QR	INT 207
MINIGRID IN ZB 1 50	INT 197
MINIGRID IN ZB 1 50 Hi	INT 197
MINIGRID IN ZB 1 BOX L	TEC 31
MINIGRID IN ZB 1 QR	INT 197
MINIGRID IN ZB 1 REO 82718	INT 195
MINIGRID IN ZB 1 REO 82733	INT 195
MINIGRID IN ZB 1 REO 83018	INT 195
MINIGRID IN ZB 1 REO 83033	INT 195
MINIGRID IN ZB 1 REO 92718	INT 195
MINIGRID IN ZB 1 REO 92733	INT 195
MINIGRID IN ZB 1 REO 93018	INT 195
MINIGRID IN ZB 1 REO 93033	INT 195
MINIGRID IN ZB 1 REO SOFT	INT 195
MINIGRID IN ZB 2 50	INT 197
MINIGRID IN ZB 2 50 Hi	INT 197
MINIGRID IN ZB 2 BOX L	TEC 31
MINIGRID IN ZB 2 QR	INT 197
MINIGRID IN ZB 2 REO 82718	INT 195
MINIGRID IN ZB 2 REO 82733	INT 195
MINIGRID IN ZB 2 REO 83018	INT 195
MINIGRID IN ZB 2 REO 83033	INT 195
MINIGRID IN ZB 2 REO 92718	INT 195
MINIGRID IN ZB 2 REO 92733	INT 195
MINIGRID IN ZB 2 REO 93018	INT 195
MINIGRID IN ZB 2 REO 93033	INT 195
MINIGRID IN ZB 2 REO SOFT	INT 195
MINIGRID IN ZB 3 50	INT 197
MINIGRID IN ZB 3 BOX L	TEC 31
MINIGRID IN ZB 3 QR	INT 197
MINIGRID ON 1 BOX	INT 336
MINIGRID ON 1 BOX ED8	INT 336
MINIGRID ON 2 BOX	INT 337
MINIGRID ON 2 BOX ED8	INT 337
MINIGRID ON 3 BOX	INT 337
MINIGRID ON 3 BOX ED8	INT 337
MINIGRID SNAP-IN REO 82718	INT 211
MINIGRID SNAP-IN REO 82718	INT 199
MINIGRID SNAP-IN REO 82718	INT 337
MINIGRID SNAP-IN REO 82718	INT 336
MINIGRID SNAP-IN REO 82733	INT 211
MINIGRID SNAP-IN REO 82733	INT 199
MINIGRID SNAP-IN REO 82733	INT 337
MINIGRID SNAP-IN REO 82733	INT 336
MINIGRID SNAP-IN REO 83018	INT 211
MINIGRID SNAP-IN REO 83018	INT 199
MINIGRID SNAP-IN REO 83018	INT 337
MINIGRID SNAP-IN REO 83018	INT 336
MINIGRID SNAP-IN REO 83033	INT 211
MINIGRID SNAP-IN REO 83033	INT 199
MINIGRID SNAP-IN REO 83033	INT 337
MINIGRID SNAP-IN REO 83033	INT 336
MINIGRID SNAP-IN REO 92718	INT 211
MINIGRID SNAP-IN REO 92718	INT 199
MINIGRID SNAP-IN REO 92718	INT 337
MINIGRID SNAP-IN REO 92718	INT 336
MINIGRID SNAP-IN REO 92733	INT 211
MINIGRID SNAP-IN REO 92733	INT 199
MINIGRID SNAP-IN REO 92733	INT 337
MINIGRID SNAP-IN REO 92733	INT 336
MINIGRID SNAP-IN REO 93018	INT 211
MINIGRID SNAP-IN REO 93018	INT 199
MINIGRID SNAP-IN REO 93018	INT 337
MINIGRID SNAP-IN REO 93018	INT 336
MINIGRID SNAP-IN REO 93033	INT 211
MINIGRID SNAP-IN REO 93033	INT 199
MINIGRID SNAP-IN REO 93033	INT 337
MINIGRID SNAP-IN REO 93033	INT 336
MINIGRID SNAP-IN SOFT	INT 211
MINIGRID SNAP-IN SOFT	INT 199
MOHOW LED 2715 AD	INT 647
MOHOW LED 2733 AD	INT 647
MOHOW LED 2745 AD	INT 647

MOHOW LED 3015 AD INT 647
MOHOW LED 3033 AD INT 647
MOHOW LED 3045 AD INT 647
MOMBA DOWN-UP LED SP WW EXT 75
MOMBA DOWN-UP LED WW EXT 75
MOMBA LED SP WW EXT 75
MOMBA LED WW EXT 75
MONO EXT 80
MONO DOWN-UP EXT 81
MONO DOWN-UP LED WW EXT 79
MONO LED WW EXT 79
MONO X DOWN-UP T50 EXT 81
MONO X T50 EXT 81
MONOPOL 26 LED WW EXT 185
MONOPOL 70 LED WW EXT 185
MONOSTEP 26 EXT 189
MONOSTEP 26 T50 EXT 189
MONOSTEP 70 T50 EXT 189
MONTUR L O E27 INT 551
MONTUR L P 45 LED EXT 173
MONTUR L PC LED INT 551, EXT 59
MONTUR M E27 INT 549, EXT 58
MONTUR M LED INT 549, EXT 35, EXT 58
MONTUR M O E27 INT 549
MONTUR M P 70 E27 EXT 173
MONTUR M P 70 LED EXT 173
MONTUR M P 90 E27 EXT 173
MONTUR M P 90 LED EXT 173
MONTUR S LED INT 548, EXT 35, EXT 58
MONTUR S O E27 INT 548
MONTUR S P 30 LED EXT 172
MONTUR S P 30 LED TW EXT 172
MONTUR S P 65 LED EXT 172
MONTUR S P 65 LED TW EXT 172
MONTUR S P 90 LED EXT 172
MONTUR S P 90 LED TW EXT 172
MOUNTING KIT 55 TEC 32
MOUNTING KIT 64 TEC 32
MOUNTING KIT 75 TEC 32
MOUNTING KIT 75 TRIMLESS TEC 32
MOUNTING KIT 75 TRIMLESS O.F.A. TEC 32
MOUNTING KIT FLUSH TEC 32
MOUNTING KIT FLUSH SPY TEC 32
MOUNTING KIT MIDISPY TRIMLESS TEC 32
MOUNTING KIT MINI DIRO II 12 TEC 32
MOUNTING KIT MINI DIRO II 15 TEC 32
MOUNTING KIT MINI DIRO RL TRIMLESS TEC 32
MOUNTING KIT R102 TRIMLESS O.F.A. TEC 32
MOUNTING KIT R143 TRIMLESS TEC 32
MOUNTING KIT R30 TRIMLESS TEC 32
MOUNTING KIT R60 TRIMLESS O.F.A. TEC 32
MOUNTING KIT R82 TRIMLESS TEC 32
MOUNTING KIT R82 TRIMLESS O.F.A. TEC 32
MOUNTING KIT SKELP TRIMLESS TEC 32
MOUNTING KIT TWEETER TRIMLESS TEC 32
MOUNTING SET S2 INT 18, INT 20, INT 23
Mr. JUNIOR X EXT 197
Mr. SENIOR 155 EXT 197
Mr. SENIOR 159 EXT 197

N

NB200 - PROFILE PRO 186
NB300 - PROFILE PRO 198
NEBEL INT 477
NEBEL EVG DIM2 INT 477
NEBEL RGB INT 477
NEBEL RGB RC M INT 477
NEBEL RGB RC S INT 477
NEC+ULTRA 250 Hi INT 547
NLW - PROFILE CL PRO 88
NLW - PROFILE SBL PRO 88
NoBody 200 P1254 INT 489
NoBody 300 P1254 INT 489
NOX Hi EXT 99
NOX LED WW EXT 99
NYX WW INT 449

O

OBLIX 40 EXT 177
OBLIX 70 EXT 177
OFFICER INT 590
OFFICER ED INT 590
OFFICER EDL INT 590
OFFICER S INT 591
OFFICER SL INT 591
OPTO CLIP TEC 41
ORBIT INT 571
OREO 2733 S1 INT 59
OREO 2733-9 S1 INT 59
OREO 3033 S1 INT 59
OREO 3033-9 S1 INT 59
OUTFIT L 211 LED INT 437
OUTFIT L 211 T50 INT 437
OUTFIT L 411 T50 INT 437
OUTFIT U 211 LED INT 435
OUTFIT U 211 T50 INT 435
OUTFIT U 411 T50 INT 435

P

PHANTOM II 15cm JAC INT 425
PHANTOM II 15cm M10 INT 425
PHANTOM II 30cm JAC INT 425
PHANTOM II 30cm M10 INT 425
PHANTOM II 7.5cm JAC INT 425
PHANTOM II 7.5cm M10 INT 425
PHAR FRL 827 AD INT 617
PHAR FRL 830 AD INT 617
PIN 1 EXT 183, EXT 185, EXT 189
PIN 11 EXT 143, EXT 145, EXT 149, EXT 153, EXT 158
PIN 12 EXT 177
PIN 13 EXT 173, EXT 181
PIN 14 EXT 191
PIN 15 EXT 171
PIN 3 EXT 145, EXT 151
PIN 7 EXT 167
PITCH 162 INT 383
PITCH 162 RECESSED KIT INT 382
PITCH 260 INT 383
PITCH 450 INT 383
PLASTERKIT 101 TEC 28
PLASTERKIT 104 TEC 28
PLASTERKIT 108 TEC 28
PLASTERKIT 109 TEC 28
PLASTERKIT 110 TEC 28
PLASTERKIT 111 TEC 28
PLASTERKIT 115 TEC 28
PLASTERKIT 118 TEC 28
PLASTERKIT 120 TEC 28
PLASTERKIT 121 TEC 28
PLASTERKIT 122 TEC 28
PLASTERKIT 123 TEC 28
PLASTERKIT 124 TEC 28
PLASTERKIT 126 TEC 28
PLASTERKIT 127 TEC 28
PLASTERKIT 128 TEC 28
PLASTERKIT 145 TEC 28
PLASTERKIT 161 TEC 28
PLASTERKIT 162 TEC 28
PLASTERKIT 163 TEC 28
PLASTERKIT 164 TEC 28
PLASTERKIT 167 TEC 28
PLASTERKIT 169 TEC 28
PLASTERKIT 170 TEC 28
PLASTERKIT 171 TEC 28
PLASTERKIT 172 TEC 28
PLASTERKIT 173 TEC 28
PLASTERKIT 174 TEC 28
PLASTERKIT 180 TEC 28
PLASTERKIT 181 TEC 28
PLASTERKIT 184 TEC 28
PLASTERKIT 185 TEC 28
PLASTERKIT 186 TEC 28
PLASTERKIT 188 TEC 28
PLASTERKIT 189 TEC 28
PLASTERKIT 190 TEC 28
PLASTERKIT 193 TEC 28
PLASTERKIT 194 TEC 28
PLATE 1 EXT 183, EXT 185, EXT 189
PLATE 3 EXT 172, EXT 197
PLATE 5 EXT 193
PLATE 7 EXT 177
PLATE 8 EXT 173, EXT 181
POGO INT 537
PUK 4 BLUE INT 529
PUK 4 NW INT 529
PUK 4 WW INT 529
PUT 111 CENTER INT 157
PUT 111 CLICK INT 157
PUT 50 CLICK INT 157
PUT C20 CENTER INT 157
PUT C20 CLICK INT 157
PUT C30 CENTER INT 157
PUT CLICKPLATE INT 156

Q

QUEEN TEAK EXT 199

R

RAND 1 REO 2733 INT 427
RAND 1 REO 2733-9 INT 427
RAND 1 REO 2750 INT 427
RAND 1 REO 2750-9 INT 427
RAND 1 REO 3033 INT 427
RAND 1 REO 3033-9 INT 427
RAND 1 REO 3050 INT 427
RAND 1 REO 3050-9 INT 427
RAND 111 JAC INT 425
RAND 111 LED DIM8 INT 429
RAND 111 T50 INT 430
RAND 2 REO 2733 INT 427
RAND 2 REO 2733-9 INT 427
RAND 2 REO 2750 INT 427
RAND 2 REO 2750-9 INT 427
RAND 2 REO 3033 INT 427
RAND 2 REO 3033-9 INT 427
RAND 2 REO 3050 INT 427
RAND 2 REO 3050-9 INT 427
RAND 211 LED DIM8 INT 429
RAND 211 T50 INT 430
RAND 311 LED DIM8 INT 429
RAND 311 T50 INT 431
RAND 411 T50 INT 431
RAND 511 T50 INT 431
RASTER 109 TEC 40
RASTER 66 TEC 40
REO 111 2733 TEC 5
REO 111 2733-9 TEC 5
REO 111 2750 TEC 5
REO 111 2750-9 TEC 5
REO 111 3033 TEC 5
REO 111 3033-9 TEC 5
REO 111 3050 TEC 5
REO 111 3050-9 TEC 5
REO 2 S OK 2733 S1 INT 73
REO 2 S OK 2733-9 S1 INT 73
REO 2 S OK 2750 S1 INT 73
REO 2 S OK 2750-9 S1 INT 73
REO 2 S OK 3033 S1 INT 73
REO 2 S OK 3033-9 S1 INT 73
REO 2 S OK 3050 S1 INT 73
REO 2 S OK 3050-9 S1 INT 73
REO 2 S OK 4033 S1 INT 73
REO 2 S OK 4050 S1 INT 73

REO 2 S OK SOFT S1 INT 71
REO 2733 S1 INT 71
REO 2733 S2 INT 71
REO 2733-9 S1 INT 71
REO 2733-9 S2 INT 71
REO 2750 S1 INT 71
REO 2750 S2 INT 71
REO 2750-9 S1 INT 71
REO 2750-9 S2 INT 71
REO 3033 S1 INT 71
REO 3033 S2 INT 71
REO 3033-9 S1 INT 71
REO 3033-9 S2 INT 71
REO 3050 S1 INT 71
REO 3050 S2 INT 71
REO 3050-9 S1 INT 71
REO 3050-9 S2 INT 71
REO 4033 S1 INT 71
REO 4033 S2 INT 71
REO 4050 S1 INT 71
REO 4050 S2 INT 71
REO OK 2733 S1 INT 69
REO OK 2733 S2 INT 69
REO OK 2733-9 S1 INT 69
REO OK 2733-9 S2 INT 69
REO OK 2750 S1 INT 69
REO OK 2750 S2 INT 69
REO OK 2750-9 S1 INT 69
REO OK 2750-9 S2 INT 69
REO OK 3033 S1 INT 69
REO OK 3033 S2 INT 69
REO OK 3033-9 S1 INT 69
REO OK 3033-9 S2 INT 69
REO OK 3050 S1 INT 69
REO OK 3050 S2 INT 69
REO OK 3050-9 S1 INT 69
REO OK 3050-9 S2 INT 69
REO OK 4033 S1 INT 69
REO OK 4033 S2 INT 69
REO OK 4050 S1 INT 69
REO OK 4050 S2 INT 69
REO OK SOFT S1 INT 69
REO OK SOFT S2 INT 69
REO S 2733 S1 INT 73
REO S 2733-9 S1 INT 73
REO S 2750 S1 INT 73
REO S 2750-9 S1 INT 73
REO S 3033 S1 INT 73
REO S 3033-9 S1 INT 73
REO S 3050 S1 INT 73
REO S 3050-9 S1 INT 73
REO S 4033 S1 INT 73
REO S 4050 S1 INT 73
REO S OK 2733 S1 INT 73
REO S OK 2733-9 S1 INT 73
REO S OK 2750 S1 INT 73
REO S OK 2750-9 S1 INT 73
REO S OK 3033 S1 INT 73
REO S OK 3033-9 S1 INT 73
REO S OK 3050 S1 INT 73
REO S OK 3050-9 S1 INT 73
REO S OK 4033 S1 INT 73
REO S OK 4050 S1 INT 73
REO S OK SOFT S1 INT 73
REO S SOFT S1 INT 73
REO SOFT S1 INT 71
REO SOFT S2 INT 71
REO X 3033 S1 EXT 9
REO X 3033 S2 EXT 9
REO X 3033-65 S1 EXT 9
REO X 3033-65 S2 EXT 9
RGB DRIVER TEC 25
RGB REMOTE CONTROL INT 477
RGB TOUCH CONTROLLER DMX TEC 25
RING 109 TEC 39
RING 66 TEC 39
RINGO Hi S1 INT 130
RINGO Hi S2 INT 130
RINGO S1 INT 130
RINGO S2 INT 130
RODI 111 S1 INT 109
RODI FRAME S1 INT 109
RV - PROFILE PRO 64

S

SAX 1 TEC 34
SETPOINT TEC 34
SFINKS 2 82733 DOWN-UP INT 441
SFINKS 2 83033 DOWN-UP INT 441
SFINKS 2 92733 DOWN-UP INT 441
SFINKS 2 93033 DOWN-UP INT 441
SFINKS 4 82733 DIM8 INT 441
SFINKS 4 83033 DIM8 INT 441
SFINKS 4 92733 DIM8 INT 441
SFINKS 4 93033 DIM8 INT 441
SKELP LED WW INT 513
SKELP ON LED WW INT 543
SKELP TRIMLESS LED WW INT 513
SOFTENING LENS 40 TEC 38
SOFTENING LENS 50 TEC 38
SOFTENING LENS 70 TEC 38
SOFTENING LENS 78 TEC 38
SOFTENING LENS 87 TEC 38
SONAR 101 HP EXT 93
SONTUR L PC LED INT 551, EXT 59
SPATIO 111 JAC INT 419
SPATIO 111 T50 INT 421
SPATIO 111 T50 AD INT 653
SPATIO 50 JAC INT 419
SPATIO 50 T50 INT 421
SPATIO 50 T50 AD INT 653
SPATIO REO 2733 INT 421
SPATIO REO 2733 AD INT 649
SPATIO REO 2733-9 INT 421
SPATIO REO 2733-9 AD INT 649
SPATIO REO 2750 INT 421
SPATIO REO 2750 AD INT 649
SPATIO REO 2750-9 INT 421
SPATIO REO 2750-9 AD INT 649
SPATIO REO 3033 INT 421
SPATIO REO 3033 AD INT 649
SPATIO REO 3033-9 INT 421
SPATIO REO 3033-9 AD INT 649
SPATIO REO 3050 INT 421
SPATIO REO 3050 AD INT 649
SPATIO REO 3050-9 INT 421
SPATIO REO 3050-9 AD INT 649
SPL25 - PROFILE PRO 42
SPL29 - PROFILE PRO 18
SPL51 - PROFILE PRO 42
SPL52 - PROFILE PRO 26
SPOTNIC 1 3033 INT 413
SPOTNIC 1 T50 INT 413
SPOTNIC 2 3033 INT 413
SPOTNIC 2 T50 INT 413
SPOTNIC 50 JAC INT 413
SPOTNIC CLIP + ROSAS TEC 35
SPOTNIC LED 3033 M10 INT 412
SPOTNIC M10 TRIMLESS O.F.A. TEC 35
SPOTNIC S1 CLIP TEC 35
SPREAD LENS 40 TEC 38
SPREAD LENS 50 TEC 38
SPREAD LENS 70 TEC 38
SPREAD LENS 87 TEC 38
SPT - PROFILE PRO 52
SPY CLIP 82715 INT 155
SPY CLIP 82718 INT 155
SPY CLIP 82733 INT 155
SPY CLIP 83015 INT 155
SPY CLIP 83018 INT 155
SPY CLIP 83033 INT 155
SPY CLIP 92718 INT 155
SPY CLIP 92733 INT 155
SPY CLIP 93018 INT 155
SPY CLIP 93033 INT 155
SPY CLIP HP 82733 INT 154
SPY CLIP HP 83033 INT 154
SPY CLIP HP 92733 INT 154
SPY CLIP HP 93033 INT 154
SPY ON 1 82718 DIM8 INT 367
SPY ON 1 82733 DIM8 INT 367
SPY ON 1 83018 DIM8 INT 367
SPY ON 1 83033 DIM8 INT 367
SPY ON 1 92718 DIM8 INT 367
SPY ON 1 92733 DIM8 INT 367
SPY ON 1 93018 DIM8 INT 367
SPY ON 1 93033 DIM8 INT 367
SPY ON 2 82718 INT 367
SPY ON 2 82733 INT 367
SPY ON 2 83018 INT 367
SPY ON 2 83033 INT 367
SPY ON 2 92718 INT 367
SPY ON 2 92733 INT 367
SPY ON 2 93018 INT 367
SPY ON 2 93033 INT 367
SPY ON 3 82718 INT 367
SPY ON 3 82733 INT 367
SPY ON 3 83018 INT 367
SPY ON 3 83033 INT 367
SPY ON 3 92718 INT 367
SPY ON 3 92733 INT 367
SPY ON 3 93018 INT 367
SPY ON 3 93033 INT 367
SPY ON 82715 INT 365
SPY ON 82715 AD INT 611
SPY ON 82715 ADL INT 609
SPY ON 82718 INT 365
SPY ON 82718 AD INT 611
SPY ON 82718 ADL INT 609
SPY ON 82733 INT 365
SPY ON 82733 AD INT 611
SPY ON 82733 ADL INT 609
SPY ON 83015 INT 365
SPY ON 83015 AD INT 611
SPY ON 83015 ADL INT 609
SPY ON 83018 INT 365
SPY ON 83018 AD INT 611
SPY ON 83018 ADL INT 609
SPY ON 83033 INT 365
SPY ON 83033 AD INT 611
SPY ON 83033 ADL INT 609
SPY ON 92718 INT 365
SPY ON 92718 AD INT 611
SPY ON 92718 ADL INT 609
SPY ON 92733 INT 365
SPY ON 92733 AD INT 611
SPY ON 92733 ADL INT 609
SPY ON 93018 INT 365
SPY ON 93018 AD INT 611
SPY ON 93018 ADL INT 609
SPY ON 93033 INT 365
SPY ON 93033 AD INT 611
SPY ON 93033 ADL INT 609
SPY ON HP 82733 INT 364
SPY ON HP 82733 AD INT 610
SPY ON HP 82733 ADL INT 608
SPY ON HP 83033 INT 364
SPY ON HP 83033 AD INT 610
SPY ON HP 83033 ADL INT 608
SPY ON HP 92733 INT 364
SPY ON HP 92733 AD INT 610
SPY ON HP 92733 ADL INT 608
SPY ON HP 93033 INT 364
SPY ON HP 93033 AD INT 610
SPY ON HP 93033 ADL INT 608
SPY ST 2733 INT 147
SPY ST 2733-9 INT 147
SPY ST 3033 INT 147
SPY ST 3033-9 INT 147
SPY TRIMLESS 2733 INT 147
SPY TRIMLESS 2733-9 INT 147
SPY TRIMLESS 3033 INT 147
SPY TRIMLESS 3033-9 INT 147
SPY TUBE TEC 41

SPY TUBE S TEC 41
SPYKER 143 EXT 149
SPYKER 146 EXT 149
STREAMER L DIM1 INT 261
STREAMER M DIM1 INT 261
STREAMER TRIMLESS L DIM1 INT 260
STREAMER TRIMLESS M DIM1 INT 260
STREAMER TRIMLESS W L350 DIM1 INT 258
STREAMER TRIMLESS W L500 DIM1 INT 258
STREAMER TRIMLESS W M DIM1 INT 258
STREAMER W L350 DIM1 INT 259
STREAMER W L500 DIM1 INT 259
STREAMER W M DIM1 INT 259
STREAMER W S DIM1 INT 259
STRIPER EXT 183
SUNSET 1 INT 416
SUNSET 2 INT 417
SUNSET 3 INT 417
SUNSET 4 INT 417
SUPERDOME 9528 EVG DIM1 INT 483
SUPERDOME 9528 RECESSED EVG DIM1 INT 289
SUPERDOME E27 INT 483
SUPERDOME E27 RECESSED INT 289
SUPERDOME RECESSED KIT INT 289
SUPERNOVA 125 INT 283, INT 395
SUPERNOVA 125 DOWN-UP INT 401
SUPERNOVA 125 DOWN-UP EVG DIM2 INT 401
SUPERNOVA 125 EVG DIM2 INT 283, INT 395
SUPERNOVA 125 RECESSED KIT TEC 32
SUPERNOVA 12528 EVG DIM1 INT 279, INT 391
SUPERNOVA 4583 INT 387
SUPERNOVA 4583 DIM1 INT 387
SUPERNOVA 4583 DIM5 INT 387
SUPERNOVA 65 INT 283, INT 395
SUPERNOVA 65 DOWN-UP INT 401
SUPERNOVA 65 DOWN-UP EVG DIM2 INT 401
SUPERNOVA 65 EVG DIM2 INT 283, INT 395
SUPERNOVA 65 RECESSED KIT TEC 32
SUPERNOVA 6528 EVG DIM1 INT 279, INT 391
SUPERNOVA 95 INT 283, INT 395
SUPERNOVA 95 DOWN-UP INT 401
SUPERNOVA 95 DOWN-UP EVG DIM2 INT 401
SUPERNOVA 95 EVG DIM2 INT 283, INT 395
SUPERNOVA 95 RECESSED KIT TEC 32
SUPERNOVA 9528 EVG DIM1 INT 279, INT 391
SUPERNOVA F INT 589
SUPERNOVA LINE 12583 INT 279, INT 391
SUPERNOVA LINE 12583 DOWN-UP INT 397
SUPERNOVA LINE 12583 DOWN-UP EVG DIM1 INT 397
SUPERNOVA LINE 12583 DOWN-UP EVG DIM5 INT 397
SUPERNOVA LINE 12583 EVG DIM1 INT 279, INT 391
SUPERNOVA LINE 12583 EVG DIM5 INT 279, INT 391
SUPERNOVA LINE 6583 INT 279, INT 391
SUPERNOVA LINE 6583 DOWN-UP INT 397
SUPERNOVA LINE 6583 DOWN-UP EVG DIM1 INT 397
SUPERNOVA LINE 6583 DOWN-UP EVG DIM5 INT 397
SUPERNOVA LINE 6583 EVG DIM1 INT 279, INT 391
SUPERNOVA LINE 6583 EVG DIM5 INT 279, INT 391
SUPERNOVA LINE 6583 PRISMATIC INT 281, INT 393
SUPERNOVA LINE 6583 PRISMATIC DOWN-UP INT 399
SUPERNOVA LINE 6583 PRISMATIC DOWN-UP EVG DIM1 INT 399
SUPERNOVA LINE 6583 PRISMATIC DOWN-UP EVG DIM5 INT 399
SUPERNOVA LINE 6583 PRISMATIC EVG DIM1 INT 281, INT 393
SUPERNOVA LINE 6583 PRISMATIC EVG DIM5 INT 281, INT 393
SUPERNOVA LINE 9583 INT 279, INT 391
SUPERNOVA LINE 9583 DOWN-UP INT 397
SUPERNOVA LINE 9583 DOWN-UP EVG DIM1 INT 397
SUPERNOVA LINE 9583 DOWN-UP EVG DIM5 INT 397
SUPERNOVA LINE 9583 EVG DIM1 INT 279, INT 391
SUPERNOVA LINE 9583 EVG DIM5 INT 279, INT 391
SUPERNOVA LINE 9583 PRISMATIC INT 281, INT 393
SUPERNOVA LINE 9583 PRISMATIC DOWN-UP INT 399
SUPERNOVA LINE 9583 PRISMATIC DOWN-UP EVG DIM1 INT 399
SUPERNOVA LINE 9583 PRISMATIC DOWN-UP EVG DIM5 INT 399
SUPERNOVA LINE 9583 PRISMATIC EVG DIM1 INT 281, INT 393
SUPERNOVA LINE 9583 PRISMATIC EVG DIM5 INT 281, INT 393
SUPERNOVA LINE TRIMLESS 12583 INT 273
SUPERNOVA LINE TRIMLESS 12583 EVG DIM1 INT 273
SUPERNOVA LINE TRIMLESS 12583 EVG DIM5 INT 273
SUPERNOVA LINE TRIMLESS 6583 INT 273
SUPERNOVA LINE TRIMLESS 6583 EVG DIM1 INT 273
SUPERNOVA LINE TRIMLESS 6583 EVG DIM5 INT 273
SUPERNOVA LINE TRIMLESS 9583 INT 273
SUPERNOVA LINE TRIMLESS 9583 EVG DIM1 INT 273
SUPERNOVA LINE TRIMLESS 9583 EVG DIM5 INT 273
SUPERNOVA SEMI 125 INT 277
SUPERNOVA SEMI 65 INT 277
SUPERNOVA SEMI 95 INT 277
SUPERNOVA SR 254 INT 407
SUPERNOVA SR 254 DOWN-UP INT 409
SUPERNOVA SR 254 DOWN-UP EVG DIM2 INT 409
SUPERNOVA SR 254 EVG DIM2 INT 407
SUPERNOVA SR 424 INT 407
SUPERNOVA SR 424 DOWN-UP INT 409
SUPERNOVA SR 424 DOWN-UP EVG DIM2 INT 409
SUPERNOVA SR 424 EVG DIM2 INT 407
SUPERNOVA SR 654 INT 407
SUPERNOVA SR 654 DOWN-UP INT 409
SUPERNOVA SR 654 DOWN-UP EVG DIM2 INT 409
SUPERNOVA SR 654 EVG DIM2 INT 407
SUPERNOVA TRIMLESS 125 INT 275
SUPERNOVA TRIMLESS 125 EVG DIM2 INT 275
SUPERNOVA TRIMLESS 12528 EVG DIM1 INT 273
SUPERNOVA TRIMLESS 65 INT 275
SUPERNOVA TRIMLESS 65 EVG DIM2 INT 275
SUPERNOVA TRIMLESS 6528 EVG DIM1 INT 273
SUPERNOVA TRIMLESS 95 INT 275
SUPERNOVA TRIMLESS 95 EVG DIM2 INT 275
SUPERNOVA TRIMLESS 9528 EVG DIM1 INT 273
SUPERNOVA XS 260 INT 387
SUPERNOVA XS 260 DIM1 INT 387
SUPERNOVA XS 260 DIM5 INT 387
SUPERNOVA XS 260 X EXT 31
SUPERNOVA XS 330 INT 387
SUPERNOVA XS 330 DIM1 INT 387
SUPERNOVA XS 330 DIM5 INT 387
SUPERNOVA XS PIVOT 260 INT 386
SUPERNOVA XS PIVOT 260 AD INT 645
SUPERNOVA XS PIVOT 260 AD DIM1 INT 645
SUPERNOVA XS PIVOT 260 AD DIM5 INT 645
SUPERNOVA XS PIVOT 260 DIM1 INT 386
SUPERNOVA XS PIVOT 260 DIM5 INT 386
SUPERNOVA XS PIVOT 260 X EXT 31
SUPERNOVA XS PIVOT 330 INT 386
SUPERNOVA XS PIVOT 330 AD INT 645
SUPERNOVA XS PIVOT 330 AD DIM1 INT 645
SUPERNOVA XS PIVOT 330 AD DIM5 INT 645
SUPERNOVA XS PIVOT 330 DIM1 INT 386
SUPERNOVA XS PIVOT 330 DIM5 INT 386
SUPERNOVA XS RECESSED 260 INT 271
SUPERNOVA XS RECESSED 260 DIM1 INT 271
SUPERNOVA XS RECESSED 260 DIM5 INT 271
SUPERNOVA XS RECESSED 330 INT 271
SUPERNOVA XS RECESSED 330 DIM1 INT 271
SUPERNOVA XS RECESSED 330 DIM5 INT 271
SUPERNOVA XS RECESSED KIT 260 INT 271
SUPERNOVA XS RECESSED KIT 330 INT 271
SUPER-OH! 120 INT 379
SUPER-OH! 120 82720 INT 377
SUPER-OH! 120 83020 INT 377
SUPER-OH! 170 INT 379
SUPER-OH! 170 82720 INT 377
SUPER-OH! 170 83020 INT 377
SUPER-OH! 70 INT 379
SUPER-OH! 70 82720 INT 377
SUPER-OH! 70 83020 INT 377
SUSPENSION + CONNECTION TRIMLESS O.F.A. PRO 14, TEC 36
SUSPENSION CHAIN 3,0 INT 463
SUSPENSION CHAIN 6,0 INT 463
SUSPENSION SET 17 2x0.75 1.6m INT 490
SUSPENSION SET 17 3x0.75 1.6m INT 490
SUSPENSION SET 18 3m INT 278, INT 280, INT 282, INT 390, INT 392, INT 394,INT 406
SUSPENSION SET 18 EVG DIM1 3m INT 278, INT 280, INT 282, INT 390, INT 392
SUSPENSION SET 18 EVG DIM2 3m INT 282, INT 394, INT 406
SUSPENSION SET 2 1,6m INT 434, INT 436
SUSPENSION SET 21 2x0.75 1.6m INT 485
SUSPENSION SET 21 3x0.75 1.6m INT 485
SUSPENSION SET 21 DIM1 1.6m INT 485
SUSPENSION SET 22 1.6m INT 486
SUSPENSION SET 4 1,6m INT 434, INT 436
SUSPENSION TRIMLESS O.F.A. PRO 14, TEC 36

T

T FLOR 2 - 224 INT 579
T FLOR 2 - 224 EVG DIM6 INT 579
T FLOR 2 - 254 INT 579
T FLOR 2 - 254 EVG DIM6 INT 579
T16 SEAMLESS 14W 3000K TEC 4
T16 SEAMLESS 14W 3000K - 25pc box TEC 4
T16 SEAMLESS 21W 3000K TEC 4
T16 SEAMLESS 21W 3000K - 25pc box TEC 4
T16 SEAMLESS 24W 3000K TEC 4
T16 SEAMLESS 24W 3000K - 25pc box TEC 4
T16 SEAMLESS 28W 3000K TEC 4
T16 SEAMLESS 28W 3000K - 25pc box TEC 4
T16 SEAMLESS 39W 3000K TEC 4
T16 SEAMLESS 39W 3000K - 25pc box TEC 4
T16 SEAMLESS 54W 3000K TEC 4
T16 SEAMLESS 54W 3000K - 25pc box TEC 4
TACTIC 2 WW EXT 117
TIGA LED 2724 INT 567
TIGA LED 3024 INT 567, EXT 87
TIGA LED BS 2724 INT 567
TIGA LED BS 3024 INT 567, EXT 87
T-LINER 100 83 DOWN-UP WW INT 579
T-LINER 100 83 WW INT 579
T-LINER 50 83 DOWN-UP WW INT 579
T-LINER 50 83 WW INT 579
TOPIX L X EXT 71
TOPIX L X WW EXT 71
TOPIX NW INT 523
TOPIX WW INT 523
TOURNESOL WW EXT 169
TRACK 1m INT 598
TRACK 2F 2m INT 602
TRACK 2F 3m INT 602
TRACK 2F CORNER 180° INT 602
TRACK 2F CORNER 90° IN INT 602
TRACK 2F CORNER 90° OUT INT 602
TRACK 2F END CAP INT 602
TRACK 2F END SUPPLY 11 INT 602
TRACK 2F END SUPPLY 12 INT 602
TRACK 2m INT 598
TRACK 3m INT 598
TRACK BENDING TOOL INT 599
TRACK CORNER 180° INT 598
TRACK CORNER 60° - 300° INT 598
TRACK CORNER 90° IN INT 598
TRACK CORNER 90° OUT INT 598
TRACK CURRENT SUPPLY 5 x 0,75mm² 3,0m INT 599, INT 601
TRACK DIM 1m INT 600
TRACK DIM 2m INT 600
TRACK DIM 3m INT 600
TRACK DIM CORNER 180° INT 600
TRACK DIM CORNER 60° - 300° INT 600
TRACK DIM CORNER 90° IN INT 600
TRACK DIM CORNER 90° OUT INT 600
TRACK DIM DIRECT FIXATION INT 601
TRACK DIM END CAP INT 600
TRACK DIM END SUPPLY 11 INT 600

TRACK DIM END SUPPLY 12 INT 600
TRACK DIM MIDDLE SUPPLY INT 600
TRACK DIM SUSPENSION 3,0 INT 601
TRACK DIRECT FIXATION INT 599
TRACK END CAP INT 598
TRACK END SUPPLY 11 INT 598
TRACK END SUPPLY 12 INT 598
TRACK MIDDLE SUPPLY INT 598
TRACK SUSPENSION 3,0 INT 599
TRANSFO 100W TEC 26
TRANSFO 100W IP67 TEC 26
TRANSFO 50W TEC 26
TUBE C TEC 40
TUBE R TEC 40
TUBE SBL INT 116
TUBE SL INT 116
TWEETER CLIP INT 46
TWEETER FIX W BL 827 INT 541
TWEETER FIX W BL 830 INT 541
TWEETER FIX W FRL 827 INT 541
TWEETER FIX W FRL 830 INT 541
TWEETER ON 1 BL 827 INT 307
TWEETER ON 1 BL 830 INT 307
TWEETER ON 1 FRL 827 DIM1 INT 307
TWEETER ON 1 FRL 830 DIM1 INT 307
TWEETER ON 1 REO 2733 INT 299
TWEETER ON 1 REO 2733-9 INT 299
TWEETER ON 1 REO 2750 INT 299
TWEETER ON 1 REO 2750-9 INT 299
TWEETER ON 1 REO 3033 INT 299
TWEETER ON 1 REO 3033-9 INT 299
TWEETER ON 1 REO 3050 INT 299
TWEETER ON 1 REO 3050-9 INT 299
TWEETER ON 2 REO 2733 INT 299
TWEETER ON 2 REO 2733-9 INT 299
TWEETER ON 2 REO 2750 INT 299
TWEETER ON 2 REO 2750-9 INT 299
TWEETER ON 2 REO 3033 INT 299
TWEETER ON 2 REO 3033-9 INT 299
TWEETER ON 2 REO 3050 INT 299
TWEETER ON 2 REO 3050-9 INT 299
TWEETER ON 4 C REO 2733 INT 301
TWEETER ON 4 C REO 2733-9 INT 301
TWEETER ON 4 C REO 2750 INT 301
TWEETER ON 4 C REO 2750-9 INT 301
TWEETER ON 4 C REO 3033 INT 301
TWEETER ON 4 C REO 3033-9 INT 301
TWEETER ON 4 C REO 3050 INT 301
TWEETER ON 4 C REO 3050-9 INT 301
TWEETER ON 4 REO 2733 INT 301
TWEETER ON 4 REO 2733-9 INT 301
TWEETER ON 4 REO 2750 INT 301
TWEETER ON 4 REO 2750-9 INT 301
TWEETER ON 4 REO 3033 INT 301
TWEETER ON 4 REO 3033-9 INT 301
TWEETER ON 4 REO 3050 INT 301
TWEETER ON 4 REO 3050-9 INT 301
TWEETER ST D 111 S1 INT 49
TWEETER ST D H111 S1 INT 49
TWEETER ST D REO 2733 S1 INT 48
TWEETER ST D REO 2733-9 S1 INT 48
TWEETER ST D REO 2750 S1 INT 48
TWEETER ST D REO 2750-9 S1 INT 48
TWEETER ST D REO 3033 S1 INT 48
TWEETER ST D REO 3033-9 S1 INT 48
TWEETER ST D REO 3050 S1 INT 48
TWEETER ST D REO 3050-9 S1 INT 48
TWEETER TRIMLESS 111 INT 47
TWEETER TRIMLESS FRL 827 INT 55
TWEETER TRIMLESS FRL 830 INT 55
TWEETER TRIMLESS REO 2733 INT 47
TWEETER TRIMLESS REO 2733-9 INT 47
TWEETER TRIMLESS REO 2750 INT 47
TWEETER TRIMLESS REO 2750-9 INT 47
TWEETER TRIMLESS REO 3033 INT 47
TWEETER TRIMLESS REO 3033-9 INT 47
TWEETER TRIMLESS REO 3050 INT 47
TWEETER TRIMLESS REO 3050-9 INT 47
TWEETER TRIMLESS SBL 827 INT 55
TWEETER TRIMLESS SBL 830 INT 55
TWEETER X P 30 EXT 143
TWEETER X P 60 EXT 143
TWEETER X W EXT 97
TWENTY-7 ON INT 359
TWENTY-7 TRIMLESS INT 129

U

ULTRA C D 2733 INT 357
ULTRA C D 2733-9 INT 357
ULTRA C D 3033 INT 357
ULTRA C D 3033-9 INT 357
ULTRA II S INT 353
ULTRA S D 2733 INT 353
ULTRA S D 2733-9 INT 353
ULTRA S D 3033 INT 353
ULTRA S D 3033-9 INT 353
ULTRA TW HP INT 547
ULTRA W INT 547
ULTRA X DOWN-UP LED WW INT 545, EXT 101
ULTRA X LED WW INT 545, EXT 101
UNI T - PROFILE PRO 155
UNI TR - PROFILE PRO 154
UNI TRT - PROFILE PRO 154
UNI W - PROFILE PRO 155
UNI70 - PROFILE PRO 155
UNI85 - PROFILE PRO 154
UV-FILTER C30 TEC 39

V

VICE VERSA F LED INT 515
VIKTOR INT 543, EXT 95
VINCE INT 565
VISA INT 553
VISA LED WW INT 553
VISA X LED WW EXT 87
VISION INT 561
VISION LED WW INT 561
VISION OUT LED NW EXT 89
VISION OUT LED WW EXT 89
VISION S LED WW INT 561
VISION S OUT LED NW EXT 89
VISION S OUT LED WW EXT 89
VISION S OUT RGB EXT 89
VISION S RGB INT 561
VISIONAIR EXT 201

W

WALKER 63 LED EXT 181
WALKER 67 LED EXT 181
WALKER 67L LED EXT 181
WLS - PROFILE CL PRO 88
WLS - PROFILE SBL PRO 88

X

Y

YOU-TURN 111 INT 137
YOU-TURN H111 INT 137
YOU-TURN HIT FL24 INT 137
YOU-TURN HIT SP15 INT 137
YOU-TURN HIT WFL43 INT 137
YOU-TURN ON 111 T50 INT 308
YOU-TURN ON 111 T50 AD INT 618
YOU-TURN ON H111-35 INT 317
YOU-TURN ON H111-35 AD INT 631
YOU-TURN ON H111-70 INT 317
YOU-TURN ON H111-70 AD INT 631
YOU-TURN ON HIT-35 AD FL24 INT 631
YOU-TURN ON HIT-35 AD SP15 INT 631
YOU-TURN ON HIT-35 AD WFL43 INT 631
YOU-TURN ON HIT-35 FL24 INT 317
YOU-TURN ON HIT-35 SP15 INT 317
YOU-TURN ON HIT-35 WFL43 INT 317
YOU-TURN ON HIT-70 AD FL24 INT 631
YOU-TURN ON HIT-70 AD SP15 INT 631
YOU-TURN ON HIT-70 AD WFL43 INT 631
YOU-TURN ON HIT-70 FL24 INT 317
YOU-TURN ON HIT-70 SP15 INT 317
YOU-TURN ON HIT-70 WFL43 INT 317
YOU-TURN ON OPTO 20 82715 INT 313
YOU-TURN ON OPTO 20 82715 AD INT 623
YOU-TURN ON OPTO 20 82733 INT 313
YOU-TURN ON OPTO 20 82733 AD INT 623
YOU-TURN ON OPTO 20 82755 INT 313
YOU-TURN ON OPTO 20 82755 AD INT 623
YOU-TURN ON OPTO 20 83015 INT 313
YOU-TURN ON OPTO 20 83015 AD INT 623
YOU-TURN ON OPTO 20 83033 INT 313
YOU-TURN ON OPTO 20 83033 AD INT 623
YOU-TURN ON OPTO 20 83055 INT 313
YOU-TURN ON OPTO 20 83055 AD INT 623
YOU-TURN ON OPTO 20 92715 INT 313
YOU-TURN ON OPTO 20 92715 AD INT 623
YOU-TURN ON OPTO 20 92733 INT 313
YOU-TURN ON OPTO 20 92733 AD INT 623
YOU-TURN ON OPTO 20 92755 INT 313
YOU-TURN ON OPTO 20 92755 AD INT 623
YOU-TURN ON OPTO 20 93015 INT 313
YOU-TURN ON OPTO 20 93015 AD INT 623
YOU-TURN ON OPTO 20 93033 INT 313
YOU-TURN ON OPTO 20 93033 AD INT 623
YOU-TURN ON OPTO 20 93055 INT 313
YOU-TURN ON OPTO 20 93055 AD INT 623
YOU-TURN ON OPTO 2715 INT 309
YOU-TURN ON OPTO 2715 AD INT 619
YOU-TURN ON OPTO 2715-9 INT 309
YOU-TURN ON OPTO 2715-9 AD INT 619
YOU-TURN ON OPTO 2733 INT 309
YOU-TURN ON OPTO 2733 AD INT 619
YOU-TURN ON OPTO 2733-9 INT 309
YOU-TURN ON OPTO 2733-9 AD INT 619
YOU-TURN ON OPTO 2755 INT 309
YOU-TURN ON OPTO 2755 AD INT 619
YOU-TURN ON OPTO 2755-9 INT 309
YOU-TURN ON OPTO 2755-9 AD INT 619
YOU-TURN ON OPTO 30 82715 AD INT 625
YOU-TURN ON OPTO 30 82715 AD DIM1 INT 629
YOU-TURN ON OPTO 30 82715 AD DIM5 INT 629
YOU-TURN ON OPTO 30 82715 DIM1 INT 315
YOU-TURN ON OPTO 30 82715 DIM5 INT 315
YOU-TURN ON OPTO 30 82733 AD INT 625
YOU-TURN ON OPTO 30 82733 AD DIM1 INT 629
YOU-TURN ON OPTO 30 82733 AD DIM5 INT 629
YOU-TURN ON OPTO 30 82733 DIM1 INT 315
YOU-TURN ON OPTO 30 82733 DIM5 INT 315
YOU-TURN ON OPTO 30 82755 AD INT 625
YOU-TURN ON OPTO 30 82755 AD DIM1 INT 629
YOU-TURN ON OPTO 30 82755 AD DIM5 INT 629
YOU-TURN ON OPTO 30 82755 DIM1 INT 315
YOU-TURN ON OPTO 30 82755 DIM5 INT 315
YOU-TURN ON OPTO 30 83015 AD INT 625
YOU-TURN ON OPTO 30 83015 AD DIM1 INT 629
YOU-TURN ON OPTO 30 83015 AD DIM5 INT 629
YOU-TURN ON OPTO 30 83015 DIM1 INT 315
YOU-TURN ON OPTO 30 83015 DIM5 INT 315
YOU-TURN ON OPTO 30 83033 AD INT 625
YOU-TURN ON OPTO 30 83033 AD DIM1 INT 629
YOU-TURN ON OPTO 30 83033 AD DIM5 INT 629
YOU-TURN ON OPTO 30 83033 DIM1 INT 315
YOU-TURN ON OPTO 30 83033 DIM5 INT 315
YOU-TURN ON OPTO 30 83055 AD INT 625
YOU-TURN ON OPTO 30 83055 AD DIM1 INT 629
YOU-TURN ON OPTO 30 83055 AD DIM5 INT 629

YOU-TURN ON OPTO 30 83055 DIM1 INT 315
YOU-TURN ON OPTO 30 83055 DIM5 INT 315
YOU-TURN ON OPTO 30 92715 AD INT 625
YOU-TURN ON OPTO 30 92715 AD DIM1 INT 629
YOU-TURN ON OPTO 30 92715 AD DIM5 INT 629
YOU-TURN ON OPTO 30 92715 DIM1 INT 315
YOU-TURN ON OPTO 30 92715 DIM5 INT 315
YOU-TURN ON OPTO 30 92733 AD INT 625
YOU-TURN ON OPTO 30 92733 AD DIM1 INT 629
YOU-TURN ON OPTO 30 92733 AD DIM5 INT 629
YOU-TURN ON OPTO 30 92733 DIM1 INT 315
YOU-TURN ON OPTO 30 92733 DIM5 INT 315
YOU-TURN ON OPTO 30 92755 AD INT 625
YOU-TURN ON OPTO 30 92755 AD DIM1 INT 629
YOU-TURN ON OPTO 30 92755 AD DIM5 INT 629
YOU-TURN ON OPTO 30 92755 DIM1 INT 315
YOU-TURN ON OPTO 30 92755 DIM5 INT 315
YOU-TURN ON OPTO 30 93015 AD INT 625
YOU-TURN ON OPTO 30 93015 AD DIM1 INT 629
YOU-TURN ON OPTO 30 93015 AD DIM5 INT 629
YOU-TURN ON OPTO 30 93015 DIM1 INT 315
YOU-TURN ON OPTO 30 93015 DIM5 INT 315
YOU-TURN ON OPTO 30 93033 AD INT 625
YOU-TURN ON OPTO 30 93033 AD DIM1 INT 629
YOU-TURN ON OPTO 30 93033 AD DIM5 INT 629
YOU-TURN ON OPTO 30 93033 DIM1 INT 315
YOU-TURN ON OPTO 30 93033 DIM5 INT 315
YOU-TURN ON OPTO 30 93055 AD INT 625
YOU-TURN ON OPTO 30 93055 AD DIM1 INT 629
YOU-TURN ON OPTO 30 93055 AD DIM5 INT 629
YOU-TURN ON OPTO 30 93055 DIM1 INT 315
YOU-TURN ON OPTO 30 93055 DIM5 INT 315
YOU-TURN ON OPTO 3015 INT 309
YOU-TURN ON OPTO 3015 AD INT 619
YOU-TURN ON OPTO 3015-9 INT 309
YOU-TURN ON OPTO 3015-9 AD INT 619
YOU-TURN ON OPTO 3033 INT 309
YOU-TURN ON OPTO 3033 AD INT 619
YOU-TURN ON OPTO 3033-9 INT 309
YOU-TURN ON OPTO 3033-9 AD INT 619
YOU-TURN ON OPTO 3055 INT 309
YOU-TURN ON OPTO 3055 AD INT 619
YOU-TURN ON OPTO 3055-9 INT 309
YOU-TURN ON OPTO 3055-9 AD INT 619
YOU-TURN ON REO 20 82733 INT 313
YOU-TURN ON REO 20 82733 AD INT 623
YOU-TURN ON REO 20 82750 INT 313
YOU-TURN ON REO 20 82750 AD INT 623
YOU-TURN ON REO 20 83033 INT 313
YOU-TURN ON REO 20 83033 AD INT 623
YOU-TURN ON REO 20 83050 INT 313
YOU-TURN ON REO 20 83050 AD INT 623
YOU-TURN ON REO 20 92733 INT 313
YOU-TURN ON REO 20 92733 AD INT 623
YOU-TURN ON REO 20 92750 INT 313
YOU-TURN ON REO 20 92750 AD INT 623
YOU-TURN ON REO 20 93033 INT 313
YOU-TURN ON REO 20 93033 AD INT 623
YOU-TURN ON REO 20 93050 INT 313
YOU-TURN ON REO 20 93050 AD INT 623
YOU-TURN ON REO 2733 INT 309
YOU-TURN ON REO 2733 AD INT 619
YOU-TURN ON REO 2733-9 INT 309
YOU-TURN ON REO 2733-9 AD INT 619
YOU-TURN ON REO 2750 INT 309
YOU-TURN ON REO 2750 AD INT 619
YOU-TURN ON REO 2750-9 INT 309
YOU-TURN ON REO 2750-9 AD INT 619
YOU-TURN ON REO 30 82733 AD INT 625
YOU-TURN ON REO 30 82733 AD DIM1 INT 627
YOU-TURN ON REO 30 82733 AD DIM5 INT 627
YOU-TURN ON REO 30 82733 DIM1 INT 316
YOU-TURN ON REO 30 82733 DIM5 INT 316
YOU-TURN ON REO 30 82750 AD INT 625
YOU-TURN ON REO 30 82750 AD DIM1 INT 627
YOU-TURN ON REO 30 82750 AD DIM5 INT 627
YOU-TURN ON REO 30 82750 DIM1 INT 316
YOU-TURN ON REO 30 82750 DIM5 INT 316
YOU-TURN ON REO 30 83033 AD INT 625
YOU-TURN ON REO 30 83033 AD DIM1 INT 627
YOU-TURN ON REO 30 83033 AD DIM5 INT 627
YOU-TURN ON REO 30 83033 DIM1 INT 316
YOU-TURN ON REO 30 83033 DIM5 INT 316
YOU-TURN ON REO 30 83050 AD INT 625
YOU-TURN ON REO 30 83050 AD DIM1 INT 627
YOU-TURN ON REO 30 83050 AD DIM5 INT 627
YOU-TURN ON REO 30 83050 DIM1 INT 316
YOU-TURN ON REO 30 83050 DIM5 INT 316
YOU-TURN ON REO 30 92733 AD INT 625
YOU-TURN ON REO 30 92733 AD DIM1 INT 627
YOU-TURN ON REO 30 92733 AD DIM5 INT 627
YOU-TURN ON REO 30 92733 DIM1 INT 316
YOU-TURN ON REO 30 92733 DIM5 INT 316
YOU-TURN ON REO 30 92750 AD INT 625
YOU-TURN ON REO 30 92750 AD DIM1 INT 627
YOU-TURN ON REO 30 92750 AD DIM5 INT 627
YOU-TURN ON REO 30 92750 DIM1 INT 316
YOU-TURN ON REO 30 92750 DIM5 INT 316
YOU-TURN ON REO 30 93033 AD INT 625
YOU-TURN ON REO 30 93033 AD DIM1 INT 627
YOU-TURN ON REO 30 93033 AD DIM5 INT 627
YOU-TURN ON REO 30 93033 DIM1 INT 316
YOU-TURN ON REO 30 93033 DIM5 INT 316
YOU-TURN ON REO 30 93050 AD INT 625
YOU-TURN ON REO 30 93050 AD DIM1 INT 627
YOU-TURN ON REO 30 93050 AD DIM5 INT 627
YOU-TURN ON REO 30 93050 DIM1 INT 316
YOU-TURN ON REO 30 93050 DIM5 INT 316
YOU-TURN ON REO 3033 INT 309
YOU-TURN ON REO 3033 AD INT 619
YOU-TURN ON REO 3033-9 INT 309
YOU-TURN ON REO 3033-9 AD INT 619
YOU-TURN ON REO 3050 INT 309
YOU-TURN ON REO 3050 AD INT 619
YOU-TURN ON REO 3050-9 INT 309
YOU-TURN ON REO 3050-9 AD INT 619
YOU-TURN OPTO 20 82715 INT 134
YOU-TURN OPTO 20 82733 INT 134
YOU-TURN OPTO 20 82755 INT 134
YOU-TURN OPTO 20 83015 INT 134
YOU-TURN OPTO 20 83033 INT 134
YOU-TURN OPTO 20 83055 INT 134
YOU-TURN OPTO 20 92715 INT 134
YOU-TURN OPTO 20 92733 INT 134
YOU-TURN OPTO 20 92755 INT 134
YOU-TURN OPTO 20 93015 INT 134
YOU-TURN OPTO 20 93033 INT 134
YOU-TURN OPTO 20 93055 INT 134
YOU-TURN REO 20 82733 INT 135
YOU-TURN REO 20 82750 INT 135
YOU-TURN REO 20 83033 INT 135
YOU-TURN REO 20 83050 INT 135
YOU-TURN REO 20 92733 INT 135
YOU-TURN REO 20 92750 INT 135
YOU-TURN REO 20 93033 INT 135
YOU-TURN REO 20 93050 INT 135
YOU-TURN REO 2733 INT 135
YOU-TURN REO 2733-9 INT 135
YOU-TURN REO 2750 INT 135
YOU-TURN REO 2750-9 INT 135
YOU-TURN REO 3033 INT 135
YOU-TURN REO 3033-9 INT 135
YOU-TURN REO 3050 INT 135
YOU-TURN REO 3050-9 INT 135
YOU-TURN REO SOFT INT 135
YUPI INT 571
YUPI X LED WW EXT 73

Z

INDEX
BY REFERENCE

200 00 01	INT 599
200 01 02	INT 599
200 01 11	INT 598
200 01 12	INT 598
200 01 13	INT 599
200 01 14	INT 598
200 01 21	INT 598
200 01 24	INT 598
200 01 34	INT 598
200 01 35	INT 598
200 01 41	INT 598
200 01 410	INT 598
200 01 420	INT 598
200 01 430	INT 598
200 11 02	INT 601
200 11 11	INT 600
200 11 12	INT 600
200 11 13	INT 601
200 11 14	INT 600
200 11 21	INT 600
200 11 24	INT 600
200 11 34	INT 600
200 11 35	INT 600
200 11 41	INT 600
200 11 410	INT 600
200 11 420	INT 600
200 11 430	INT 600
200 21 11	INT 602
200 21 12	INT 602
200 21 21	INT 602
200 21 34	INT 602
200 21 35	INT 602
200 21 41	INT 602
200 21 420	INT 602
200 21 430	INT 602
200 44 21	TEC 26
200 44 36	TEC 26
200 45 135	TEC 26
200 45 170	TEC 26
200 46 06	TEC 26
200 46 10	TEC 26
200 47 10	TEC 26
200 47 60	TEC 26
200 99 53	INT 599, INT 601
201 01 01	TEC 38
201 01 02	TEC 38
201 01 03	TEC 38
201 01 04	TEC 38
201 01 05	TEC 38
201 02 00	TEC 41
201 02 01	TEC 38
201 02 04	TEC 38
201 02 05	TEC 38
201 03 00	INT 46
201 03 01	TEC 38
201 03 02	TEC 38
201 03 03	TEC 38
201 03 04	TEC 38
201 03 05	TEC 38
201 04 01	TEC 38
201 04 02	TEC 38
201 04 03	TEC 38
201 04 04	TEC 38
201 04 05	TEC 38
201 17 00	TEC 39
201 18 00	TEC 39
201 27 99	TEC 39
201 28 00	TEC 39
201 28 01	TEC 39
201 28 02	TEC 40
201 30 05	TEC 39
201 30 11	TEC 39
201 30 12	TEC 39
201 30 13	TEC 39
201 30 14	TEC 39
201 30 98	TEC 39
201 31 50	TEC 39
201 32 50	TEC 39
201 32 51	TEC 40
201 32 52	TEC 39
201 34 00	TEC 40
201 37 00	TEC 39
201 38 11	TEC 39
201 47 11	TEC 39
201 48 01	TEC 39
202 00 55	TEC 32
202 00 64	TEC 32
202 00 75	TEC 32
202 01 10	INT 131
202 01 1010	INT 131
202 01 13	INT 130
202 01 1310	INT 130
202 01 40	INT 131
202 01 4010	INT 131
202 01 75	TEC 32
202 01 75 OFA	TEC 32
202 02 05	TEC 40
202 02 08	TEC 40
202 04 12	INT 500
202 04 14	INT 500
202 04 22	EXT 53
202 04 24	EXT 53
202 04 32	INT 500
202 04 34	INT 500
202 11 10	INT 131
202 11 1010	INT 131
202 11 13	INT 130
202 11 1310	INT 130
202 11 16	INT 123
202 11 19	TEC 28
202 11 26	INT 123
202 11 40	INT 131
202 11 4010	INT 131
202 11 82	TEC 32
202 11 82 OFA	TEC 32
202 14 11	INT 99
202 14 12	INT 99
202 14 1210	INT 99
202 14 13	EXT 15
202 14 21	INT 99
202 14 29	TEC 28
202 14 61	INT 95
202 14 71	INT 97
202 14 80	INT 98
202 14 90	INT 91
202 14 91	INT 91
202 141 28120	INT 73
202 141 28122	INT 73
202 141 28123	INT 73
202 141 28124	INT 73
202 141 28132	INT 73
202 141 28133	INT 73
202 141 28134	INT 73
202 141 29122	INT 73
202 141 29123	INT 73
202 141 29132	INT 73
202 141 29133	INT 73
202 144 28120	INT 91
202 144 28122	INT 91
202 144 28123	INT 91
202 144 29122	INT 91
202 144 29123	INT 91
202 15 61 00	INT 107
202 15 61 01	INT 107
202 15 61 97	TEC 32
202 15 61 971	TEC 32
202 15 61 972	TEC 32
202 15 61 973	TEC 32
202 15 62 01	INT 107
202 19 24	INT 162
202 191 823	INT 163
202 191 833	INT 163
202 192 821	INT 163
202 192 822	INT 163
202 192 831	INT 163
202 192 832	INT 163
202 20 06	INT 185
202 20 07	INT 185
202 20 16	INT 185
202 20 161	INT 185
202 20 17	INT 185
202 20 171	INT 185
202 20 18	TEC 29
202 20 19	TEC 28
202 20 28122	EXT 17
202 20 31	INT 179
202 20 32	INT 179
202 20 33	INT 179
202 20 41	EXT 17
202 20 42	EXT 17
202 206 28122	EXT 17
202 207 28122	EXT 17
202 21 15	INT 189
202 21 20	INT 189
202 21 28	TEC 29
202 21 29	TEC 28
202 21 31	INT 179
202 21 32	INT 179
202 21 33	INT 179
202 21 34	INT 179
202 21 58	TEC 29
202 21 59	TEC 28
202 22 05	INT 183
202 22 15	INT 183
202 22 25	INT 183
202 22 35	INT 183
202 23 05	INT 113
202 23 15	INT 113
202 23 25	INT 113
202 23 35	INT 113
202 25 18	TEC 29
202 25 19	TEC 28
202 25 28122	EXT 9
202 252 28122	EXT 9
202 256 28122	EXT 9
202 2562 28122	EXT 9
202 26 28120	INT 71
202 26 28122	INT 71
202 26 28123	INT 71
202 26 28124	INT 71
202 26 28132	INT 71
202 26 28133	INT 71
202 26 28134	INT 71
202 26 29122	INT 71
202 26 29123	INT 71
202 26 29132	INT 71
202 26 29133	INT 71
202 262 28120	INT 71
202 262 28122	INT 71
202 262 28123	INT 71
202 262 28124	INT 71
202 262 28132	INT 71
202 262 28133	INT 71
202 262 28134	INT 71
202 262 29122	INT 71
202 262 29123	INT 71
202 262 29132	INT 71
202 262 29133	INT 71
202 272 28120	INT 123
202 272 28122	INT 123
202 272 28123	INT 123
202 272 29122	INT 123
202 272 29123	INT 123
202 28 26	INT 191
202 28 28120	INT 127
202 28 28122	INT 127
202 28 28123	INT 127
202 28 29122	INT 127
202 28 29123	INT 127
202 281 83	INT 191
202 282 28120	INT 127
202 282 28122	INT 127
202 282 28123	INT 127
202 282 29122	INT 127
202 282 29123	INT 127
202 29 226	INT 105
202 29 26	INT 105
202 29 28102	INT 105
202 29 28103	INT 105
202 292 28122	INT 95
202 292 28123	INT 95
202 292 28222	INT 97
202 292 28223	INT 97
202 292 29122	INT 95
202 292 29123	INT 95
202 292 29222	INT 97
202 292 29223	INT 97
202 31 00	INT 501
202 31 10	INT 501
202 31 98	TEC 29
202 31 99	TEC 28
202 33 01	INT 109
202 34 12	INT 101, EXT 15
202 342 28120	INT 101
202 342 28122	INT 101, EXT 15
202 342 28123	INT 101
202 37 12	INT 109
202 37 28120	INT 69
202 37 28122	INT 69
202 37 28123	INT 69
202 37 28124	INT 69
202 37 28132	INT 69
202 37 28133	INT 69
202 37 28134	INT 69
202 37 29122	INT 69
202 37 29123	INT 69
202 37 29132	INT 69
202 37 29133	INT 69
202 372 28120	INT 69
202 372 28122	INT 69
202 372 28123	INT 69
202 372 28124	INT 69
202 372 28132	INT 69
202 372 28133	INT 69
202 372 28134	INT 69
202 372 29122	INT 69
202 372 29123	INT 69
202 372 29132	INT 69
202 372 29133	INT 69
202 38 28120	INT 73
202 38 28122	INT 73
202 38 28123	INT 73
202 38 28124	INT 73
202 38 28132	INT 73

202 38 28133 INT 73
202 38 28134 INT 73
202 38 28220 INT 71
202 38 28222 INT 73
202 38 28223 INT 73
202 38 28224 INT 73
202 38 28232 INT 73
202 38 28233 INT 73
202 38 28234 INT 73
202 38 29122 INT 73
202 38 29123 INT 73
202 38 29132 INT 73
202 38 29133 INT 73
202 38 29222 INT 73
202 38 29223 INT 73
202 38 29232 INT 73
202 38 29233 INT 73
202 391 21 822 INT 77
202 391 21 823 INT 77
202 391 21 832 INT 77
202 391 21 833 INT 77
202 391 21 922 INT 77
202 391 21 923 INT 77
202 391 21 932 INT 77
202 391 21 933 INT 77
202 392 21 822 INT 77
202 392 21 823 INT 77
202 392 21 832 INT 77
202 392 21 833 INT 77
202 392 21 922 INT 77
202 392 21 923 INT 77
202 392 21 932 INT 77
202 392 21 933 INT 77
202 393 21 822 INT 79
202 393 21 823 INT 79
202 393 21 832 INT 79
202 393 21 833 INT 79
202 393 21 922 INT 79
202 393 21 923 INT 79
202 393 21 932 INT 79
202 393 21 933 INT 79
202 394 21 822 INT 79
202 394 21 823 INT 79
202 394 21 832 INT 79
202 394 21 833 INT 79
202 394 21 922 INT 79
202 394 21 923 INT 79
202 394 21 932 INT 79
202 394 21 933 INT 79
202 41 30 00 TEC 32
202 41 30 15102 INT 83
202 41 58 12 TEC 32
202 41 58 15 TEC 32
202 41 58 51 INT 83
202 42 00 INT 265
202 42 04 INT 265
202 42 23 INT 265
202 42 23 ED2 INT 265
202 43 00 INT 267
202 43 04 INT 267
202 43 04 SBL INT 267
202 43 07 INT 267
202 43 23 INT 267
202 43 23 ED2 INT 267
202 46 28122 INT 184
202 46 28123 INT 184
202 46 29122 INT 184
202 46 29123 INT 184
202 471 28120 INT 175
202 471 28122 INT 175
202 471 28123 INT 175
202 471 29122 INT 175
202 471 29123 INT 175
202 472 28120 INT 175
202 472 28122 INT 175
202 472 28123 INT 175
202 472 29122 INT 175
202 472 29123 INT 175
202 48 28 INT 189
202 49 28120 INT 182
202 49 28122 INT 182
202 49 28123 INT 182
202 50 11 INT 183
202 50 28122 INT 170
202 50 28123 INT 170
202 50 29122 INT 170
202 50 29123 INT 170
202 50 50 INT 178
202 50 51 INT 178
202 50 53 INT 178
202 501 28120 INT 171
202 501 28122 INT 171
202 501 28123 INT 171
202 501 29122 INT 171
202 501 29123 INT 171
202 502 28120 INT 171
202 502 28122 INT 171
202 502 28123 INT 171
202 502 29122 INT 171
202 502 29123 INT 171
202 51 28122 INT 166
202 51 28123 INT 166
202 51 29122 INT 166
202 51 29123 INT 166
202 51 51 INT 167
202 510 28120 INT 167
202 510 28122 INT 167
202 510 28123 INT 167
202 510 29122 INT 167
202 510 29123 INT 167
202 52 11 INT 183
202 53 28120 INT 174
202 53 28122 INT 174
202 53 28123 INT 174
202 53 29122 INT 174
202 53 29123 INT 174
202 56 99 01 TEC 28
202 581 212 ED1 INT 260
202 581 312 ED1 INT 260
202 582 212 ED1 INT 261
202 582 312 ED1 INT 261
202 591 212 ED1 INT 258
202 591 312 ED1 INT 258
202 591 322 ED1 INT 258
202 592 112 ED1 INT 259
202 592 212 ED1 INT 259
202 592 312 ED1 INT 259
202 592 322 ED1 INT 259
202 60 00 01 INT 220
202 60 00 02 INT 221
202 60 00 03 INT 221
202 60 00 04 INT 221
202 60 98 01 TEC 31
202 60 98 02 TEC 31
202 60 98 03 TEC 31
202 60 98 04 TEC 31
202 600 211822 INT 219
202 600 211832 INT 219
202 600 211922 INT 219
202 600 211932 INT 219
202 600 212822 INT 219
202 600 212832 INT 219
202 600 212922 INT 219
202 600 212932 INT 219
202 601 98 01 TEC 31
202 601 98 02 TEC 31
202 61 00 01 INT 233
202 61 00 02 INT 233
202 61 00 03 INT 235
202 61 00 04 INT 235
202 61 00 04L INT 235
202 61 88 01 INT 233
202 61 88 02 INT 233
202 61 95 01 TEC 32
202 61 95 01 HP TEC 32
202 61 95 01L TEC 32
202 61 95 02 TEC 32
202 61 95 02 HP TEC 32
202 61 95 02L TEC 32
202 61 95 03 TEC 32
202 61 95 04 TEC 32
202 61 95 04L TEC 32
202 61 96 01 TEC 30
202 61 96 02 TEC 30
202 61 96 03 TEC 30
202 61 96 04L TEC 30
202 62 00 01 INT 248
202 62 00 02 INT 249
202 62 00 03 INT 250
202 62 00 04 INT 251
202 62 00 04L INT 251
202 62 060 12 FL24 INT 249
202 62 060 12 SP15 INT 249
202 62 060 12 WFL43 INT 249
202 62 060 13 FL24 INT 251
202 62 060 13 SP15 INT 251
202 62 060 13 WFL43 INT 251
202 62 660 01 FL24 INT 248
202 62 660 01 SP15 INT 248
202 62 660 01 WFL43 INT 248
202 62 660 02 FL24 INT 249
202 62 660 02 SP15 INT 249
202 62 660 02 WFL43 INT 249
202 62 660 03 FL24 INT 250
202 62 660 03 SP15 INT 250
202 62 660 03 WFL43 INT 250
202 62 88 01 INT 248
202 62 88 02 INT 249
202 62 98 01 TEC 29
202 62 98 02 TEC 29
202 62 98 03 TEC 29
202 62 98 04 TEC 29
202 62 98 04L TEC 29
202 62 99 01 TEC 28
202 62 99 02 TEC 28
202 62 99 03 TEC 28
202 62 99 04 TEC 28
202 62 99 04L TEC 28
202 671 11 INT 343
202 671 822 INT 343
202 672 11 INT 343
202 672 822 INT 343
202 680 211822 INT 227
202 680 211832 INT 227
202 680 211922 INT 227
202 680 211932 INT 227
202 680 212822 INT 227
202 680 212832 INT 227
202 680 212922 INT 227
202 680 212932 INT 227
202 681 211821 INT 229
202 681 211822 INT 229
202 681 211823 INT 229
202 681 211831 INT 229
202 681 211832 INT 229
202 681 211833 INT 229
202 681 211921 INT 229
202 681 211922 INT 229
202 681 211923 INT 229
202 681 211931 INT 229
202 681 211932 INT 229
202 681 211933 INT 229
202 681 212821 INT 229
202 681 212822 INT 229
202 681 212823 INT 229
202 681 212831 INT 229
202 681 212832 INT 229
202 681 212833 INT 229
202 681 212921 INT 229
202 681 212922 INT 229
202 681 212923 INT 229
202 681 212931 INT 229
202 681 212932 INT 229
202 681 212933 INT 229
202 684 20122 INT 231
202 684 20132 INT 231
202 684 20222 INT 231
202 684 20232 INT 231
202 684 209122 INT 231
202 684 209132 INT 231
202 684 209222 INT 231
202 684 209232 INT 231
202 690 211822 INT 243
202 690 211832 INT 243
202 690 211922 INT 243
202 690 211932 INT 243
202 690 212822 INT 243
202 690 212832 INT 243
202 690 212922 INT 243
202 690 212932 INT 243
202 691 211821 INT 245
202 691 211822 INT 245
202 691 211823 INT 245
202 691 211831 INT 245
202 691 211832 INT 245
202 691 211833 INT 245
202 691 211921 INT 245
202 691 211922 INT 245
202 691 211923 INT 245
202 691 211931 INT 245
202 691 211932 INT 245
202 691 211933 INT 245
202 691 212821 INT 245
202 691 212822 INT 245
202 691 212823 INT 245
202 691 212831 INT 245
202 691 212832 INT 245
202 691 212833 INT 245
202 691 212921 INT 245
202 691 212922 INT 245
202 691 212923 INT 245
202 691 212931 INT 245
202 691 212932 INT 245
202 691 212933 INT 245
202 694 20122 INT 247
202 694 20132 INT 247
202 694 20222 INT 247
202 694 20232 INT 247
202 694 209122 INT 247
202 694 209132 INT 247
202 694 209222 INT 247
202 694 209232 INT 247
202 70 00 01 INT 197
202 70 00 02 INT 197
202 70 00 03 INT 197
202 70 01 802 INT 195
202 70 02 802 INT 195
202 70 55 01 INT 197
202 70 55 02 INT 197
202 70 55 03 INT 197
202 70 66 01 INT 197
202 70 66 02 INT 197
202 70 81821 INT 195
202 70 81822 INT 195
202 70 81831 INT 195
202 70 81832 INT 195
202 70 81921 INT 195
202 70 81922 INT 195
202 70 81931 INT 195
202 70 81932 INT 195
202 70 82821 INT 195
202 70 82822 INT 195
202 70 82831 INT 195
202 70 82832 INT 195
202 70 82921 INT 195
202 70 82922 INT 195
202 70 82931 INT 195
202 70 82932 INT 195
202 70 98 01 TEC 31
202 70 98 02 TEC 31
202 70 98 03 TEC 31
202 71 00 01 INT 207
202 71 00 02 INT 207
202 71 00 03 INT 207
202 71 55 01 INT 207
202 71 55 02 INT 207

202 71 55 03	INT 207
202 71 66 01	INT 207
202 71 66 02	INT 207
202 71 95 01	TEC 32
202 71 95 01 HP	TEC 32
202 71 95 01L	TEC 32
202 71 95 02	TEC 32
202 71 95 02 HP	TEC 32
202 71 95 02L	TEC 32
202 71 96 01	TEC 30
202 71 96 02	TEC 30
202 71 97 03	TEC 32
202 72 00 01	INT 215
202 72 00 02	INT 215
202 72 00 03	INT 215
202 72 55 01	INT 215
202 72 55 02	INT 215
202 72 55 03	INT 215
202 72 66 01	INT 215
202 72 66 02	INT 215
202 72 99 01	TEC 28
202 72 99 02	TEC 28
202 72 99 03	TEC 28
202 73 01	INT 199
202 73 02	INT 199
202 731 211821	INT 203
202 731 211822	INT 203
202 731 211823	INT 203
202 731 211831	INT 203
202 731 211832	INT 203
202 731 211833	INT 203
202 731 211921	INT 203
202 731 211922	INT 203
202 731 211923	INT 203
202 731 211931	INT 203
202 731 211932	INT 203
202 731 211933	INT 203
202 731 212821	INT 203
202 731 212822	INT 203
202 731 212823	INT 203
202 731 212831	INT 203
202 731 212832	INT 203
202 731 212833	INT 203
202 731 212921	INT 203
202 731 212922	INT 203
202 731 212923	INT 203
202 731 212931	INT 203
202 731 212932	INT 203
202 731 212933	INT 203
202 74 01	INT 211
202 74 02	INT 211
202 741 211821	INT 213
202 741 211822	INT 213
202 741 211823	INT 213
202 741 211831	INT 213
202 741 211832	INT 213
202 741 211833	INT 213
202 741 211921	INT 213
202 741 211922	INT 213
202 741 211923	INT 213
202 741 211931	INT 213
202 741 211932	INT 213
202 741 211933	INT 213
202 741 212821	INT 213
202 741 212822	INT 213
202 741 212823	INT 213
202 741 212831	INT 213
202 741 212832	INT 213
202 741 212833	INT 213
202 741 212921	INT 213
202 741 212922	INT 213
202 741 212923	INT 213
202 741 212931	INT 213
202 741 212932	INT 213
202 741 212933	INT 213
202 78 55 01	INT 333
202 78 55 02	INT 333
202 78 8122	INT 332
202 78 8123	INT 332
202 78 8222	INT 332
202 78 8223	INT 332
202 78 89122	INT 332
202 78 89123	INT 332
202 78 89222	INT 332
202 78 89223	INT 332
202 79 01	INT 336
202 79 01 ED8	INT 336
202 79 02	INT 337
202 79 02 ED8	INT 337
202 79 03	INT 337
202 79 03 ED8	INT 337
202 790 81120	INT 199
202 790 81120	INT 211
202 790 81821	INT 199
202 790 81821	INT 211
202 790 81821	INT 336
202 790 81821	INT 337
202 790 81822	INT 199
202 790 81822	INT 211
202 790 81822	INT 336
202 790 81822	INT 337
202 790 81831	INT 199
202 790 81831	INT 211
202 790 81831	INT 336
202 790 81831	INT 337
202 790 81832	INT 199
202 790 81832	INT 211
202 790 81832	INT 336
202 790 81832	INT 337
202 790 81921	INT 199
202 790 81921	INT 211
202 790 81921	INT 336
202 790 81921	INT 337
202 790 81922	INT 199
202 790 81922	INT 211
202 790 81922	INT 336
202 790 81922	INT 337
202 790 81931	INT 199
202 790 81931	INT 211
202 790 81931	INT 336
202 790 81931	INT 337
202 790 81932	INT 199
202 790 81932	INT 211
202 790 81932	INT 336
202 790 81932	INT 337
202 91 01 11	INT 157
202 91 01 20	INT 157
202 91 01 30	INT 157
202 91 02 05	INT 157
202 91 02 11	INT 157
202 91 02 20	INT 157
202 91 04 00	INT 156
202 91 98 01	INT 157
202 93 01	INT 156
202 96 11 83	INT 257
202 96 12 83	INT 257
202 96 14 83	INT 257
202 97 01	INT 241
202 97 02	INT 241
202 970 21 822	INT 109
202 970 21 822	INT 241
202 970 21 822	INT 225
202 970 21 822	INT 339
202 970 21 832	INT 109
202 970 21 832	INT 241
202 970 21 832	INT 225
202 970 21 832	INT 339
202 970 21 922	INT 109
202 970 21 922	INT 241
202 970 21 922	INT 225
202 970 21 922	INT 339
202 970 21 932	INT 109
202 970 21 932	INT 241
202 970 21 932	INT 225
202 970 21 932	INT 339
202 98 01	INT 225
202 98 02	INT 225
202 99 01	INT 339
202 99 011	INT 339
202 99 02	INT 339
202 99 021	INT 339
203 05 04	TEC 35
203 05 041	TEC 35
203 05 06	TEC 35
203 05 061	TEC 35
203 05 10	TEC 35
203 10 01	TEC 34
203 10 02	TEC 34
203 10 03	TEC 34
203 10 06	TEC 34
203 10 15	TEC 34
203 10 27	TEC 34
203 20 01	TEC 34
203 99 55	TEC 36
203 99 56	TEC 36
204 00 100	TEC 36
204 00 62	TEC 36
204 00 90	TEC 36
204 62 62	TEC 36
204 80 80	TEC 36
204 90 90	TEC 36
205 05 455 E	INT 590
205 05 455 ED	INT 590
205 05 455 S	INT 591
205 06 455 EDL	INT 590
205 06 455 SL	INT 591
206 06 28122	INT 59
206 06 28123	INT 59
206 06 29122	INT 59
206 06 29123	INT 59
206 11 11	INT 49
206 11 28122	INT 48
206 11 28123	INT 48
206 11 28132	INT 48
206 11 28133	INT 48
206 11 29122	INT 48
206 11 29123	INT 48
206 11 29132	INT 48
206 11 29133	INT 48
206 11 88	INT 49
206 21 11	INT 47
206 21 28122	INT 47
206 21 28123	INT 47
206 21 28132	INT 47
206 21 28133	INT 47
206 21 29122	INT 47
206 21 29123	INT 47
206 21 29132	INT 47
206 21 29133	INT 47
206 22 21 82	INT 55
206 22 21 83	INT 55
206 23 21 82	INT 55
206 23 21 83	INT 55
206 31 12122	INT 299
206 31 12123	INT 299
206 31 12132	INT 299
206 31 12133	INT 299
206 31 12222	INT 299
206 31 12223	INT 299
206 31 12232	INT 299
206 31 12233	INT 299
206 31 129122	INT 299
206 31 129123	INT 299
206 31 129132	INT 299
206 31 129133	INT 299
206 31 129222	INT 299
206 31 129223	INT 299
206 31 129232	INT 299
206 31 129233	INT 299
206 31 21 82 ED1	INT 307
206 31 21 83 ED1	INT 307
206 32 21 82 AD	INT 617
206 32 21 83 AD	INT 617
206 33 8182	INT 307
206 33 8183	INT 307
206 40 12	EXT 97
206 43 12	EXT 143
206 46 12	EXT 143
207 01 161	TEC 28
207 01 162	TEC 28
207 01 163	TEC 28
207 01 164	TEC 28
207 01 167	TEC 28
207 01 169	TEC 28
207 01 170	TEC 28
207 01 171	TEC 28
207 01 172	TEC 28
207 01 173	TEC 28
207 01 174	TEC 28
207 01 180	TEC 28
207 01 181	TEC 28
207 01 184	TEC 28
207 01 185	TEC 28
207 01 186	TEC 28
207 01 188	TEC 28
207 01 189	TEC 28
207 01 190	TEC 28
207 01 193	TEC 28
207 01 194	TEC 28
207 02 9071	TEC 30
207 02 9071 C	TEC 30
207 02 9071 T	TEC 30
207 02 9093	TEC 30
207 02 9093 C	TEC 30
207 02 9093 T	TEC 30
207 02 9123 T	TEC 30
207 02 9123 TMK	TEC 30
213 11 05	EXT 131
213 11 21	EXT 131
213 12 05	EXT 131
213 12 21	EXT 131
213 15 05	EXT 131
213 15 21	EXT 131
213 19 08	EXT 130, TEC 37
213 19 09	EXT 130, TEC 37
213 19 10	EXT 120, TEC 37
213 42 22	EXT 117
213 45 10 18122	EXT 119
213 45 12	EXT 121
213 45 18122	EXT 120
213 45 212	EXT 119
213 45 2125	EXT 119
213 46 10 18122	EXT 119
213 46 12	EXT 121
213 46 18122	EXT 121
213 47 112	EXT 129
213 47 122	EXT 129
213 47 18112	EXT 123
213 47 18122	EXT 123
213 47 18132	EXT 123
213 47 212	EXT 122
213 47 2125	EXT 122
213 48 18112	EXT 123
213 48 18122	EXT 123
213 48 18132	EXT 123
213 48 212	EXT 122
213 48 2125	EXT 122
213 49 18112	EXT 123
213 49 18122	EXT 123
213 49 18132	EXT 123
214 52 73	EXT 151
214 52 76	EXT 151
214 52 83 E	EXT 151
214 52 86 E	EXT 151
215 02 11	EXT 109
215 04 11	EXT 109
216 12 00	TEC 37
216 12 01	TEC 37
216 12 02	TEC 37
216 12 100	TEC 37
216 12 50	TEC 37
216 14 35	TEC 37
217 60 15 18102	EXT 153
217 60 25 18102	EXT 153
217 60 40 18102	EXT 153
217 61 25 4102	EXT 137

217 61 25 4202	EXT 137
217 61 40 4102	EXT 137
217 61 40 4202	EXT 137
220 10 36	EXT 193
220 63 18102	EXT 181
220 67 18102	EXT 181
220 68 18102	EXT 181
220 74 12	EXT 177
220 77 12	EXT 177
220 80 832	EXT 195
222 121 12	EXT 145
222 123 12	EXT 145
222 126 12	EXT 145
222 603 62	EXT 145
222 606 62	EXT 145
222 613 12	EXT 149
222 616 12	EXT 149
223 00 10	TEC 41
223 00 12	EXT 183
223 00 52	EXT 189
223 00 57	EXT 189
223 11 01	EXT 80
223 11 4102	EXT 79
223 12 51	EXT 81
223 16 4102	EXT 185
223 17 4102	EXT 185
223 51 01	EXT 81
223 51 4102	EXT 79
223 52 51	EXT 81
223 65 40	EXT 93
223 751 8102	INT 567, EXT 87
223 751 8103	INT 567
223 752 8102	INT 567, EXT 87
223 752 8103	INT 567
223 80 12	INT 543, EXT 95
225 11 15	EXT 99
225 11 4102	EXT 99
225 20 18102	EXT 75
225 20 18112	EXT 75
225 20 18202	EXT 75
225 20 18212	EXT 75
225 31 15	EXT 103
225 51 15	EXT 103
226 11 37	EXT 199
226 12 37	EXT 199
226 21 17	EXT 197
226 23 57	EXT 197
226 23 97	EXT 197
228 111 11 11	EXT 133
228 112 11 11	EXT 133
228 171 11 11	EXT 133
228 90 10	EXT 132, TEC 40
228 90 20	EXT 132, TEC 40
228 91 20	EXT 132, TEC 40
229 01 01	EXT 183, EXT 185, EXT 189
229 01 03	EXT 145, EXT 151
229 01 07	EXT 167
229 01 11	EXT 143, EXT 145, EXT 149, EXT 153, EXT 158
229 01 12	EXT 177
229 01 13	EXT 173, EXT 181
229 01 14	EXT 191
229 01 15	EXT 171
229 02 01	EXT 183, EXT 185, EXT 189
229 02 03	EXT 172, EXT 197
229 02 05	EXT 193
229 02 07	EXT 177
229 02 08	EXT 173, EXT 181
232 008 83	INT 551, EXT 59
232 01 07	EXT 29
232 01 09	EXT 29
232 02 07	EXT 105
232 02 09	EXT 105
232 03 07	EXT 105
232 03 09	EXT 105
232 08 831	EXT 39, EXT 62, EXT 157
232 09 831	EXT 157
232 10 00	TEC 41
232 10 03	TEC 41
232 10 18112	EXT 63, EXT 160
232 10 18122	EXT 63, EXT 160
232 10 18132	EXT 63, EXT 160
232 10 21 831	EXT 63, EXT 161
232 10 21 832	EXT 63, EXT 161
232 10 21 833	EXT 63, EXT 161
232 10 81833	EXT 63, EXT 160
232 11 18112	EXT 161
232 11 18122	EXT 161
232 11 18132	EXT 161
232 11 21 831	EXT 161
232 11 21 832	EXT 161
232 11 21 833	EXT 161
232 11 81833	EXT 161
232 111 00	INT 548
232 112 83	INT 548, EXT 35, EXT 58
232 12 833	EXT 63, EXT 159
232 13 831	EXT 159
232 13 833	EXT 159
232 143 833	EXT 159
232 146 833	EXT 159
232 211 00	INT 549
232 212 83	INT 549, EXT 35, EXT 58
232 213 00	INT 549, EXT 58
232 318 83	INT 551, EXT 59
232 321 00	INT 551
232 432 83	EXT 172
232 432 99	EXT 172
232 472 83	EXT 172
232 472 99	EXT 172
232 492 83	EXT 172
232 492 99	EXT 172
232 572 83	EXT 173
232 573 00	EXT 173
232 592 83	EXT 173
232 593 00	EXT 173
232 659 83	EXT 173
250 11 10	INT 416
250 11 20	INT 417
250 11 30	INT 417
250 11 40	INT 417
250 16 10	INT 413
250 16 20	INT 413
250 16 28122	INT 413
250 16 28222	INT 413
251 67 20	INT 327
251 67 43	INT 327, EXT 37
251 67 44	INT 327, EXT 37
251 67 8122	INT 325
251 67 8122	INT 325, EXT 37
251 67 8123	INT 325
251 67 8222	INT 325, EXT 37
251 67 8223	INT 325
251 67 89122	INT 325
251 67 89123	INT 325
251 67 89222	INT 325
251 67 89223	INT 325
251 69 8122	INT 569
251 69 8123	INT 569
251 70 03 01	TEC 38
251 70 03 04	TEC 38
251 70 03 05	TEC 38
251 70 81822	INT 318
251 70 81822 ED8	INT 319
251 70 81822 ED8	INT 319, EXT 27
251 70 81832	INT 318
251 70 81832 ED8	INT 319
251 70 81832 ED8	INT 319, EXT 27
251 70 81922	INT 318
251 70 81922 ED8	INT 319
251 70 81922 ED8	INT 319, EXT 27
251 70 81932	INT 318
251 70 81932 ED8	INT 319
251 70 81932 ED8	INT 319, EXT 27
251 71 21 821	INT 323
251 71 21 823	INT 323
251 71 21 831	INT 323
251 71 21 833	INT 323
251 71 21 921	INT 323
251 71 21 923	INT 323
251 71 21 931	INT 323
251 71 21 933	INT 323
251 72 21 821	INT 331
251 72 21 823	INT 331
251 72 21 831	INT 331
251 72 21 833	INT 331
251 72 21 921	INT 331
251 72 21 923	INT 331
251 72 21 931	INT 331
251 72 21 933	INT 331
251 73 21 821	INT 323
251 73 21 823	INT 323
251 73 21 831	INT 323
251 73 21 833	INT 323
251 73 21 921	INT 323
251 73 21 923	INT 323
251 73 21 931	INT 323
251 73 21 933	INT 323
251 74 81822 ED8	INT 319
251 74 81822 ED8 AD	INT 605
251 74 81832 ED8	INT 319
251 74 81832 ED8 AD	INT 605
251 74 81922 ED8	INT 319
251 74 81922 ED8 AD	INT 605
251 74 81932 ED8	INT 319
251 74 81932 ED8 AD	INT 605
251 75 81822 ED8	INT 319
251 75 81832 ED8	INT 319
251 75 81922 ED8	INT 319
251 75 81932 ED8	INT 319
268 00 00	PRO 198
268 02 88	INT 489
268 03 01	PRO 198
268 06 01	PRO 198
268 06 05	PRO 198
268 06 06	PRO 198
268 06 10	PRO 198
268 52 24	PRO 201
268 52 39	PRO 201
268 52 54	PRO 201
268 52 80	PRO 201
268 61 10	PRO 199
268 61 15	PRO 199
268 61 201	PRO 199
268 61 202	PRO 199
268 61 224 E	PRO 200
268 61 224 ED1	PRO 200
268 61 224 ED2	PRO 200
268 61 231	PRO 199
268 61 232	PRO 199
268 61 233	PRO 199
268 61 235 E	PRO 200
268 61 235 ED1	PRO 200
268 61 235 ED2	PRO 200
268 61 239 E	PRO 200
268 61 239 ED1	PRO 200
268 61 239 ED2	PRO 200
268 61 254 E	PRO 200
268 61 254 EB	PRO 200
268 61 254 ED1	PRO 200
268 61 254 ED1B	PRO 200
268 61 254 ED2	PRO 200
268 61 254 ED2B	PRO 200
268 61 280 E	PRO 200
268 61 280 ED1	PRO 200
268 61 280 ED2	PRO 200
268 62 224 E	PRO 201
268 62 224 ED1	PRO 201
268 62 224 ED2	PRO 201
268 62 235 E	PRO 201
268 62 235 ED1	PRO 201
268 62 235 ED2	PRO 201
268 62 239 E	PRO 201
268 62 239 ED1	PRO 201
268 62 239 ED2	PRO 201
268 62 254 E	PRO 201
268 62 254 ED1	PRO 201
268 62 254 ED2	PRO 201
268 62 280 E	PRO 201
268 62 280 ED1	PRO 201
268 62 280 ED2	PRO 201
268 62 424 E	PRO 201
268 62 424 ED1	PRO 201
268 62 424 ED2	PRO 201
268 62 435 E	PRO 201
268 62 435 ED1	PRO 201
268 62 435 ED2	PRO 201
268 62 439 E	PRO 201
268 62 439 ED1	PRO 201
268 62 439 ED2	PRO 201
268 62 454 E	PRO 201
268 62 454 ED1	PRO 201
268 62 454 ED2	PRO 201
268 62 480 E	PRO 201
268 62 480 ED1	PRO 201
268 62 480 ED2	PRO 201
268 63 224 E	PRO 202
268 63 224 ED1	PRO 202
268 63 224 ED1L	PRO 202
268 63 224 ED2	PRO 202
268 63 224 ED2L	PRO 202
268 63 224 EL	PRO 202
268 63 235 E	PRO 202
268 63 235 ED1	PRO 202
268 63 235 ED1L	PRO 202
268 63 235 ED2	PRO 202
268 63 235 ED2L	PRO 202
268 63 235 EL	PRO 202
268 63 239 E	PRO 202
268 63 239 ED1	PRO 202
268 63 239 ED1L	PRO 202
268 63 239 ED2	PRO 202
268 63 239 ED2L	PRO 202
268 63 239 EL	PRO 202
268 63 254 E	PRO 202
268 63 254 EB	PRO 202
268 63 254 ED1	PRO 202
268 63 254 ED1B	PRO 202
268 63 254 ED1L	PRO 202
268 63 254 ED2	PRO 202
268 63 254 ED2B	PRO 202
268 63 254 ED2L	PRO 202
268 63 254 EL	PRO 202
268 63 280 E	PRO 202
268 63 280 ED1	PRO 202
268 63 280 ED1L	PRO 202
268 63 280 ED2	PRO 202
268 63 280 ED2L	PRO 202
268 63 280 EL	PRO 202
268 98 51	PRO 198
268 98 56	PRO 198
268 99 51	PRO 198
268 99 56	PRO 198
270 11 161	TEC 29
270 11 162	TEC 29
270 11 163	TEC 29
270 11 165	TEC 29
270 11 180	TEC 29
270 11 183	TEC 29
270 11 184	TEC 29
270 11 185	TEC 29
270 11 186	TEC 29
270 11 187	TEC 29
270 11 188	TEC 29
270 11 189	TEC 29
270 11 191	TEC 29
270 11 192	TEC 29
270 11 194	TEC 29
270 50 24	INT 579
270 50 24 ED6	INT 579
270 50 54	INT 579
270 50 54 ED6	INT 579
270 60 11 83	INT 579
270 60 12 83	INT 579
270 61 21 83	INT 579
270 61 22 83	INT 579
271 11 40	INT 571

271 51 124	INT 469, INT 581
271 511 83	INT 469, INT 581
271 52 160	INT 469, INT 581
271 52 218	INT 469, INT 581
271 52 424	INT 469, INT 581
271 521 83	INT 469, INT 581
271 522 83 ED1	INT 469, INT 581
271 54 260	INT 468
271 61 21	INT 468
271 64 21	INT 473
271 64 21 ED2	INT 473
274 24 114	EXT 107
274 24 128	EXT 107
274 25 154	INT 475, INT 583
274 25 254	INT 475, INT 583
274 25 55	INT 583
274 251 83	INT 475, INT 583
274 252 83	INT 475, INT 583
274 26 254	INT 475
274 262 83	INT 475
274 55 24	INT 575
274 80 26 E	INT 573
274 80 36 E	INT 573
274 81 12	INT 573
274 81 22	INT 573
274 84 3224	INT 589
274 85 1607	INT 383
274 85 2515	INT 383
274 85 4535	INT 383
274 86 2515	INT 271
274 86 2515 ED1	INT 271
274 86 2515 ED5	INT 271
274 86 3224	INT 271
274 86 3224 ED1	INT 271
274 86 3224 ED5	INT 271
274 87 2515	INT 387
274 87 2515 ED1	INT 387
274 87 2515 ED5	INT 387
274 87 2610 83	EXT 31
274 87 3224	INT 387
274 87 3224 ED1	INT 387
274 87 3224 ED5	INT 387
274 88 014	INT 382
274 88 029	INT 271
274 88 036	INT 271
274 88 120	INT 277
274 88 2515	INT 386
274 88 2515 AD	INT 645
274 88 2515 AD ED1	INT 645
274 88 2515 AD ED5	INT 645
274 88 2515 ED1	INT 386
274 88 2515 ED5	INT 386
274 88 2610 83	EXT 31
274 88 3224	INT 386
274 88 3224 AD	INT 645
274 88 3224 AD ED1	INT 645
274 88 3224 AD ED5	INT 645
274 88 3224 ED1	INT 386
274 88 3224 ED5	INT 386
274 88 60	INT 277
274 88 90	INT 277
274 89 06 83	INT 273
274 89 06 83 ED1	INT 273
274 89 06 83 ED5	INT 273
274 89 09 83	INT 273
274 89 09 83 ED1	INT 273
274 89 09 83 ED5	INT 273
274 89 12 83	INT 273
274 89 12 83 ED1	INT 273
274 89 12 83 ED5	INT 273
274 89 120	INT 275
274 89 120 ED2	INT 275
274 89 12528 ED1	INT 273
274 89 60	INT 275
274 89 60 ED2	INT 275
274 89 6528 ED1	INT 273
274 89 90	INT 275
274 89 90 ED2	INT 275
274 89 9528 ED1	INT 273
274 92 0312	INT 407
274 92 0312 ED2	INT 407
274 92 0606	INT 407
274 92 0606 ED2	INT 407
274 92 1212	INT 407
274 92 1212 ED2	INT 407
274 93 0312	INT 409
274 93 0312 ED2	INT 409
274 93 0606	INT 409
274 93 0606 ED2	INT 409
274 93 1212	INT 409
274 93 1212 ED2	INT 409
274 94 0710	TEC 32
274 94 1010	TEC 32
274 94 1310	TEC 32
274 95 06 83	INT 279, INT 391
274 95 06 83 ED1	INT 279, INT 391
274 95 06 83 ED5	INT 279, INT 391
274 95 06 83 PR	INT 281, INT 393
274 95 06 83 PR ED1	INT 281, INT 393
274 95 06 83 PR ED5	INT 281, INT 393
274 95 09 83	INT 279, INT 391
274 95 09 83 ED1	INT 279, INT 391
274 95 09 83 ED5	INT 279, INT 391
274 95 09 83 PR	INT 281, INT 393
274 95 09 83 PR ED1	INT 281, INT 393
274 95 09 83 PR ED5	INT 281, INT 393
274 95 12 83	INT 279, INT 391
274 95 12 83 ED1	INT 279, INT 391
274 95 12 83 ED5	INT 279, INT 391
274 95 120	INT 283, INT 395
274 95 120 ED2	INT 283, INT 395
274 95 12528 ED1	INT 279, INT 391
274 95 45 83	INT 387
274 95 45 83 ED1	INT 387
274 95 45 83 ED5	INT 387
274 95 60	INT 283, INT 395
274 95 60 ED2	INT 283, INT 395
274 95 6528 ED1	INT 279, INT 391
274 95 90	INT 283, INT 395
274 95 90 ED2	INT 283, INT 395
274 95 9528 ED1	INT 279, INT 391
274 96 06 83	INT 397
274 96 06 83 ED1	INT 397
274 96 06 83 ED5	INT 397
274 96 06 83 PR	INT 399
274 96 06 83 PR ED1	INT 399
274 96 06 83 PR ED5	INT 399
274 96 09 83	INT 397
274 96 09 83 ED1	INT 397
274 96 09 83 ED5	INT 397
274 96 09 83 PR	INT 399
274 96 09 83 PR ED1	INT 399
274 96 09 83 PR ED5	INT 399
274 96 12 83	INT 397
274 96 12 83 ED1	INT 397
274 96 12 83 ED5	INT 397
274 96 120	INT 401
274 96 120 ED2	INT 401
274 96 60	INT 401
274 96 60 ED2	INT 401
274 96 90	INT 401
274 96 90 ED2	INT 401
275 04 01	INT 557
275 04 18202	INT 556, EXT 85
275 04 24	INT 557
275 04 52	INT 557, EXT 85
275 06 24	EXT 87
275 07 24	INT 553
275 07 42	INT 553
275 08 4102	INT 565
275 10 12	INT 565
275 11 8183	INT 556
276 07 12	INT 515
276 64 24	INT 575
278 24 22	INT 561
278 24 33	INT 561
278 25 22	INT 561
278 25 40	INT 561
278 26 22	EXT 89
278 26 24	EXT 89
278 26 33	EXT 89
278 27 22	EXT 89
278 27 24	EXT 89
278 28 00	EXT 201
278 71 12 L	INT 531
278 71 12 R	INT 531
278 72 22	INT 537
278 73 8282	INT 535
278 73 8283	INT 535
278 74 8282	INT 535
278 74 8283	INT 535
278 75 8182	INT 541
278 75 8183	INT 541
278 76 8182	INT 541
278 76 8183	INT 541
279 51 40	INT 547
279 52 62	INT 547
279 61 18102	INT 545, EXT 101
279 61 18202	INT 545, EXT 101
279 70 00	INT 359
279 72 20	INT 353
279 72 28122	INT 353
279 72 28123	INT 353
279 72 29122	INT 353
279 72 29123	INT 353
279 73 28122	INT 357
279 73 28123	INT 357
279 73 29122	INT 357
279 73 29123	INT 357
279 81 40	INT 547
279 91 22	EXT 73
279 92 40	INT 571
280 30 211	INT 443
280 30 411	INT 443
280 31 411	INT 443
280 50 84822 ED8	INT 441
280 50 84832 ED8	INT 441
280 50 84922 ED8	INT 441
280 50 84932 ED8	INT 441
280 51 82822	INT 441
280 51 82832	INT 441
280 51 82922	INT 441
280 51 82932	INT 441
280 60 84 822	INT 301
280 60 84 823	INT 301
280 60 84 832	INT 301
280 60 84 833	INT 301
280 60 84 922	INT 301
280 60 84 923	INT 301
280 60 84 932	INT 301
280 60 84 933	INT 301
280 61 84 822	INT 301
280 61 84 823	INT 301
280 61 84 832	INT 301
280 61 84 833	INT 301
280 61 84 922	INT 301
280 61 84 923	INT 301
280 61 84 932	INT 301
280 61 84 933	INT 301
285 50 124 ED8	INT 429
285 50 224 ED8	INT 429
285 50 324 ED8	INT 429
285 51 11	INT 430
285 52 21	INT 430
285 52 8122	INT 427
285 52 8123	INT 427
285 52 8132	INT 427
285 52 8133	INT 427
285 52 8222	INT 427
285 52 8223	INT 427
285 52 8232	INT 427
285 52 8233	INT 427
285 52 89122	INT 427
285 52 89123	INT 427
285 52 89132	INT 427
285 52 89133	INT 427
285 52 89222	INT 427
285 52 89223	INT 427
285 52 89232	INT 427
285 52 89233	INT 427
285 53 31	INT 431
285 54 41	INT 431
285 55 51	INT 431
286 51 155 11	INT 481
286 51 255	INT 481
286 51 255 ED6	INT 481
286 51 300	INT 481
286 61 254	INT 477
286 61 254 ED2	INT 477
286 61 33	INT 477
286 61 33 RC M	INT 477
286 61 33 RC S	INT 477
286 64 12	INT 447
286 64 22	INT 539
286 65 27	INT 451
286 67 01	INT 307, INT 445, INT 541
286 67 02	INT 307, INT 445, INT 541
286 67 03	INT 307, INT 445, INT 541
286 67 8182	INT 445
286 67 8183	INT 445
286 68 28102	INT 449
286 691 28122	INT 449
286 70 27	INT 455
286 70 28	INT 455
286 71 03	INT 463
286 71 06	INT 463
286 71 427	INT 459
286 71 727	INT 463
286 73 831	INT 439
286 73 832	INT 439
296 00 00	PRO 120
296 02 05 SBL	PRO 116, PRO 121
296 03 01	PRO 120
296 06 01	PRO 120
296 06 05	PRO 120
296 06 06	PRO 120
296 06 10	PRO 120, PRO 132
296 61 10	PRO 121
296 61 124 E	PRO 123
296 61 124 ED1	PRO 123
296 61 124 ED2	PRO 123
296 61 139 E	PRO 123
296 61 139 ED1	PRO 123
296 61 139 ED2	PRO 123
296 61 154 E	PRO 123
296 61 154 EB	PRO 123
296 61 154 ED1	PRO 123
296 61 154 ED1B	PRO 123
296 61 154 ED2	PRO 123
296 61 154 ED2B	PRO 123
296 61 16	PRO 121
296 61 180 E	PRO 123
296 61 180 ED1	PRO 123
296 61 180 ED2	PRO 123
296 61 224 E	PRO 123
296 61 224 ED1	PRO 123
296 61 224 ED2	PRO 123
296 61 239 E	PRO 123
296 61 239 ED1	PRO 123
296 61 239 ED2	PRO 123
296 61 254 E	PRO 123
296 61 254 EB	PRO 123
296 61 254 ED1	PRO 123
296 61 254 ED1B	PRO 123
296 61 254 ED2	PRO 123
296 61 254 ED2B	PRO 123
296 76 114 E	PRO 121
296 76 121 E	PRO 121
296 76 128 E	PRO 121
296 98 51	PRO 120, PRO 132
296 98 56	PRO 120, PRO 132
296 99 51	PRO 120, PRO 132
296 99 56	PRO 120, PRO 132
297 00 00	PRO 114
297 03 01	PRO 114
297 06 01	PRO 114

297 06 05	PRO 114
297 06 06	PRO 114
297 14 01	PRO 114
297 61 01	PRO 121
297 61 10	PRO 115
297 61 154 EB	PRO 116
297 61 154 ED1B	PRO 116
297 61 154 ED2B	PRO 116
297 61 16	PRO 115
297 61 254 EB	PRO 116
297 61 254 ED1B	PRO 116
297 61 254 ED2B	PRO 116
297 71 124 E	PRO 116
297 71 124 ED1	PRO 116
297 71 124 ED2	PRO 116
297 71 139 E	PRO 116
297 71 139 ED1	PRO 116
297 71 139 ED2	PRO 116
297 71 154 E	PRO 116
297 71 154 ED1	PRO 116
297 71 154 ED2	PRO 116
297 71 180 E	PRO 116
297 71 180 ED1	PRO 116
297 71 180 ED2	PRO 116
297 71 235 E	PRO 116
297 71 235 ED1	PRO 116
297 71 235 ED2	PRO 116
297 71 239 E	PRO 116
297 71 239 ED1	PRO 116
297 71 239 ED2	PRO 116
297 71 254 E	PRO 116
297 71 254 ED1	PRO 116
297 71 254 ED2	PRO 116
298 02 05 SBL	PRO 168
298 98 51	PRO 138, PRO 166
298 98 56	PRO 138, PRO 166
298 99 51	PRO 138, PRO 166
298 99 56	PRO 138, PRO 166
300 2415 350	TEC 20
300 89 12 71	TEC 26
300 89 24 150	TEC 22
300 89 24 20	TEC 22
300 89 24 40	TEC 22
300 89 24 480	TEC 24
300 89 24 60	TEC 22
300 89 24 61	TEC 20
300 89 24 80	TEC 22
300 89 48 100	INT 603
300 89 48 240	INT 603
300 90 108	TEC 17
300 90 116	TEC 17
300 90 117	TEC 17
300 90 118	TEC 17
300 90 123	TEC 17
300 90 206	TEC 25
300 90 215	TEC 25
300 90 22 U	TEC 17
300 90 24 ED2	TEC 24
300 90 250	INT 83
300 90 310	INT 477
300 90 3112	TEC 17
300 90 330	TEC 25
300 90 331	TEC 25
300 90 5120	TEC 17
300 90 60	TEC 19
300 90 61	TEC 19
300 90 63	TEC 19
300 90 64	TEC 18
300 90 66	INT 230, INT 246
300 90 66 ED2	INT 230, INT 246
300 90 67	TEC 20
300 90 68	TEC 18
300 90 90	TEC 24
300 90 91	TEC 17
300 90 913	TEC 17
300 90 914	TEC 18
300 90 915 ED8	TEC 9
300 90 92	TEC 17
300 90 93	TEC 17
300 91 10 11 F HW	PRO 65
300 91 10 11 F NW	PRO 65
300 91 10 11 F WW	PRO 65
300 91 10 11 FP HW	PRO 65
300 91 10 11 FP NW	PRO 65
300 91 10 11 FP WW	PRO 65
300 91 10 12 F HW	PRO 89
300 91 10 12 F NW	PRO 89
300 91 10 12 F WW	PRO 89
300 91 10 12 FP HW	PRO 89
300 91 10 12 FP NW	PRO 89
300 91 10 12 FP WW	PRO 89
300 91 10 15 F HW	PRO 109
300 91 10 15 F NW	PRO 109
300 91 10 15 F WW	PRO 109
300 91 10 15 FP HW	PRO 109
300 91 10 15 FP NW	PRO 109
300 91 10 15 FP WW	PRO 109
300 91 33 11	PRO 65
300 91 33 12	PRO 89
300 91 33 14	TEC 8
300 91 33 15	PRO 109
300 91 52 02	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 52 03	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 52 04	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 52 33	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 53 02	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 53 03	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 53 04	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 54 02	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 54 03	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 62 02	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 62 03	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 62 04	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 62 33	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 63 02	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 63 03	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 91 63 04	PRO 57, PRO 65, PRO 71, PRO 79, PRO 89, PRO 109
300 92 00 12 F	TEC 8
300 92 00 12 FP	TEC 8
300 92 00 13 F	TEC 8
300 92 00 13 FP	TEC 8
300 92 00 14 F	TEC 8
300 92 00 14 FP	TEC 8
300 92 00 33	TEC 8
300 92 52 02	TEC 6
300 92 52 03	TEC 6
300 92 52 04	TEC 6
300 92 52 33	TEC 6
300 92 53 02	TEC 6
300 92 53 03	TEC 6
300 92 53 04	TEC 6
300 92 54 02	TEC 6
300 92 54 03	TEC 6
300 92 62 02	TEC 6
300 92 62 03	TEC 6
300 92 62 04	TEC 6
300 92 62 33	TEC 6
300 92 63 02	TEC 6
300 92 63 03	TEC 6
300 92 63 04	TEC 6
300 92 91 01	TEC 8
300 92 91 02	TEC 8
300 92 92 01	TEC 8
300 92 92 02	TEC 8
300 92 93 01	TEC 7
300 92 93 02	TEC 7
300 92 93 03	TEC 7
300 92 93 04	TEC 7
300 92 93 05	TEC 7
300 92 93 06	TEC 7
300 92 93 07	TEC 7
300 92 93 08	TEC 7
300 92 93 09	TEC 7
300 93 17 3014	TEC 4
300 93 17 3014-25	TEC 4
300 93 17 3021	TEC 4
300 93 17 3021-25	TEC 4
300 93 17 3024	TEC 4
300 93 17 3024-25	TEC 4
300 93 17 3028	TEC 4
300 93 17 3028-25	TEC 4
300 93 17 3039	TEC 4
300 93 17 3039-25	TEC 4
300 93 17 3054	TEC 4
300 93 17 3054-25	TEC 4
301 00 04 BL	INT 529
301 00 05	INT 529
301 00 44	INT 529
302 10 32	EXT 49, EXT 115
302 10 34	EXT 49, EXT 115
302 19 21	TEC 29
302 19 22	TEC 29
302 20 10	INT 507, EXT 51
302 20 11 BL	INT 507, EXT 51
302 20 12	INT 507, EXT 51
302 20 21	TEC 29
302 20 22	TEC 29
302 20 32	INT 507, EXT 51, EXT 115
302 20 34	INT 507, EXT 51, EXT 115
302 20 41 BL	INT 507, EXT 51
302 20 42	INT 507, EXT 51
302 20 44	INT 507, EXT 51
302 22 831	INT 115
302 23 02	INT 115
302 23 04	INT 115
303 13 12	INT 521
303 13 14	INT 521
303 23 12	INT 521
303 23 14	INT 521
304 05 11 BL	INT 509
304 05 12	INT 509
304 05 13	INT 509
304 05 14	INT 509
304 05 98	TEC 29
304 05 99	TEC 28
304 13 02	INT 527
304 13 04	INT 527
304 13 12	EXT 69
304 13 14	EXT 69
304 16 02	INT 521
304 16 04	INT 521
304 17 02	INT 523
304 17 04	INT 523
304 17 51	EXT 71
304 17 52	EXT 71
304 30 12	INT 502, EXT 44
304 31 12	INT 502, EXT 44
304 32 01 83	INT 503, EXT 45
304 32 02 83	INT 503, EXT 45
304 32 96	TEC 30
304 33 01 83	INT 503, EXT 45
304 33 96	TEC 30
306 01 02	EXT 39, EXT 67, EXT 167
306 01 04	EXT 39, EXT 67, EXT 167
308 07 03 822	INT 377
308 07 03 832	INT 377
308 07 05 00	INT 379
308 12 06 822	INT 377
308 12 06 832	INT 377
308 12 07 00	INT 379
308 17 08 822	INT 377
308 17 08 832	INT 377
308 17 10 00	INT 379
309 106 38 22	TEC 4
309 106 38 32	TEC 4
309 107 38 32	TEC 4
309 108 00 02	TEC 4
309 109 00 25	TEC 4
309 109 01 27	TEC 4
309 109 02 27	TEC 4
309 109 03 27	TEC 4
309 111 28122	TEC 5
309 111 28123	TEC 5
309 111 28132	TEC 5
309 111 28133	TEC 5
309 111 29122	TEC 5
309 111 29123	TEC 5
309 111 29132	TEC 5
309 111 29133	TEC 5
309 155 24 12	TEC 5
309 155 45 12	TEC 5
311 10 105	INT 421
311 10 105 AD	INT 653
311 10 111	INT 421
311 10 111 AD	INT 653
311 13 8122	INT 421
311 13 8122 AD	INT 649
311 13 8123	INT 421
311 13 8123 AD	INT 649
311 13 8132	INT 421
311 13 8132 AD	INT 649
311 13 8133	INT 421
311 13 8133 AD	INT 649
311 13 89122	INT 421
311 13 89122 AD	INT 649
311 13 89123	INT 421
311 13 89123 AD	INT 649
311 13 89132	INT 421
311 13 89132 AD	INT 649
311 13 89133	INT 421
311 13 89133 AD	INT 649
313 01 12	INT 137
313 01 130 FL24	INT 137
313 01 130 SP15	INT 137
313 01 130 WFL43	INT 137
313 01 19	INT 137
313 01 28120	INT 135
313 01 28122	INT 135
313 01 28123	INT 135
313 01 28132	INT 135
313 01 28133	INT 135
313 01 29122	INT 135
313 01 29123	INT 135
313 01 29132	INT 135
313 01 29133	INT 135
313 010 21 822	INT 135
313 010 21 823	INT 135
313 010 21 832	INT 135
313 010 21 833	INT 135
313 010 21 922	INT 135
313 010 21 923	INT 135
313 010 21 932	INT 135
313 010 21 933	INT 135
313 011 21 821	INT 134
313 011 21 822	INT 134
313 011 21 823	INT 134
313 011 21 831	INT 134
313 011 21 832	INT 134
313 011 21 833	INT 134
313 011 21 921	INT 134
313 011 21 922	INT 134
313 011 21 923	INT 134
313 011 21 931	INT 134
313 011 21 932	INT 134
313 011 21 933	INT 134
313 02 12	INT 308
313 02 12 AD	INT 618
313 02 133 AD FL24	INT 631
313 02 133 AD SP15	INT 631
313 02 133 AD WFL43	INT 631

313 02 133 FL24 INT 317
313 02 133 SP15 INT 317
313 02 133 WFL43 INT 317
313 02 137 AD FL24 INT 631
313 02 137 AD SP15 INT 631
313 02 137 AD WFL43 INT 631
313 02 137 FL24 INT 317
313 02 137 SP15 INT 317
313 02 137 WFL43 INT 317
313 02 1935 INT 317
313 02 1935 AD INT 631
313 02 1970 INT 317
313 02 1970 AD INT 631
313 020 12122 INT 309
313 020 12122 AD INT 619
313 020 12123 INT 309
313 020 12123 AD INT 619
313 020 12132 INT 309
313 020 12132 AD INT 619
313 020 12133 INT 309
313 020 12133 AD INT 619
313 020 129122 INT 309
313 020 129122 AD INT 619
313 020 129123 INT 309
313 020 129123 AD INT 619
313 020 129132 INT 309
313 020 129132 AD INT 619
313 020 129133 INT 309
313 020 129133 AD INT 619
313 020 21 822 INT 313
313 020 21 822 AD INT 623
313 020 21 823 INT 313
313 020 21 823 AD INT 623
313 020 21 832 INT 313
313 020 21 832 AD INT 623
313 020 21 833 INT 313
313 020 21 833 AD INT 623
313 020 21 922 INT 313
313 020 21 922 AD INT 623
313 020 21 923 INT 313
313 020 21 923 AD INT 623
313 020 21 932 INT 313
313 020 21 932 AD INT 623
313 020 21 933 INT 313
313 020 21 933 AD INT 623
313 021 12112 INT 309
313 021 12112 AD INT 619
313 021 12113 INT 309
313 021 12113 AD INT 619
313 021 12122 INT 309
313 021 12122 AD INT 619
313 021 12123 INT 309
313 021 12123 AD INT 619
313 021 12132 INT 309
313 021 12132 AD INT 619
313 021 12133 INT 309
313 021 12133 AD INT 619
313 021 129112 INT 309
313 021 129112 AD INT 619
313 021 129113 INT 309
313 021 129113 AD INT 619
313 021 129122 INT 309
313 021 129122 AD INT 619
313 021 129123 INT 309
313 021 129123 AD INT 619
313 021 129132 INT 309
313 021 129132 AD INT 619
313 021 129133 INT 309
313 021 129133 AD INT 619
313 021 21 821 INT 313
313 021 21 821 AD INT 623
313 021 21 822 INT 313
313 021 21 822 AD INT 623
313 021 21 823 INT 313
313 021 21 823 AD INT 623
313 021 21 831 INT 313
313 021 21 831 AD INT 623
313 021 21 832 INT 313
313 021 21 832 AD INT 623
313 021 21 833 INT 313
313 021 21 833 AD INT 623
313 021 21 921 INT 313
313 021 21 921 AD INT 623
313 021 21 922 INT 313
313 021 21 922 AD INT 623
313 021 21 923 INT 313
313 021 21 923 AD INT 623
313 021 21 931 INT 313
313 021 21 931 AD INT 623
313 021 21 932 INT 313
313 021 21 932 AD INT 623
313 021 21 933 INT 313
313 021 21 933 AD INT 623
313 030 21 822 AD INT 625
313 030 21 822 AD ED1 INT 627
313 030 21 822 AD ED5 INT 627
313 030 21 822 ED1 INT 316
313 030 21 822 ED5 INT 316
313 030 21 823 AD INT 625
313 030 21 823 AD ED1 INT 627
313 030 21 823 AD ED5 INT 627
313 030 21 823 ED1 INT 316
313 030 21 823 ED5 INT 316
313 030 21 832 AD INT 625
313 030 21 832 AD ED1 INT 627
313 030 21 832 AD ED5 INT 627
313 030 21 832 ED1 INT 316
313 030 21 832 ED5 INT 316
313 030 21 833 AD INT 625
313 030 21 833 AD ED1 INT 627
313 030 21 833 AD ED5 INT 627
313 030 21 833 ED1 INT 316
313 030 21 833 ED5 INT 316
313 030 21 922 AD INT 625
313 030 21 922 AD ED1 INT 627
313 030 21 922 AD ED5 INT 627
313 030 21 922 ED1 INT 316
313 030 21 922 ED5 INT 316
313 030 21 923 AD INT 625
313 030 21 923 AD ED1 INT 627
313 030 21 923 AD ED5 INT 627
313 030 21 923 ED1 INT 316
313 030 21 923 ED5 INT 316
313 030 21 932 AD INT 625
313 030 21 932 AD ED1 INT 627
313 030 21 932 AD ED5 INT 627
313 030 21 932 ED1 INT 316
313 030 21 932 ED5 INT 316
313 030 21 933 AD INT 625
313 030 21 933 AD ED1 INT 627
313 030 21 933 AD ED5 INT 627
313 030 21 933 ED1 INT 316
313 030 21 933 ED5 INT 316
313 031 21 821 AD INT 625
313 031 21 821 AD ED1 INT 629
313 031 21 821 AD ED5 INT 629
313 031 21 821 ED1 INT 315
313 031 21 821 ED5 INT 315
313 031 21 822 AD INT 625
313 031 21 822 AD ED1 INT 629
313 031 21 822 AD ED5 INT 629
313 031 21 822 ED1 INT 315
313 031 21 822 ED5 INT 315
313 031 21 823 AD INT 625
313 031 21 823 AD ED1 INT 629
313 031 21 823 AD ED5 INT 629
313 031 21 823 ED1 INT 315
313 031 21 823 ED5 INT 315
313 031 21 831 AD INT 625
313 031 21 831 AD ED1 INT 629
313 031 21 831 AD ED5 INT 629
313 031 21 831 ED1 INT 315
313 031 21 831 ED5 INT 315
313 031 21 832 AD INT 625
313 031 21 832 AD ED1 INT 629
313 031 21 832 AD ED5 INT 629
313 031 21 832 ED1 INT 315
313 031 21 832 ED5 INT 315
313 031 21 833 AD INT 625
313 031 21 833 AD ED1 INT 629
313 031 21 833 AD ED5 INT 629
313 031 21 833 ED1 INT 315
313 031 21 833 ED5 INT 315
313 031 21 921 AD INT 625
313 031 21 921 AD ED1 INT 629
313 031 21 921 AD ED5 INT 629
313 031 21 921 ED1 INT 315
313 031 21 921 ED5 INT 315
313 031 21 922 AD INT 625
313 031 21 922 AD ED1 INT 629
313 031 21 922 AD ED5 INT 629
313 031 21 922 ED1 INT 315
313 031 21 922 ED5 INT 315
313 031 21 923 AD INT 625
313 031 21 923 AD ED1 INT 629
313 031 21 923 AD ED5 INT 629
313 031 21 923 ED1 INT 315
313 031 21 923 ED5 INT 315
313 031 21 931 AD INT 625
313 031 21 931 AD ED1 INT 629
313 031 21 931 AD ED5 INT 629
313 031 21 931 ED1 INT 315
313 031 21 931 ED5 INT 315
313 031 21 932 AD INT 625
313 031 21 932 AD ED1 INT 629
313 031 21 932 AD ED5 INT 629
313 031 21 932 ED1 INT 315
313 031 21 932 ED5 INT 315
313 031 21 933 AD INT 625
313 031 21 933 AD ED1 INT 629
313 031 21 933 AD ED5 INT 629
313 031 21 933 ED1 INT 315
313 031 21 933 ED5 INT 315
313 12 121 PRO 37
313 12 133 FL24 PRO 37
313 12 133 SP15 PRO 37
313 12 133 WFL43 PRO 37
313 12 137 FL24 PRO 37
313 12 137 SP15 PRO 37
313 12 137 WFL43 PRO 37
313 12 1935 PRO 37
313 12 1970 PRO 37
313 120 21 822 PRO 35
313 120 21 823 PRO 35
313 120 21 832 PRO 35
313 120 21 833 PRO 35
313 120 21 922 PRO 35
313 120 21 923 PRO 35
313 120 21 932 PRO 35
313 120 21 933 PRO 35
313 121 21 821 PRO 35
313 121 21 822 PRO 35
313 121 21 823 PRO 35
313 121 21 831 PRO 35
313 121 21 832 PRO 35
313 121 21 833 PRO 35
313 121 21 921 PRO 35
313 121 21 922 PRO 35
313 121 21 923 PRO 35
313 121 21 931 PRO 35
313 121 21 932 PRO 35
313 121 21 933 PRO 35
313 22 1935-18 INT 373
313 22 1935-18 AD INT 641
313 22 1935-28 INT 373
313 22 1935-28 AD INT 641
313 22 1935-52 INT 373
313 22 1935-52 AD INT 641
313 22 1970-18 INT 373
313 22 1970-18 AD INT 641
313 22 1970-28 INT 373
313 22 1970-28 AD INT 641
313 22 1970-52 INT 373
313 22 1970-52 AD INT 641
313 22 28122 INT 372
313 22 28122 AD INT 638
313 22 28132 INT 372
313 22 28132 AD INT 638
313 23 48122 INT 373
313 23 48122 AD INT 639
313 23 48122 AD ED5 INT 639
313 23 48132 INT 373
313 23 48132 AD INT 639
313 23 48132 AD ED5 INT 639
313 24 832 AD INT 639
313 24 832 AD ED5 INT 639
313 24 832 ED5 INT 373
313 24 833 AD INT 639
313 24 833 AD ED5 INT 639
313 24 833 ED5 INT 373
314 16 26 EXT 169
315 11 00 INT 345
315 11 00 CE PRO 129
315 12 00 INT 347
315 12 00 CE PRO 129
315 12 00 CM PRO 125
315 13 00 INT 349
315 13 00 CE PRO 129
315 41 8122 INT 345
315 41 8122 CE PRO 127
315 41 8123 INT 345
315 41 8123 CE PRO 127
315 41 8222 INT 347
315 41 8222 CE PRO 127
315 41 8222 CM PRO 125
315 41 8223 INT 347
315 41 8223 CE PRO 127
315 41 8223 CM PRO 125
315 41 8322 INT 349
315 41 8322 CE PRO 127
315 41 8323 INT 349
315 41 8323 CE PRO 127
315 41 89122 INT 345
315 41 89122 CE PRO 127
315 41 89123 INT 345
315 41 89123 CE PRO 127
315 41 89222 INT 347
315 41 89222 CE PRO 127
315 41 89222 CM PRO 125
315 41 89223 INT 347
315 41 89223 CE PRO 127
315 41 89223 CM PRO 125
315 41 89322 INT 349
315 41 89322 CE PRO 127
315 41 89323 INT 349
315 41 89323 CE PRO 127
317 12 22 EXT 191
317 15 22 EXT 191
318 14 4102 EXT 171
318 17 4102 EXT 171
319 01 12312 AD INT 647
319 01 12313 AD INT 647
319 01 12322 AD INT 647
319 01 12323 AD INT 647
319 01 12332 AD INT 647
319 01 12333 AD INT 647
320 01 12 INT 513
320 02 12 INT 513
320 03 12 INT 543
321 95 327 INT 483
321 95 9528 ED1 INT 483
321 96 1036 INT 289
321 96 327 INT 289
321 96 9528 ED1 INT 289
328 10 01 PRO 14, TEC 36
328 10 02 PRO 14, TEC 36
328 10 03 PRO 14, TEC 36
328 10 04 TEC 34
328 10 05 TEC 35
328 12 01 PRO 155, PRO 166, PRO 186, PRO 198
328 12 06 PRO 155, PRO 166, PRO 186, PRO 198
328 13 01 PRO 120, PRO 132
328 13 06 PRO 120, PRO 132
328 15 21 INT 434, INT 436

328 15 41 INT 434, INT 436
328 16 01 PRO 155
328 16 06 PRO 155
328 17 01 PRO 96
328 17 06 PRO 96
328 17 212 INT 490
328 17 213 INT 490
328 18 01 PRO 174, PRO 178
328 18 06 PRO 174, PRO 178
328 18 43 INT 278, INT 280, INT 282, INT 390, INT 392, INT 394,INT 406
328 18 43 ED1 INT 278, INT 280, INT 282, INT 390, INT 392
328 18 43 ED2 INT 282, INT 394, INT 406
328 21 212 INT 485
328 21 213 INT 485
328 21 213 ED1 INT 485
328 22 01 PRO 186
328 22 22 INT 486
328 90 01 PRO 13
330 91 0801 PRO 191
330 98 51 PRO 186
330 98 56 PRO 186
330 99 51 PRO 186
330 99 56 PRO 186
331 00 00 PRO 186
331 02 88 INT 489
331 03 01 PRO 186
331 06 01 PRO 186
331 06 05 PRO 186
331 06 06 PRO 186
331 06 10 PRO 186
331 52 24 PRO 191
331 52 39 PRO 191
331 52 54 PRO 191
331 52 80 PRO 191
331 61 01 PRO 188
331 61 10 PRO 188
331 61 16 PRO 188
331 61 201 PRO 187
331 61 202 PRO 187
331 61 224 E PRO 190
331 61 224 ED1 PRO 190
331 61 224 ED2 PRO 190
331 61 231 PRO 187
331 61 232 PRO 187
331 61 235 E PRO 190
331 61 235 ED1 PRO 190
331 61 235 ED2 PRO 190
331 61 239 E PRO 190
331 61 239 ED1 PRO 190
331 61 239 ED2 PRO 190
331 61 254 E PRO 190
331 61 254 EB PRO 190
331 61 254 ED1 PRO 190
331 61 254 ED1B PRO 190
331 61 254 ED2 PRO 190
331 61 254 ED2B PRO 190
331 61 280 E PRO 190
331 61 280 ED1 PRO 190
331 61 280 ED2 PRO 190
331 61 8122 PRO 187
331 61 8123 PRO 187
331 61 8132 PRO 187
331 61 8133 PRO 187
331 61 8222 PRO 187
331 61 8223 PRO 187
331 61 8232 PRO 187
331 61 8233 PRO 187
331 61 89122 PRO 187
331 61 89123 PRO 187
331 61 89132 PRO 187
331 61 89133 PRO 187
331 61 89222 PRO 187
331 61 89223 PRO 187
331 61 89232 PRO 187
331 61 89233 PRO 187
331 610 42 E PRO 189
331 610 42 ED1 PRO 189
331 610 42 ED2 PRO 189
331 62 224 E PRO 191
331 62 224 ED1 PRO 191
331 62 224 ED2 PRO 191
331 62 235 E PRO 191
331 62 235 ED1 PRO 191
331 62 235 ED2 PRO 191
331 62 239 E PRO 191
331 62 239 ED1 PRO 191
331 62 239 ED2 PRO 191
331 62 254 E PRO 191
331 62 254 ED1 PRO 191
331 62 254 ED2 PRO 191
331 62 280 E PRO 191
331 62 280 ED1 PRO 191
331 62 280 ED2 PRO 191
331 620 42 E PRO 189
331 620 42 ED1 PRO 189
331 620 42 ED2 PRO 189
331 63 224 E PRO 191
331 63 224 ED1 PRO 191
331 63 224 ED2 PRO 191
331 63 235 E PRO 191
331 63 235 ED1 PRO 191
331 63 235 ED2 PRO 191
331 63 239 E PRO 191
331 63 239 ED1 PRO 191
331 63 239 ED2 PRO 191
331 63 254 E PRO 191
331 63 254 EB PRO 191
331 63 254 ED1 PRO 191
331 63 254 ED1B PRO 191
331 63 254 ED2 PRO 191
331 63 254 ED2B PRO 191
331 63 280 E PRO 191
331 63 280 ED1 PRO 191
331 63 280 ED2 PRO 191
331 630 62 E PRO 189
331 630 62 ED2 PRO 189
333 00 00 PRO 64
333 06 01 PRO 64
333 06 06 PRO 64
333 06 10 PRO 64
333 06 16 PRO 64
338 01 124 INT 495
338 01 154 INT 495
338 01 254 INT 495
345 01 21 INT 437
345 01 41 INT 437
345 012 822 INT 437
345 02 21 INT 435
345 02 41 INT 435
345 022 822 INT 435
346 00 00 PRO 132
346 021 124 INT 485
346 021 154 INT 485
346 021 254 INT 485
346 021 42 ED1 INT 485
346 03 01 PRO 132
346 06 01 PRO 132
346 06 06 PRO 132
346 61 124 E PRO 133
346 61 124 ED1 PRO 133
346 61 124 ED2 PRO 133
346 61 139 E PRO 133
346 61 139 ED1 PRO 133
346 61 139 ED2 PRO 133
346 61 154 E PRO 133
346 61 154 ED1 PRO 133
346 61 154 ED2 PRO 133
346 61 180 E PRO 133
346 61 180 ED1 PRO 133
346 61 180 ED2 PRO 133
346 61 224 E PRO 133
346 61 224 ED1 PRO 133
346 61 224 ED2 PRO 133
346 61 235 E PRO 133
346 61 235 ED1 PRO 133
346 61 235 ED2 PRO 133
346 61 239 E PRO 133
346 61 239 ED1 PRO 133
346 61 239 ED2 PRO 133
346 61 254 E PRO 133
346 61 254 ED1 PRO 133
346 61 254 ED2 PRO 133
346 61 280 E PRO 133
346 61 280 ED1 PRO 133
346 61 280 ED2 PRO 133
346 610 22 E PRO 133
346 610 22 ED1 PRO 133
346 610 22 ED2 PRO 133
346 610 32 ED1 PRO 133
346 610 32 ED2 PRO 133
346 610 42 E PRO 133
346 610 42 ED1 PRO 133
346 610 42 ED2 PRO 133
346 610 62 E PRO 133
346 610 62 ED2 PRO 133
346 610 82 E PRO 133
346 610 82 ED2 PRO 133
346 75 124 E PRO 133
346 75 139 E PRO 133
346 75 139 ED1 PRO 133
346 75 139 ED2 PRO 133
346 75 154 E PRO 133
346 75 154 ED1 PRO 133
346 75 154 ED2 PRO 133
346 75 239 E PRO 133
346 75 239 ED1 PRO 133
346 75 239 ED2 PRO 133
346 75 254 E PRO 133
346 75 254 ED1 PRO 133
346 75 254 ED2 PRO 133
347 02 124 INT 577
347 02 154 INT 577
351 00 00 PRO 155
351 03 01 PRO 155
351 06 10 PRO 155
351 98 51 PRO 155
351 98 56 PRO 155
351 99 51 PRO 155
351 99 56 PRO 155
352 00 00 PRO 154
352 02 05 SBL PRO 156
352 02 06 SBL PRO 156
352 03 01 PRO 154
352 06 01 PRO 154, PRO 155, PRO 166
352 06 05 PRO 154, PRO 155, PRO 166
352 06 06 PRO 154, PRO 155, PRO 166
352 14 01 PRO 154
352 61 10 PRO 156
352 61 154 EB PRO 156
352 61 154 ED1B PRO 156
352 61 154 ED2B PRO 156
352 61 16 PRO 156
352 610 22 E PRO 156
352 610 22 ED1 PRO 156
352 610 22 ED2 PRO 156
352 610 32 E PRO 156
352 610 32 ED1 PRO 156
352 610 32 ED2 PRO 156
352 610 42 E PRO 156
352 610 42 ED1 PRO 156
352 610 42 ED2 PRO 156
352 75 124 E PRO 157
352 75 139 E PRO 157
352 75 139 ED1 PRO 157
352 75 139 ED2 PRO 157
352 75 154 E PRO 157
352 75 154 ED1 PRO 157
352 75 154 ED2 PRO 157
352 75 239 E PRO 157
352 75 239 ED1 PRO 157
352 75 239 ED2 PRO 157
352 75 254 E PRO 157
352 75 254 ED1 PRO 157
352 75 254 ED2 PRO 157
352 79 001 E PRO 157
352 79 001 ED1 PRO 157
352 79 001 ED2 PRO 157
352 79 002 E PRO 157
352 79 002 ED1 PRO 157
352 79 002 ED2 PRO 157
352 79 003 E PRO 157
352 79 003 ED1 PRO 157
352 79 003 ED2 PRO 157
352 79 004 E PRO 157
352 79 004 ED1 PRO 157
352 79 004 ED2 PRO 157
352 79 005 E PRO 157
352 79 005 ED1 PRO 157
352 79 005 ED2 PRO 157
352 79 006 E PRO 157
352 79 006 ED1 PRO 157
352 79 006 ED2 PRO 157
352 79 007 E PRO 157
352 79 007 ED1 PRO 157
352 79 007 ED2 PRO 157
352 79 008 E PRO 157
352 79 008 ED1 PRO 157
352 79 008 ED2 PRO 157
352 79 009 E PRO 157
352 79 009 ED1 PRO 157
352 79 009 ED2 PRO 157
352 79 010 E PRO 157
352 79 010 ED1 PRO 157
352 79 010 ED2 PRO 157
352 79 011 E PRO 157
352 79 011 ED1 PRO 157
352 79 011 ED2 PRO 157
352 79 012 E PRO 157
352 79 012 ED1 PRO 157
352 79 012 ED2 PRO 157
352 79 013 E PRO 157
352 79 013 ED1 PRO 157
352 79 013 ED2 PRO 157
352 79 014 E PRO 157
352 79 014 ED1 PRO 157
352 79 014 ED2 PRO 157
352 79 015 E PRO 157
352 79 015 ED1 PRO 157
352 79 015 ED2 PRO 157
352 79 016 E PRO 157
352 79 016 ED1 PRO 157
352 79 016 ED2 PRO 157
352 79 017 E PRO 157
352 79 017 ED1 PRO 157
352 79 017 ED2 PRO 157
352 79 018 E PRO 157
352 79 018 ED1 PRO 157
352 79 018 ED2 PRO 157
352 79 019 E PRO 157
352 79 019 ED1 PRO 157
352 79 019 ED2 PRO 157
352 79 020 E PRO 157
352 79 020 ED1 PRO 157
352 79 020 ED2 PRO 157
352 79 021 E PRO 157
352 79 021 ED1 PRO 157
352 79 021 ED2 PRO 157
353 00 00 PRO 155
353 03 01 PRO 155
353 06 01 PRO 155
353 06 05 PRO 155
353 06 06 PRO 155
353 06 10 PRO 155
353 98 51 PRO 155
353 98 56 PRO 155
353 99 51 PRO 155
353 99 56 PRO 155
354 00 00 PRO 155
354 06 10 PRO 155
355 00 00 PRO 154
355 01 124 INT 490
355 01 154 INT 490
355 03 01 PRO 154
355 14 01 PRO 154

358 00 00 CL PRO 88
358 00 00 SBL PRO 88
358 03 01 PRO 88
360 00 00 PRO 166
360 03 01 PRO 166
360 06 10 PRO 166
361 00 00 PRO 166
361 03 01 PRO 166
361 14 01 PRO 166
361 61 10 PRO 167
361 61 150 PRO 167
361 61 16 PRO 167
361 61 250 PRO 167
361 71 224 E PRO 168
361 71 224 ED1 PRO 168
361 71 224 ED2 PRO 168
361 71 235 E PRO 168
361 71 235 ED1 PRO 168
361 71 235 ED2 PRO 168
361 71 254 E PRO 168
361 71 254 ED1 PRO 168
361 71 254 ED2 PRO 168
361 75 224 E PRO 168
361 75 239 E PRO 168
361 75 239 ED1 PRO 168
361 75 239 ED2 PRO 168
361 75 254 E PRO 168
361 75 254 ED1 PRO 168
361 75 254 ED2 PRO 168
364 03 01 PRO 88
364 06 11 PRO 79, PRO 88
366 00 00 CL PRO 88
366 00 00 SBL PRO 88
368 00 00 PRO 154
368 03 01 PRO 154
368 14 01 PRO 154
369 00 00 PRO 96
369 01 154 INT 491
369 01 342 INT 491
369 03 01 PRO 96
369 06 01 PRO 96
369 61 42 PRO 97
369 75 124 E PRO 97
369 75 139 E PRO 97
369 75 139 ED1 PRO 97
369 75 139 ED2 PRO 97
369 75 154 E PRO 97
369 75 154 ED1 PRO 97
369 75 154 ED2 PRO 97
369 75 239 E PRO 97
369 75 239 ED1 PRO 97
369 75 239 ED2 PRO 97
369 75 254 E PRO 97
369 75 254 ED1 PRO 97
369 75 254 ED2 PRO 97
369 98 51 PRO 96
369 98 56 PRO 96
369 99 51 PRO 96
369 99 56 PRO 96
371 00 00 PRO 56
371 06 01 PRO 56
371 06 06 PRO 56
371 06 16 PRO 56
372 00 00 PRO 52
372 00 06 01 PRO 52
372 00 06 06 PRO 52
372 00 06 16 PRO 52
372 00 61 1135 E PRO 53
372 00 61 1170 E PRO 53
372 00 61 231 PRO 53
372 25 00 PRO 42
372 25 03 01 PRO 42
372 25 06 01 PRO 42
372 25 06 06 PRO 42
372 25 271 823 PRO 44
372 25 271 833 PRO 44
372 25 271 923 PRO 44
372 25 271 933 PRO 44
372 25 272 822 PRO 44
372 25 272 832 PRO 44
372 25 51 06 L PRO 42
372 25 51 06 R PRO 42
372 25 61 01 PRO 43
372 29 00 PRO 18
372 29 03 01 PRO 18
372 29 06 01 PRO 18
372 29 06 06 PRO 18
372 29 14 01 PRO 18
372 29 24 20 PRO 19
372 29 24 20 ED1 PRO 19
372 29 24 60 PRO 19
372 29 24 60 ED1 PRO 19
372 29 25 062 PRO 19
372 29 25 092 PRO 19
372 29 25 122 PRO 19
372 29 25 152 PRO 19
372 29 271 823 PRO 21
372 29 271 833 PRO 21
372 29 271 923 PRO 21
372 29 271 933 PRO 21
372 29 272 822 PRO 21
372 29 272 832 PRO 21
372 29 61 01 PRO 19
372 29 61 42 PRO 19
372 29 75 124 E PRO 19
372 29 75 124 ED1 PRO 19
372 29 75 124 ED2 PRO 19
372 29 75 139 E PRO 19
372 29 75 139 ED1 PRO 19
372 29 75 139 ED2 PRO 19
372 29 75 154 E PRO 19
372 29 75 154 ED1 PRO 19
372 29 75 154 ED2 PRO 19
372 29 75 239 E PRO 19
372 29 75 239 ED1 PRO 19
372 29 75 239 ED2 PRO 19
372 29 75 254 E PRO 19
372 29 75 254 ED1 PRO 19
372 29 75 254 ED2 PRO 19
372 51 00 PRO 42
372 51 03 01 PRO 42
372 51 06 01 PRO 42
372 51 06 06 PRO 42
372 51 1822 PRO 43
372 51 1832 PRO 43
372 51 271 823 PRO 45
372 51 271 833 PRO 45
372 51 271 923 PRO 45
372 51 271 933 PRO 45
372 51 272 822 PRO 45
372 51 272 832 PRO 45
372 51 2822 PRO 43
372 51 2832 PRO 43
372 51 371 81821 PRO 47
372 51 371 81822 PRO 47
372 51 371 81831 PRO 47
372 51 371 81832 PRO 47
372 51 371 81921 PRO 47
372 51 371 81922 PRO 47
372 51 371 81931 PRO 47
372 51 371 81932 PRO 47
372 51 372 821 PRO 47
372 51 372 831 PRO 47
372 51 61 01 PRO 43
372 52 00 PRO 26
372 52 03 01 PRO 26
372 52 06 01 PRO 26
372 52 06 06 PRO 26
372 52 1822 PRO 28
372 52 1832 PRO 28
372 52 271 823 PRO 29
372 52 271 833 PRO 29
372 52 271 923 PRO 29
372 52 271 933 PRO 29
372 52 272 822 PRO 29
372 52 272 832 PRO 29
372 52 2822 PRO 28
372 52 2832 PRO 28
372 52 371 21 821 PRO 30
372 52 371 21 831 PRO 30
372 52 371 21 921 PRO 30
372 52 371 21 931 PRO 30
372 52 371 81821 PRO 31
372 52 371 81822 PRO 31
372 52 371 81831 PRO 31
372 52 371 81832 PRO 31
372 52 371 81921 PRO 31
372 52 371 81922 PRO 31
372 52 371 81931 PRO 31
372 52 371 81932 PRO 31
372 52 372 821 PRO 31
372 52 372 831 PRO 31
372 52 61 01 PRO 27
372 52 61 8122 PRO 27
372 52 61 8122 D PRO 27
372 52 61 8123 PRO 27
372 52 61 8123 D PRO 27
372 52 61 8132 PRO 27
372 52 61 8133 PRO 27
372 52 61 8222 PRO 27
372 52 61 8222 D PRO 27
372 52 61 8223 PRO 27
372 52 61 8223 D PRO 27
372 52 61 8232 PRO 27
372 52 61 8233 PRO 27
372 52 61 8322 PRO 27
372 52 61 8322 D PRO 27
372 52 61 8323 PRO 27
372 52 61 8323 D PRO 27
372 52 61 8332 PRO 27
372 52 61 8333 PRO 27
372 52 61 89122 PRO 27
372 52 61 89122 D PRO 27
372 52 61 89123 PRO 27
372 52 61 89123 D PRO 27
372 52 61 89132 PRO 27
372 52 61 89133 PRO 27
372 52 61 89222 PRO 27
372 52 61 89222 D PRO 27
372 52 61 89223 PRO 27
372 52 61 89223 D PRO 27
372 52 61 89232 PRO 27
372 52 61 89233 PRO 27
372 52 61 89322 PRO 27
372 52 61 89322 D PRO 27
372 52 61 89323 PRO 27
372 52 61 89323 D PRO 27
372 52 61 89332 PRO 27
372 52 61 89333 PRO 27
372 52 63 8122 PRO 27
372 52 63 8123 PRO 27
372 52 63 8132 PRO 27
372 52 63 8133 PRO 27
372 52 63 8222 PRO 27
372 52 63 8223 PRO 27
372 52 63 8232 PRO 27
372 52 63 8233 PRO 27
372 52 63 89122 PRO 27
372 52 63 89123 PRO 27
372 52 63 89132 PRO 27
372 52 63 89133 PRO 27
372 52 63 89222 PRO 27
372 52 63 89223 PRO 27
372 52 63 89232 PRO 27
372 52 63 89233 PRO 27
372 61 42 PRO 43
372 61 8122 PRO 43
372 61 8123 PRO 43
372 61 8132 PRO 43
372 61 8133 PRO 43
372 61 8222 PRO 43
372 61 8223 PRO 43
372 61 8232 PRO 43
372 61 8233 PRO 43
372 61 8322 PRO 43
372 61 8323 PRO 43
372 61 8332 PRO 43
372 61 8333 PRO 43
372 61 89122 PRO 43
372 61 89123 PRO 43
372 61 89132 PRO 43
372 61 89133 PRO 43
372 61 89222 PRO 43
372 61 89223 PRO 43
372 61 89232 PRO 43
372 61 89233 PRO 43
372 61 89322 PRO 43
372 61 89323 PRO 43
372 61 89332 PRO 43
372 61 89333 PRO 43
372 75 124 E PRO 48
372 75 139 E PRO 48
372 75 139 ED1 PRO 48
372 75 139 ED2 PRO 48
372 75 154 E PRO 48
372 75 154 ED1 PRO 48
372 75 154 ED2 PRO 48
372 75 239 E PRO 48
372 75 239 ED1 PRO 48
372 75 239 ED2 PRO 48
372 75 254 E PRO 48
372 75 254 ED1 PRO 48
372 75 254 ED2 PRO 48
374 00 00 PRO 102
374 01 154 INT 491
374 01 254 INT 491
374 03 01 PRO 102
374 61 42 PRO 103
374 75 124 E PRO 103
374 75 139 E PRO 103
374 75 139 ED1 PRO 103
374 75 139 ED2 PRO 103
374 75 154 E PRO 103
374 75 154 ED1 PRO 103
374 75 154 ED2 PRO 103
374 75 239 E PRO 103
374 75 239 ED1 PRO 103
374 75 239 ED2 PRO 103
374 75 254 E PRO 103
374 75 254 ED1 PRO 103
374 75 254 ED2 PRO 103
375 00 00 PRO 78
375 03 01 PRO 78
375 06 06 PRO 78
376 00 00 PRO 78
376 01 242 INT 511
376 01 244 INT 511
376 03 01 PRO 78
376 06 06 PRO 78
376 14 01 PRO 78
377 00 00 PRO 144
377 01 154 INT 487
377 03 01 01 PRO 144
377 06 10 PRO 138, PRO 144
377 12 00 PRO 138, PRO 144
377 20 21 PRO 138, PRO 144
377 20 26 PRO 138, PRO 144
377 98 51 PRO 144
377 98 56 PRO 144
377 99 51 PRO 144
377 99 56 PRO 144
378 00 00 PRO 144
378 02 05 SBL PRO 146
378 02 06 PR PRO 146
378 03 01 PRO 144
378 06 01 PRO 144
378 06 06 PRO 144
378 14 01 PRO 144
378 52 124 PRO 147
378 52 139 PRO 147
378 52 154 PRO 147
378 61 01 PRO 145
378 61 154 EB PRO 147
378 61 154 ED1B PRO 147
378 61 154 ED2B PRO 147
378 61 8122 PRO 145

378 61 8123	PRO 145
378 61 8132	PRO 145
378 61 8133	PRO 145
378 61 8222	PRO 145
378 61 8223	PRO 145
378 61 8232	PRO 145
378 61 8233	PRO 145
378 61 89122	PRO 145
378 61 89123	PRO 145
378 61 89132	PRO 145
378 61 89133	PRO 145
378 61 89222	PRO 145
378 61 89223	PRO 145
378 61 89232	PRO 145
378 61 89233	PRO 145
378 610 32 E	PRO 146
378 610 32 ED1	PRO 146
378 610 32 ED2	PRO 146
378 610 42 E	PRO 146
378 610 42 ED1	PRO 146
378 610 42 ED2	PRO 146
378 610 52 E	PRO 146
378 610 52 ED1	PRO 146
378 610 52 ED2	PRO 146
378 610 62 E	PRO 146
378 610 62 ED1	PRO 146
378 610 62 ED2	PRO 146
378 610 82 E	PRO 146
378 610 82 ED1	PRO 146
378 610 82 ED2	PRO 146
378 75 124 E	PRO 146
378 75 139 E	PRO 146
378 75 139 ED1	PRO 146
378 75 139 ED2	PRO 146
378 75 154 E	PRO 146
378 75 154 ED1	PRO 146
378 75 154 ED2	PRO 146
378 75 239 E	PRO 146
378 75 239 ED1	PRO 146
378 75 239 ED2	PRO 146
378 75 254 E	PRO 146
378 75 254 ED1	PRO 146
378 75 254 ED2	PRO 146
381 00 00	PRO 78
381 03 01	PRO 78
382 00 00	PRO 79
382 03 01	PRO 79
384 00 00	PRO 138
384 01 62 ED1	INT 487
384 03 01	PRO 138
384 620 22 ED1	PRO 139
384 620 22 ED2	PRO 139
384 620 42 ED1	PRO 139
384 620 42 ED2	PRO 139
385 00 00	PRO 138
385 03 01	PRO 138
385 06 01	PRO 138
385 06 06	PRO 138
385 14 01	PRO 138
385 610 22 ED1	PRO 139
385 610 22 ED2	PRO 139
385 610 42 ED1	PRO 139
385 610 42 ED2	PRO 139
385 611 ED5	TEC 26
388 01 22	EXT 33
388 01 32	EXT 33
388 01 42	EXT 33
390 00 00	PRO 174
390 03 01	PRO 174, PRO 178
390 06 01	PRO 174
390 06 018	PRO 178
390 06 06	PRO 174
390 06 10	PRO 174
390 518 42 E	PRO 179
390 518 42 ED1	PRO 179
390 518 42 ED2	PRO 179
390 518 62 E	PRO 179
390 518 62 ED2	PRO 179
390 518 82 E	PRO 179
390 518 82 ED2	PRO 179
390 538 42 32 E	PRO 179
390 538 42 32 ED1	PRO 179
390 538 42 32 ED2	PRO 179
390 538 62 42 E	PRO 179
390 538 62 42 ED2	PRO 179
390 538 82 52 E	PRO 179
390 538 82 52 ED2	PRO 179
390 61 22 L	PRO 176
390 61 22 R	PRO 176
390 61 32 AL	PRO 176
390 61 32 AR	PRO 176
390 61 8122	PRO 175
390 61 8123	PRO 175
390 61 8132	PRO 175
390 61 8133	PRO 175
390 61 8222	PRO 175
390 61 8223	PRO 175
390 61 8232	PRO 175
390 61 8233	PRO 175
390 61 89122	PRO 175
390 61 89123	PRO 175
390 61 89132	PRO 175
390 61 89133	PRO 175
390 61 89222	PRO 175
390 61 89223	PRO 175
390 61 89232	PRO 175
390 61 89233	PRO 175
390 611 22 L E	PRO 177
390 611 22 L ED1	PRO 177
390 611 22 L ED2	PRO 177
390 611 22 R E	PRO 177
390 611 22 R ED1	PRO 177
390 611 22 R ED2	PRO 177
390 611 42 L E	PRO 177
390 611 42 L ED1	PRO 177
390 611 42 L ED2	PRO 177
390 611 42 R E	PRO 177
390 611 42 R ED1	PRO 177
390 611 42 R ED2	PRO 177
390 620 22 E	PRO 177
390 620 42 E	PRO 177
390 620 62 E	PRO 177
390 98 51	PRO 174, PRO 178
390 98 56	PRO 174, PRO 178
390 99 51	PRO 174, PRO 178
390 99 56	PRO 174, PRO 178
391 00 00	PRO 70
391 03 01	PRO 70
391 06 06	PRO 70
391 06 11	PRO 70
392 00 00	PRO 70
392 03 01	PRO 70
393 00 00	PRO 70
393 03 01	PRO 70
393 06 01	PRO 70
393 06 06	PRO 70
393 06 11	PRO 70
393 14 01	PRO 70
394 00 00	PRO 108
394 06 01	PRO 108
394 06 06	PRO 108
395 00 00	PRO 110
395 03 01	PRO 110
395 06 01	PRO 110
395 06 06	PRO 110
395 610 22 E	PRO 111
395 610 22 ED1	PRO 111
395 610 22 ED2	PRO 111
395 610 32 ED1	PRO 111
395 610 32 ED2	PRO 111
395 610 42 E	PRO 111
395 610 42 ED1	PRO 111
395 610 42 ED2	PRO 111
395 610 62 E	PRO 111
395 610 62 ED2	PRO 111
395 610 82 E	PRO 111
395 610 82 ED2	PRO 111
396 00 00	PRO 108
396 06 01	PRO 108
396 06 06	PRO 108
396 06 16	PRO 108
400 00 11	INT 17
400 00 19	INT 17
400 00 21	INT 17
400 00 30	INT 17
400 00 41	INT 17
400 00 55	INT 17
400 03 01	INT 16, TEC 38
400 03 02	INT 16, TEC 38
400 03 03	INT 16, TEC 38
400 03 04	INT 16, TEC 38
400 03 05	INT 16, TEC 38
400 03 10	INT 20
400 90 01	TEC 32
400 91 02 OFA	TEC 32
400 99 00	INT 18, INT 20, INT 23
401 01 08 821	INT 20
401 01 08 822	INT 20
401 01 08 831	INT 20
401 01 08 832	INT 20
401 01 08 921	INT 20
401 01 08 922	INT 20
401 01 08 931	INT 20
401 01 08 932	INT 20
401 01 21 821	INT 21
401 01 21 822	INT 21
401 01 21 831	INT 21
401 01 21 832	INT 21
401 01 21 921	INT 21
401 01 21 922	INT 21
401 01 21 931	INT 21
401 01 21 932	INT 21
401 02 04 829	INT 19
401 02 04 839	INT 19
401 02 04 929	INT 19
401 02 04 939	INT 19
401 11 13 822	INT 21
401 11 13 832	INT 21
401 11 13 922	INT 21
401 11 13 932	INT 21
401 22 02 829	INT 19
401 22 02 839	INT 19
401 22 02 929	INT 19
401 22 02 939	INT 19
401 31 08 802	INT 20
401 60 00	INT 23
401 61 00	INT 23
401 80 00	INT 23
402 01 08 821	INT 26
402 01 08 822	INT 26
402 01 08 831	INT 26
402 01 08 832	INT 26
402 01 08 921	INT 26
402 01 08 922	INT 26
402 01 08 931	INT 26
402 01 08 932	INT 26
402 01 21 821	INT 27
402 01 21 822	INT 27
402 01 21 831	INT 27
402 01 21 832	INT 27
402 01 21 921	INT 27
402 01 21 922	INT 27
402 01 21 931	INT 27
402 01 21 932	INT 27
402 02 04 829	INT 25
402 02 04 839	INT 25
402 02 04 929	INT 25
402 02 04 939	INT 25
402 11 13 822	INT 27
402 11 13 832	INT 27
402 11 13 922	INT 27
402 11 13 932	INT 27
402 22 02 829	INT 25
402 22 02 839	INT 25
402 22 02 929	INT 25
402 22 02 939	INT 25
402 31 08 802	INT 26
402 60 00	INT 29
402 61 00	INT 29
402 80 00	INT 29
403 01 08 821	INT 32
403 01 08 822	INT 32
403 01 08 831	INT 32
403 01 08 832	INT 32
403 01 08 921	INT 32
403 01 08 922	INT 32
403 01 08 931	INT 32
403 01 08 932	INT 32
403 01 21 821	INT 33
403 01 21 822	INT 33
403 01 21 831	INT 33
403 01 21 832	INT 33
403 01 21 921	INT 33
403 01 21 922	INT 33
403 01 21 931	INT 33
403 01 21 932	INT 33
403 02 04 829	INT 31
403 02 04 839	INT 31
403 02 04 929	INT 31
403 02 04 939	INT 31
403 11 13 822	INT 33
403 11 13 832	INT 33
403 11 13 922	INT 33
403 11 13 932	INT 33
403 22 02 829	INT 31
403 22 02 839	INT 31
403 22 02 929	INT 31
403 22 02 939	INT 31
403 31 08 802	INT 32
403 60 00	INT 35
403 61 00	INT 35
403 80 00	INT 35
404 01 08 821	INT 37
404 01 08 822	INT 37
404 01 08 831	INT 37
404 01 08 832	INT 37
404 01 08 921	INT 37
404 01 08 922	INT 37
404 01 08 931	INT 37
404 01 08 932	INT 37
404 11 13 822	INT 37
404 11 13 832	INT 37
404 11 13 922	INT 37
404 11 13 932	INT 37
404 31 08 802	INT 37
413 01 08 821	INT 43
413 01 08 822	INT 43
413 01 08 831	INT 43
413 01 08 832	INT 43
413 01 08 921	INT 43
413 01 08 922	INT 43
413 01 08 931	INT 43
413 01 08 932	INT 43
413 02 04 829	INT 43
413 02 04 839	INT 43
413 02 04 929	INT 43
413 02 04 939	INT 43
413 03 01	TEC 38
413 03 02	TEC 38
413 03 03	TEC 38
413 03 04	TEC 38
413 03 05	TEC 38
413 22 02 829	INT 43
413 22 02 839	INT 43
413 22 02 929	INT 43
413 22 02 939	INT 43
414 01 00	TEC 41
414 02 00	TEC 41
414 03 00	TEC 41
414 04 00	TEC 41
414 13 839	INT 143
414 221 823	INT 145
414 221 833	INT 145
414 221 923	INT 145
414 221 933	INT 145
414 222 822	INT 145

414 222 832	INT 145
414 241 823	INT 153
414 241 833	INT 153
414 241 923	INT 153
414 241 933	INT 153
414 242 822	INT 153
414 242 832	INT 153
414 251 1823 ED8	INT 363
414 251 1833 ED8	INT 363
414 251 1923 ED8	INT 363
414 251 1933 ED8	INT 363
414 251 2823	INT 363
414 251 2823 ED8	INT 363
414 251 2833	INT 363
414 251 2833 ED8	INT 363
414 251 2923	INT 363
414 251 2923 ED8	INT 363
414 251 2933	INT 363
414 251 2933 ED8	INT 363
414 251 3823	INT 363
414 251 3823 ED8	INT 363
414 251 3833	INT 363
414 251 3833 ED8	INT 363
414 251 3923	INT 363
414 251 3923 ED8	INT 363
414 251 3933	INT 363
414 251 3933 ED8	INT 363
414 259 1823	INT 363
414 259 1833	INT 363
414 259 1923	INT 363
414 259 1933	INT 363
414 261 823	INT 361
414 261 823 ADL	INT 607
414 261 833	INT 361
414 261 833 ADL	INT 607
414 261 923	INT 361
414 261 923 ADL	INT 607
414 261 933	INT 361
414 261 933 ADL	INT 607
414 262 822	INT 361
414 262 822 ADL	INT 607
414 262 832	INT 361
414 262 832 ADL	INT 607
414 31 822	INT 147
414 31 832	INT 147
414 31 922	INT 147
414 31 932	INT 147
414 33 822	INT 147
414 33 832	INT 147
414 33 922	INT 147
414 33 932	INT 147
414 341 21 821	INT 154
414 341 21 831	INT 154
414 341 21 921	INT 154
414 341 21 931	INT 154
414 341 81821	INT 155
414 341 81822	INT 155
414 341 81831	INT 155
414 341 81832	INT 155
414 341 81921	INT 155
414 341 81922	INT 155
414 341 81931	INT 155
414 341 81932	INT 155
414 342 821	INT 155
414 342 831	INT 155
414 351 81821 ED8	INT 367
414 351 81822 ED8	INT 367
414 351 81831 ED8	INT 367
414 351 81832 ED8	INT 367
414 351 81921 ED8	INT 367
414 351 81922 ED8	INT 367
414 351 81931 ED8	INT 367
414 351 81932 ED8	INT 367
414 351 82821	INT 367
414 351 82822	INT 367
414 351 82831	INT 367
414 351 82832	INT 367
414 351 82921	INT 367
414 351 82922	INT 367
414 351 82931	INT 367
414 351 82932	INT 367
414 351 83821	INT 367
414 351 83822	INT 367
414 351 83831	INT 367
414 351 83832	INT 367
414 351 83921	INT 367
414 351 83922	INT 367
414 351 83931	INT 367
414 351 83932	INT 367
414 361 21 821	INT 364
414 361 21 821 AD	INT 610
414 361 21 821 ADL	INT 608
414 361 21 831	INT 364
414 361 21 831 AD	INT 610
414 361 21 831 ADL	INT 608
414 361 21 921	INT 364
414 361 21 921 AD	INT 610
414 361 21 921 ADL	INT 608
414 361 21 931	INT 364
414 361 21 931 AD	INT 610
414 361 21 931 ADL	INT 608
414 361 81821	INT 365
414 361 81821 AD	INT 611
414 361 81821 ADL	INT 609
414 361 81822	INT 365
414 361 81822 AD	INT 611
414 361 81822 ADL	INT 609
414 361 81831	INT 365
414 361 81831 AD	INT 611
414 361 81831 ADL	INT 609
414 361 81832	INT 365
414 361 81832 AD	INT 611
414 361 81832 ADL	INT 609
414 361 81921	INT 365
414 361 81921 AD	INT 611
414 361 81921 ADL	INT 609
414 361 81922	INT 365
414 361 81922 AD	INT 611
414 361 81922 ADL	INT 609
414 361 81931	INT 365
414 361 81931 AD	INT 611
414 361 81931 ADL	INT 609
414 361 81932	INT 365
414 361 81932 AD	INT 611
414 361 81932 ADL	INT 609
414 362 821	INT 365
414 362 821 AD	INT 611
414 362 821 ADL	INT 609
414 362 831	INT 365
414 362 831 AD	INT 611
414 362 831 ADL	INT 609
414 46 21 822 AD	INT 613
414 46 21 822 AD ED1	INT 613
414 46 21 822 ED1	INT 371
414 46 21 823 AD	INT 613
414 46 21 823 AD ED1	INT 613
414 46 21 823 ED1	INT 371
414 46 21 832 AD	INT 613
414 46 21 832 AD ED1	INT 613
414 46 21 832 ED1	INT 371
414 46 21 833 AD	INT 613
414 46 21 833 AD ED1	INT 613
414 46 21 833 ED1	INT 371
414 46 21 922 AD	INT 613
414 46 21 922 AD ED1	INT 613
414 46 21 922 ED1	INT 371
414 46 21 923 AD	INT 613
414 46 21 923 AD ED1	INT 613
414 46 21 923 ED1	INT 371
414 46 21 932 AD	INT 613
414 46 21 932 AD ED1	INT 613
414 46 21 932 ED1	INT 371
414 46 21 933 AD	INT 613
414 46 21 933 AD ED1	INT 613
414 46 21 933 ED1	INT 371
414 90 01	TEC 32
414 90 02	TEC 32
415 03 01	INT 62, TEC 38
415 03 04	INT 62, TEC 38
415 03 05	INT 62, TEC 38
415 111 823	INT 67
415 111 833	INT 67
415 112 821	INT 67
415 112 822	INT 67
415 112 831	INT 67
415 112 832	INT 67
415 121 823	INT 119
415 121 833	INT 119
415 122 821	INT 119
415 122 822	INT 119
415 122 831	INT 119
415 122 832	INT 119
415 132 822	INT 89
415 132 832	INT 89
415 142 822	INT 89
415 142 832	INT 89
415 151 823	EXT 9
415 151 833	EXT 9
415 211 823	INT 65
415 211 833	INT 65
415 212 821	INT 65
415 212 822	INT 65
415 212 831	INT 65
415 212 832	INT 65
415 221 823	INT 63
415 221 833	INT 63
415 222 821	INT 63
415 222 822	INT 63
415 222 831	INT 63
415 222 832	INT 63
415 311 823	INT 117
415 311 833	INT 117
415 312 821	INT 117
415 312 822	INT 117
415 312 831	INT 117
415 312 832	INT 117
415 32 04	INT 116
415 32 05	INT 116
415 332 822	INT 85
415 332 832	INT 85
415 342 822	INT 85
415 342 832	INT 85
415 35 00	INT 129
415 91 60	TEC 32
JAC 04 01	INT 425
JAC 04 15	INT 425
JAC 04 30	INT 425
JAC 61 00	INT 423
JAC 62 00	INT 423
JAC 62 28122	INT 422
JAC 62 28123	INT 422
JAC 62 29122	INT 422
JAC 62 29123	INT 422
JAC 63 00	INT 423
JAC 73 00	INT 425
JAC 81 00	INT 419
JAC 83 00	INT 419
JAC 89 00	INT 413
M10 04 01	INT 425
M10 04 15	INT 425
M10 04 30	INT 425
M10 89 28122	INT 412

A FAMILY BUSINESS



Delta Light®'s success is built on the determination, passion and talent of our global team.
We hereby **thank** all our colleagues and partners for their invaluable work.

The lighting industry is evolving and growing at very high speed.
As a family run business we have a personal stake in keeping our clients happy.
As such we are committed to making a difference through original designs,
outstanding service levels, eye for detail and personal contact, striving to be the best in all we do.

Our product development process is based on a combination of creativity and technological innovation.
It's our mission to present the world a portfolio of lighting solutions that satisfy people's desires and needs,
creating a perfect symbiosis between architecture, function and atmosphere.



deltalight.com

Manufacturer Delta Light® nv

Product Design - Research - Development: Delta Light® Team & Nice 2C
Coordination - Concept: Delta Light® Team & Nice 2C
Graphic Design - Realisation: Delta Light® Team & Nice 2C

Finally, to everyone who contributed in some way
to the realisation of The Lighting Bible® 11... **Thanks.**

Copyright © Delta Light® nv
04-2015

DOC GE / 299

Made in Belgium

For the latest edition of the Lighting Bible®, please visit **www.deltalight.com**

All information in this catalogue is provided for information purposes only and Delta Light® NV makes no representations about the accuracy or completeness of the information in this catalogue. Delta Light® NV may, in its sole discretion, revise the information and technical data contained herein at any time without notice. The catalogue does not contain any guarantee on the Delta Light® NV products nor any warranty of merchantability or fitness for a particular purpose or use
All Delta Light® products are supplied without lamps and any lamp data is given as a mere example.

The general terms & conditions of Delta Light® NV shall be applicable on each sale of a Delta Light® product.
Any trademarks, text, images, graphics and other information in this catalogue are the sole property and subject to the intellectual property rights of Delta Light® NV and may not be copied, modified or used for any purpose without Delta Light®'s prior written consent.

Innovative use of combined heat and power technology when printing this product reduced CO_2 emissions by up to 52% in comparison to conventional methods in Germany.

minus 52% CO_2

PEFC
PEFC/04-31-1033

WORLD WIDE

For additional product information, technical downloads, project inspiration, contact details and much more… please go to **www.deltalight.com**

Whether you access the site via your desktop computer or mobile device, an inspiring platform opens up with up-to-date content, exciting images, extensive product information, upgraded user experience… all in a fresh look & feel.

The **product search engine** will quickly guide you to the right product page, where you can download 3D files, product data sheets, manual, IES files and drawings.

The **My Delta Light Toolbox** helps you to quickly collect, save, download and share images and product information. Start creating your personal shortlists and share them with your partner, client, architect, electrical installer or other people involved in your project. You are free to use this feature without login, or you can register to save and edit multiple pinlists.

If you are looking for a contact person in your region or country please go to **www.deltalight.com/contact**

Enjoy your visit.



HQ

Headquarters
Delta Light® nv
Muizelstraat 2
B-8560 Wevelgem (Moorsele)
Belgium
Phone: +32 (0)56 435 735
Fax: +32 (0)56 435 736
E-mail: info@deltalight.com
www.deltalight.com

OFFICES

Asia
Delta Light Asia
Phone: +852 3486 3789
Mobile: +852 5501 7809
E-mail: asia@deltalight.com
www.deltalight.asia

Belgium / Luxembourg
Delta Light® nv
Phone: +32 (0)56 435 735
Fax: +32 (0)56 435 736
E-mail: info@deltalight.be
www.deltalight.be

Canada
Delta Light Canada Inc.
Phone: +1 905 813 6130
Fax: +1 289 805 7388
E-mail: canada@deltalight.com
www.deltalight.ca

Czech Republic
Delta Light Czech s.r.o.
Phone(1): +420 241 740 775
Phone(2): +420 241 740 776
E-mail: info@deltalight.cz
www.deltalight.cz

Denmark
Delta Light Denmark Aps
Phone: +45 3311 4429
E-mail: info@deltalight.dk
www.deltalight.dk

France
Delta Light France SA
Phone: +33 (0)4 72 90 45 45
Fax: +33 (0)4 72 90 45 44
E-mail: dlinfo@deltalight.fr
www.deltalight.fr

Germany / Austria
DELTA LINE + LIGHT GmbH
Phone: +49 (0)2451 4090-0
Fax: +49 (0)2451 4090-200
E-mail: info@deltalight.de
www.deltalight.de

India
Delta Light India
Phone: +91 98 10 228 494
E-mail: india@deltalight.com
www.deltalight.com

Italy
Delta Light Italia S.r.l.
Phone(1): +39 0 571 82226
Phone(2): +39 0 571 93541
Fax: +39 0 571 83594
E-mail: info@deltalight.it
www.deltalight.it

Latin America
Delta Light Latin America
E-mail: info@deltalight-latin.com
www.deltalight-latin.com

Colombia
Phone: +57 1 749 5307
Mobile: + 57 314 449 4015
E-mail: colombia@deltalight-latin.com

Mexico
Mobile: + 52 155 4082 1342
E-mail: mexico@deltalight-latin.com

Middle East & North Africa
Delta Light Mena
Phone: +961 1 491 175
Fax: +961 1 491 173
E-mail: sales@deltalight-mena.com
www.deltalight-mena.com

Poland
Delta Light Poland
Phone: +48 698 33 00 03
E-mail: poland@deltalight.com
www.deltalight.pl

Slovakia
Delta Light Slovakia s.r.o.
Phone: +421 2 6353 0180
Fax: +421 2 6353 0181
E-mail: info@deltalight.sk
www.deltalight.sk

Russia, Eastern Europe, Middle Asia
Delta Light REEMA
reema@deltalight.com

Moscow
Phone: +7 926 03 888 93

Saint-Petersburg
Phone: +7 921 79 183 88
www.deltalight.ru

Spain
Iluminación Delta Light España S.A.
Phone: +34 (0)93 586 19 00
Fax: +34 (0)93 697 95 00
E-mail: marketing@deltalight.es
www.deltalight.es

Switzerland
Delta Light AG
Phone: +41 (0)61 485 99 10
Fax: +41 (0)61 485 99 11
E-mail: info@deltalight.ch
www.deltalight.ch
















The Netherlands
Delta Light Nederland B.V.
Phone: +31 (0)88 80 40 600
Fax: +31 (0)88 80 40 699
E-mail: info@deltalight.nl
www.deltalight.nl

United Kingdom
Delta Light UK LTD
Phone: +44 (0)870 757 7087
Fax: +44 (0)207 620 0985
E-mail: info@deltalight.co.uk
www.deltalight.co.uk

USA
Delta Light USA, LLC.
Phone: +1 (954) 677 9800
Fax: +1 (954) 677 1007
E-mail: info@deltalight.us
www.deltalight.us

deltalight.com/contact

LED POWER SUPPLY

	LED POWER CONVERTOR 24V-DC>350mA/15W **300 2415 350** 0,1 IP20	new		min. 30	Input 24V-DC (min 15W) Output 350mA / 15W
	LED PS 350mA / 8W **300 90 108** 0,1 IP54 λ0,6	new		min. 40	Input 100-240V / 50-60Hz Output 350mA / 8W / 0-25V-DC
	LED PS 350mA / 15W **300 90 91** 0,1 IP20 λ0,55			min. 38	Input 100-240V / 50-60Hz Output 350mA / 15W / 0-43V-DC 110-120V: 10W
*	**LED PS 350mA / 16W DIM8** **300 90 3112** DIM8 (10-100%) FE 0,3 IP65 λ>0,9			min. 43	Input 100-240V / 50-60Hz Output 350mA / 16W / 17-46V-DC
	LED PS 350mA / 17W **300 90 913** 0,1 IP20 λ0,55			min. 46	Input 110-240V / 50-60Hz Output 350mA / 17W / 0-49V-DC 110-124V: 12W
	LED PS 350mA / 18W DIM8 **300 90 116** DIM8 (10-100%) 0,2 IP20 λ>0,9	new		min. 55	Input 220-240V / 0/50/60Hz Output 350mA / 18W / 25-51V-DC
	LED PS 500mA / 6W **300 90 22 U** 0,1 IP67 λ0,5			min. 52	Input 120-240V / 50-60Hz Output 500mA / 6W / 2-14V-DC
	LED PS 500mA / 20W **300 90 92** 0,1 IP20 λ0,57			min. 46	Input 110-240V / 50-60Hz Output 500mA / 20W / 3,5-45V-DC 110V: 12W
	LED PS 500mA / 32W DIM8 **300 90 5120** DIM8 (10-100%) FE 0,3 IP65 λ>0,9			min. 61	Input 110-240V / 0/50/60Hz Output 500mA / 32W / 24-45V-DC
	LED PS 500mA / 20W DIM8 **300 90 117** DIM8 (10-100%) 0,2 IP20 λ>0,9	new		min. 55	Input 220-240V 50-60Hz Output 500mA / 20W / 16-40V-DC
	LED PS 700mA / 17W **300 90 93** 0,1 IP20 λ0,6			min. 46	Input 230-240V / 50-60Hz Output 700mA / 17W / 3,5-26V-DC
	LED PS 700mA / 36W DIM8 **300 90 123** DIM8 (10-100%) FE 0,3 IP54 λ>0,97			min. 50	Input 220-240V / 50-60Hz Output 700mA / 36W / 4-52V-DC
	LED PS 700mA / 20W DIM8 **300 90 118** DIM8 (10-100%) FE 0,2 IP20 λ>0,9	new		min. 55	Input 220-240V / 50-60Hz Output 700mA / 20W / 16-28V-DC
	LED PS MULTI-POWER **300 90 914** 0,1 IP20 λ>0,9			min. 82	Input 110-240V / 50-60Hz Output **350mA / 25W / 74V-DC** Output **500mA / 35W / 72V-DC** Output **550mA / 39W / 72V-DC** Output **700mA / 50W / 70V-DC** Output **1050mA / 50W / 48V-DC**	350mA 500mA 550mA 700mA 1050mA
*	**LED PS MULTI-POWER DIM1** **300 90 64** DIM8 / 1-10V 0,1 IP20 λ>0,9			min. 70	Input 120-240V / 50-60Hz Output **350mA / 20W / 60V-DC** Output **500mA / 25W / 50V-DC** Output **550mA / 25W / 50V-DC** **(120V / 15W / 30V-DC)**	350mA 500mA 550mA
	LED PS MULTI-POWER DIM6 **300 90 61** SWITCH DIM / FE DIM (10-100%) FE 0,1 IP20 λ>0,9			min. 55	Input 220-240V / 50-60Hz Output **350mA / 17W / 43V-DC** Output **500mA / 24W / 43V-DC** Output **700mA / 32W / 36V-DC** 110V: 15W	350mA 500mA 700mA
	LED PS MULTI-POWER DIM7 **300 90 60** SWITCH DIM / 1-10V 0,1 IP20 λ0,5			min. 70	Input 110-240V / 50-60Hz Output **350mA / 15W / 43V-DC** Output **500mA / 20W / 43V-DC** Output **700mA / 25W / 36V-DC** 110V: 15W	350mA 500mA 700mA
	LED PS MULTI-POWER DIM9 **300 90 63** SWITCH DIM / 1-10V / DALI 0,1 IP20 λ>0,9			min. 82	Input 120-240V / 50-60Hz Output **350mA / 25W / 74V-DC** Output **500mA / 35W / 72V-DC** Output **550mA / 39W / 72V-DC** Output **700mA / 50W / 70V-DC** Output **1050mA / 50W / 48V-DC**	350mA 500mA 550mA 700mA 1050mA
	LED PS MULTI-POWER DIM5 **300 90 68** DALI DIM 0,2 IP20 λ>0,9	new		min. 70	Input 110-240V / 50-60Hz Output **350mA / 15W / 47V-DC** Output **500mA / 24W / 47V-DC** Output **550mA / 25W / 47V-DC** Output **700mA / 32W / 46V-DC** 110V: 15W	350mA 500mA 550mA 700mA
	LED POWER CONVERTOR 24V-DC>MULTI CURRENT 48W DIM9 **300 90 67** SWITCH DIM / 1-10V / DALI 0,1 IP20	new			Input 24V-DC (min 48W) Output **350mA / 48W** (3 CHANNELS) Output **700mA / 48W** Output **1050mA / 48W**	350mA (FOR EACH CHANNEL) 700mA 1050mA

DIM1: dimming by 1-10V
DIM5: dimming by Dali
DIM6: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

[A]			[B]	[C] *		[D]	[E]		[F]		[G]	[H]		[I]		[J]				[K]	[L]	
1,1W	1,6W	2,3W	3,3W	4,1W	6W	7W	6W	9W	2W	3,2W	7W	6,2W	9,3W	7W	10W	18W	19,2W	25W	31,5W	26W	12W CRI80	11W CRI90
3 - 12				3		2	2					2		2								
6				1		1	1					1		1								
11				3 (2)		2 (1)	2 (1)					2 (1)		2 (1)								
7 - 12				2 - 3		2	2 - 2					2 - 2		2								
13 (9)				3 (2)		2 (1)	2 (1)					2 (1)		2 (1)								
10 - 14				3 - 3		2 - 2	2 - 2					2 - 2		2 - 2								
	3																					
	2 - 11 (6)				3 (1)			2 (1)					2 (1)		1	1 (0)						2 (1)
	8 - 12				2 - 3			2 - 2					2 - 2		2	1						2 - 2
	7 - 11				2 - 3			1					2		1							2 - 2
		2 - 6							2 - 7		2										1	
		2 - 14							2 - 15		5							1			2	
		7 - 7							6 - 8		2 - 2											
19				5		3	3					3		3								
	19				5			3					3		3	1						3
		19							21		7						1					
			14							14								1			3	
15 (11)				4 (3)		2	2					2		2 (1)								
	13 (8)				3 (2)			2 (1)					2 (1)		2 (1)	1 (0)						2 (1)
																	1 (0)					
11				3		2	2					2		1								
	11 (8)				3 (2)			2 (1)					2 (1)		1	1 (0)						2 (1)
		10 (5)							10 (6)		3 (2)										1	
11				3		2	2					2		1								
	11 (8)				3 (2)			2 (1)					2 (1)		1	1 (0)						2 (1)
		9 (5)							10 (6)		3 (2)										1	
19				5		3	3					3		3								
	19				5			3					3		3	1						3
		19 (15)							21 (17)		7 (5)						1					
			14 (11)							14 (11)								1			3	
11				3		2	2					2		1								
	13 (8)				3 (2)			2 (1)					2 (1)		2 (1)	1 (0)						2 (1)
																	1 (0)					
		12 (5)							13 (6)		4 (2)							1 (0)			2 (1)	
3 - 12				3		2	2					2		2								
		3 - 12							3 - 13		4							1			2	
			3 - 13							3 - 13												



2015 | 2016